


Head nod recognition · 3 s sliding-window protocol

Pitch axis fixed for nod. Amplitude threshold selected on human DEV by balanced accuracy, then applied once to TEST.



15 clips per split · 435 windows · 3 s window, 2 s stride
bars on the selected rule are 95% intervals from resampling clips

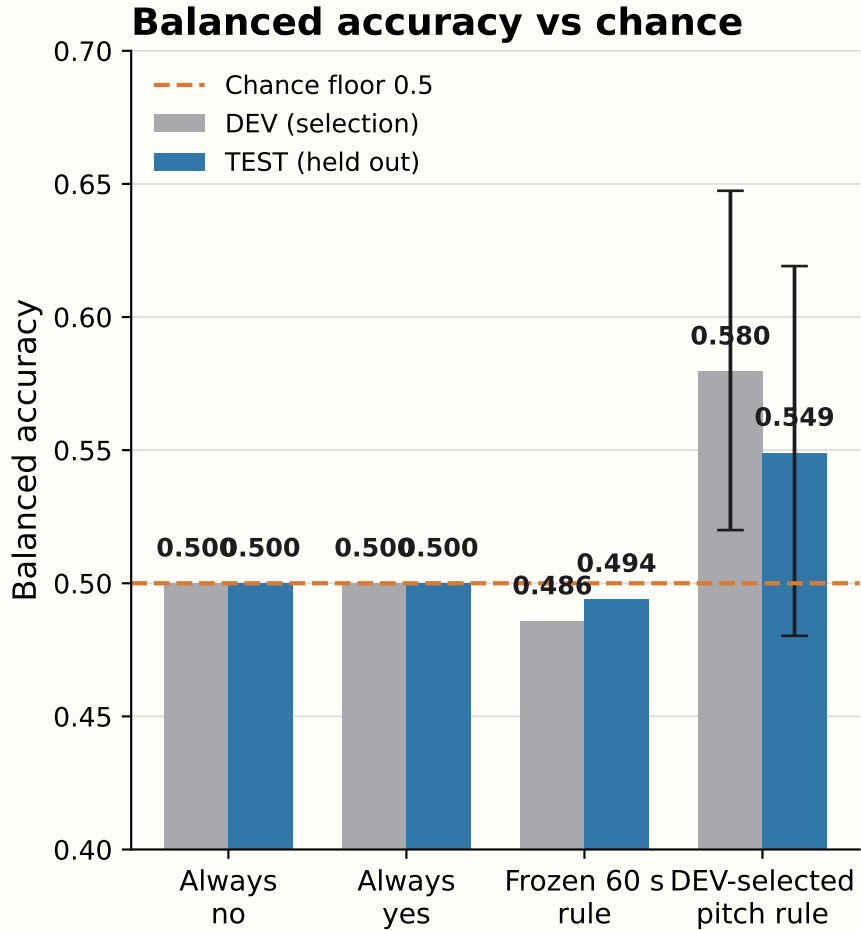