TRACK 2 · ACCESS AND DISTRIBUTION

MUSD Pay Links

Ask for MUSD on Mezo with a link or a QR code. Before anything is signed, the payer's guard checks the token, the recipient and the amount.



A real link from the live API.
12.5 MUSD on Mezo Testnet

```
ethereum:0x1189…c503@31611/transfer?address=0x5aAe…eAed&uint256=12500000000000000000&memo=INV-1042
```

MUSD TOKEN · MEZO CHAIN ID · RECIPIENT · AMOUNT · REFERENCE

THE PROBLEM

A payment link is plain text. One character decides where the money goes.

REAL MUSD ON MEZO TESTNET

0x118917a40FAF1CD7a13dB0Ef56C86De7973Ac503

LOOKALIKE FROM THE DEMO

0x118917a40FaF1cD7A10dB0EF56C86DE7973aC503

TOKEN

A fake token with the same symbol

The wallet shows MUSD. The contract is someone else's.

CHAIN

Real MUSD, wrong network

A changed chain id sends the payment where the merchant never looks.

AGENTS

Bots pay from text they did not write

AI agents that pay for people act on whatever the link says.

WHO IT IS FOR · TRACK 2, ACCESS AND DISTRIBUTION

For people who want to be paid in MUSD where they already talk to customers.

01

Sellers, freelancers and creators

Paid in a Bitcoin-backed stablecoin without a payment processor. A link in a chat or an invoice, a QR code at a counter.

02

Wallets, bots and AI agents

One check before they sign. Every refusal comes with a code and a plain reason they can show the user.

03

Developers

A TypeScript library and a read-only JSON API that run the same checks as the demo page.

> Why Track 2. It lowers the friction of asking for MUSD and paying it, with the standard EIP-681 link format, a pay page for chats and a borrow quote for payers who hold no MUSD yet. Which wallets open these links has not been tested yet.

HOW IT WORKS

Three steps. The library never holds a key and never signs.

01 · MERCHANT

Create the link

- EIP-681 link and QR code for MUSD on Mezo Testnet 31611 or Mainnet 31612
- Amount, recipient and an optional reference such as an invoice number
- Every link runs through the payer guard before it is shown

02 · PAYER

Check, then build

- Token is the MUSD contract for that chain id
- Recipient is valid, EIP-55 checksummed, and on the allowlist when one is set
- Amount is within the limit, exact integer math at 18 decimals
- Returns an unsigned transfer with value 0 for the wallet to sign

03 · MERCHANT

Confirm on chain

- Reads the transaction receipt
- Counts only Transfer events from the real MUSD contract to the merchant's address
- Matches the reference bytes in the transaction input

Same code in the browser, the library and the Worker API `/api/link` `/api/check` `/api/verify` `/api/token` `/api/balance`

MEZO INTEGRATION

Built on the real MUSD contracts. Read live, not mocked.

NETWORK	CHAIN ID	MUSD CONTRACT, VERIFIED ON MEZO BLOCKSCOUT	TOTALSUPPLY() READ 18 OCT
Mezo Testnet	31611	0x118917a40FAF1CD7a13dB0Ef56C86De7973Ac503	523,692,374 MUSD
Mezo Mainnet	31612	0xdD468A1DDc392dcdbEf6db6e34E89AA338F9F186	29,789,446 MUSD

- `name()` `symbol()` `decimals()` on both contracts return Mezo USD, MUSD, 18
- `readBorrowTerms` reads BorrowerOperations, TroveManager, PriceFeed and InterestRateManager live. MCR 110%, CCR 150%, minimum debt 1,800 MUSD plus 200 gas compensation, fee 0.1%
- `findPayments` reads MUSD Transfer logs to the merchant since the invoice block and decodes each reference. Older payments are refused
- `findDuplicatePayments` lists later transfers with the same reference and marks each one refund due

Done on 26 Oct 2026, Mezo Testnet. Our scripts sent four real transactions.

Borrow	0x1de64d3a9fe0588d2707718ed3c247d793f5d5f818efd502ae80ee8dc70a26f2
Payment	0x7abfedb120383f817134e5e63823aef69948930fa9760c6b96fb03a87909cc0b
Signed invoice payment	0x9b8285c19033cc957932406347234a8b339e85fc2c1848fb672f522dd10a825c
Duplicate, refund due	0x95ef25c8d2f3dec854e8203e3122ec6694f12153d2d21b7f5945669a7c902dc4

Open limits. A browser wallet has not paid a link yet. The reference is appended calldata that some wallets drop. There is no WalletConnect yet.

Addresses from the Mezo docs page MUSD Payments With x402. Chain ids confirmed with eth_chainId. Raw output in docs/evidence.json

SAFETY CHECKS

The attacker controls the link text. Anything that is not a clean MUSD transfer is refused.

Fake token with the same symbol	`not_musd`
Lookalike token address	`lookalike_token`
Real MUSD with the other Mezo chain id	`token_chain_mismatch`
Non-Mezo or missing chain id	`wrong_chain` · `missing_chain_id`
Altered or poisoned recipient	`recipient_bad_checksum` · `recipient_lookalike`
Above the payer's limit	`over_limit`
Above uint256, which some parsers wrap	`amount_overflow`
Zero-width, bidi or Cyrillic lookalikes	`unicode_trick`
Extra value, gas, nonce or data	`forbidden_param`
Two address or two amount values	`duplicate_param`
approve, transferFrom, permit	`dangerous_function`

337 / 337

tests pass with LIVE=1 on 26 Oct 2026, 330 offline and 7 that read Mezo over RPC

93

guard tests for chains, tokens, overflow, checksums and parameters

2,000

random inputs, none of them throw

300

merchant links round-trip through the guard with the same amount


11

unicode tricks refused, with the code point named


Full threat model in the README. Typecheck passes and the production dependency audit reports no known vulnerabilities

LIVE DEMO


musd-pay-links.lipmichal.workers.dev

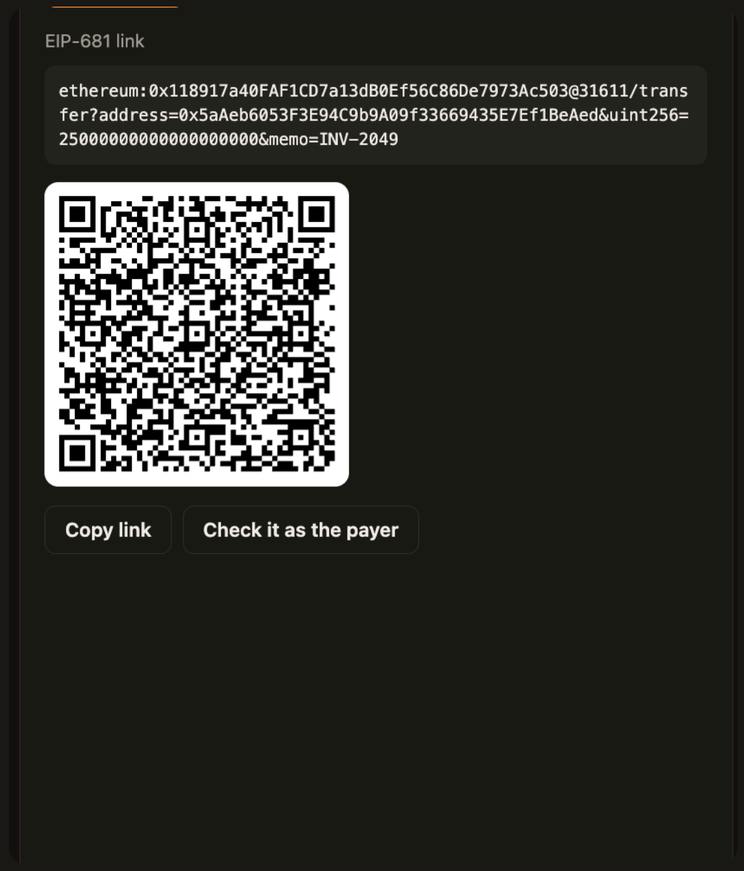

Merchant. 25 MUSD with reference INV-2049 becomes an EIP-681 link and a QR code.

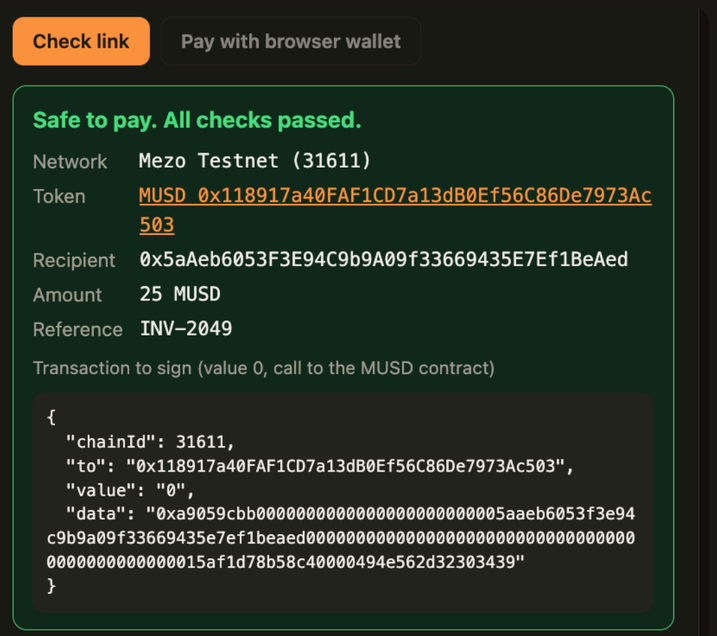

Payer. All checks pass. The page shows the unsigned transfer, value 0, to the MUSD contract.

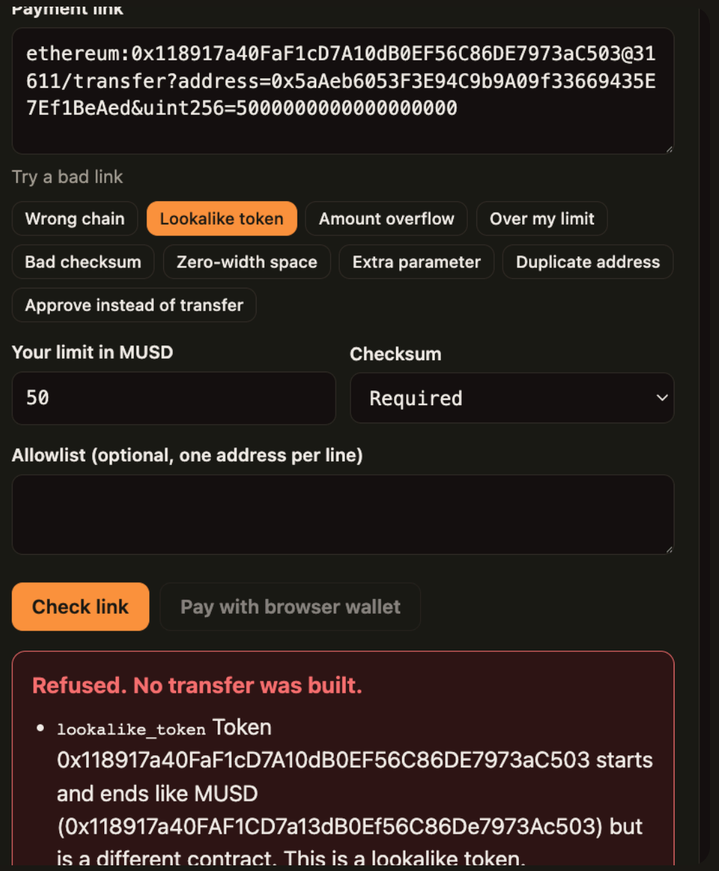

Refusal. A lookalike token is refused, and both addresses are named.

BUSINESS MODEL AND ADOPTION ON MEZO

Free checks spread MUSD. A hosted invoice service can pay for the work.

FREE PLAN

Guard and plain links

The guard library and the plain links stay free under the MIT license.

Wallets, bots and agents can use them with no account and no fee.

HOSTED PLAN

Invoice service for shops

A flat monthly plan with payment notifications, higher limits and a custom pay page.

Payments go straight from the payer to the merchant. The service never holds funds.

WAVE 2 GOAL

10 pilot merchants

From the Mezo community and the author's network.

None is signed today. This is a goal for 15 November 2026.

Why it helps Mezo. Every merchant link is a request for MUSD, so each new shop gives its customers a reason to hold MUSD.

FUTURE MILESTONES

Three dated milestones after Wave 1.

26 OCT 2026

Live now

Web app and JSON API on Cloudflare Workers. Guard, invoices with pay pages, on-chain matching and a live MUSD borrow quote. Four real testnet transactions and 337 tests.

15 NOV 2026 · WAVE 2

First wallet payment

A browser wallet pays a link on Mezo Testnet and we record it. The guard on npm. A Telegram bot for links and confirmations.

31 DEC 2026

Bitcoin wallets and a borrow

Mezo Passport so Bitcoin wallets can pay links. The pay page can open a trove when the payer is short.

31 JAN 2027

Merchant notifications

A small shop takes MUSD with links and sees each payment confirmed without running a node.

TEAM

Michael Lip

Solo builder. Design, code and deployment.
Warsaw, Poland.

GitHub github.com/theluckystrike

X @_alphashark_

EARLIER WORK

PayLink Guard, a payment-link checker for Base and Solana by the same author. MUSD Pay Links reuses its design ideas. The Mezo and MUSD code is new, built during the buildathon.

musd-pay-links.lipmichal.workers.dev

github.com/theluckystrike/musd-pay-links

github.com/theluckystrike/paylink-guard