The Expanded Natural History of Song Discography, a global corpus of vocal music

Mila Bertolo[1,2,3,4,*], Martynas Snarskis[5], Thanos Kyritsis[5], Lidya Yurdum[4,5,6], Constance M. Bainbridge[7], S. Atwood[8], Courtney B. Hilton[5], Anya Keomurjian[9], Judy S. Lee[9], Alex Mackiel[10], Vanessa Mak[11], Mi-joo Shin[12], Alma Bitran[13], Dor Shilton[14,15], Lana Delasanta[16,17], Hang (Heather) Do[18], Jenna Lang[9], Tenaaz Irani[19], Jayanthiny Kangatharan[9], Kevin Lafleur[9], Nashua Malko[9], Quentin D. Atkinson[5,20], Manvir Singh[21], and Samuel A. Mehr[3,4,5,*]

[1]Integrated Program in Neuroscience, McGill University, Montreal, QC H1A 2B4, Canada.
[2]Centre for Research on Brain, Language, and Music, Quebec, QC H3G 2A8, Canada.
[3]International Laboratory for Brain, Music, and Sound Research, Department of Psychology, University of Montreal, Montreal, QC H3C 3J7, Canada.
[4]Yale Child Study Center, Yale University, New Haven, CT 06520, USA.
[5]School of Psychology, University of Auckland, Auckland 1010, New Zealand.
[6]Department of Psychology, University of Amsterdam, Amsterdam 1018WT, The Netherlands.
[7]Department of Communication, University of California, Los Angeles, CA 90095, USA.
[8]Department of Psychology, Princeton University, Princeton, NJ 08540, USA.
[9]Department of Psychology, Harvard University, Cambridge, MA 02138, USA.
[10]Department of Psychology, University of Chicago, Chicago, IL 60637, USA.
[11]Department of Psychology, University of British Columbia, Vancouver, BC V6T 1Z4, Canada.
[12]Department of Government, Harvard University, Cambridge, MA 02138, USA.
[13]Department of Clinical Psychology, Rutgers, The State University of New Jersey, Newark, NJ 07102, United States.
[14]Cohn Institute for the History and Philosophy of Science and Ideas, Tel Aviv University, Ramat Aviv 6997801, Israel.
[15]Sidney M. Edelstein Center for History and Philosophy of Science, Technology and Medicine, Hebrew University, Jerusalem 91904, Israel.
[16]Department of Psychological Sciences, University of Connecticut, Storrs, CT 06269, USA.
[17]Center for the Ecological Study of Perception & Action, University of Connecticut, Storrs, CT 06269, USA.
[18]University of Pennsylvania Graduate School of Education, 3700 Walnut Street, Philadelphia, PA, 19104, USA.
[19]University of Ottawa, Faculty of Medicine, Ottawa, ON K1H 8M5, Canada.
[20]Max Planck Institute for the Science of Human History, Jena 07745, Germany.
[21]Department of Anthropology, University of California, Davis, Davis, CA 95616, USA.

*Corresponding author. E-mails: mila.bertolo@mail.mcgill.ca, sam@auckland.ac.nz

Abstract

A comprehensive cognitive science requires broad sampling of human behavior to justify general inferences about the mind. For example, the language sciences rely on a rich history of comparative study, with many available resources that systematically document many languages. Surprisingly, despite a longstanding interest in questions of universality and diversity, the psychology of music has few such resources. Here, we report the Expanded Natural History of Song Discography, an open-access corpus of vocal music ($n = 1007$ song excerpts), with accompanying metadata detailing each song's region of origin, language (of 413 languages represented here), and one of 10 behavioral contexts (e.g., work, storytelling, mourning, lullaby, dance). The corpus is designed to sample broadly, with a wide cross-section of societies and language; and deeply, with many songs from three large language families (Atlantic-Congo, Austronesian, and Indo-European). This design facilitates direct comparison of musical and vocal features across cultures, principled approaches to sampling stimuli for experiments, and the evaluation of explicit models of the cultural evolution of song. In this paper we describe the corpus and provide two proofs of concept, demonstrating its utility. We show that (1) the acoustical forms of songs are predictive of their behavioral contexts, including in previously understudied contexts (e.g., children's play songs); and (2) similarities in acoustic content of songs across cultures are predictable, in part, by the relatedness of those cultures.

1 Introduction

Investigating music across contexts and cultures is essential for understanding the interacting biological and cultural underpinnings of the human capacity for music.

Findings of universality suggest what characteristics of musicality are likely to reflect basic aspects of the human music phenotype. For example, the mutual intelligibility of music across cultures (Hilton, Moser, et al., 2022; Singh & Mehr, 2023; Yurdum et al., 2023) and early psychophysiological responses to culturally unfamiliar music in infancy (Bainbridge et al., 2021) support predictions of some adaptive functions of musicality in the domain of communication (e.g., Mehr et al., 2021; Trehub, 2001).

Findings of diversity suggest what characteristics of musicality are molded by cultural forces and in what ways. For instance, cross-cultural variability in preferences for consonance over dissonance (McDermott et al., 2016) suggest mechanisms of cultural evolution may shape musical aesthetics. Moreover, differences in the propensity to match pitch across octaves (Jacoby et al., 2019) and effects of tonal language experience on music processing abilities (Liu et al., 2023) suggest that cultural experience can mold lower-level music perception — despite key aspects of music perception showing evidence for universality (Mehr, 2024).

While research in the psychology of music has seen a recent increase in focus on cross-cultural studies, like many of the cognitive sciences, the bulk of music research is still carried out in WEIRD (Henrich et al., 2010) societies, with experiments involving WEIRD stimuli. This, of course, paints a non-representative picture of musicality (Jacoby et al., 2020). One route forward is the diversification and expansion in scope of global music corpora (Savage, 2018).

This is not a new idea: collecting large numbers of samples from a diverse number of individuals is common in many fields. Psycholinguists often unite corpus work with empirical studies, improving the ecological validity of their work (Gilquin & Gries, 2009). For example, analysis of a corpus of spoken conversation showed that naturalistic turn-taking happens more than twice as rapidly as previously shown in laboratory studies (Reece et al., 2023). In the field of emotion perception, a study that used an expansive set of stimuli (over 2000 recordings of vocal bursts from people from four countries) mapped 24 distinct clusters of emotion categories, and their overlap (Cowen et al., 2018). A related approach to animal vocalizations revealed no apparent relation between magnitude of a species' sexual dimorphism in size and the pitch or complexity of birdsong, contrary to what would be predicted by sexual selection accounts of birdsong evolution (Pearse et al., 2018). The use of large, diverse, and naturalistic corpora can help to reduce the over-representation of English in cognitive science research (Blasi et al., 2022).

What of music? While the availability of corpora in the music domain has increased, most focus on popular or classical music, (e.g., the *Million Song Database*, Bertin-Mahieux et al., 2011; *MusicBrainz*, Swartz, 2002; the *Google/Magenta MAESTRO dataset of piano performances*, Hawthorne et al., 2019). Only a few attempt global representation of music (Panteli et al., 2017; reviewed in Savage, 2018), such as *The Garland Encyclopedia of World Music* (Nettl et al., 2002), the *Natural History of Song Discography* (Mehr et al., 2019), *The Global Jukebox* (Wood et al., 2022), and the *Compmusic project* (Serra, 2014). A few global corpora also focus on narrower contexts or populations; these include corpora of infant-directed vocalizations (Hilton, Crowley-de Thierry, et al., 2022) or lullabies (Trehub et al., 1993b), and a group of researchers producing speech and song themselves (Ozaki et al., 2024).

These music corpora vary in the availability of audio for each musical excerpt; the presence or absence of symbolic or data-analytic representations of the music; and the depth of available metadata, both for musical excerpts themselves (such as the behavioral context of a song) and the people producing the music (such as the language or dialect of the lyrics).

Here, we report the *Expanded Natural History of Song Discography*, a large set of excerpts of vocal music designed to support research on both the universality and diversity of human song (following Mehr et al., 2019). The sampling strategy includes both broad global representation and deep sampling of three large language families (Austronesian, Atlantic-Congo, and Indo-European). Given the now well-known relevance

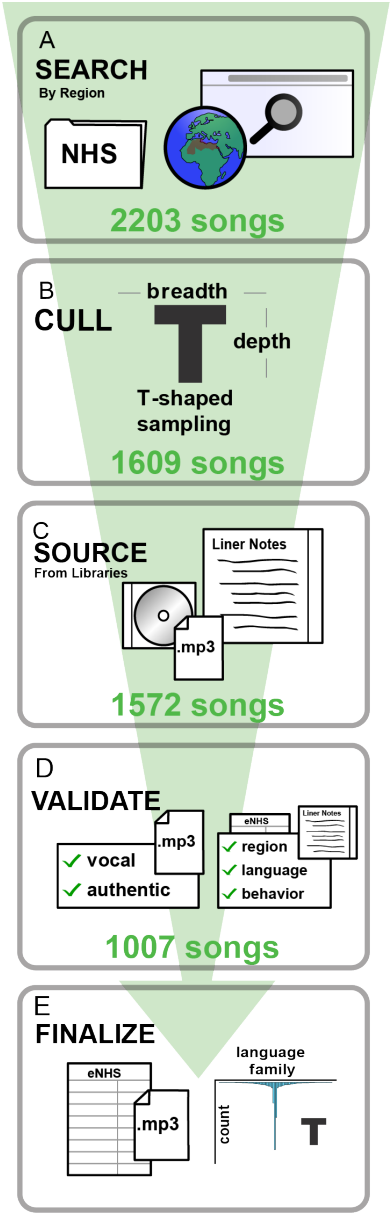

Figure 1 | How we built the corpus. **(A)** Candidate items were gathered from libraries and online databases via broad initial searches. **(B)** To create a "deep" sample that densely sampled from three large language families for closer study, we retained all items from the Atlantic-Congo, Austronesian, and Indo-European language families. To create a "broad" sample that was diverse and did not over-represent any particular language family, we culled the initial search by selecting a maximum of 2 songs per language family per behavioral context. **(C)** Audio recordings of candidate items were sourced digitially or by digitizing from a physical CD or LP, and associated liner notes were scanned. **(D)** Metadata for each recording was validated by two independent groups of annotators; each group reviewed the liner notes for each recording and determined whether there was sufficient information therein to determine the recording's region, language, and behavioral context. When two annotators disagreed on such determinations, a third annotator arbitrated, or a consensus decision was reached after discussion. **(E)** The corpus was released on Zenodo, in the form of a *CSV* metadata file and with each audio recording excerpted as a 10-second *MP3* file; metadata was also provided to the D-PLACE database.

of behavioral context to the forms of vocal music (e.g., Yurdum et al., 2023), the corpus samples songs across 10 behavioral contexts (Table 1) with clearly defined inclusion and exclusion criteria. To maximize usability, we used standardized descriptors of all songs' metadata: behavioral context, region of origin, and the language the song was sung in. Finally, and most importantly, the corpus, including all audio excerpts and metadata, is open-access, with no restrictions on its use (readers may access it on Zenodo at https://doi.org/10.5281/zenodo.8223168).

2 Corpus construction

We built the corpus in five stages.

First, research assistants searched for candidate items (Figure 1A). They were each assigned a geographical region and instructed to seek out all available recordings of songs used in each of ten behavioral contexts (Table 1). They did so using a variety of public and private sources, including internally via the Harvard Libraries (e.g., the Archive of World Music at Loeb Music Library); at various external libraries and institutes (e.g., the Centre de Recherche en Ethnomusicologie at Université Paris Nanterre, the British Library, etc.); via library aggregation databases (e.g., WorldCat); recordings previously used in the original *Natural History*

Table 1 | Definitions of Behavioral Contexts. Each of the 10 behavioral contexts were defined by inclusion and exclusion criteria.

Behavioral Context	Inclusion Criteria	Exclusion Criteria
Dance	Sung with the goal of a person or persons dancing along to it.	Songs that happen to be accompanied by dancing but are used for other goals.
Healing	Sung in a healing ceremony with the goal of curing sickness.	Songs describing sick people or a past epidemic.
Love	Sung to express love directly to another person or to describe currently felt love.	Songs about unrequited love, deceased loved ones, or love for animals or property.
Lullaby	Sung to an infant or child with the goal of soothing, calming, or putting to sleep.	Songs designed to excite the listener (e.g., play songs); singing games.
Play	Sung to excite a child or infant and engages them in play. This can include singing games.	Children's songs for soothing, calming, or putting to sleep.
Procession	Sung to accompany a formalized march, entrance, or parade, suchas during a wedding, funeral or the introduction of a leader.	Processions of dancing.
Mourning	Sung to express grief or sadness about the death of a person, in the present or past.	Songs for sick or dying people, or laments about events other than the death of a person.
Work	Sung to accompany work activities, including planting, grinding, harvesting, processing, tool-making.	Hunting songs (to celebrate successful hunts, prepare for hunts).
Story	Sung to recount historical or mythological events, narrate a sequence of activities by one or more persons.	Lullabies that include stories.
Praise	Sung to express admiration for the traits or accomplishments of a person, animal, location, or item of property.	A song expressing love for another person or explicitly religious songs (like devotionals).

of Song Discography (Mehr et al., 2019); and by directly contacting ethnomusicologists, music collectors, and scholars working with private collections of field recordings. Recordings were only considered to be positive candidates for inclusion if they were accompanied by credible information concerning (i) the recording's geographical region of origin; (ii) the language the recording was sung in; and (iii) source ethnography supporting the behavioral context of the recording. While these types of information were typically included in liner notes to a published album or a library-based field recording, in some cases they were provided in referenced publications (e.g., a book that accompanied a recording), or were provided informally (e.g., via email from a collector). This process yielded 2203 candidate items.

Second, we culled the candidate items to an initial sample (Figure 1B), whose structure balanced broad sampling with large, global diversity, and densely sampling in select areas for more detailed study. In order to maximize global diversity, we retained at least one candidate item for each behavioral context type for each language family and major language. For each of the 10 song behavioral contexts, if a language family had more than 2 songs, we randomly selected only 2 of them in an effort to avoid over-representing any particular language family. Additionally, in order to produce a dense sample, we retained all songs available from three specific large language families: Indo-European, Austronesian, and Atlantic-Congo. This process yielded 1609 items.

The resulting sampling structure of the corpus is "T-shaped": it contains both a *broad* sample evenly covering many language families, far-reaching global diversity; and a *deep* sample covering three language families, with much more intensive sampling than the broad sample.

Third, we obtained recordings from their original sources (e.g., using Interlibrary Loan, purchasing items, requesting digital audio files from collectors) and extracted an audio excerpt from each recording. To comply with Fair Use (under the United States doctrine), we extracted a brief excerpt of each recording [as in prior work; Mehr et al. (2019)]; we did this by using a random number generator to indicate a starting timestamp within the song and cutting the following 10 seconds of audio. If the excerpt did not contain audible singing (e.g., if it only contained instrumental music), a new random timestamp was generated until this condition was met. This process yielded 1572 song excerpts.

Fourth, two teams of two coders then independently reviewed each excerpt (Figure 1D). They confirmed (i) that the excerpt contained audible singing; and (ii) did not appear to be an unfaithful recreation of an original song, such as an electronic or orchestral rendition of a traditional song, or an overproduced, studio-based performance of a song that was obviously unrelated to its original context. Then, they conducted a detailed review of the source ethnography (e.g., liner notes) to ensure that the excerpt's metadata (i.e., language classification, behavioral context, and geographic region) were accurate. Each of the two teams carried out their reviews with no access to the other team's review. Another researcher then compared the two teams' reviews; when assessments did not agree, they arbitrated between the two judgements, reviewing all original source materials, and deciding whether to remove a recording from the sample. The researchers' reviews thus occassionally overrode initial assessments of each song's metadata (region of origin, language, behavioral context), and resulted in a small number of language families outside the 3 large language families having more than 2 song per behavioral context. This process yielded the final corpus of 1007 song excerpts.

Finally, we prepared the corpus for public release (Figure 1E). We used Adobe Audition to normalize the loudness and add 1-second fades at the beginning and end of each excerpt, to facilitate their use in experiments. We released the corpus publicly on Zenodo (https://doi.org/10.5281/zenodo.8223168), including all audio files and a metadata table. Spreadsheets detailing each stage of song search, song sourcing, and validation are in this paper's GitHub repository (https://github.com/themusiclab/nhs-expanded).

We also provided a version of the corpus to the *Database of Places, Language, Culture, and Environment* [*D-PLACE*; Kirby et al. (2016)], which stores the *Expanded Natural History of Song Discography* in a dedicated Github repository (https://github.com/D-PLACE/dplace-dataset-ccmc) in Cross-Linguistic Data Format (Forkel et al., 2018). This FAIR (Wilkinson et al., 2016) data availability facilitates analysing our corpus alongside other cross-cultural and cross-linguistic corpora. As in other iteratively-updated corpora concerning human behavior (e.g., *Saraga*, a dataset of Indian art music (Srinivasamurthy et al., 2021)), this format allows users to suggest changes to the corpus by submitting pull requests, which the managers of the

repository can review and approve.

2.1 Annotation details

We annotated each excerpt with three pieces of metadata: (1) *region*, the geographic region in which it was recorded; (2) *glottocode*, the languoid (i.e., a language or dialect) in which it was sung; and (3) *type*, the behavioral context surrounding its original use.

We classified geographic regions with a predetermined set of world regions defined by the *Electronic Human Relations Area Files* [*eHRAF*; Human Relations Area Files (1967)]*, following our previous work (Mehr et al., 2019). In addition to the original 35 eHRAF regions we included Western Europe, Central Europe, and Eastern Europe, which at the time of writing are not included in eHRAF.

We classified languoids via the *Glottolog* database (Hammarström et al., 2023), using as precise a languoid level as the available information allowed. For example, in some excerpts, the supporting liner notes were sufficiently detailed that annotators, unaware of each other's work, identified the same specific dialect that a song was sung in. In others, annotators could only reach consensus on the broader language. The use of glottocodes allows each song to be linked to a persistent identifier with a known location in the genealogy of all the world's languages, and allows this corpus to be integrated with other existing cross-cultural datasets that use such identifiers, such as *D-PLACE* (Kirby et al., 2016), *NoRaRE* (Tjuka, 2021), *PHOIBLE* (Moran & McCloy, 2019), *Lexibank* (List et al., 2022), and *Grambank* (Skirgård et al., 2023). Glottocodes are often used in phylogenetic analyses, for example, to study questions surrounding the evolution of syntactic structure (Hahn & Xu, 2022). They can similarly be used to study the evolution of musical form.

To determine song behavioral context, research assistants read the songs' associated liner notes to confirm whether each song fit an inclusion criteria for any of the behavioral contexts we considered here, and did not violate its exclusion criteria (Table 1). The present corpus considers ten behavioral contexts; the four considered in the original *Natural History of Song Discography* [i.e., dance, healing, love, lullaby; Mehr et al. (2019)] along with six newly added behavioral contexts (i.e., play, mourning, work, praise, story, and procession; see Table 1). These six were chosen by surveying the existing literature for candidate song contexts that appeared across distant human societies. Some songs plausibly aligned with more than one behavioral context definition (see Discussion); in these cases, research assistants chose what they determined the liner notes communicated about the song's *primary* function, even if the song could plausibly be represented by more than one context.

For both geographic region and glottocode, when the supporting evidence was ambiguous, annotators made judgments by consensus (e.g., in `NHS2-U13X`, the liner notes describe the general cultural context being the music of the Minnesota Ojibway, suggesting the eHRAF region *Plains and Plateau*, but also describe exchange with Ojibway who live over the Canadian border, where songs were actually recorded; annotators ultimately chose the eHRAF region *Arctic and Subarctic* for this excerpt); or used a more general glottocode at a higher level of the language tree (e.g., in `NHS2-2BT6`, where liner notes state this recording is from Tiga Island, which currently has no corresponding glottocode; instead, annotators chose a higher level of linguistic granularity, with the *Loyalty Islands* languoid). Shifts between these levels of granularity make it difficult to measure how many distinct societies the corpus actually represents; the 413 languoids labelled in the corpus likely reflect a lower bound on the number of societies represented.

2.2 Breadth and depth of the corpus

The *Expanded Natural History of Song Discography* contains 1007 songs, with wide global and linguistic distributions (Figure 2A-E). The sampling strategy yielded a broad diversity of songs across languages ($n =$

*With the exception of one North American subregion, "Regional, Ethnic, and Diaspora Cultures", which had ambiguous boundaries.

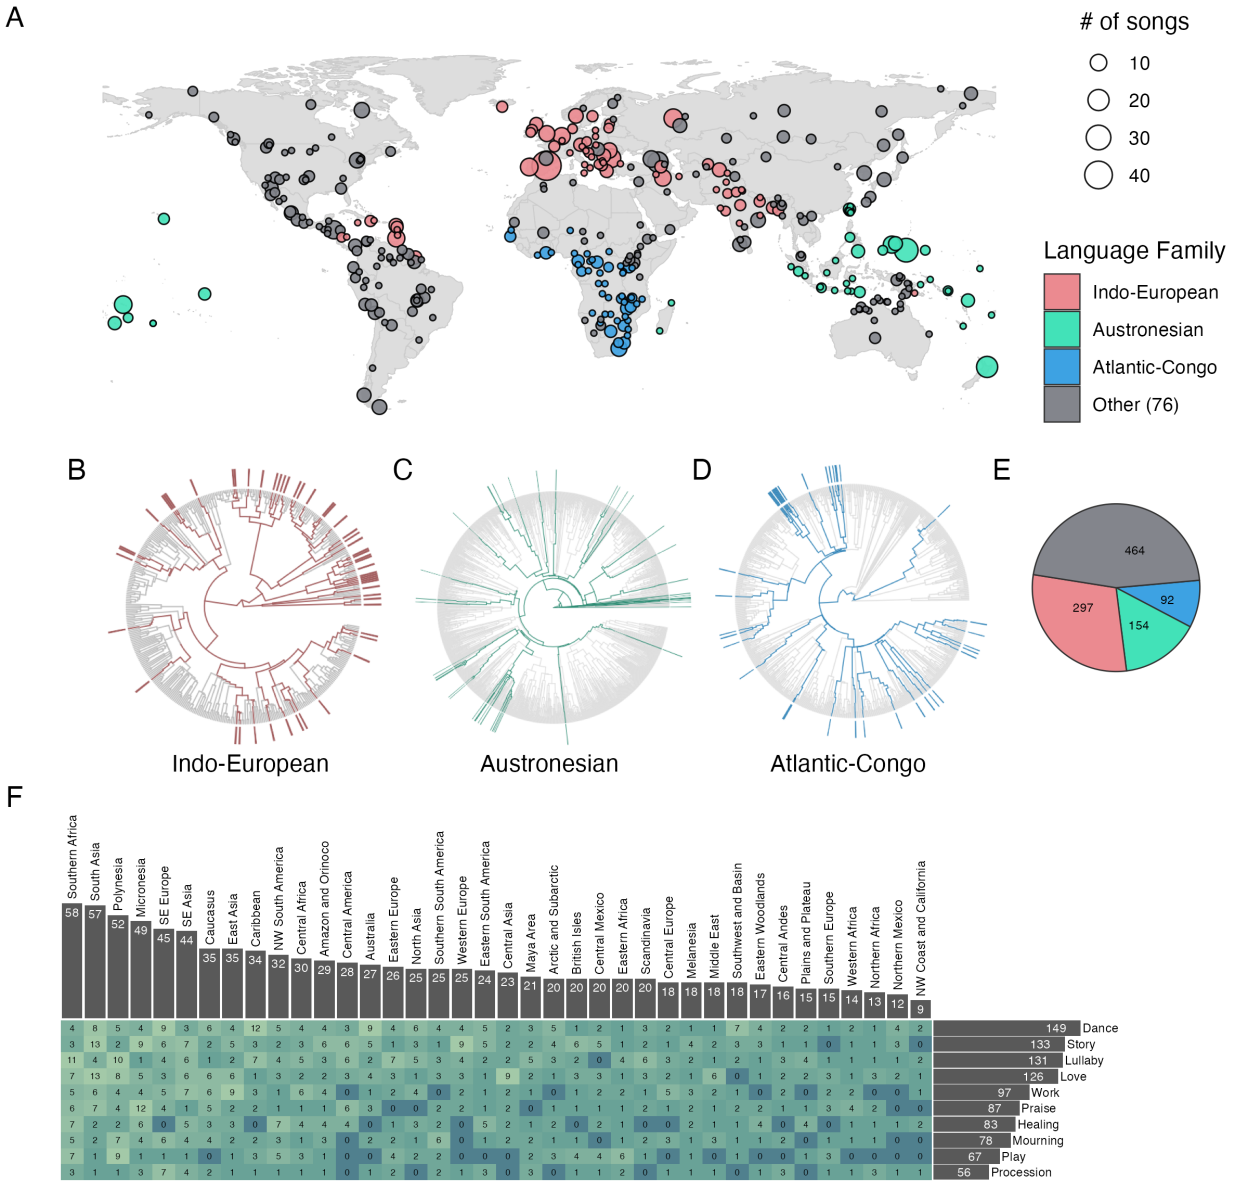

Figure 2 | The Expanded Natural History of Song Discography. **(A)** The 1007 songs in the corpus are broadly globally distributed. The size of each bubble represents the number of songs in the corpus from the approximate map location. Locations are plotted using Glottolog metadata and aggregated by glottocode (i.e., languoid); 47 locations, representing 88 songs, are omitted due to missing location data. **(B-D)** The linguistic distribution is also broad, with approximately half the corpus representing three large language families, deeply sampled; and the other half from a large number of other language families (see the pie chart in **E**). In the phylogenetic language trees, lineages are highlighted when represented by at least one song. **(F)** The distribution of behavioral contexts represented in the corpus is also broad; the heatmap depicts the number of songs representing each geographic region in each of the ten behavioral contexts studied. Of the 380 possible region-by-behavioral-context pairings, 328 are represented by at least one song.

413 languoids, median songs per languoid = 1, range 1-46); behavioral contexts (10 types, median songs per type = 92, range 56-149); and geographic regions (median songs per region = 23, range 1-58). Of the 380 possible behavior-by-region combinations, 329 are represented by at least one song (Figure 2F).

The strategy to deeply sample songs across three language families (Austronesian, Indo-European, and Atlantic-Congo) yielded many songs (543 of the 1007 songs) with languages hailing from diverse branches within each language family (Figure 2B-D). This mixed approach to sampling (both a deep and broad sample) should facilitate phylogenetic analyses, while still maintaining a large representation of language families corpus-wide ($n = 79$ language families, median songs per family = 1, range 1-87).

3 Results

To demonstrate the utility of the corpus, we undertook two sets of analyses. The first focussed on the breadth of the corpus, to test a question of universality; and the second focussed on the depth of the corpus, to test a question of diversity.

3.1 Proof-of-concept 1: Acoustic forms predict the behavioral contexts of songs

We and others have argued that aspects of music are mutually intelligible across cultures (Argstatter, 2016; Balkwill et al., 2004; Balkwill & Thompson, 1999; Fritz et al., 2009; Hilton, Crowley-de Thierry, et al., 2022; Hilton & Mehr, 2022; Laukka et al., 2013; Mehr et al., 2018, 2019; Sievers et al., 2013; Trehub et al., 1993a; Yurdum et al., 2023; see Singh & Mehr, 2023 for a review). A pattern of mutual intelligibility implies links between form and function, akin to those found in vocalizations found in non-human primates (Filippi et al., 2017; Owren & Rendall, 2001); frogs (Wagner, 1989); hawks (Mueller, 1971); and deer (Clutton-Brock & Albon, 1979). In music, form-function links are predicted by functional accounts of musical behavior (Kotler et al., 2019; e.g., Mehr et al., 2017).

While studies of form-function links in music include a large diversity of *listeners*, they use a limited diversity of *music* as stimuli. For example, we previously showed an ability to detect the behavioral context of lullabies, dance songs, and healing songs in English-speaking adults recruited on Amazon Mechanical Turk (Mehr et al., 2018); in English-speaking adult citizen-science volunteers (Mehr et al., 2019); in English-speaking children (Hilton, Crowley-de Thierry, et al., 2022); and in adults recruited globally, in many languages, who were living in both industrialized and non-industrialized societies (Yurdum et al., 2023) — but in all four studies, the same relatively small collection of 118 songs was studied (the original *Natural History of Song Discography*). While this collection represented an advance in the diversity of music studied in this type of experiment (Fitch & Popescu, 2019), its small size constrains the generality of findings using it.

As such, for a first proof-of-concept of the utility of the *Expanded Natural History of Song Discography*, we aimed to reproduce the findings of these previous studies, testing whether the acoustic features of songs in the corpus were reliably predictive of their behavioral functions across the cultures represented.

We extracted statistical summaries of the acoustic content of each song excerpt using `MIRtoolbox` (Lartillot et al., 2008), a MATLAB toolbox for analysis of spectral and rhythmic features. We used the `mirfeatures` function to extract 38 acoustic features per song. The song excerpts were loudness-matched before model fitting. This tool has previously been used to quantify musical features in stimuli that elicit groove in music (Matthews et al., 2020); to describe global patterns in the acoustic features of speech and song (Albouy et al., 2024; Hilton, Moser, et al., 2022); and to relate acoustical forms of songs to their behavioral contexts, in our previous work (Mehr et al., 2019).

We ran a Least Absolute Shrinkage and Selection Operator (LASSO) model (Friedman et al., 2010) to predict the behavioral context from each excerpt's acoustic features. In order to minimize bias due to differing base rates of behavioral types, including cases in which the LASSO model limits its predictions to a

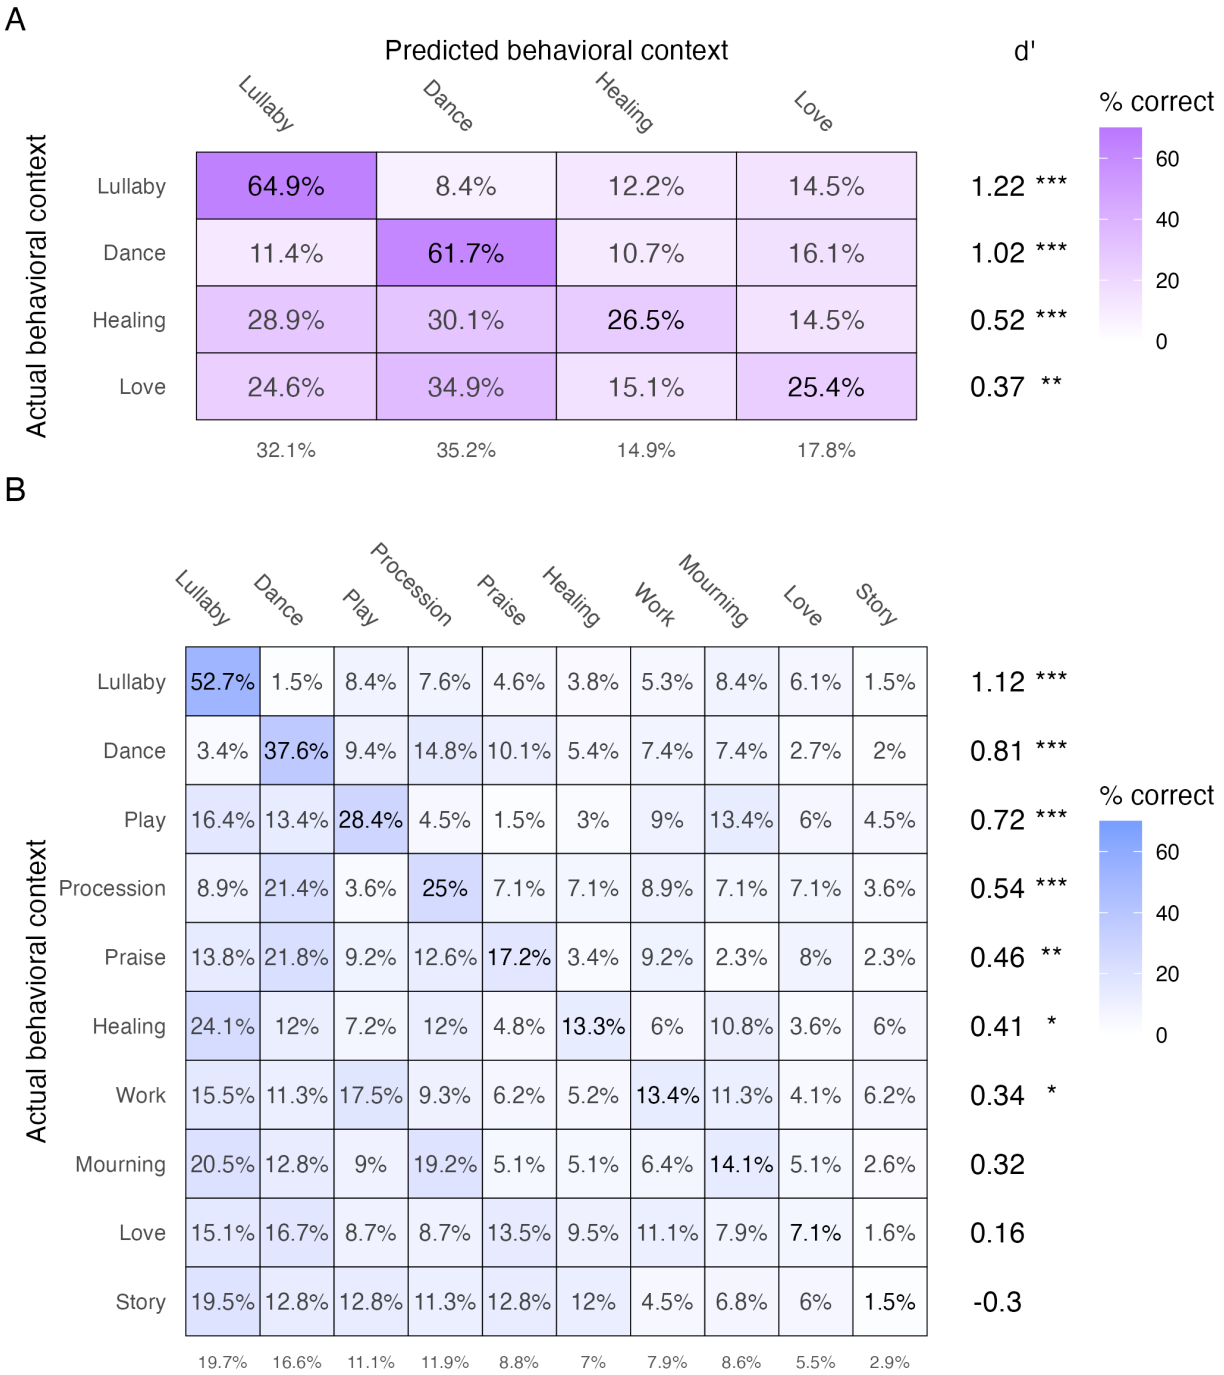

Figure 3 | The acoustic forms of songs predict their behavioral contexts with varying accuracy. We trained an ensemble LASSO model to predict the behavioral context of songs using acoustic features extracted from their recordings. Significance testing was performed using a permutation test on the results of the ensemble model, with the p-value set to the proprtion of random permutations with accuracy greater than the ensemble model for each song function ($p < .05(*), p < .01(**), p < .005(***)$). The confusion matrices show **(A)** a conceptual replication of prior work (Mehr et al., 2019), using only the four behavioral contexts studied therein: lullabies, dance, healing, and love songs are all predicted with significant accuracy, but sensitivity to lullabies and dance songs is far higher than for healing and love songs. This analysis approach is extended in **(B)** to all ten behavioral contexts studied in the *Expanded Natural History of Song Discography*. Lullabies, dance, play, and procession songs are well-predicted, while mourning, love, and story songs are not.

small subsample of the most prevalent behavioral types, we used an ensemble modelling approach in which many LASSO models were ran and their predictions were aggregated. We first randomly split the data into a 10-part test-train partition. To create predictions for each testing partition while minimizing the base rate biases, we generated new training sets by bootstrapping (i.e., sampling with replacement) from the remaining training partitions while keeping the number of behavioral types equivalent (e.g., in each partition, sampling the same number of dance songs as story songs).

For each testing partition, we bootstrapped 10 training sets and trained a LASSO model on each set, recording its predictions. We repeated this procedure for 25 randomly selected test-train splits. Finally, the results were aggregated, with the final prediction for each song recorded as the modal prediction from the 250 LASSO models. We calculated significance by performing a permutation test; p-values for each type were estimated as the proportion of permutation simulations which resulted in accuracy higher than the ensemble model.

We first used this approach to classify only songs from the four behavioral contexts represented in the original *Natural History of Song Discography* (i.e., dance, lullaby, healing, and love), providing a direct replication of prior results (see Figure 5B in Mehr et al., 2019).

The replication was successful (Figure 3A): the model's classification of song behavioral contexts based on acoustic features was above chance (mean accuracy = 47.2%, chance level of 25%) and higher than in Mehr et al. (2019), where mean accuracy using `MIRtoolbox` features was on par with human listeners, at approximately 42% correct. Moreover, accuracy varied across song types in an identical fashion to the pattern found in the smaller corpus, where dance songs and lullabies are classified with highest accuracy, while healing songs and love songs are classified with lower accuracy (but still above chance). Note that we define chance accuracy as the inverse of the number of behavioral contexts, rather than the proportion of songs of a given behavioural context actually present in the corpus.

Second, we expanded the approach to test whether the same acoustic features could be used to identify all *ten* behavioral contexts represented in the new corpus — six of which have not previously been studied in this fashion (i.e., play, procession, praise, work, mourning, story). We used the same LASSO ensemble modeling approach.

Here too the acoustical forms of songs were predictive of their behavioral contexts (Figure 3B). On average, performance was above chance (accuracy = 21.7%, chance level of 10%), although with ten categories of songs, variability was high. Some song contexts showed very clear relations (e.g., lullabies, dance songs, and play songs all have relatively high *d*-prime scores) and others less so [e.g., the model has no sensitivity at all to story songs, and only weakly detects love songs, conceptually replicating prior work on human classification of love songs; Mehr et al. (2018), Yurdum et al. (2023)].

3.2 Proof-of-concept 2: Cultural relatedness and behavioral context both explain acoustical similarities in songs

Many studies explore how music perception and production are patterned across cultures, as such data are informative for hypotheses concerning the biological and cultural evolution of music (for discussion, see Mehr et al., 2021). Indeed, a variety of sources of evidence support the idea that cultural experience shapes musicality: infants show preferences for culturally familiar metrical structures over unfamiliar ones (Soley & Hannon, 2010); music processing abilities (i.e., pitch discrimination and beat alignment) differ as a function of linguistic experience (Liu et al., 2023); melodies sung in tonal languages are shaped in part by the contours of those languages (Kirby & Ladd, 2016); and so on.

Computational approaches that directly model cultural relatedness have tested a variety of hypotheses about the structure of cross-cultural diversity in musicality, complementing these experimental studies. Such approaches have revealed how frequent specific structural forms are globally, such as the near-universal use of discrete pitches and non-equidistant scales versus the large cultural variance in the use of pentatonic scales

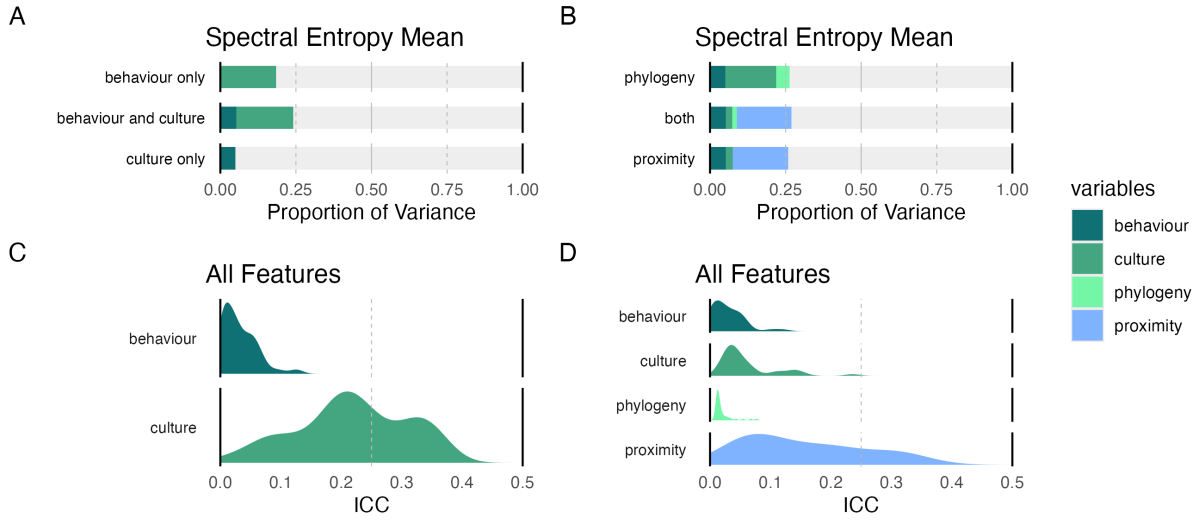

Figure 4 | Effects of behavioral context, culture, and cultural transmission on acoustic features in song. We fit Bayesian group effects models calculating explained variance (measured by intra-class correlation, ICC) in acoustic features in songs in the corpus. In **A**, we compare the ICC of models fit with behavior (coded by song type), culture (coded by language), or both for the mean spectral entropy of each song. We note that the proportion of explained variance for behavior and culture are independent for this and other acoustic features (not shown), such that including both factors additively increases the total explained variance. **C** shows the distribution of ICC of behavior and culture from the model which includes both over all 38 acoustic features. Variance captured by behavioral context tends to be consistent but lower across the acoustic features, whereas variance captured by culture tends to be more variable. In **B**, we compared models for spectral entropy which additionally included phylogenetic distance and/or geographical distance, which we can take as proxies for vertical and horizontal transmission, respectively. We see that the explained variance of culture is largely absorbed by geographical proximity, while variance explained by phylogeny is relatively low. Additionally, there is little additional explained variance gained from including these two new factors, a trend which holds for all acoustic features. In **C**, we show the ICC across all acoustic features from models which include all four factors. We see that the explained variance of proximity has absorbed much of the ICC previously attributed to culture, while ICC for phylogeny is consistently quite low.

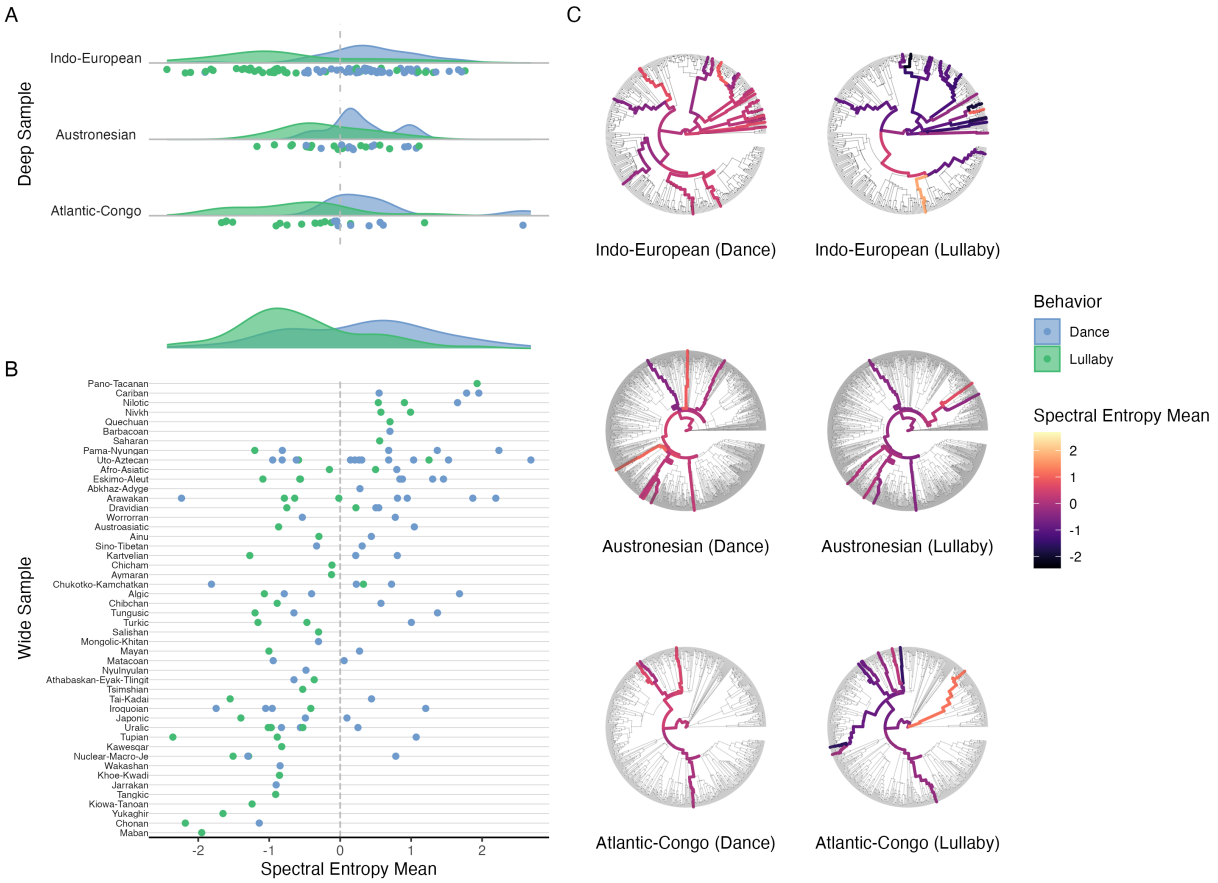

Figure 5 | Visual exploration of spectral entropy across cultures. Spectral entropy, an acoustic feature that loosely tracks complexity, shows distinctive patterns within and between language families. **(A)** In each of three language families, there is a robust difference in spectral entropy between dance songs (in blue) and lullabies (in green). **(B)** This effect replicates across the rest of the 49 language families which contain dance or lullaby songs. In **(C)** a within-language-family view of the same data shows variability in spectral entropy in both dance songs and lullabies within each deeply-sampled language family tree. Nodes closer to the center of the tree are colored to show the average spectral entropy of the songs included in that clade. The Indo-European lullabies, for instance, show that spectral entropy is overall relatively low for most languages, but also reveals languages where spectral entropy is atypically high given the behavioral context.

(Savage et al., 2015). And in contrast to language, which by necessity requires low within-population variability to enable communication, musical diversity throughout Austronesian languages shows more variability within languages than between them (Rzeszutek et al., 2012).

One outstanding question in the modelling of musical diversity is how the interplay between cultural diversity and the functional uses of music lead to reliable variability in musical forms. This question has been difficult to address, however, because previous corpus studies have not accounted for the behavioral contexts of the music being performed. This omission complicates the interpretation of cross-cultural models, as the music available for a given language or language family may be strongly biased. For example, if the sample of songs in Hindi are dance music and none are lullabies, model estimates for the influence of Hindi on musical features will shift toward those features characterizing dance songs, even if such a shift is independent of linguistic influences. The availability of behavioral context information for each song in the *Expanded Natural History of Song Discography* allows for a test of the relative impact of contextual factors (e.g., when a song is used for soothing a baby) on musical features, relative to the impacts of geographical location, language, and linguistic ancestry of that ethnolinguistic group on how a song sounds.

We used Bayesian phylogenetic modeling to estimate the group-level effects of songs' behavioral context, language, as well as linguistic ancestry (hereby *phylogeny*) and geographical proximity on its acoustic features. The model was estimated in `brms` (Bürkner, 2020), modeling random group effects using Gaussian processes and computing intra-class correlation (ICC) as the proportion of variance explained by each variable. The acoustic features used here are the same `MIRtoolbox` features described in the previous section. Phylogenetic distance between languages was modeled assuming Brownian diffusion of traits on a single Maximum Clade Credibility language tree describing language geneology across the globe (Bouckaert et al., 2022). Geospatial proximity was calculated using `geosphere` (Bürkner, 2022) on geospatial data present in the *Glottolog* (Hammarström et al., 2023) for each language, assuming covariance is exponentially proportional to geographic distance.

We ran the model on the deeply sampled subset of the corpus, that is, on songs from the Indo-European ($n = 297$), Austronesian ($n = 154$), and Atlantic Congo ($n = 92$) language families (total $N = 543$). These families all diversified over the last few thousand years and together now represent ~40% of the world's languages[†]. Focusing on these three large families, for which we have many songs from many ethnolinguistic groups, allows us to infer the relative importance of immediate and historical factors in shaping song diversity over this period.

First, we tested the relative influence of behavioral context and language without phylogenetic or geographic proximity. For each acoustic feature, we ran three models: an initial model that included a term for songs' behavioral contexts; a second that included a term for songs' ethnolinguistic context; and a third that included both. All models show $\hat{R} < 1.05$, suggesting convergence in sampling. Figure 4A shows an example set of intra-class correlations across these three models (for the acoustic feature *spectral entropy*). This and other acoustic features show that the explained variance from behavioral context and language are independent, in that the total explained variance for the model that includes both is roughly the sum of the models that include the terms individually, confirming that behavioral context is an important factor for shaping the variability in the acoustics of music. In Figure 4C, we show density plots of the ICC across all acoustic feature for the models that include both behavior and language. We find that language tends to have a larger proportion of explained variance; however we note that behavior is limited to 10 different factors, one for each context, while language uses 188. A finer- or coarser-grained taxonomy of behavioral contexts might change this result.

Second, we repeated these analyses, adding terms to the model that compare the effects of phylogeny and geographical proximity, to ask whether similarities between acoustic features are better explained by horizontal transmission (transfer of features between cultures in close geographic proximity) or vertical transmission (transfer of features through descent groups within a lineage), independently of language or behavioral context. The phylogenetic proximity was calculated as covariance matrices derived from the

[†]At time of writing, Glottocode documents 3270 child languages of these three language families, out of 8605 total languages documented.

global tree (Bouckaert et al., 2022) while geographical proximity used coordinates associated with glottocodes (Hammarström et al., 2023). As in the first analysis, our strategy was to model the two features of interest independently and then together in a third model. In Figure 4B, we show the resulting ICCs for *spectral entropy*. We see that geographical proximity seems to absorb much of the explained variance originally attributed to language, while phylogeny explains a much smaller proportion. This trend is also demonstrated in Figure 4D, which shows the intra-class correlations from models that include both phylogeny and proximity for all acoustic features. We see ICCs for language in Figure 4D are overall smaller than in Figure 4C, while the ICCs for proximity in 4D more closely resemble those of language in 4C. Meanwhile, ICCs for phylogenetic proximity are quite low, suggesting that horizontal transmission plays a more significant role in shaping the acoustics of music than vertical transmission. We additionally found that geographical and phylogenetic proximity explained minimal variance beyond behavioral context and linguistic origin; this is not that surprising as phylogeny and geographical proximity were factored by glottocodes the same as language, differing only in the covariance matrix structuring the factors. Note that, as above, there is substantial variability in the amount of variance explained across acoustic features.

Focusing on specific acoustic features of interest is also informative, especially given their potential theoretical importance. We demonstrate this approach with *spectral entropy*, an acoustic feature that loosely tracks musical complexity. For example, spectral entropy correlates with perceived musical disorganization and phrase termination (Danieli & Frank, 2022), and melodic and textural entropy represent components of complexity relating to musical pleasure (Margulis & Beatty, 2008). Several theories predict that lullabies and dance songs should differ substantially on this feature, as lullabies tend to be identifiable in being "soft" and "simple" (Trehub et al., 1993a) and low in roughness (Hilton, Moser, et al., 2022).

In Figure 5, we examine this feature within the three deeply-sampled language families, and across the whole corpus. The overall effect of behavioral context is evident: dance songs, as a class, are higher in spectral entropy than lullabies (Figure 5A-B). Additionally, spectral entropy values also differ between dance songs and lullabies *within each language family* (Figure 5C). These descriptive visualizations help reveal how acoustics vary between cultures and behavioral contexts, highlighting the substantial variability within each language family, while demonstrating the general trend that spectral entropy can coarsely differentiate between dance songs and lullabies. The nature of this association is not yet clear, although considering differences in the purpose of dance music and lullabies, it may be related to how energizing or calming the response to that music is likely to be. However, it remains unknown the degree to which this association is grounded more in physiological aspects of our music psychology or in some culturally reinforced convention that is likely to turn out otherwise if we were to replay the tape of life.

4 General discussion

We report the *Expanded Natural History of Song Discography* and describe its applications for cross-cultural research on the universality and diversity of human song, with two proofs of concept. First, LASSO classifiers showed that the behavioral contexts of songs are detectable on the basis of their acoustic features, with variability in accuracy across contexts. Second, Bayesian group-effects modeling showed that cultural-linguistic origins and behavioral context explain variability in acoustics independently, with further influences of language ancestry and geographic proximity.

Many other questions are testable with this corpus. For example, in conjunction with large multi-lingual speech corpora, such as *Common Voice* (Ardila et al., 2020) and *DoReCo* (Seifart et al., 2024), one might study how speech and song vocalizations may co-vary across cultures and contexts. Research applying the audio files in citizen-science experiments might investigate how the original behavioral context may shape or constrain emotional reactions to the music, allowing us to better understand the evolutionary underpinnings of musical behaviors. Laboratory studies on psychological responses to music may sample stimuli from the corpus, as in previous work (Bainbridge et al., 2021), so as to improve the generalizability of experimental findings which necessarily use a small number of stimuli (see Hilton, Moser, et al., 2022).

The *Expanded Natural History of Song Discography* is permanently archived at https://doi.org/10.5281/zenodo.8223168 and we encourage members of the research community to use this resource in their research.

One important long-term use for corpora involves new data. We have hosted the corpus on *D-PLACE* to help users to easily link the songs from this corpus to cultural and ecological data from other corpora. The provision of raw audio files also means researchers can experiment with different methods of musical and acoustic feature extraction. For the purposes this relatively short paper, we used single-valued estimates of acoustic features automatically extracted with an off-the-shelf tool (`MIRtoolbox`), but this approach has many limitations (for instance, a single estimate of tempo does not account for a song speeding up or slowing down). Richer data characterizing the musical features of each song, such as changes in features over time or transcriptions created with pitch-extraction software, may support more robust tests of cultural transmission and variability in music (see Mehr et al., 2019 for discussion).

Moreover, we anticipate that future iterations of this corpus would benefit from expanding annotation data. For example, reporting the degree of confidence alongside each coding decision has been argued to improve transparency when reporting cross-cultural databases, similar to how it is standard practice to report measures of inter-rater reliability when multiple researchers ascribe codes to the same data (Slingerland et al., 2020). Further, some songs could plausibly be described as having more than one behavioral context, but such information is not captured by the current version of the corpus; a potential solution is to include a secondary behavioral context when applicable or refine our behavioral taxonomy as we learn more about form-function relationships in music. The inclusion of multiple labels in this fashion may aid the evaluation of classification accuracy (McKay & Fujinaga, 2006).

Lastly, we encourage researchers to test hypotheses about the evolution music using this corpus, as well as to connect it to other datasets that may reveal how song evolution may be driven by cultural and ecological factors. Such questions have a long history in computational analyses of language, supporting findings that languages evolve in rapid bursts (Atkinson et al., 2008); mapping the expansion of Indo-European (Bouckaert et al., 2012) and Pama-Nyungan (Bouckaert et al., 2018) language families; and the finding that word order can be explained as a function of linguistic lineage rather than Chomskyan universality (Dunn et al., 2011). As the study of the evolutionary history of human vocalization grows, we hope that this corpus will provide a systematically constructed foundation for those curious about how musicality is instantiated worldwide.

End notes

Data, code, and materials availability

The Expanded Natural History of Song Discography is freely available at https://zenodo.org/doi/10.5281/zenodo.8223168. A fully reproducible manuscript; data; analysis and visualization code; and other materials are available at https://github.com/themusiclab/nhs-expanded; this repository will be permanently archived on Zenodo at the time of publication.

Acknowledgments

We thank Micah Walter, Brisa Garcia, and Nivi Ravi for contributions to searches for candidate items; Sumi Onoe for contributions to corpus validation; and the members of The Music Lab for feedback and discussion.

Funding

This research was supported by the US National Institutes of Health Director's Early Independence Award DP5OD024566 (S.A.M.); the Royal Society of New Zealand Te Apārangi Rutherford Discovery Fellowship RDF-UOA2103 (S.A.M. and M. Snarskis); the Marsden Fund Standard Grant MFP-UOA2133 (S.A.M. and M.Snarskis); the Royal Society of New Zealand Marsden Standard Grant 20-UOA123 (Q.D.A.); the Fonds de Recherche du Québec Nature et Technologies PR-299652, to Sarah C. Woolley (supporting M.B.); and a doctoral training scholarship from Fonds de Recherche du Québec Nature et Technologies (M.B.).

Author contributions

S.A.M. and M. Singh conceived of the research, with design contributions from Q.D.A. and T.K.. S.A.M. and Q.D.A. provided funding. The initial search for candidate songs for the corpus was conducted by A.B., D.S., H.D., L.D., C.M.B., N.M., T.I., K.L., J.K., and J.L., under the supervision of S.A.M., S.A., and M.B. The process for sourcing audio recordings was developed and supervised by L.Y. and C.M.B., and items were sourced by L.Y., C.M.B., J.S.L., and M.B. The songs were validated by M.B., C.B.H., A.K., T.K., J.S.L., A.M., V.M., M. Shin, and M. Snarskis. M. Snarskis and M.B. conducted analyses and created visualizations, with contributions from S.A.M. M.B., M.Snarskis, and S.A.M. led the writing of the manuscript, and all authors approved it.

References

Albouy, P., Mehr, S. A., Hoyer, R. S., Ginzburg, J., Du, Y., & Zatorre, R. J. (2024). Spectro-temporal acoustical markers differentiate speech from song across cultures. *Nature Communications*, *15*(1), 4835. https://doi.org/10.1038/s41467-024-49040-3

Ardila, R., Branson, M., Davis, K., Henretty, M., Kohler, M., Meyer, J., Morais, R., Saunders, L., Tyers, F. M., & Weber, G. (2020). *Common Voice: A Massively-Multilingual Speech Corpus* (No. arXiv:1912.06670). arXiv. https://doi.org/10.48550/arXiv.1912.06670

Argstatter, H. (2016). Perception of basic emotions in music: Culture-specific or multicultural? *Psychology of Music*, *44*(4), 674–690. https://doi.org/10.1177/0305735615589214

Atkinson, Q. D., Meade, A., Venditti, C., Greenhill, S. J., & Pagel, M. (2008). Languages evolve in punctuational bursts. *Science*, *319*(5863), 588. https://doi.org/10.1126/science.1149683

Bainbridge, C. M., Bertolo, M., Youngers, J., Atwood, S., Yurdum, L., Simson, J., Lopez, K., Xing, F., Martin, A., & Mehr, S. A. (2021). Infants relax in response to unfamiliar foreign lullabies. *Nature Human Behaviour*. https://doi.org/10.1038/s41562-020-00963-z

Balkwill, L.-L., & Thompson, W. F. (1999). A cross-cultural investigation of the perception of emotion in music: Psychophysical and cultural cues. *Music Perception*, *17*(1), 43–64. https://doi.org/10.2307/40285811

Balkwill, L.-L., Thompson, W. F., & Matsunaga, R. (2004). Recognition of emotion in Japanese, Western, and Hindustani music by Japanese Listeners1. *Japanese Psychological Research*, *46*(4), 337–349. https://doi.org/10.1111/j.1468-5584.2004.00265.x

Bertin-Mahieux, T., Ellis, D. P. W., Whitman, B., & Lamere, P. (2011). The million song dataset. *Proceedings of the 12th International Society for Music Information Retrieval Conference*, 591–596. https://doi.org/10.7916/D8NZ8J07

Blasi, D. E., Henrich, J., Adamou, E., Kemmerer, D., & Majid, A. (2022). Over-reliance on English hinders cognitive science. *Trends in Cognitive Sciences*.

Bouckaert, R. R., Bowern, C., & Atkinson, Q. D. (2018). The origin and expansion of Pama–Nyungan languages across Australia. *Nature Ecology & Evolution*, *2*(4), 741–749. https://doi.org/10.1038/s41559-018-0489-3

Bouckaert, R., Lemey, P., Dunn, M., Greenhill, S. J., Alekseyenko, A. V., Drummond, A. J., Gray, R. D., Suchard, M. A., & Atkinson, Q. D. (2012). Mapping the Origins and Expansion of the Indo-European

Language Family. *Science*, *337*(6097), 957–960. https://doi.org/10.1126/science.1219669

Bouckaert, R., Redding, D., Sheehan, O., Kyritsis, T., Gray, R., Jones, K. E., & Atkinson, Q. (2022). *Global language diversification is linked to socio-ecology and threat status.* SocArXiv. https://doi.org/10.31235/osf.io/f8tr6

Bürkner, P.-C. (2020). *Brms: Bayesian Regression Models using Stan.*

Bürkner, P.-C. (2022). *Geosphere: Spherical Trigonometry.*

Clutton-Brock, T. H., & Albon, S. D. (1979). The roaring of red deer and the evolution of honest advertisement. *Behaviour*, *69*(3), 145–170. https://doi.org/10.1163/156853979X00449

Cowen, A. S., Elfenbein, H. A., Laukka, P., & Keltner, D. (2018). Mapping 24 emotions conveyed by brief human vocalization. *American Psychologist*. https://doi.org/10.1037/amp0000399

Danieli, L., & Frank, M. (2022). Entropy, pitch, and noise: Organisation and disorganisation in the perception of closure for different types of spectra. *Journal of New Music Research*, *51*(4-5), 378–387. https://doi.org/10.1080/09298215.2023.2276281

Dunn, M., Greenhill, S. J., Levinson, S. C., & Gray, R. D. (2011). Evolved structure of language shows lineage-specific trends in word-order universals. *Nature*, *473*(7345), 79–82. https://doi.org/10.1038/nature09923

Filippi, P., Congdon, J. V., Hoang, J., Bowling, D. L., Reber, S. A., Pašukonis, A., Hoeschele, M., Ocklenburg, S., Boer, B. de, Sturdy, C. B., Newen, A., & Güntürkün, O. (2017). Humans recognize emotional arousal in vocalizations across all classes of terrestrial vertebrates: Evidence for acoustic universals. *Proceedings of the Royal Society B: Biological Sciences*, *284*(1859). https://doi.org/10.1098/osf.io/rspb.2017.0990

Fitch, W. T., & Popescu, T. (2019). The world in a song. *Science*, *366*(6468), 944–945. https://doi.org/10.1126/science.aay2214

Forkel, R., List, J.-M., Greenhill, S. J., Rzymski, C., Bank, S., Cysouw, M., Hammarström, H., Haspelmath, M., Kaiping, G. A., & Gray, R. D. (2018). Cross-Linguistic Data Formats, advancing data sharing and re-use in comparative linguistics. *Scientific Data*, *5*(1), 180205. https://doi.org/10.1038/sdata.2018.205

Friedman, J., Hastie, T., & Tibshirani, R. (2010). Regularization paths for generalized linear models via coordinate descent. *Journal of Statistical Software*, *33*(1), 1–22.

Fritz, T., Jentschke, S., Gosselin, N., Sammler, D., Peretz, I., Turner, R., Friederici, A. D., & Koelsch, S. (2009). Universal recognition of three basic emotions in music. *Current Biology*, *19*(7), 573–576. https://doi.org/10.1016/j.cub.2009.02.058

Gilquin, G., & Gries, S. T. (2009). *Corpora and experimental methods: A state-of-the-art review.* *5*(1), 1–26. https://doi.org/10.1515/CLLT.2009.001

Hahn, M., & Xu, Y. (2022). Crosslinguistic word order variation reflects evolutionary pressures of dependency and information locality. *Proceedings of the National Academy of Sciences*, *119*(24), e2122604119. https://doi.org/10.1073/pnas.2122604119

Hammarström, H., Forkel, R., Haspelmath, M., & Bank, S. (2023). *Glottolog 4.8*. https://doi.org/10.5281/zenodo.8131084

Hawthorne, C., Stasyuk, A., Roberts, A., Simon, I., Huang, C.-Z. A., Dieleman, S., Elsen, E., Engel, J., & Eck, D. (2019). Enabling factorized piano music modeling and generation with the MAESTRO dataset. *International Conference on Learning Representations.*

Henrich, J., Heine, S. J., & Norenzayan, A. (2010). Most people are not WEIRD. *Nature*, *466*(7302), 29–29. https://doi.org/10.1038/466029a

Hilton, C. B., Crowley-de Thierry, L., Yan, R., Martin, A., & Mehr, S. A. (2022). Children infer the behavioral contexts of unfamiliar foreign songs. *Journal of Experimental Psychology: General*. https://doi.org/10.1037/xge0001289

Hilton, C. B., & Mehr, S. A. (2022). Citizen science can help to alleviate the generalizability crisis. *Behavioral and Brain Sciences.*

Hilton, C. B., Moser, C. J., Bertolo, M., Lee-Rubin, H., Amir, D., Bainbridge, C. M., Simson, J., Knox, D., Glowacki, L., Alemu, E., Galbarczyk, A., Jasienska, G., Ross, C. T., Neff, M. B., Martin, A., Cirelli, L. K., Trehub, S. E., Song, J., Kim, M., … Mehr, S. A. (2022). Acoustic regularities in infant-directed speech and song across cultures. *Nature Human Behaviour*, *6*(11), 1545–1556. https://doi.org/10.1038/s41562-022-01410-x

Human Relations Area Files, Inc. (1967). The HRAF quality control sample universe. *Behavior Science*

Notes, *2*(2), 81–88.
Jacoby, N., Margulis, E. H., Clayton, M., Hannon, E., Honing, H., Iversen, J., Klein, T. R., Mehr, S. A., Pearson, L., Peretz, I., Perlman, M., Polak, R., Ravignani, A., Savage, P. E., Steingo, G., Stevens, C. J., Trainor, L., Trehub, S., Veal, M., & Wald-Fuhrmann, M. (2020). Cross-Cultural Work in Music Cognition: Challenges, Insights, and Recommendations. *Music Perception: An Interdisciplinary Journal*, *37*(3), 185–195. https://doi.org/10.1525/mp.2020.37.3.185
Jacoby, N., Undurraga, E. A., McPherson, M. J., Valdés, J., Ossandón, T., & McDermott, J. H. (2019). Universal and non-universal features of musical pitch perception revealed by singing. *Current Biology*, *29*(19), 3229–3243. https://doi.org/10.1016/j.cub.2019.08.020
Kirby, J., & Ladd, D. R. (2016). Tone-melody correspondence in Vietnamese popular song. *5th International Symposium on Tonal Aspects of Languages (TAL 2016)*, 48–51. https://doi.org/10.21437/TAL.2016-10
Kirby, K. R., Gray, R. D., Greenhill, S. J., Jordan, F. M., Gomes-Ng, S., Bibiko, H.-J., Blasi, D. E., Botero, C. A., Bowern, C., Ember, C. R., Leehr, D., Low, B. S., McCarter, J., Divale, W., & Gavin, M. C. (2016). D-PLACE: A Global Database of Cultural, Linguistic and Environmental Diversity. *PLOS ONE*, *11*(7), e0158391. https://doi.org/10.1371/journal.pone.0158391
Kotler, J., Mehr, S. A., Egner, A., Haig, D., & Krasnow, M. M. (2019). Response to vocal music in Angelman syndrome contrasts with Prader-Willi syndrome. *Evolution and Human Behavior*, *40*(5), 420–426. https://doi.org/10.1016/j.evolhumbehav.2019.05.003
Lartillot, O., Toiviainen, P., & Eerola, T. (2008). A Matlab toolbox for music information retrieval. In C. Preisach, H. Burkhardt, L. Schmidt-Thieme, & R. Decker (Eds.), *Data analysis, machine learning and applications* (pp. 261–268). Springer Berlin Heidelberg.
Laukka, P., Eerola, T., Thingujam, N. S., Yamasaki, T., & Beller, G. (2013). Universal and culture-specific factors in the recognition and performance of musical affect expressions. *Emotion*, *13*(3), 434–449. https://doi.org/10.1037/a0031388
List, J.-M., Forkel, R., Greenhill, S. J., Rzymski, C., Englisch, J., & Gray, R. D. (2022). Lexibank, a public repository of standardized wordlists with computed phonological and lexical features. *Scientific Data*, *9*(1), 316. https://doi.org/10.1038/s41597-022-01432-0
Liu, J., Hilton, C. B., Bergelson, E., & Mehr, S. A. (2023). Language experience predicts music processing in a half-million speakers of fifty-four languages. *Current Biology*, *33*(10), 1916–1925.e4. https://doi.org/10.1016/j.cub.2023.03.067
Margulis, E. H., & Beatty, A. P. (2008). Musical Style, Psychoaesthetics, and Prospects for Entropy as an Analytic Tool. *Computer Music Journal*, *32*(4), 64–78. https://www.jstor.org/stable/40072681
Matthews, T. E., Witek, M. A. G., Lund, T., Vuust, P., & Penhune, V. B. (2020). The sensation of groove engages motor and reward networks. *NeuroImage*, *214*, 116768. https://doi.org/10.1016/j.neuroimage.2020.116768
McDermott, J. H., Schultz, A. F., Undurraga, E. A., & Godoy, R. A. (2016). Indifference to dissonance in native Amazonians reveals cultural variation in music perception. *Nature*, *535*(7613), 547–550. https://doi.org/10.1038/nature18635
McKay, C., & Fujinaga, I. (2006). Musical genre classification: Is it worth pursuing and how can it be improved? *ISMIR*, 101–106.
Mehr, S. (2024). *Principles of music perception*. OSF. https://doi.org/10.31234/osf.io/bdpjc
Mehr, S. A., Kotler, J., Howard, R. M., Haig, D., & Krasnow, M. M. (2017). Genomic imprinting is implicated in the psychology of music. *Psychological Science*, *28*(10), 1455–1467. https://doi.org/10.1177/0956797617711456
Mehr, S. A., Krasnow, M. M., Bryant, G. A., & Hagen, E. H. (2021). Origins of music in credible signaling. *Behavioral and Brain Sciences*, *44*, e60. https://doi.org/10.1017/S0140525X20000345
Mehr, S. A., Singh, M., Knox, D., Ketter, D. M., Pickens-Jones, D., Atwood, S., Lucas, C., Jacoby, N., Egner, A. A., Hopkins, E. J., Howard, R. M., Hartshorne, J. K., Jennings, M. V., Simson, J., Bainbridge, C. M., Pinker, S., O'Donnell, T. J., Krasnow, M. M., & Glowacki, L. (2019). Universality and diversity in human song. *Science*, *366*(6468), 957–970. https://doi.org/10.1126/science.aax0868
Mehr, S. A., Singh, M., York, H., Glowacki, L., & Krasnow, M. M. (2018). Form and function in human song. *Current Biology*, *28*(3), 356–368. https://doi.org/10.1016/j.cub.2017.12.042
Moran, S., & McCloy, D. (Eds.). (2019). *PHOIBLE 2.0*. Max Planck Institute for the Science of Human History.

Mueller, H. C. (1971). Displays and vocalizations of the sparrow hawk. *The Wilson Bulletin*, *83*(3), 249–254. https://www.jstor.org/stable/4160099

Nettl, B., Stone, R. M., Porter, J., & Rice, T. (2002). *The Garland encyclopedia of world music*. Garland Pub.

Owren, M. J., & Rendall, D. (2001). Sound on the rebound: Bringing form and function back to the forefront in understanding nonhuman primate vocal signaling. *Evolutionary Anthropology*, *10*(2), 58–71. https://doi.org/10.1002/evan.1014

Ozaki, Y., Tierney, A., Pfordresher, P. Q., McBride, J. M., Benetos, E., Proutskova, P., Chiba, G., Liu, F., Jacoby, N., Purdy, S. C., Opondo, P., Fitch, W. T., Hegde, S., Rocamora, M., Thorne, R., Nweke, F., Sadaphal, D. P., Sadaphal, P. M., Hadavi, S., … Savage, P. E. (2024). Globally, songs and instrumental melodies are slower and higher and use more stable pitches than speech: A Registered Report. *Science Advances*, *10*(20), eadm9797. https://doi.org/10.1126/sciadv.adm9797

Panteli, M., Benetos, E., & Dixon, S. (2017). A computational study on outliers in world music. *PLOS ONE*, *12*(12), e0189399. https://doi.org/10.1371/journal.pone.0189399

Pearse, W. D., Morales-Castilla, I., James, L. S., Farrell, M., Boivin, F., & Davies, T. J. (2018). Global macroevolution and macroecology of passerine song. *Evolution*, *72*(4), 944–960. https://doi.org/10.1111/evo.13450

Reece, A., Cooney, G., Bull, P., Chung, C., Dawson, B., Fitzpatrick, C., Glazer, T., Knox, D., Liebscher, A., & Marin, S. (2023). The CANDOR corpus: Insights from a large multimodal dataset of naturalistic conversation. *Science Advances*, *9*(13), eadf3197. https://doi.org/10.1126/sciadv.adf3197

Rzeszutek, T., Savage, P. E., & Brown, S. (2012). The structure of cross-cultural musical diversity. *Proceedings of the Royal Society of London B: Biological Sciences*, *279*(1733), 1606–1612. https://doi.org/10.1098/rspb.2011.1750

Savage, P. E. (2018). An Overview of Cross-Cultural Music Corpus Studies. In D. Shanahan, J. A. Burgoyne, & I. Quinn (Eds.), *The Oxford Handbook of Music and Corpus Studies* (p. 0). Oxford University Press. https://doi.org/10.1093/oxfordhb/9780190945442.013.34

Savage, P. E., Brown, S., Sakai, E., & Currie, T. E. (2015). Statistical universals reveal the structures and functions of human music. *Proceedings of the National Academy of Sciences*, *112*(29), 8987–8992. https://doi.org/10.1073/pnas.1414495112

Seifart, F., Paschen, L., & Stave, M. (2024). *Language Documentation Reference Corpus (DoReCo) 2.0* (pp. 72964 bytes). NAKALA - https://nakala.fr (Huma-Num - CNRS). https://doi.org/10.34847/NKL.7CBFQ779

Serra, X. (2014). Creating research corpora for the computational study of music: The case of the Compmusic project. *Audio Engineering Society Conference: 53rd International Conference: Semantic Audio*.

Sievers, B., Polansky, L., Casey, M., & Wheatley, T. (2013). Music and movement share a dynamic structure that supports universal expressions of emotion. *Proceedings of the National Academy of Sciences*, *110*(1), 70–75. https://doi.org/10.1073/pnas.1209023110

Singh, M., & Mehr, S. A. (2023). Universality, domain-specificity and development of psychological responses to music. *Nature Reviews Psychology*, 1–14. https://doi.org/10.1038/s44159-023-00182-z

Skirgård, H., Haynie, H. J., Blasi, D. E., Hammarström, H., Collins, J., Latarche, J. J., Lesage, J., Weber, T., Witzlack-Makarevich, A., Passmore, S., Chira, A., Maurits, L., Dinnage, R., Dunn, M., Reesink, G., Singer, R., Bowern, C., Epps, P., Hill, J., … Gray, R. D. (2023). Grambank reveals the importance of genealogical constraints on linguistic diversity and highlights the impact of language loss. *Science Advances*, *9*(16), eadg6175. https://doi.org/10.1126/sciadv.adg6175

Slingerland, E., Atkinson, Q. D., Ember, C. R., Sheehan, O., Muthukrishna, M., Bulbulia, J., & Gray, R. D. (2020). Coding culture: Challenges and recommendations for comparative cultural databases. *Evolutionary Human Sciences*, *2*, e29. https://doi.org/10.1017/ehs.2020.30

Soley, G., & Hannon, E. E. (2010). Infants prefer the musical meter of their own culture: A cross-cultural comparison. *Developmental Psychology*, *46*(1), 286–292. https://doi.org/10.1037/a0017555

Srinivasamurthy, A., Gulati, S., Repetto, R. C., & Serra, X. (2021). Saraga: Open Datasets for Research on Indian Art Music. *Empirical Musicology Review*, *16*(1), 85–98. https://doi.org/10.18061/emr.v16i1.7641

Swartz, A. (2002). Musicbrainz: A semantic web service. *IEEE Intelligent Systems*, *17*(1), 76–77.

Tjuka, A. (2021). Adding data sets to NoRaRe: A guide for beginners [Billet]. In *Computer-Assisted Language Comparison in Practice*. https://doi.org/10.58079/m6l9

Trehub, S. E. (2001). Musical predispositions in infancy. *Annals of the New York Academy of Sciences*, *930*(1), 1–16.

Trehub, S. E., Unyk, A. M., & Trainor, L. J. (1993a). Adults identify infant-directed music across cultures. *Infant Behavior and Development*, *16*(2), 193–211. https://doi.org/10.1016/0163-6383(93)80017-3

Trehub, S. E., Unyk, A. M., & Trainor, L. J. (1993b). Maternal singing in cross-cultural perspective. *Infant Behavior and Development*, *16*(3), 285–295.

Wagner, W. E. (1989). Fighting, assessment, and frequency alteration in Blanchard's cricket frog. *Behavioral Ecology and Sociobiology*, *25*(6), 429–436. https://doi.org/10.1007/BF00300189

Wilkinson, M. D., Dumontier, M., Aalbersberg, Ij. J., Appleton, G., Axton, M., Baak, A., Blomberg, N., Boiten, J.-W., da Silva Santos, L. B., Bourne, P. E., Bouwman, J., Brookes, A. J., Clark, T., Crosas, M., Dillo, I., Dumon, O., Edmunds, S., Evelo, C. T., Finkers, R., … Mons, B. (2016). The FAIR Guiding Principles for scientific data management and stewardship. *Scientific Data*, *3*(1), 160018. https://doi.org/10.1038/sdata.2016.18

Wood, A. L. C., Kirby, K. R., Ember, C. R., Silbert, S., Passmore, S., Daikoku, H., McBride, J., Paulay, F., Flory, M. J., Szinger, J., D'Arcangelo, G., Bradley, K. K., Guarino, M., Atayeva, M., Rifkin, J., Baron, V., Hajli, M. E., Szinger, M., & Savage, P. E. (2022). The global jukebox: A public database of performing arts and culture. *PLOS ONE*, *17*(11), e0275469. https://doi.org/10.1371/journal.pone.0275469

Yurdum, L., Singh, M., Glowacki, L., Vardy, T., Atkinson, Q. D., Hilton, C. B., Sauter, D., Krasnow, M. M., & Mehr, S. A. (2023). Universal interpretations of vocal music. *Proceedings of the National Academy of Sciences*, *120*(37), e2218593120. https://doi.org/10.1073/pnas.2218593120