MISSION 3

Création du compte de gestion :

1- adduser theo
2- Donner les droits superadmin :
   -installer sudo ‘apt install sudo’
   usermod -aG(roup) sudo theo

```
root@TTheoVM1:~# usermod -aG sudo theo
root@TTheoVM1:~# su theo
theo@TTheoVM1:/root$
```

Installation Apache2 :

```
theo@TTheoVM1:/root$ sudo apt install apache2 -y
[sudo] password for theo:
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
apache2 is already the newest version (2.4.62-1~deb12u2).
0 upgraded, 0 newly installed, 0 to remove and 71 not upgraded.
```

Vérification du fonctionnement grâce a l’adresse ip de la VM

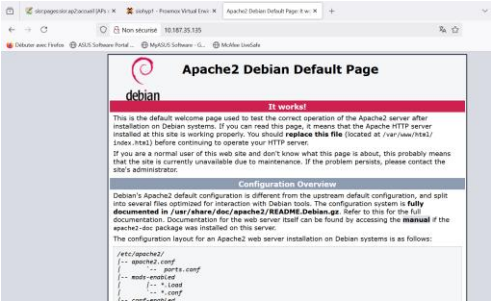

Installation des prérequis pour PHP :

```
theo@TTheoVM1:/root$ sudo apt -y install apt-transport-https lsb
-release ca-certificates curl
```

```
theo@TTheoVM1:/root$ sudo wget -O /etc/apt/trusted.gpg.d/
php.gpg https://packages.sury.org/php/apt.gpg
```

```
theo@TTheoVM1:/root$ sudo bash -c 'echo "deb https://packages.su
ry.org/php/ $(lsb_release -sc) main" > /etc/apt/sources.list.d/p
hp.list'
```

Installation de PHP =

```
theo@TTheoVM1:/var/www/html$ sudo apt -y  install php
```

Création du fichié test.php =

```
  GNU nano 7.2                    test.php
<?php
phpinfo():
?>
```

Puis vérifier la création =

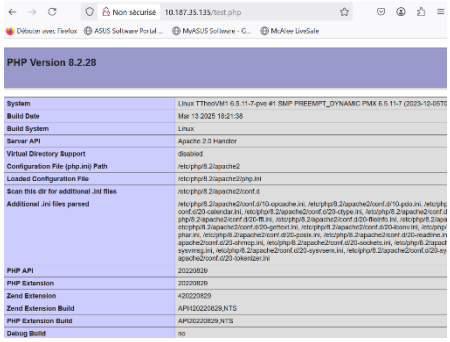

Installation de la base de données SQL MariraDB :

```
theo@TTheoVM1:~$ sudo apt -y install mariadb-server
```

Puis créer un utilisateur

Aller dans 'mariadb' puis utiliser 'mysql' puis créer l'utilisateur :

```
theo@TTheoVM1:~$ sudo mariadb
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 32
Server version: 10.11.11-MariaDB-0+deb12u1 Debian 12

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> USE mysql;
Reading table information for completion of table and column names
You can turn off this feature to get a quicker startup with -A

Database changed
MariaDB [mysql]> CREATE USER admin@'%' IDENTIFIED BY 'PASSWORD';
Query OK, 0 rows affected (0.037 sec)
```

mdp util mariadb= PASSWORD

```
MariaDB [mysql]> CREATE USER admin@'%' IDENTIFIED BY 'PASSWORD';
Query OK, 0 rows affected (0.037 sec)

MariaDB [mysql]> GRANT ALL PRIVILEGES ON *.* TO admin'%' WITH GRANT OPTION;
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your MariaDB server v
ersion for the right syntax to use near ''%' WITH GRANT OPTION' at line 1
MariaDB [mysql]> GRANT ALL PRIVILEGES ON *.* TO admin@'%' WIT
H GRANT OPTION;
Query OK, 0 rows affected (0.003 sec)

MariaDB [mysql]> FLUSH PRIVILEGES;
Query OK, 0 rows affected (0.001 sec)

MariaDB [mysql]>
```

Permettre l'accès à distance au serveur SQL MariaDB :

nano : /etc/mysql/mariadb.conf.d/50-server.cnf

```
#bind-address            = 127.0.0.1
bind-address             =0.0.0.0
```

Le serveur SQL MariaDB est en écoute sur le port TCP 3306 pour toutes les adresses

```
Process
LISTEN 0      80           0.0.0.0:3306        0.0.0.0:*
```

Connexion à MariaDB :

```
theo@TTheoVM1:~$ sudo mariadb -u root
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 31
Server version: 10.11.11-MariaDB-0+deb12u1 Debian 12

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and
others.

Type 'help;' or '\h' for help. Type '\c' to clear the current
 input statement.

MariaDB [(none)]> show database
    -> ^C
MariaDB [(none)]>
MariaDB [(none)]> show databases;
+--------------------+
| Database           |
+--------------------+
| information_schema |
| mysql              |
| performance_schema |
| sys                |
+--------------------+
4 rows in set (0.001 sec)
```

Utilisation de la base de données mysql =

```
MariaDB [(none)]> use mysql;
```

Visualisation des comptes existants (absence d'un mot de passe pour le compte route)=

```
MariaDB [mysql]> select user, password from user;
+-------------+-------------------------------------------
| User        | Password
+-------------+-------------------------------------------
| mariadb.sys |
| root        | invalid
| mysql       | invalid
| admin       | *845A9ADD7E1A82B6459804066B3A45D0025897B6
+-------------+-------------------------------------------
4 rows in set (0.002 sec)
```

lucas : groupe dev : password

Création du mots de passe pour l'utilisateur 'root'=

```
MariaDB [mysql]> SET PASSWORD FOR 'root'@'localhost' = PASSWO
RD('P@$$word1');
Query OK, 0 rows affected (0.001 sec)

MariaDB [mysql]> FLUSH PRIVILEGES;
Query OK, 0 rows affected (0.001 sec)
```

Intégration de la base de données SQL gestion de stage :

```
C:\Users\theot>scp creationbdd.zip root@10.187.35.135:/tmp
The authenticity of host '10.187.35.135 (10.187.35.135)' can't be established.
ED25519 key fingerprint is SHA256:rXP+PTCEHG7gvn/rzFqxwik9WcP44DG169zM0KKEiNE.
This key is not known by any other names.
Are you sure you want to continue connecting (yes/no/[fingerprint])?
Please type 'yes', 'no' or the fingerprint:
Warning: Permanently added '10.187.35.135' (ED25519) to the list of known hosts.
root@10.187.35.135's password:
Permission denied, please try again.
root@10.187.35.135's password:
Connection closed by 10.187.35.135 port 22
scp: Connection closed

C:\Users\theot>scp creationbdd.zip root@10.187.35.135:/tmp
root@10.187.35.135's password:
creationbdd.zip                                       100% 5077    70.8KB/s   00:00
```

Commande SCP, puis, unzip.

```
root@TTheoVM1:/tmp# unzip creationbdd.zip
Archive:  creationbdd.zip
  inflating: geststages.sql
```

Enfin, rajouter dans mariadb :

```
root@TTheoVM1:/tmp# sudo mariadb -u admin -p < geststages.sql
```

```
Database changed
MariaDB [bdd_geststages]> show tables;
+--------------------------+
| Tables_in_bdd_geststages |
+--------------------------+
| classe                   |
| entreprise               |
| etudiant                 |
| mission                  |
| prof_classe              |
| professeur               |
| spec_entreprise          |
| specialite               |
| stage                    |
+--------------------------+
9 rows in set (0.001 sec)

MariaDB [bdd_geststages]>
```

Intégration de l’application Geststages

```
C:\Users\theot>scp geststages.zip root@10.187.35.135:/var/www/html/geststages
root@10.187.35.135's password:
geststages.zip                                                    100%   58KB 371.0KB/s   00:00
```

Afin de renvoyer le dossier ZIP dans /var/www/html/geststages puis, unzip :

```
root@TTheoVM1:/var/www/html/geststages# ls
geststages.zip
root@TTheoVM1:/var/www/html/geststages# unzip geststages.
zip
Archive:  geststages.zip
   creating: geststages/
  inflating: geststages/aide.php
  inflating: geststages/ajoutModifEtu.php
  inflating: geststages/deconnexion.php
   creating: geststages/icons/
  inflating: geststages/icons/aide.png
  inflating: geststages/icons/ajouter.png
 extracting: geststages/icons/deconnexion.png
  inflating: geststages/icons/droite.png
  inflating: geststages/icons/entreprise.png
  inflating: geststages/icons/gauche.png
  inflating: geststages/icons/home.png
  inflating: geststages/icons/inscrire.png
 extracting: geststages/icons/lien.png
  inflating: geststages/icons/modifier.png
  inflating: geststages/icons/rechercher.png
  inflating: geststages/icons/stage.png
  inflating: geststages/icons/supprimer.png
  inflating: geststages/icons/voir.png
```

Habilitations du groupe dev sur le dossier de l’application geststages :

```
root@TTheoVM1:/tmp# cd
root@TTheoVM1:~# groups lucas
lucas : lucas users dev
root@TTheoVM1:~# sudo chown -R www-data:dev /var/www/html/geststages
root@TTheoVM1:~# sudo chmod g+w -R /var/www/html/geststages
root@TTheoVM1:~# ls -l /var/www/html
total 32
-rw-r--r-- 1 root     root 10701 Mar 19 10:06 geststage-equipe07.m2l.local.html
drwxrwxr-x 2 www-data dev   4096 Mar 26 10:14 geststages
-rw-r--r-- 1 root     root 10701 Mar 19 09:47 index.html
-rw-r--r-- 1 root     root    20 Mar 26 08:14 test.php
root@TTheoVM1:~#
```

Permet un accès en mise à jour pour le groupe dev sur tous les fichiers et dossiers du dossier

Pour définir l'accès à la base de données pour l’application Web Geststages :

```
  GNU nano 7.2                /var/www/html/geststages/geststages/include/function/f_bdd.php
  <?php

function connexionBDD()
{
        try
        {
            $bdd = new PDO('mysql:host=10.187.35.135;port=3306;dbname=bdd_geststages;charset=utf8', 'usergs', 'mdpG
            return $bdd;
        }
        catch(Exception $e)
        {
                $pdo_error = $e->getMessage();
                return false;
        }

}

?>
```

Création d'un compte de gestion de la base de données GESTSTAGES pour l'équipe de développement et de déploiement de l'application GESTSTAGES :

```
root@TTheoVM1:/var/www/html/geststages/geststages/include/function# sudo mariadb -u admin -p
Enter password:
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 42
Server version: 10.11.11-MariaDB-0+deb12u1 Debian 12

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> CREATE USER 'Jet'@'%' IDENTIFIED BY 'P@
Query OK, 0 rows affected (0.001 sec)

MariaDB [(none)]> GRANT ALL PRIVILEGES ON bdd_geststages. * TO 'Jet'@'%';
Query OK, 0 rows affected (0.002 sec)

MariaDB [(none)]> flush privileges;
Query OK, 0 rows affected (0.001 sec)

MariaDB [(none)]> use bdd_geststages;
Reading table information for completion of table and column names
You can turn off this feature to get a quicker startup with -A

Database changed
```

Puis s'y connecter :

```
root@TTheoVM1:/var/www/html/geststages/geststages/include/function# sudo mariadb -u Jet -p bdd_geststages
Enter password:
Reading table information for completion of table and column names
You can turn off this feature to get a quicker startup with -A

Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 43
Server version: 10.11.11-MariaDB-0+deb12u1 Debian 12

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [bdd_geststages]> show tables;
+--------------------------+
| Tables_in_bdd_geststages |
+--------------------------+
| classe                   |
| entreprise               |
| etudiant                 |
| mission                  |
| prof_classe              |
| professeur               |
```

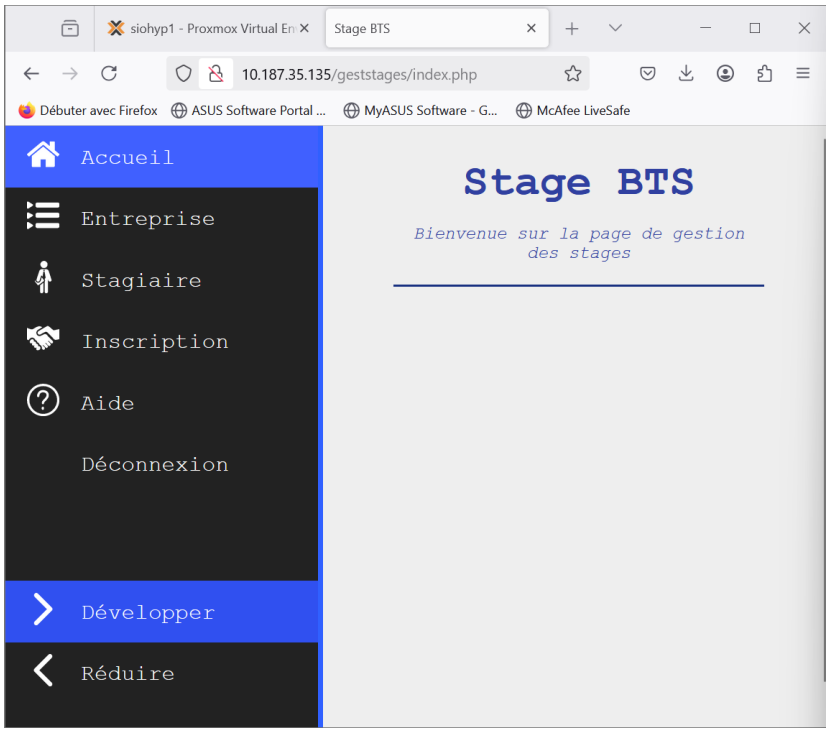

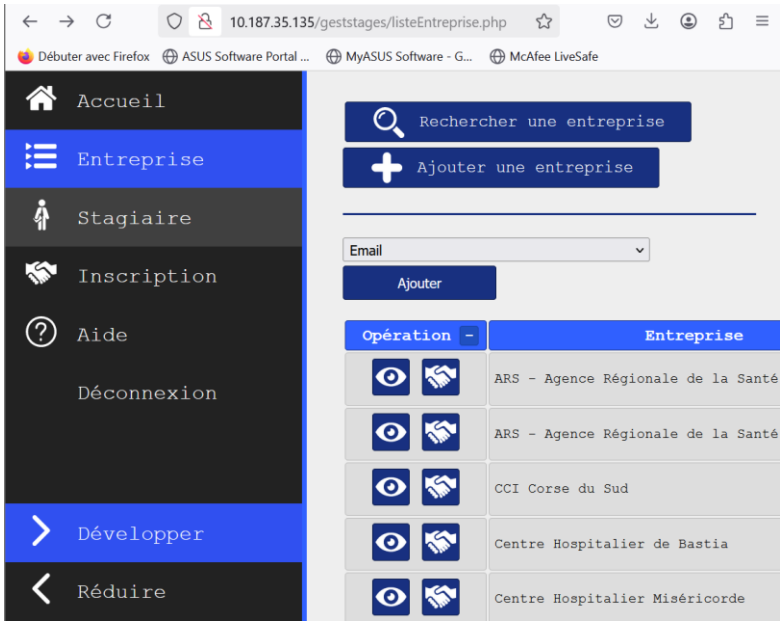

Création WordPress :

```
cd /tmp
wget https://wordpress.org/latest.zip
```

Création d'un VirtualHosts wordpress.conf

```
GNU nano 7.2                wordpress.conf
        ServerAdmin webmaster@localhost
        DocumentRoot /var/www/html/
        ServerName www.wordpress.com
        # Available loglevels: trace8, ..., trace1, debu>
        # error, crit, alert, emerg.
        # It is also possible to configure the loglevel >
        # modules, e.g.
        #LogLevel info ssl:warn

        ErrorLog ${APACHE_LOG_DIR}/error.log
```