
one PF block: elements and stored links

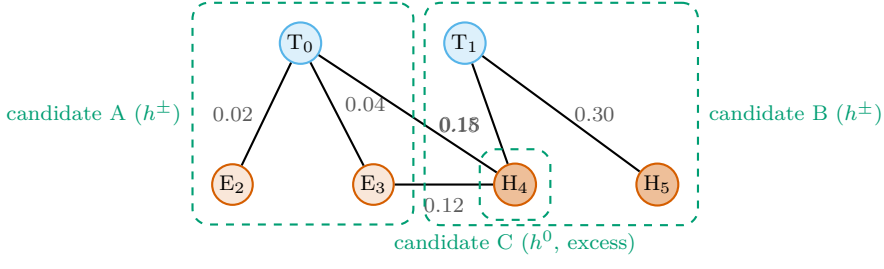

`PFBlockElem` - the inventory
one row per element: type, block, pointers to Track / PFCluster rows, candIdx

`PFBlockLink` - what PF found connected
one row per stored link: the two elements and the linking distance ($\Delta\eta$-$\Delta\phi$ at the calo entrance, placeholders for same-object links)
input of the algorithm, not its decision

`PFCandElem` - what PF decided
one row per (candidate, element) used
A: T_0, E_2, E_3 B: T_1, H_5 C: H_4

the physics is in the difference: H_4 was linked to both tracks but used by neither; T_0 was linked to E_3 and kept it