


Starting Point - Tier 0 - Redeemer (Very Easy)

Target IP - 10.129.189.111

Task 1 - Which TCP port is open on the machine?

Welp! We are using the VM Pwnbox for this! Here is what the desktop looks like:

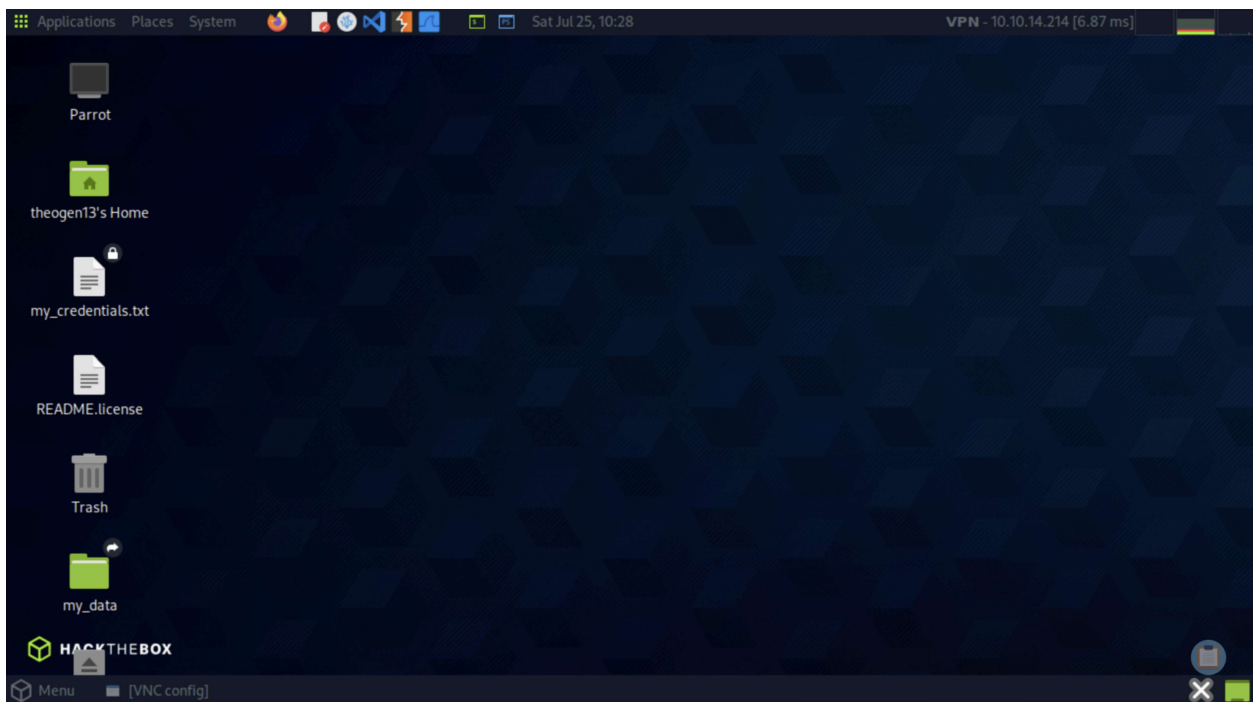

Let's open the terminal up and see what port is open!

Since we have an IP address lets open Terminator and perform an nmap scan of the target.

```
[us-starting-point-1-dhcp]-[10.10.14.214]-[theogen13@htb-4jknloallc]-[~]
[*]$ nmap -sV -p- 10.129.189.111
Starting Nmap 7.95 ( https://nmap.org ) at 2026-07-25 10:35 EDT
Nmap scan report for 10.129.189.111
Host is up (0.0069s latency).
Not shown: 65534 closed tcp ports (conn-refused)
PORT      STATE SERVICE VERSION
6379/tcp  open  redis    Redis key-value store 5.0.7

Service detection performed. Please report any incorrect results at https://nmap
.org/submit/ .
Nmap done: 1 IP address (1 host up) scanned in 11.31 seconds
```

Got our port, 6379! Note: Had to add the -p- flag to the nmap command because nothing came up initially. But with this Task 1 is complete!

Task 2 - Which service is running on the port that is open on the machine?

From the nmap scan we can see the service is called redis.

Task 3 - What type of database is Redis? Choose from the following options: (i) In-memory Database, (ii) Traditional Database

Welp, since I am not familiar with Redis, let me give it a quick Google. We are all learning here, folks! Redis is an open-source, in-memory **NoSQL key-value database**. So we will go with the first option. Task complete!

Task 4 - Which command-line utility is used to interact with the Redis server? Enter the program name you would enter into the terminal without any arguments.

redis-cli

Task 5 - Which flag is used in the Redis command-line utility to specify the hostname?

In your terminal let's use 'redis-cli -help' to see the flags that come up. Right at the top -h gives you the server hostname.

Task 6 - Once connected to a Redis server, which command is used to obtain the information and statistics about the Redis server?

info

Task 7 - What is the version of the Redis server being used on the target machine?

```
/bin/bash
/bin/bash 110x24
10.129.189.111:6379> info
# Server
redis_version:5.0.7
redis_git_sha1:00000000
redis_git_dirty:0
redis_build_id:66bd629f924ac924
redis_mode:standalone
os:Linux 5.4.0-77-generic x86_64
arch_bits:64
multiplexing_api:epoll
atomicvar_api:atomic-builtin
gcc_version:9.3.0
process_id:752
run_id:741730db9517aa669a004f5869c41041467aa25b
tcp_port:6379
uptime_in_seconds:2029
uptime_in_days:0
hz:10
configured_hz:10
lru_clock:6606564
executable:/usr/bin/redis-server
config_file:/etc/redis/redis.conf
# Clients
```

Using the 'info' command, scroll up to find the version at the top of the output!

Task 8 - Which command is used to select the desired database in Redis?

select

Task 9 - How many keys are present inside the database with index 0?

Use the 'info' command to see the number of keys, #Keyspace will be at the very bottom of the output.

```
# Keyspace
db0:keys=4,expires=0,avg_ttl=0
10.129.189.111:6379>
```

Task 10 - Which command is used to obtain all the keys in the database?

keys *

#Submit the flag located in the database.

Using the keys * command we can see the 4 keys in the database. "flag" looks interesting! Let's use 'get flag' to see what the array holds.

```
10.129.189.111:6379> keys *
1) "numb"
2) "flag"
3) "temp"
4) "stor"
10.129.189.111:6379> get flag
"03e1d2b376c37ab3f5319922053953eb"
10.129.189.111:6379>
```

Redeemer Box DONE!