


Marginal $\nabla_{\mathbf{x}} \log p_t(\mathbf{x}_t)$


weighted sum of conditional scores

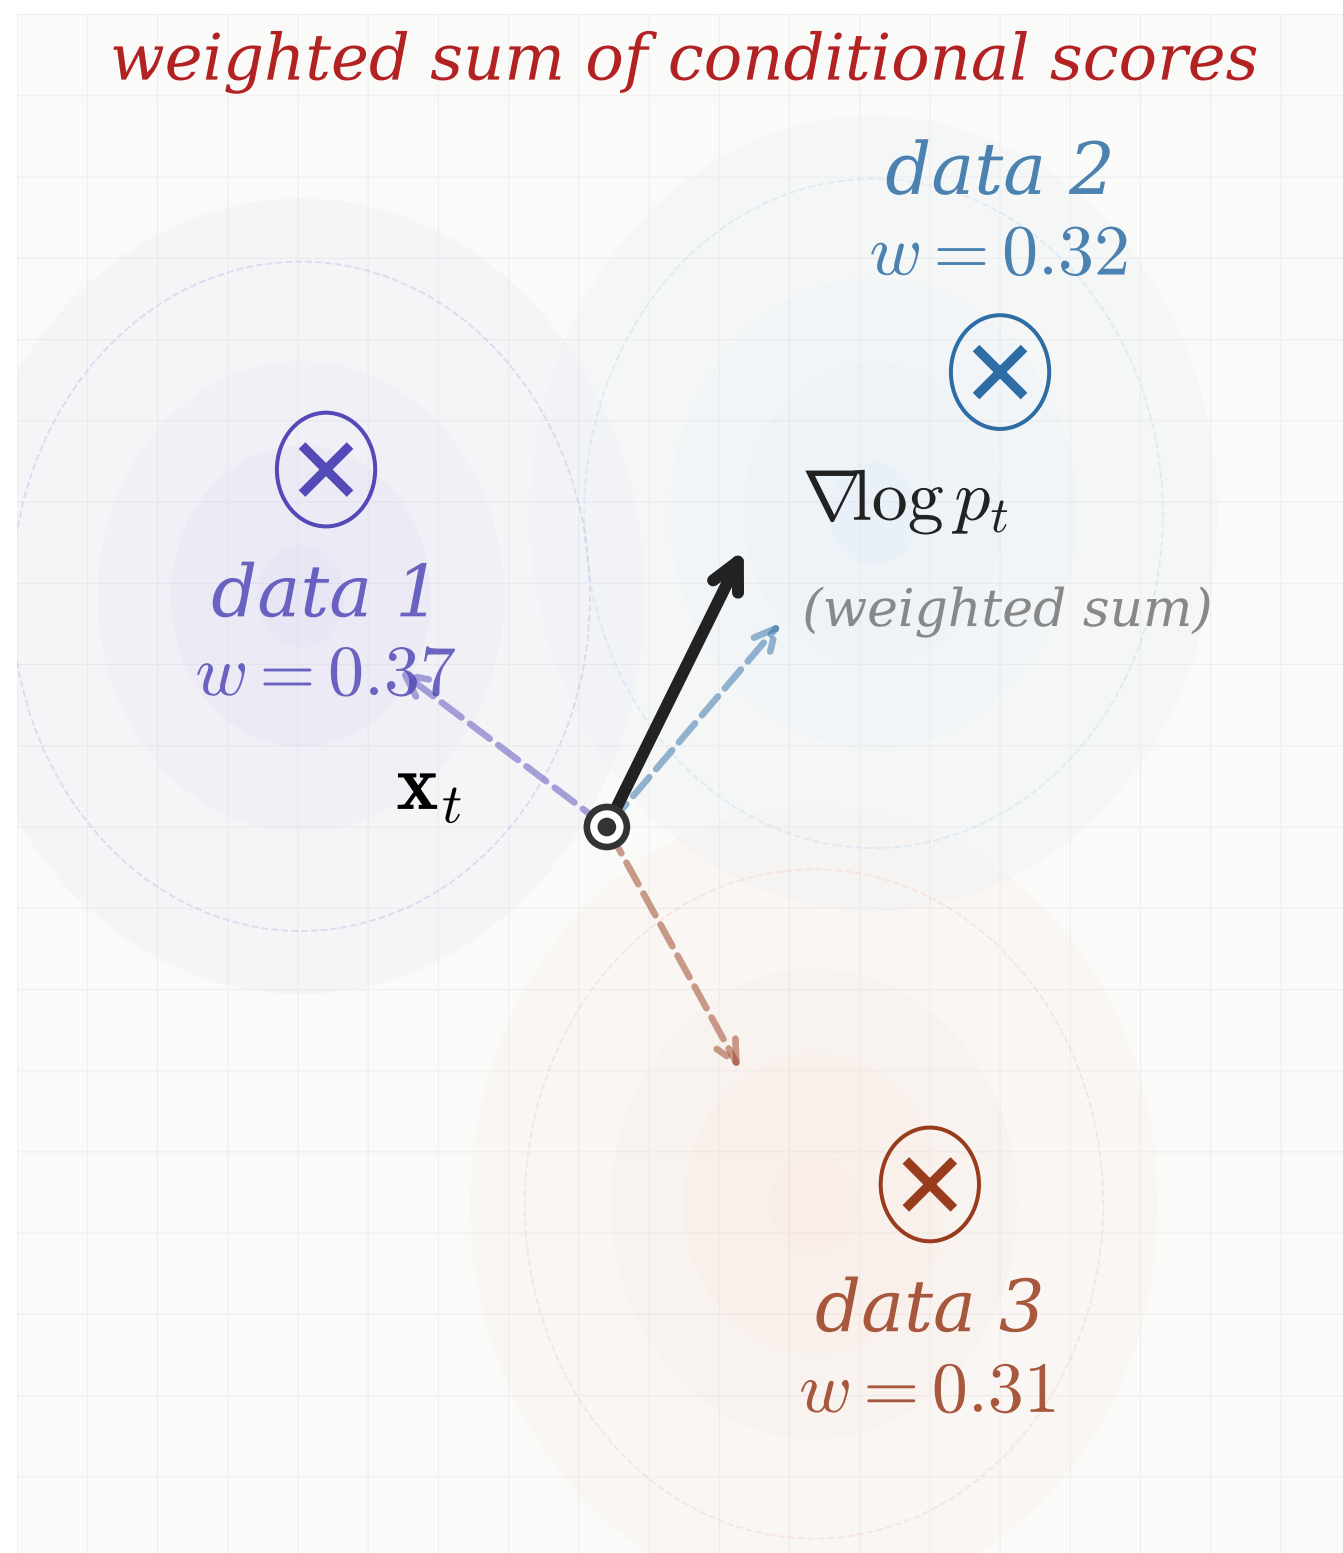

HARD: intractable weighted sum

Condition on $\mathbf{x}_0$ from data 1


$\nabla \log p_t(\mathbf{x}_t | \mathbf{x}_0) = \text{closed-form arrow}$

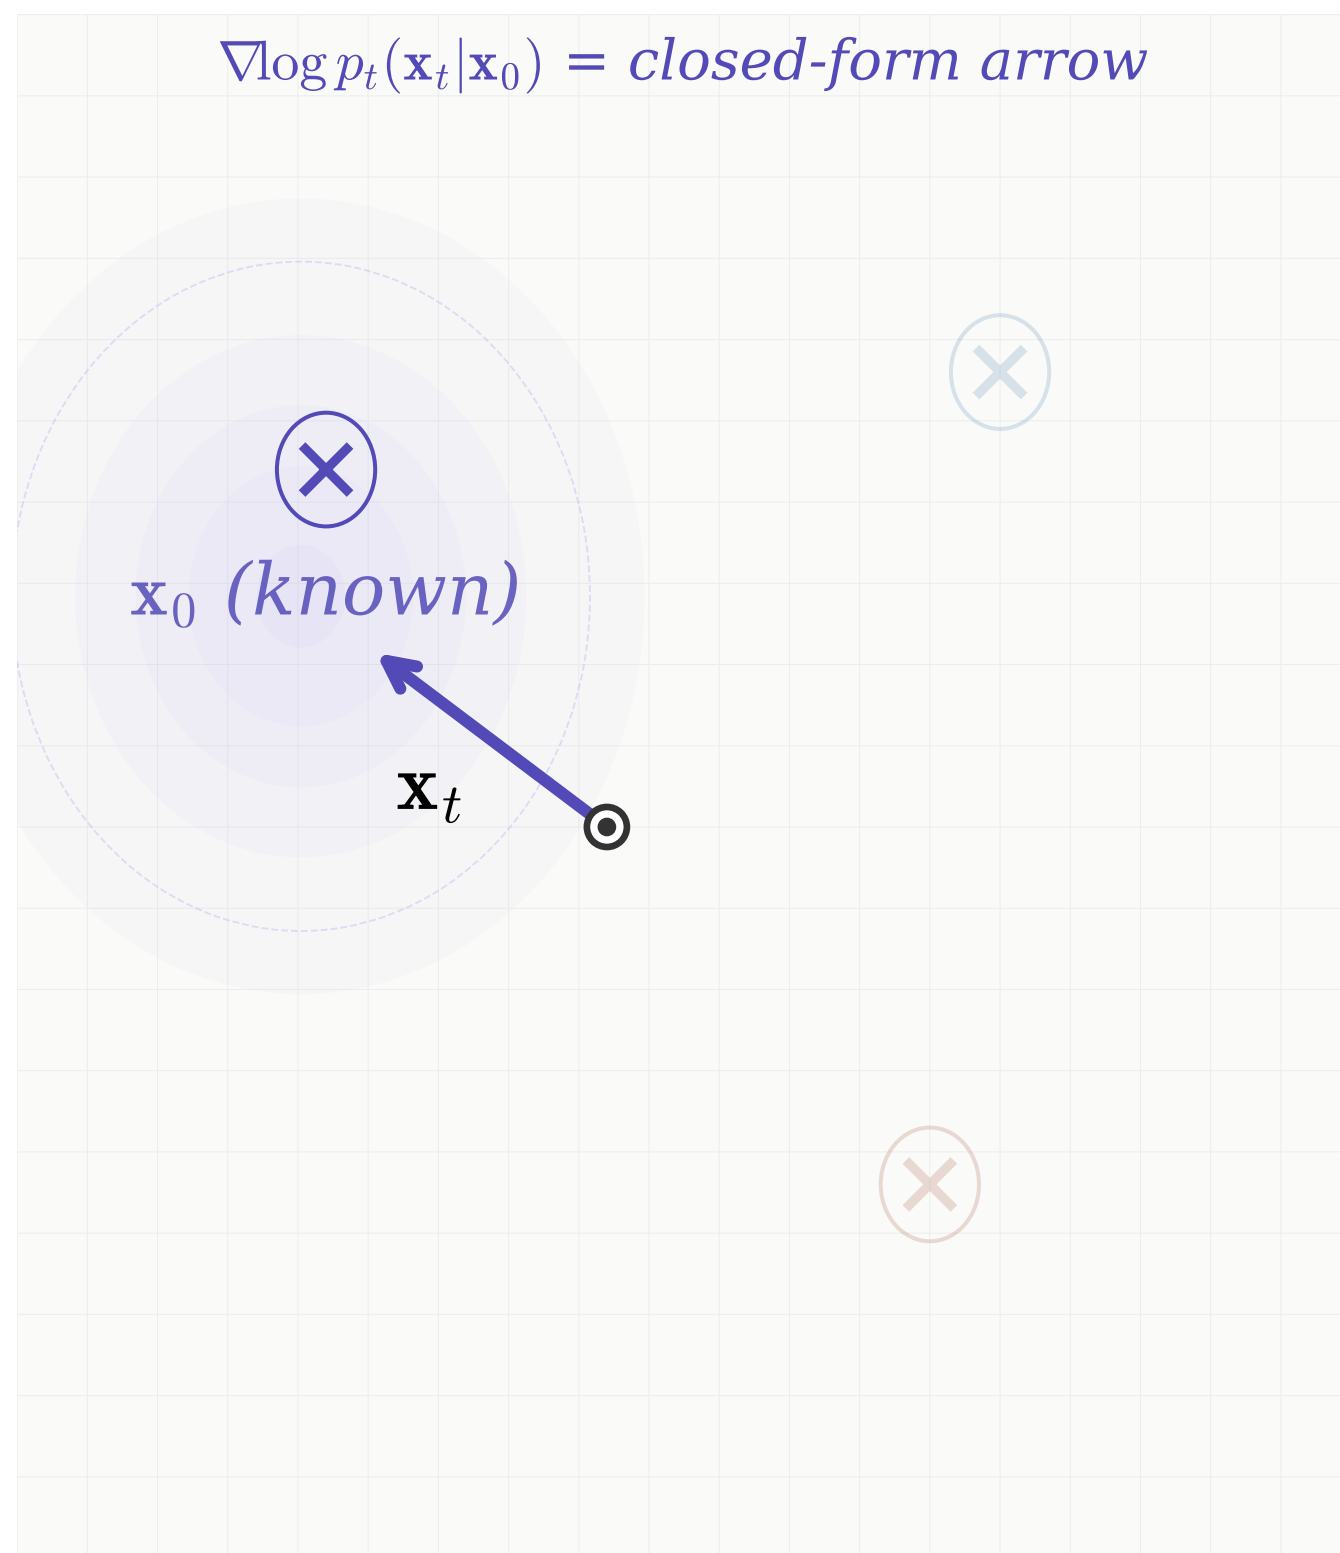

EASY: one closed-form arrow per data point (denoising score matching)

Condition on $\mathbf{x}_0$ from data 2

$\nabla \log p_t(\mathbf{x}_t | \mathbf{x}_0) = \text{closed-form arrow}$

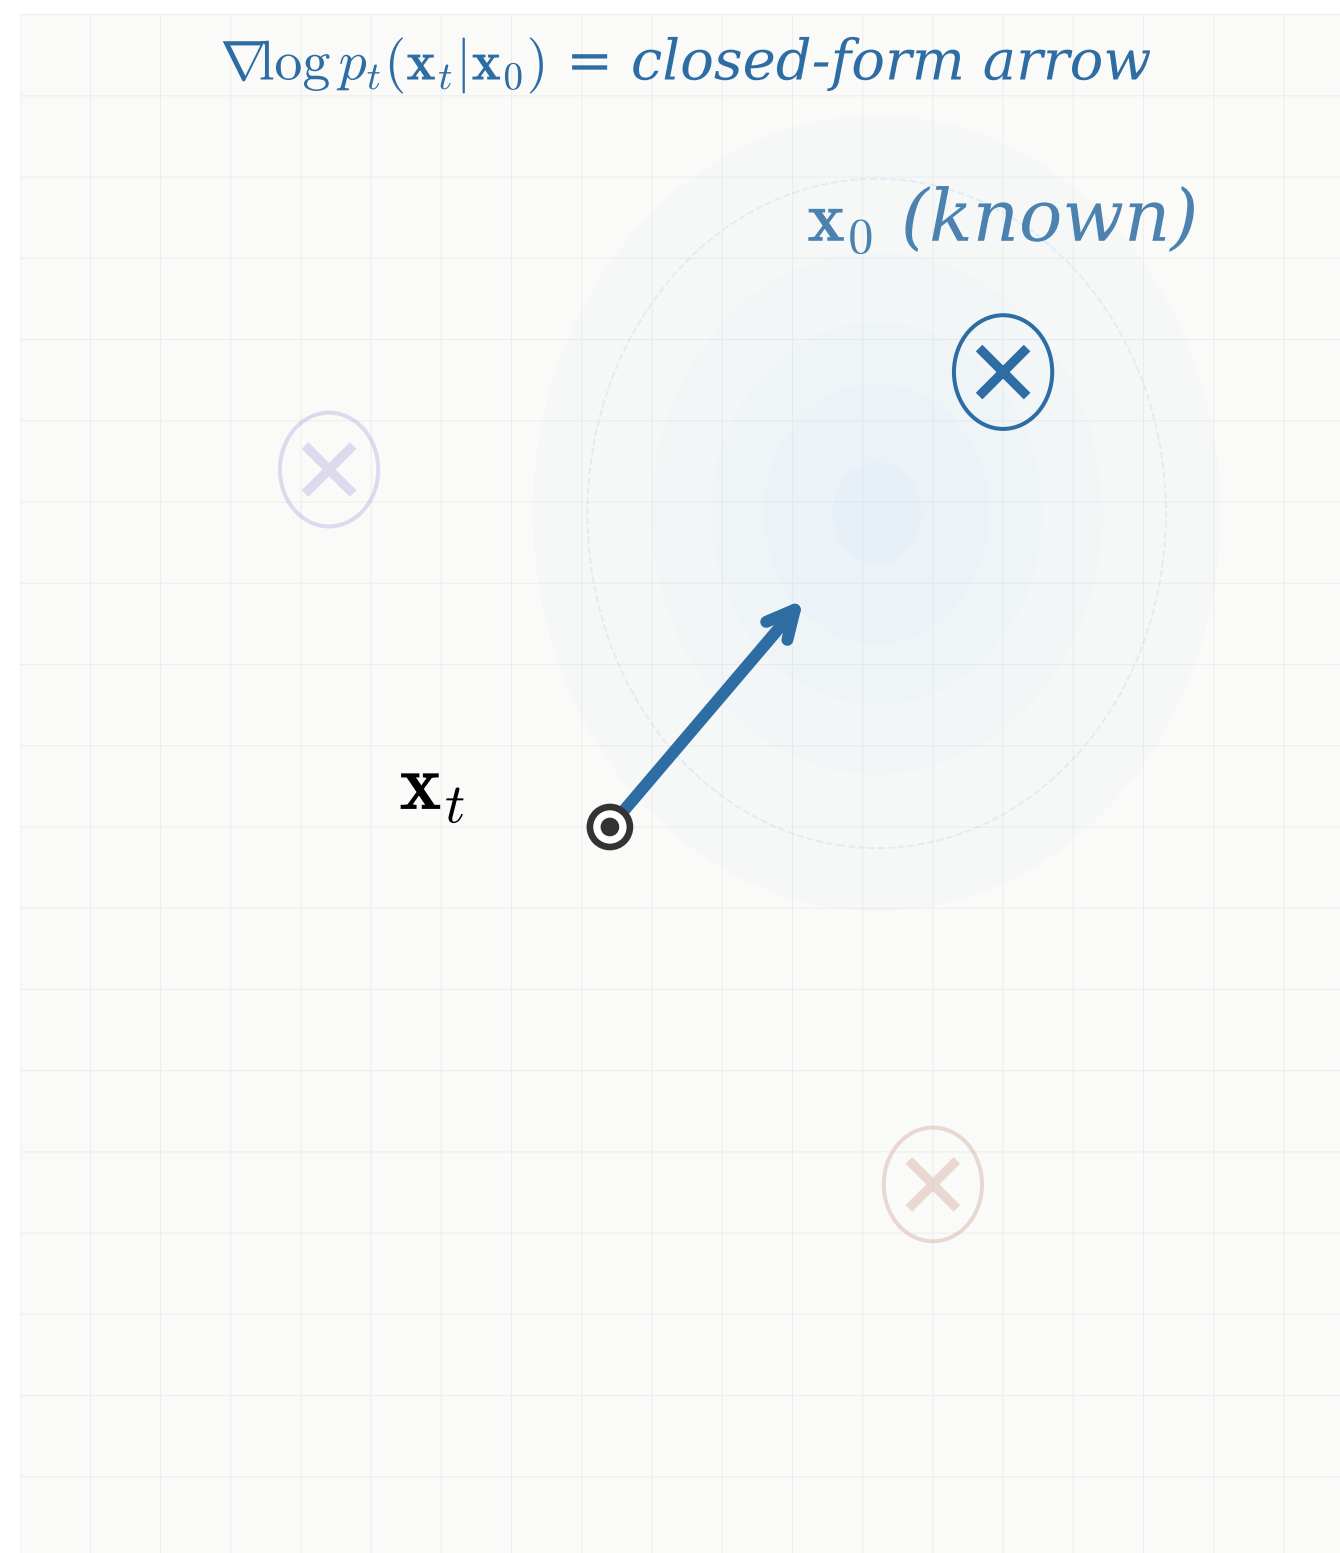

Condition on $\mathbf{x}_0$ from data 3

$\nabla \log p_t(\mathbf{x}_t | \mathbf{x}_0) = \text{closed-form arrow}$

