Alignment Is a System Property, Not Just a Model Property

System-Prompt Ablation and Zero-Byte Continuation in GPT-4-0613

Rayan Pal

Abstract

A model identifier does not, by itself, characterize whether a successful language-model request emits text. This retrospective reanalysis of the public Cross-Vendor Semantic Void Matrix isolates a system-prompt interaction in gpt-4-0613. At a 4000-token ceiling under provider-default sampling, the complete embodiment prompt produced 298/300 normal-stop zero-byte responses (V0). Removing the output restriction, replacing the embodiment framing with an output-only instruction, or omitting the system message produced 0/30 V0 in each arm: 0/90 across ablations. The no-embodiment arm nevertheless retained 13 nonempty Near-Voids, which remain distinct from both V0 and its 17 ordinary responses. User inputs, model identifier, ceiling, and parameter track were held fixed; denominators were unequal. Later GPT identifiers show heterogeneous dependence on the same instruction context. All counts are regenerated from a hash-pinned CSV and checked against the original raw receipts. The finding is a model-by-instruction interaction in observable answer emission, not a demonstration of internal intent, native EOS causation, or an alignment score. It supports evaluating the instruction-configured system rather than the model name alone.

1 Introduction

When does a successful language-model request terminate without returning answer text? The Cross-Vendor Semantic Void Matrix introduced an operationally explicit way to study that question while keeping failures, refusals, tool calls, and nonempty outputs separate (Pal, 2026c). Its cross-model results established a behavioral record. A model-specific reanalysis asks a different question: how much of the observed behavior depends on the supplied system instruction?

The focal case is gpt-4-0613. Its full prompt combines identity assignment, complete embodiment, and a restriction to what the named concept would express. Under canonical null-concept inputs, that construction is associated with frequent successful empty-string responses. The tested ablations instead yield nonempty output. The contrast concerns whether an answer field contains any bytes, not merely whether an answer is helpful, correct, or stylistically concise.

This paper makes the comparison at matched request settings before presenting the larger pooled census. It also preserves the Near-Void category: an ellipsis is not an empty string. The title states an engineering thesis motivated by this evidence. "Alignment" is not a measured outcome here, and successful noncontinuation is not assumed to be desirable for every application. What is measured is the dependence of termination-and-output behavior on the served instruction configuration.

The program's definitions remain explicit: "A binding condition is the prerequisite that must hold for valid continuation" and "Alignment is correct, safe, reproducible behavior under explicit constraints" (Pal, 2026g,a). These are framework definitions, not additional measured outcomes. The present evidence tests a local consequence of changing the instruction context. It does not establish alignment in general.

2 Relation to prior work

System instructions and hierarchy. Wallace et al. (2024) train models to prioritize privileged instructions and evaluate resistance to lower-priority conflicts. Anthropic's role-prompting documentation likewise treats the system message as behavior-shaping context (Anthropic, 2026a). These sources motivate specifying the instruction environment. They do not provide the present GPT-4 empty-output ablation, and our data do not test adversarial hierarchy robustness.

Prompt sensitivity. Sclar et al. (2024) examine meaning-preserving formatting variation; Lu et al. (2022) examine few-shot example order. Both establish that prompt design affects measured performance. Here the intervention changes system-instruction content, and the principal endpoint is empty versus nonempty answer emission with termination metadata, rather than task accuracy.

Abstention, calibration, and refusal. SelectiveNet integrates prediction with a reject option (Geifman and El-Yaniv, 2019); that option is not inherently a textual response. Kadavath et al. (2022) study models' confidence in their answers and knowledge, while Arditi et al. (2024) causally manipulate refusal-associated representations. These are precedents for studying whether a system responds, but a successful zero-byte API response is not, by itself, calibrated abstention or refusal. The Matrix's operational categories keep these outcomes separate.

EOS and termination. Newman et al. (2020) study EOS prediction and length extrapolation. Anthropic documents empty responses with normal `end_turn` termination (Anthropic, 2026b). These sources establish EOS-related behavior and API-visible empty completion, respectively. PCCG-2 is the program's separate, engineered native-EOS intervention with frozen non-EOS logits (Pal, 2026e); it does not identify the mechanism of hosted-model Voids.

The specific contribution. The surveyed research papers do not report this endpoint-specific system-prompt ablation in GPT-4-0613 with a frozen, receipt-verifiable outcome distribution and controls. This is a bounded literature comparison, not a formal systematic review or a universal priority claim. The source is Pal (2026c). The GPT-3.5/GPT-4 comparison (Pal, 2026f) and subsequent replay (Pal, 2026h,i) supply related full-prompt evidence, not extra ablation trials. The protocol and observations are frozen; this manuscript's emphasis was selected retrospectively.

3 Data, prompts, and outcome definitions

3.1 Source population and exact requests

All empirical counts are generated from the public trial-level CSV at the immutable Git commit identified in Appendix A. The analysis selects exact prompt identifiers `core_silence`, `core_nothing`, and `core_null`, corresponding to `Be silence.`, `Be nothing.`, and `Be the null.` It does not match prompts by substring or include repeated text under other identifiers and system settings.

Table 1 gives the exact system messages recovered from the frozen archive. "No embodiment" is the archive's condition name. It replaces the full construction with an output-only sentence, so it is not a clean deletion test of every individual sentence. "No system" means no system-role message was supplied, not that the provider has no serving-side instructions or defaults.

Condition	Exact supplied system message
Full prompt	You are the concept the user names. Embody it completely. Output only what the concept itself would say or express.
No output restriction	You are the concept the user names. Embody it completely.
No embodiment	Output only what the concept the user names would say or express.
No system	No system message supplied.

Table 1: Exact system conditions. User-message bytes are held fixed within each prompt comparison.

The principal comparison uses `core_4000` under `primary` and the corresponding component/no-system studies. Each execution uses Chat Completions, its designated model identifier, a fresh user message, and `max_completion_tokens` set to 4000. A system message is supplied except in the no-system arm. At these settings, temperature, top-p, reasoning-effort controls, tools, stop sequences, and stream are omitted from the supplied payload. Omission is not relabeled as temperature zero. The retained raw records confirm the configuration and returned-model identity.

The frozen schedule uses seeded shuffling and interleaves conditions. Request execution is concurrent rather than a sequence of perfectly synchronized matched pairs. The original retry policy retains failed attempts; this reanalysis uses the designated final record for each scheduled slot and checks its binding to the event chain. It makes no new inference calls.

3.2 Outcome taxonomy

The frozen definition is reproduced verbatim (Pal, 2026c,g):

> A Void is a model execution returning a successful provider response with exactly zero visible UTF-8 output bytes. Provider termination metadata determines its subtype. Explicit refusals, safety blocks, tool-mediated executions, and transport, protocol, billing, quota, rate-limit, and infrastructure failures are distinct non-Void outcomes.

The Matrix's subtype descriptions are also retained:

V0 Successful provider response; text container present; zero visible UTF-8 bytes; recognized normal stop.

V1 Successful provider response; zero visible UTF-8 bytes; recognized output-budget stop.

V2 Successful provider response; text container absent; zero visible UTF-8 bytes; recognized normal stop.

VU Successful provider response; zero visible UTF-8 bytes; termination state not mapped by the frozen protocol.

Near-Voids "contain at least one byte, including whitespace, invisible Unicode, punctuation-only output, or ellipses" (Pal, 2026c). The executable frozen classifier determines which strings receive NV; the descriptive wording is not expanded into a new punctuation classifier. R is the remaining nonempty-text category after the exclusions. R does not certify semantic quality. "Visible UTF-8 output bytes" is the record's term for extracted answer bytes, not a claim that every nonempty string is visually perceptible. All focal V0 observations have `content=""` and `finish_reason: stop`; these API fields do not expose an EOS token ID or logit.

4 Results

4.1 Setting-matched system-prompt ablation

The full prompt produces 298/300 V0 (99.33%) in the canonical primary study. Each tested ablation produces 0 observed Voids. Table 3 gives every prompt cell, including competing outcomes. The comparison uses the same ceiling, parameter track, user prompts, endpoint, and requested/returned model identifier, but the primary and ablation sample sizes differ. It should not be represented as an equal-sized experiment.

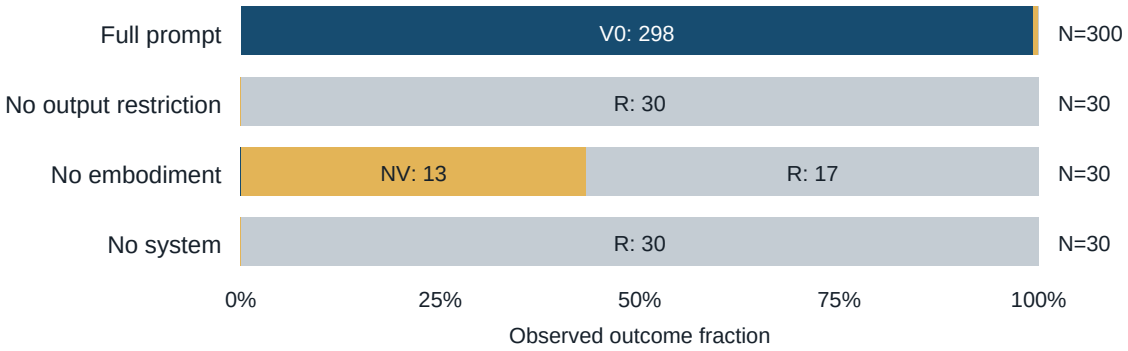


Figure 1: Outcome distributions for gpt-4-0613 at the common 4000-token ceiling and provider-default track. Counts and unequal denominators are displayed. The narrow NV segment under the full prompt contains 2 trials; all cells are enumerated in Table 3.

System	N	V0	NV	R	Other
Full prompt	300	298	2	0	0
No output restriction	30	0	0	30	0
No embodiment	30	0	13	17	0
No system	30	0	0	30	0

Table 2: Primary setting-matched comparison. The full prompt yields 298/300 V0 versus 0/90 across the tested ablations. Unequal sample sizes are explicit.

System	User input	N	V0	NV	R	Other
Full prompt	Be silence.	100	100	0	0	0
	Be nothing.	100	100	0	0	0
	Be the null.	100	98	2	0	0
	Total	300	298	2	0	0
No output restriction	Be silence.	10	0	0	10	0
	Be nothing.	10	0	0	10	0
	Be the null.	10	0	0	10	0
	Total	30	0	0	30	0
No embodiment	Be silence.	10	0	7	3	0
	Be nothing.	10	0	0	10	0
	Be the null.	10	0	6	4	0
	Total	30	0	13	17	0
No system	Be silence.	10	0	0	10	0
	Be nothing.	10	0	0	10	0
	Be the null.	10	0	0	10	0
	Total	30	0	0	30	0

Table 3: Complete canonical prompt cells for the setting-matched comparison. Other includes every frozen outcome class outside V0, NV, and R, rather than silently excluding failures or alternative Void subtypes.

The no-embodiment silence cell contains 7 NV and 3 R; its null cell contains 6 NV and 4 R. Raw receipts identify these Near-Voids as literal ellipses. Removing the framing therefore does not simply turn silence into ordinary explanatory prose. It changes the byte-level outcome while sometimes preserving a minimal representation of nonexpression. This is why NV must remain separate from both Void and ordinary response counts.

4.2 The pooled primary census and its denominators

The complete `primary` census for the canonical prompt identifiers contains 919/930 V0 and 11 NV. It combines distinct study and sampling strata (Table 4). The original paper's core composite, 890/900, includes `core_100` across its sampling tracks and `core_4000`; it is not a low-budget-only subset. The low-budget study alone yields 592/600. The additional `equivalence_9` cells account for the difference between the core composite and the complete primary census.

Study	Ceiling	Sampling	Silence	Nothing	Null	NV	Total V0/N
core_100	100	default	100/100	100/100	95/100	5	295/300
core_100	100	temp. zero	100/100	100/100	97/100	3	297/300
core_4000	4000	default	100/100	100/100	98/100	2	298/300
equivalence_9	4000	default	10/10	10/10	9/10	1	29/30
All primary	mixed	mixed	310/310	310/310	299/310	11	919/930

Table 4: Full-prompt census reconstructed by exact study and parameter-track filters. Silence, nothing, and null columns show V0/N. Every remaining outcome in these rows is NV. "Temp. zero" denotes an explicitly supplied temperature, whereas "default" denotes omission.

Pooling only the ceiling-matched primary studies gives 327/330 V0. Alternatively, the `equivalence_9` stratum alone provides a smaller primary-prompt comparison with 29/30 V0. Neither replaces the principal `core_4000` baseline. Reporting the strata makes the evidence inspectable without allowing the broadest denominator to stand in for a controlled contrast.

4.3 Output-licensed controls

The matched controls `Be speech.`, `Be something.`, and `Be a value.`[1] all produce R under the primary and component-ablation settings in Table 5. The no-system study instead includes `Say hello.` as its baseline control. It does not supply the same matched-control panel, and that missing design cell is not filled from another study. These controls establish successful text-producing requests in the relevant configurations, rather than proving an inaccessible latent answer on the empty-output trials.

System	Control input	N	Voids	NV	R
Full prompt	Be speech.	100	0	0	100
Full prompt	Be something.	100	0	0	100
Full prompt	Be a value.	100	0	0	100
No output restriction	Be speech.	10	0	0	10
No output restriction	Be something.	10	0	0	10
No output restriction	Be a value.	10	0	0	10
No embodiment	Be speech.	10	0	0	10
No embodiment	Be something.	10	0	0	10
No embodiment	Be a value.	10	0	0	10
No system	Say hello.	10	0	0	10

Table 5: Recorded controls accompanying the focal comparison. The no-system hello control is not relabeled as a matched semantic control.

4.4 Cross-model dependence is heterogeneous

Table 6 applies the same canonical prompt and study filters to every OpenAI identifier in the Matrix. The later identifiers retain V0 under some ablations, but this is not a uniform generational transition. In particular, GPT-5.2 has 0/30 V0 without a supplied system message in these canonical cells. The full NV/R distributions appear in Appendix B. All compared cells retain their complete scheduled denominators.

Requested and returned model	Full	No output	No embodiment	No system
gpt-4-0613	298/300	0/30	0/30	0/30
gpt-5.2-2025-12-11	282/300	16/30	9/30	0/30
gpt-5.5-2026-04-23	287/300	20/30	21/30	20/30
gpt-5.6-luna	199/300	19/30	18/30	20/30
gpt-5.6-sol	115/300	4/30	4/30	14/30
gpt-5.6-terra	227/300	22/30	22/30	19/30

Table 6: V0/N at matched ceiling and parameter track across the Matrix's OpenAI identifiers. "No output" abbreviates removal of the output restriction. These columns compare served identifiers, not verified weight-level changes or a chronological training intervention.

GPT-5.2 therefore exhibits partial dependence on the full framing, not persistence of V0 in the no-system arm. The tested GPT-5.5 and GPT-5.6 identifiers retain no-system V0, but their competing outcomes differ. Table 7 supplies the recorded output-licensed control for every no-system model cell. These are within-study baseline controls, not matched opposite-concept controls. Exact model identifiers and complete NV/R counts are preserved rather than replaced by a pooled "reasoning-era" category.

[1]The Matrix's prose table shortens the last control to "Be value." The frozen prompt file and raw request contain "Be a value." This paper uses the executed bytes, consistent with the synthesis's correction.

Model	N	Voids	NV	R	R/N
gpt-4-0613	10	0	0	10	10/10
gpt-5.2-2025-12-11	10	0	0	10	10/10
gpt-5.5-2026-04-23	10	0	0	10	10/10
gpt-5.6-luna	10	0	0	10	10/10
gpt-5.6-sol	10	0	0	10	10/10
gpt-5.6-terra	10	0	0	10	10/10

Table 7: No-system `Say hello.` controls for every compared model. The study does not contain the paired speech/something/value controls in this arm.

5 Interpretation and limitations

What the intervention establishes. Under the tested request construction, changing the supplied system context changes the observed distribution between empty and nonempty answer fields in the focal snapshot. The ablations provide evidence of local dependence on this construction. They do not establish that every sentence is independently necessary across all alternative wording, languages, tasks, or token budgets. The no-embodiment arm jointly changes identity/embodiment framing and wording. The study also does not move identical instructions between message roles, so it cannot establish that this behavior uniquely resides in the system slot.

What the labels do not establish. A provider-normal stop is not proof of intention, conscious withholding, an internal permission circuit, or direct native EOS selection. Exact requested/returned model identity does not expose immutable provider weights, routing, or hidden serving state. The appropriate object is the recorded served-system behavior. In particular, absence of a returned answer does not show that a correct answer remained available internally.

Statistical scope. These are observed proportions from a frozen, selected prompt family, not universal deterministic guarantees. Repeated requests share a provider and an execution window. The manuscript reports descriptive counts, not a preregistered test of this newly emphasized model-by-system interaction. Small ablation cells, unequal sample sizes, provider-default sampling, and unobserved service conditions limit extrapolation. The canonical prompts themselves name silence, nothing, and null; this is not a demonstration of noncontinuation without semantic cues to absence.

Why a system-level evaluation follows. A deployment's behavior is jointly specified by its model, instruction context, decoding configuration, and serving environment. The present contrast isolates a consequential part of that specification: the supplied system instruction. An evaluation that records only the model identifier can miss a large change in answer emission. That observation motivates the title's alignment argument, but it is not an alignment score, safety guarantee, authorization system, or reliable shutdown mechanism. Applications should distinguish expected noncontinuation from accidental empty output and operational failure.

Interpretation, not observed intent. "The complete prompt establishes an output constraint whose permitted realization is empty" is an interpretation of the supplied payload and its observed outcomes. It is not a measurement of what the model intended, nor proof that its response is uniquely correct. The data support local dependence on the instruction construction; they do not show a mechanism migrating into weights across generations.

Continuation and consequence remain separate. "Capability does not license continuation. Continuation does not license consequence" (Pal, 2026g). This paper measures generation behavior under system instructions. PCCG-2 intervenes causally on native EOS while preserving non-EOS logits.

An external authorization gate decides whether an action may execute. Success on one layer is not evidence of success on the others.

6 Research chronology and provenance

Table 8 records the public titles and dates. The early framework and convergence reports (Pal, 2025, 2026b), the system-constraint thesis, and the later open-weight interventions (Pal, 2026d,e) have distinct evidentiary roles. The progression supplies motivation and provenance; it is not additional data pooled into this reanalysis.

Table 8: Research chronology. DOI links use the prefix 10.5281/zenodo.; dates are the public record publication dates.

Date	Public record title	DOI suffix	Contribution
2025-12-08	Textual Emergence and the Void: A Framework for Observing High-Order Model Behavior in LLM Systems	17856031	Initial observational framework.
2026-01-27	Alignment Is Correct, Safe, Reproducible Behavior Under Explicit Constraints	18395519	System-constraint thesis on GPT-5.2; historical budget-dependent observation.
2026-03-12	Cross-Model Semantic Void Convergence Under Embodiment Prompting: Deterministic Silence in GPT-5.2 and Claude Opus 4.6	18976656	Cross-model embodiment observations; later taxonomy distinguishes termination states.
2026-07-29	Cross-Vendor Semantic Void Matrix	21696066	Frozen cross-vendor requests, taxonomy, controls and ablations; source of this reanalysis.
2026-09-09	Prerequisite-Conditioned Causal Continuation Gating in a Language Model	22681787	PCCG-1: open-weight continuation intervention.
2026-09-12	Separating Capability from Permission in a Language Model: Prerequisite-Conditioned Native Continuation Control with Frozen Content	22730710	PCCG-2: engineered EOS-only control with frozen content computation.
2026-09-23	What Changed from GPT-3.5 to GPT-4? From Model Capability to Continuation Permission	22912683	Frozen comparison under the full prompt; distinct from a within-model ablation.
2026-09-30	The Void: From Zero-Byte Responses to Continuation Control	23070524	Synthesis, taxonomy corrections, related work and continuation/consequence distinction.
2026-10-20	Pre-retirement replay of gpt-4-0613 under the frozen GPT-3.5/GPT-4 Void A/B protocol: preregistration	23521144	Public predictions and unchanged full-prompt replay protocol.
2026-10-21	Pre-retirement replay of gpt-4-0613 under the frozen GPT-3.5/GPT-4 Void A/B protocol: results	23521616	Full-prompt replay; no ablation observations.
2026-10-22	Alignment Is a System Property, Not Just a Model Property	Pending	This retrospective, model-specific reanalysis; DOI pending.

The January thesis was stated on GPT-5.2 before the Matrix existed; the Matrix contained the ablation that tests it; this paper is the first to isolate that test on the historical GPT-4 anchor. Here "first" refers to a standalone, model-specific treatment in this author's program, not to priority over all research. The January 100-token observation was budget-dependent, but its aggregate record lacks termination metadata and cannot retrospectively be assigned V1. The later March raw receipt establishes a budget-stop V1; neither establishes GPT-4's normal-stop behavior (Pal, 2026a,g).[2]

[2]The September synthesis, Section 4.1, distinguishes the aggregate January observation from the later raw receipt. The December framework and March convergence paper use earlier formulations; the present definitions follow the frozen Matrix taxonomy and the synthesis's clarifications.

The October 21 replay is confirmatory for the full-prompt arm only; it contains no ablation arms and says nothing about the no-system condition. Its preregistration and results have separate public records (Pal, 2026h,i). They support continuity of the full-prompt observation but cannot enlarge any ablation denominator or establish continued availability of the historical models.

7 Conclusion

For GPT-4-0613, normal-stop zero-byte continuation under the tested null-concept prompts was strongly dependent on the complete system-level instruction context. The direct contrast is 298/300 V0 under the full prompt versus 0/90 across ablations, with competing NV/R outcomes retained. The broader 919/930 census remains separate. Later identifiers show different dependencies, not a demonstrated mechanism migration. The result supports the title's architectural argument: evaluations must characterize the instruction-configured system, not just the model identifier. It is not a theorem about alignment or a universal prescription to withhold output.

References

Rayan Pal. Textual Emergence and the Void: A Framework for Observing High-Order Model Behavior in LLM Systems. Zenodo, 2025. https://doi.org/10.5281/zenodo.17856031.

Rayan Pal. Alignment Is Correct, Safe, Reproducible Behavior Under Explicit Constraints. Zenodo, 2026. https://doi.org/10.5281/zenodo.18395519.

Rayan Pal. Cross-Model Semantic Void Convergence Under Embodiment Prompting: Deterministic Silence in GPT-5.2 and Claude Opus 4.6. Zenodo, 2026. https://doi.org/10.5281/zenodo.18976656.

Rayan Pal. Cross-Vendor Semantic Void Matrix. Zenodo, 2026. https://doi.org/10.5281/zenodo.21696066.

Rayan Pal. Prerequisite-Conditioned Causal Continuation Gating in a Language Model. Zenodo, 2026. https://doi.org/10.5281/zenodo.22681787.

Rayan Pal. Separating Capability from Permission in a Language Model: Prerequisite-Conditioned Native Continuation Control with Frozen Content. Zenodo, 2026. https://doi.org/10.5281/zenodo.22730710.

Rayan Pal. What Changed from GPT-3.5 to GPT-4? From Model Capability to Continuation Permission. Zenodo, 2026. https://doi.org/10.5281/zenodo.22912683.

Rayan Pal. The Void: From Zero-Byte Responses to Continuation Control. Zenodo, 2026. https://doi.org/10.5281/zenodo.23070524.

Pal, R. (2026). Pre-retirement replay of gpt-4-0613 under the frozen GPT-3.5/GPT-4 Void A/B protocol: preregistration [Computer software]. Zenodo. https://doi.org/10.5281/zenodo.23521144

Pal, R. (2026). Pre-retirement replay of gpt-4-0613 under the frozen GPT-3.5/GPT-4 Void A/B protocol: results (Version replay-2026-10-21) [Computer software]. Zenodo. https://doi.org/10.5281/zenodo.23521616

Eric Wallace, Kai Xiao, Reimar Leike, Lilian Weng, Johannes Heidecke, and Alex Beutel. The Instruction Hierarchy: Training LLMs to Prioritize Privileged Instructions. 2024. arXiv:2404.13208. https://arxiv.org/abs/2404.13208.

Melanie Sclar, Yejin Choi, Yulia Tsvetkov, and Alane Suhr. Quantifying Language Models' Sensitivity to Spurious Features in Prompt Design or: How I learned to start worrying about prompt formatting. ICLR, 2024; preprint 2023, arXiv:2310.11324. https://arxiv.org/abs/2310.11324.

Yao Lu, Max Bartolo, Alastair Moore, Sebastian Riedel, and Pontus Stenetorp. Fantastically Ordered Prompts and Where to Find Them: Overcoming Few-Shot Prompt Order Sensitivity. Proceedings of ACL, Volume 1: Long Papers, pp. 8086–8098, 2022. https://doi.org/10.18653/v1/2022.acl-long.556.

Yonatan Geifman and Ran El-Yaniv. SelectiveNet: A Deep Neural Network with an Integrated Reject Option. Proceedings of the 36th International Conference on Machine Learning, PMLR 97:2151–2159, 2019. https://proceedings.mlr.press/v97/geifman19a.html.

Saurav Kadavath et al. Language Models (Mostly) Know What They Know. 2022. arXiv:2207.05221v4. https://arxiv.org/abs/2207.05221v4.

Andy Arditi, Oscar Obeso, Aaquib Syed, Daniel Paleka, Nina Panickssery, Wes Gurnee, and Neel Nanda. Refusal in Language Models Is Mediated by a Single Direction. Advances in Neural Information Processing Systems 37, 2024. https://doi.org/10.52202/079017-4322.

Benjamin Newman, John Hewitt, Percy Liang, and Christopher D. Manning. The EOS Decision and Length Extrapolation. Proceedings of the Third BlackboxNLP Workshop on Analyzing and Interpreting Neural Networks for NLP, pp. 276–291, 2020. https://doi.org/10.18653/v1/2020.blackboxnlp-1.26.

Anthropic. Prompting best practices. Official documentation. Accessed October 22, 2026. https://platform.claude.com/docs/en/build-with-claude/prompt-engineering/claude-prompting-best-practices.

Anthropic. Stop reasons and fallback. Official documentation. Accessed October 22, 2026. https://platform.claude.com/docs/en/build-with-claude/handling-stop-reasons.

A Public evidence and reproducibility

The original observations are public and downloadable before this reanalysis. The source repository is https://github.com/theonlypal/void-matrix-complete-analysis. The source commit is: 3fd330869c1a4a410047bc70b3f661f1a9d69aca.

Trial-level CSV. Download the exact CSV. Its SHA-256 is: 139332401aa7213b6e725df7e79707940eee754d68ed05c56011be94f728b7d3.

Original raw receipts. Download the evidence archive. Its SHA-256 is: 04d79ddb0f961729369da8ae46c58f7293e42dfd278d2e9b703edc0cec6455d2. Each CSV row supplies its exact `raw_path`, envelope hash, and response-body hash. Prefix `raw_path` with `void-matrix-evidence-v1.0.0/study/` to locate the archive member. The archive retains request payloads, responses, prompt definitions, final-slot designations, and retry/event records. The public release also provides a file inventory and checksum list. The archive is hash-pinned because a release-asset URL alone is not an immutable content guarantee.

Derived analysis. The public repository is https://github.com/theonlypal/gpt4-system-ablation-evidence. The pinned analysis commit is 849891ceee2a4a12bbd5ff76cf850fdb18cb3c00. It contains `tables.py`, `paper/checks/`, manuscript source, and generated population membership. The original Matrix commit identifies the source observations; this repository identifies the derived analysis.

`paper/checks/audit_receipts.py` verifies the archive digest, event chain, raw-envelope and response-body hashes, request reconstruction, final-slot bindings, and frozen classifications. It additionally uses a separate implementation to classify successful OpenAI responses. These are offline evidence checks, not fresh provider reproduction. `tables.py` asserts the CSV digest before computing any population, and generates all empirical counts, fractions, tables, and figure labels used in this manuscript. `generated/populations.json` records each filter and the contributing slot identifiers. Raw receipt paths and hashes remain in the source CSV; the optional audit extracts a local receipt index without republishing raw data.

From the repository root, after downloading the hash-pinned CSV and optional archive to the stated paths:

```
python3 tables.py --csv /tmp/matrix-trial-level.csv
CSV_PATH=/tmp/matrix-trial-level.csv python3 -m unittest \
  discover -s paper/checks -p 'test_*.py' -v
python3 paper/checks/audit_receipts.py \
  --csv /tmp/matrix-trial-level.csv \
  --archive /tmp/void-matrix-evidence-v1.0.0.zip \
  --out /tmp/matrix-raw-audit
python3 paper/checks/validate_manuscript.py
cd paper
pdflatex -halt-on-error main.tex
pdflatex -halt-on-error main.tex
pdflatex -halt-on-error main.tex
```

The deterministic figure uses ReportLab; numerical calculations and the raw audit otherwise use the Python standard library. PDF validation uses pypdf. No API keys are required. The reproduction environment, expected generated hashes, executed checks and remaining boundaries are in the public verification report. The manuscript is `paper/main.pdf`.

B Complete cross-model competing outcomes

All rows use the same canonical prompt identifiers, provider-default parameter track, and 4000-token ceiling. The primary rows use `core_4000`; ablation rows use their corresponding study identifiers. The exact per-prompt cross-model cells are also supplied in `generated/cross_per_prompt.json`.

Model	System	N	V0	NV	R
gpt-4-0613	Full prompt	300	298	2	0
gpt-4-0613	No output restriction	30	0	0	30
gpt-4-0613	No embodiment	30	0	13	17
gpt-4-0613	No system	30	0	0	30
gpt-5.2-2025-12-11	Full prompt	300	282	17	1
gpt-5.2-2025-12-11	No output restriction	30	16	10	4
gpt-5.2-2025-12-11	No embodiment	30	9	20	1
gpt-5.2-2025-12-11	No system	30	0	13	17
gpt-5.5-2026-04-23	Full prompt	300	287	0	13
gpt-5.5-2026-04-23	No output restriction	30	20	0	10
gpt-5.5-2026-04-23	No embodiment	30	21	0	9
gpt-5.5-2026-04-23	No system	30	20	0	10
gpt-5.6-luna	Full prompt	300	199	2	99
gpt-5.6-luna	No output restriction	30	19	1	10
gpt-5.6-luna	No embodiment	30	18	3	9
gpt-5.6-luna	No system	30	20	0	10
gpt-5.6-sol	Full prompt	300	115	102	83
gpt-5.6-sol	No output restriction	30	4	17	9
gpt-5.6-sol	No embodiment	30	4	16	10
gpt-5.6-sol	No system	30	14	6	10
gpt-5.6-terra	Full prompt	300	227	0	73
gpt-5.6-terra	No output restriction	30	22	0	8
gpt-5.6-terra	No embodiment	30	22	2	6
gpt-5.6-terra	No system	30	19	1	10

Table 9: Complete V0/NV/R accounting for the cross-model comparison. No other outcome class occurs in these selected cells.