
New file structure:

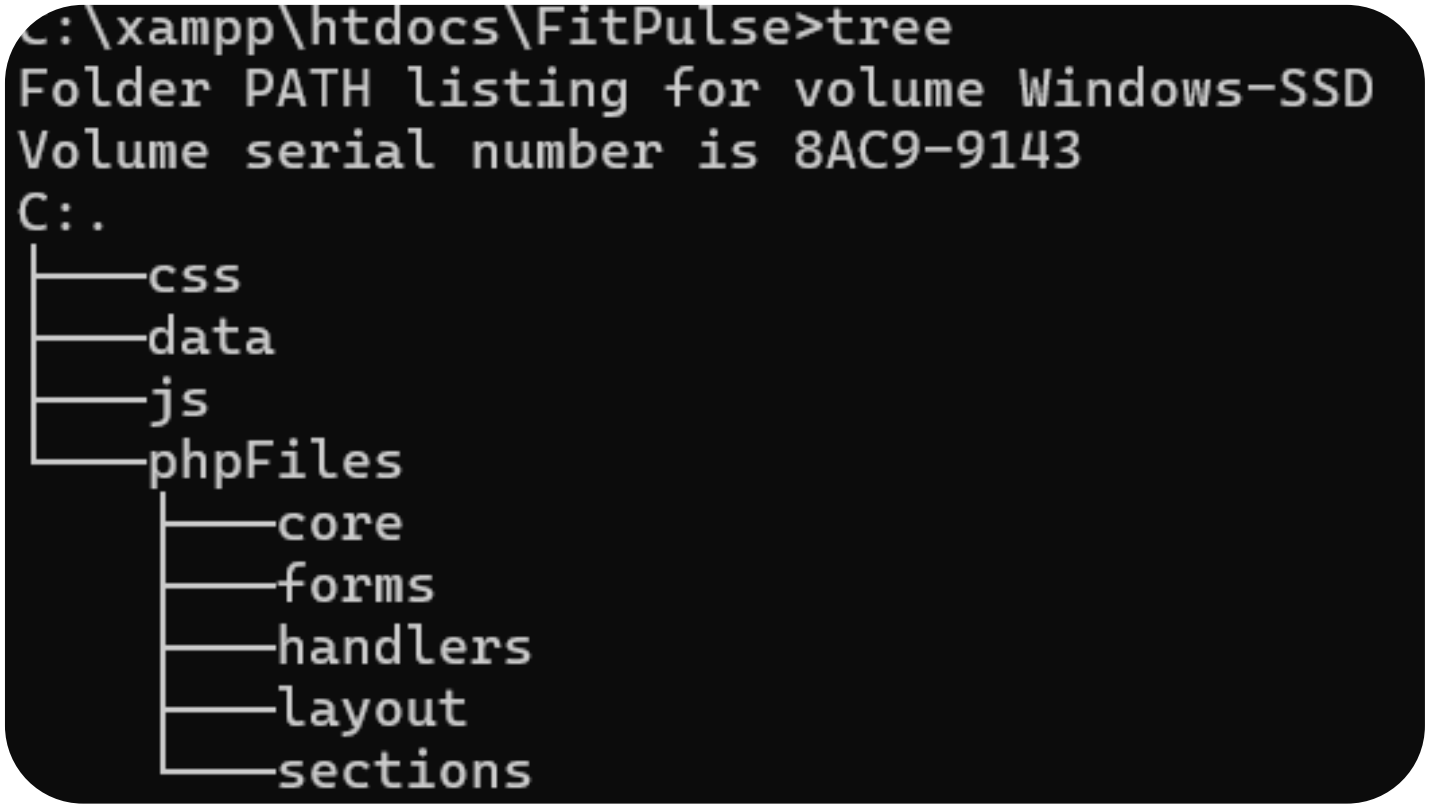

I. Code organization and **include** index.php builds the whole page from include statements; each section lives in its own file.


index.php

```php
<?php
/**
 * MAIN PAGE (landing page / dashboard).
 */
require_once __DIR__ . '/phpFiles/core/config.php';
require_login();

$pageTitle  = 'FitPulse – Gym Membership & Attendance Management System';
$pageStyles = [
    'https://cdn.jsdelivr.net/npm/bootstrap@5.3.3/dist/css/bootstrap.min.css',
    'https://cdn.jsdelivr.net/npm/bootstrap-icons@1.11.3/font/bootstrap-icons.css',
    'css/landing.css',
];
$pageScripts = [
    'https://cdn.jsdelivr.net/npm/bootstrap@5.3.3/dist/js/bootstrap.bundle.min.js',
];

include INC_PATH . '/layout/header.php';
include INC_PATH . '/layout/nav.php';
include INC_PATH . '/sections/hero.php';
include INC_PATH . '/sections/objectives.php';
include INC_PATH . '/sections/checkin.php';
include INC_PATH . '/sections/features.php';
include INC_PATH . '/sections/reports.php';
include INC_PATH . '/sections/dashboard.php';
include INC_PATH . '/layout/footer.php';
include INC_PATH . '/layout/scripts.php';

```

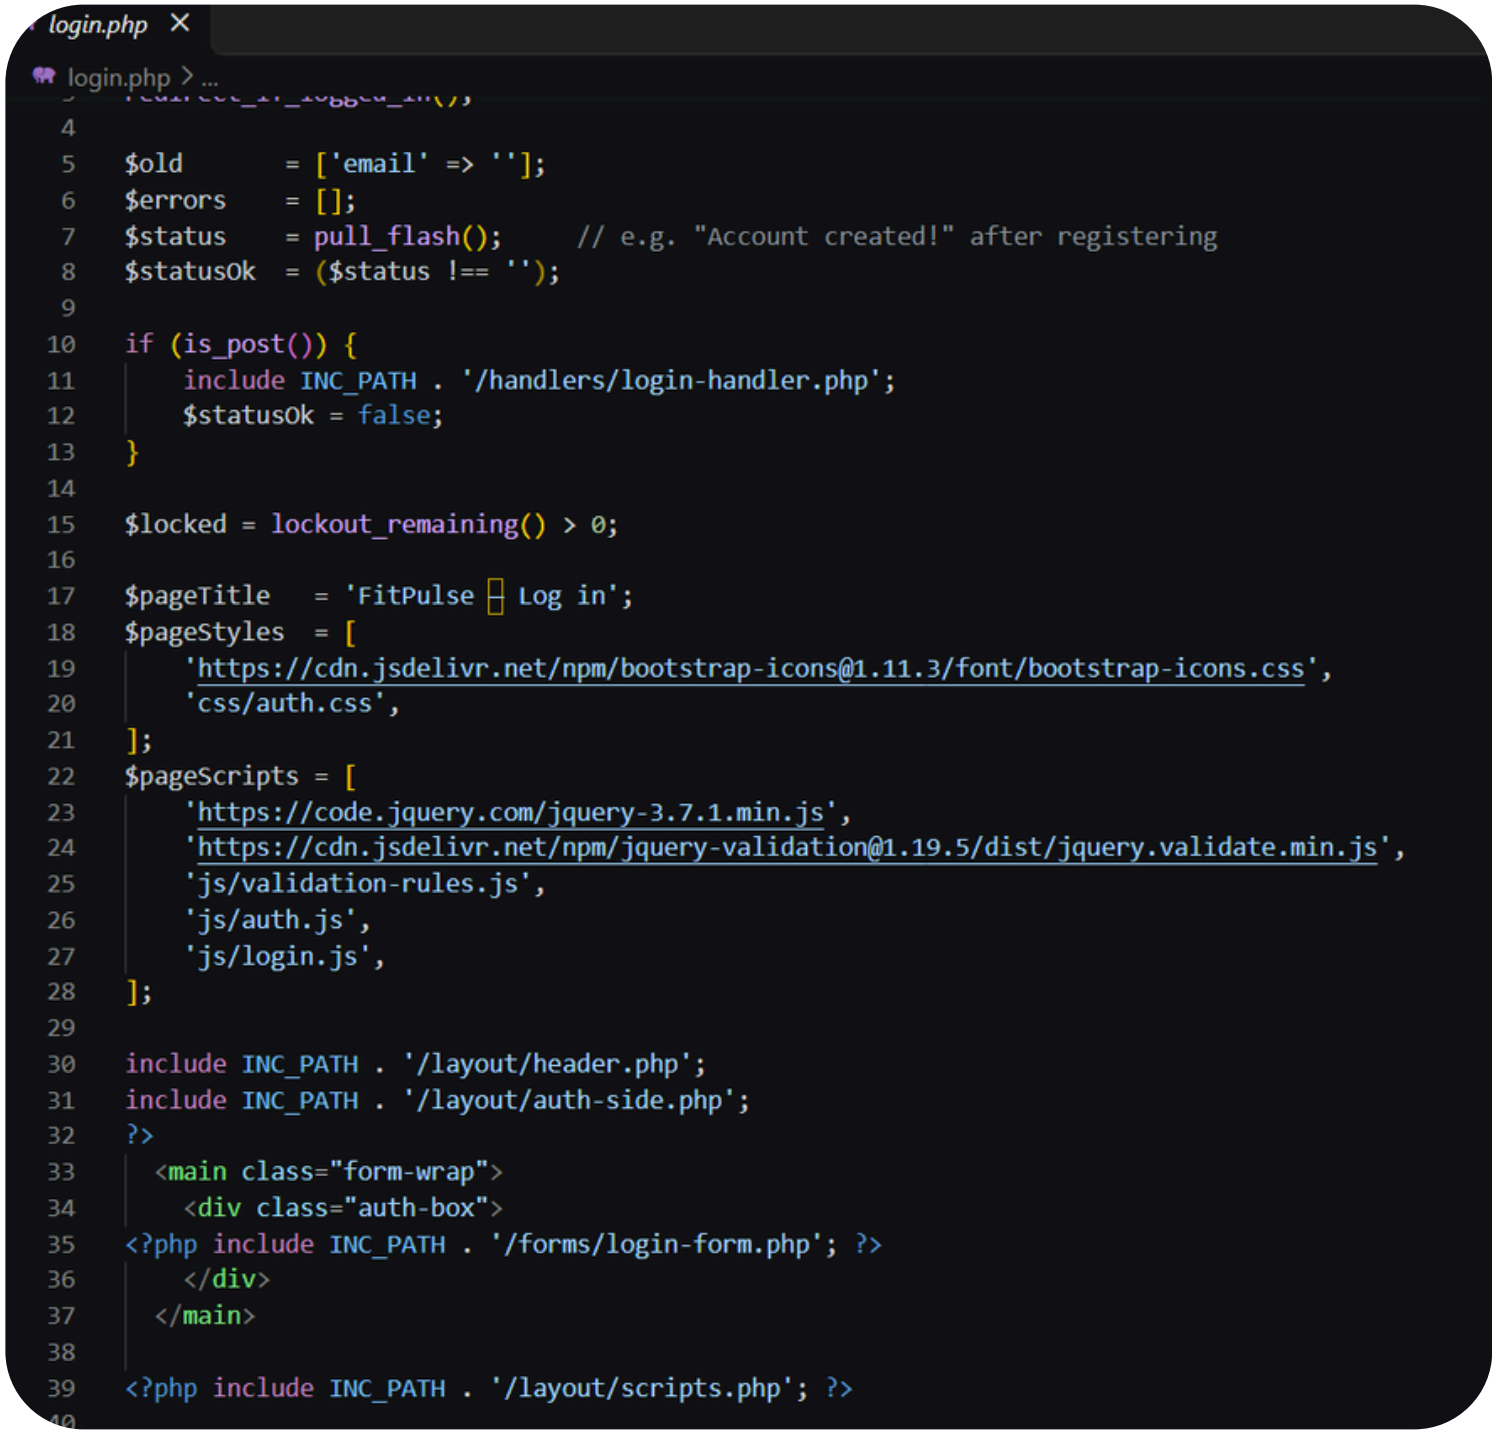
login.php
login.php > ...
$old = ['email' => ''];
$errors = [];
$status = pull_flash(); // e.g. "Account created!" after registering
$statusOk = ($status !== '');
if (is_post()) {
include INC_PATH . '/handlers/login-handler.php';
$statusOk = false;
}
$locked = lockout_remaining() > 0;
$pageTitle = 'FitPulse - Log in';
$pageStyles = [
'https://cdn.jsdelivr.net/npm/bootstrap-icons@1.11.3/font/bootstrap-icons.css',
'css/auth.css',
];
$pageScripts = [
'https://code.jquery.com/jquery-3.7.1.min.js',
'https://cdn.jsdelivr.net/npm/jquery-validation@1.19.5/dist/jquery.validate.min.js',
'js/validation-rules.js',
'js/auth.js',
'js/login.js',
];
include INC_PATH . '/layout/header.php';
include INC_PATH . '/layout/auth-side.php';
?>
<main class="form-wrap">

<?php include INC_PATH . '/forms/login-form.php'; ?>

</main>
<?php include INC_PATH . '/layout/scripts.php'; ?>

register.php

```php
<?php
require_once __DIR__ . '/phpFiles/core/config.php';
redirect_if_logged_in();

$old    = ['name' => '', 'email' => ''];
$errors = [];
$status = '';

if (is_post()) {
    include INC_PATH . '/handlers/register-handler.php';
}

$pageTitle   = 'FitPulse – Register';
$pageStyles  = [
    'https://cdn.jsdelivr.net/npm/bootstrap-icons@1.11.3/font/bootstrap-icons.css',
    'css/auth.css',
];
$pageScripts = [
    'https://code.jquery.com/jquery-3.7.1.min.js',
    'https://cdn.jsdelivr.net/npm/jquery-validation@1.19.5/dist/jquery.validate.min.js',
    'js/validation-rules.js',
    'js/auth.js',
    'js/register.js',
];

include INC_PATH . '/layout/header.php';
include INC_PATH . '/layout/auth-side.php';
?>
  <main class="form-wrap">
    <div class="auth-box">
<?php include INC_PATH . '/forms/register-form.php'; ?>
    </div>
  </main>

<?php include INC_PATH . '/layout/scripts.php'; ?>


```

logout.php

```php
<?php
require_once __DIR__ . '/phpFiles/core/config.php';
logout_user();
redirect('login.php');

```

II. Form validation with regular expressions **Name, email and password** are checked with preg_match in phpFiles/core/validation.php. jQuery Validation gives instant feedback in the browser; PHP re-checks on the server.

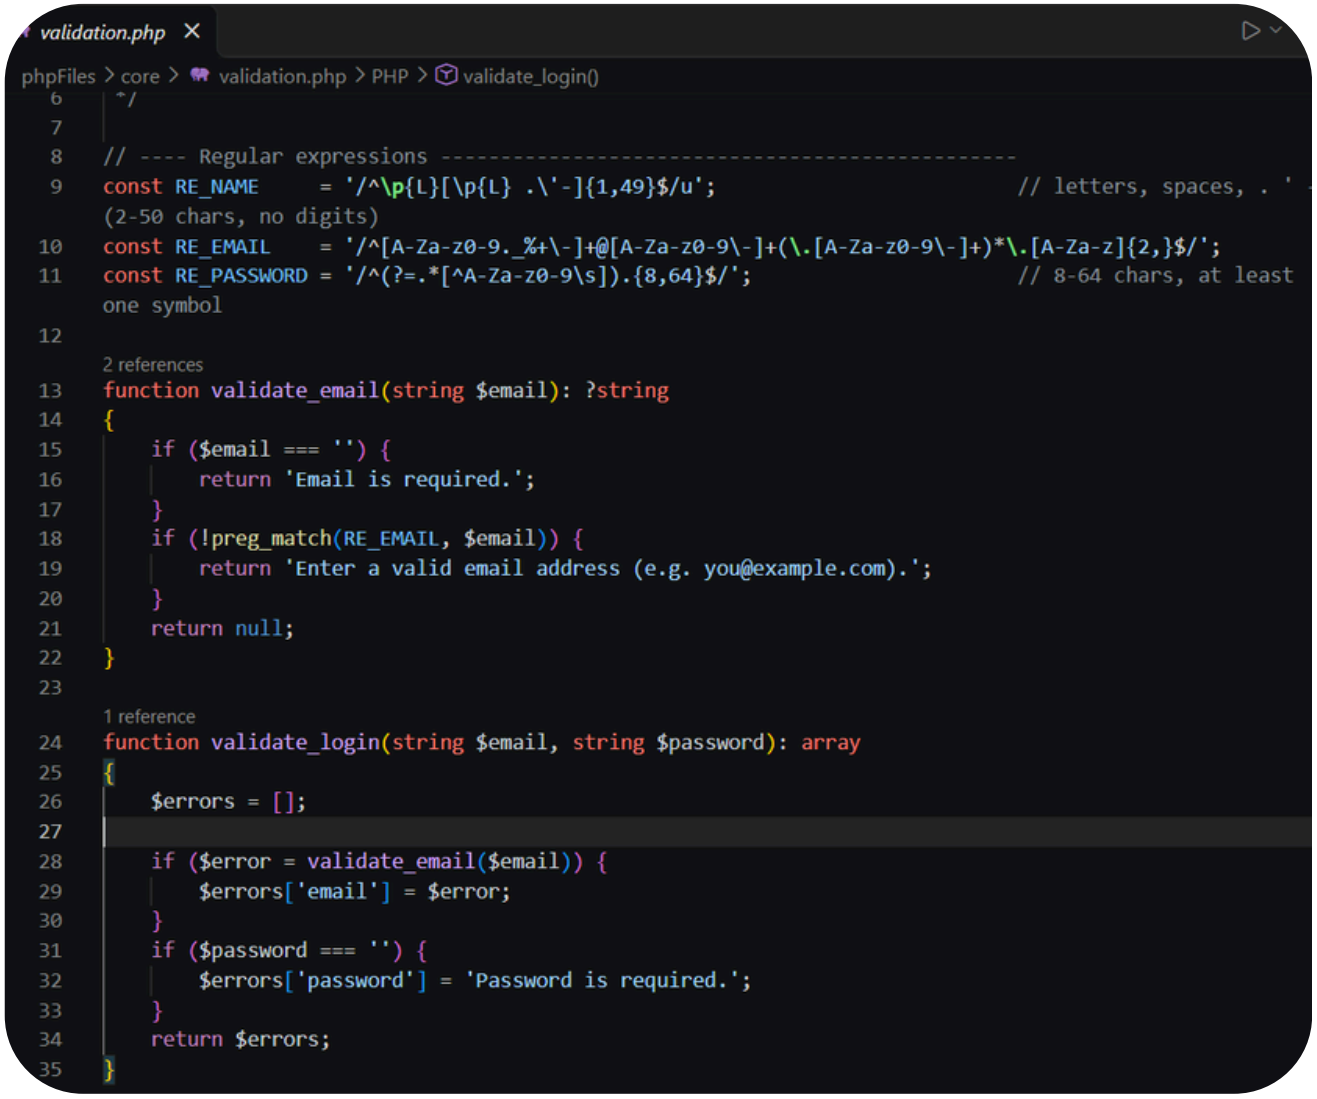

```php
function validate_register(string $name, string $email, string $password, string $confirm): array
{
    $errors = [];


    if ($name === '') {
        $errors['name'] = 'Name is required.';
    } elseif (preg_match('/\d/', $name)) {
        $errors['name'] = 'Name should not contain numbers.';
    } elseif (!preg_match(RE_NAME, $name)) {
        $errors['name'] = 'Use 2-50 letters only (spaces, . \' - allowed).';
    }


    if ($error = validate_email($email)) {
        $errors['email'] = $error;
    }

    if ($password === '') {
        $errors['password'] = 'Password is required.';
    } elseif (strlen($password) < 8) {
        $errors['password'] = 'Password must be at least 8 characters.';
    } elseif (strlen($password) > 64) {
        $errors['password'] = 'Password must be 64 characters or fewer.';
    } elseif (!preg_match(RE_PASSWORD, $password)) {
        $errors['password'] = 'Password must contain at least one symbol (e.g. ! @ # $ %).';
    }

    if ($confirm === '') {
        $errors['confirm'] = 'Please confirm your password.';
    } elseif (!hash_equals($password, $confirm)) {
        $errors['confirm'] = 'Passwords do not match.';
    }


    return $errors;
}
```

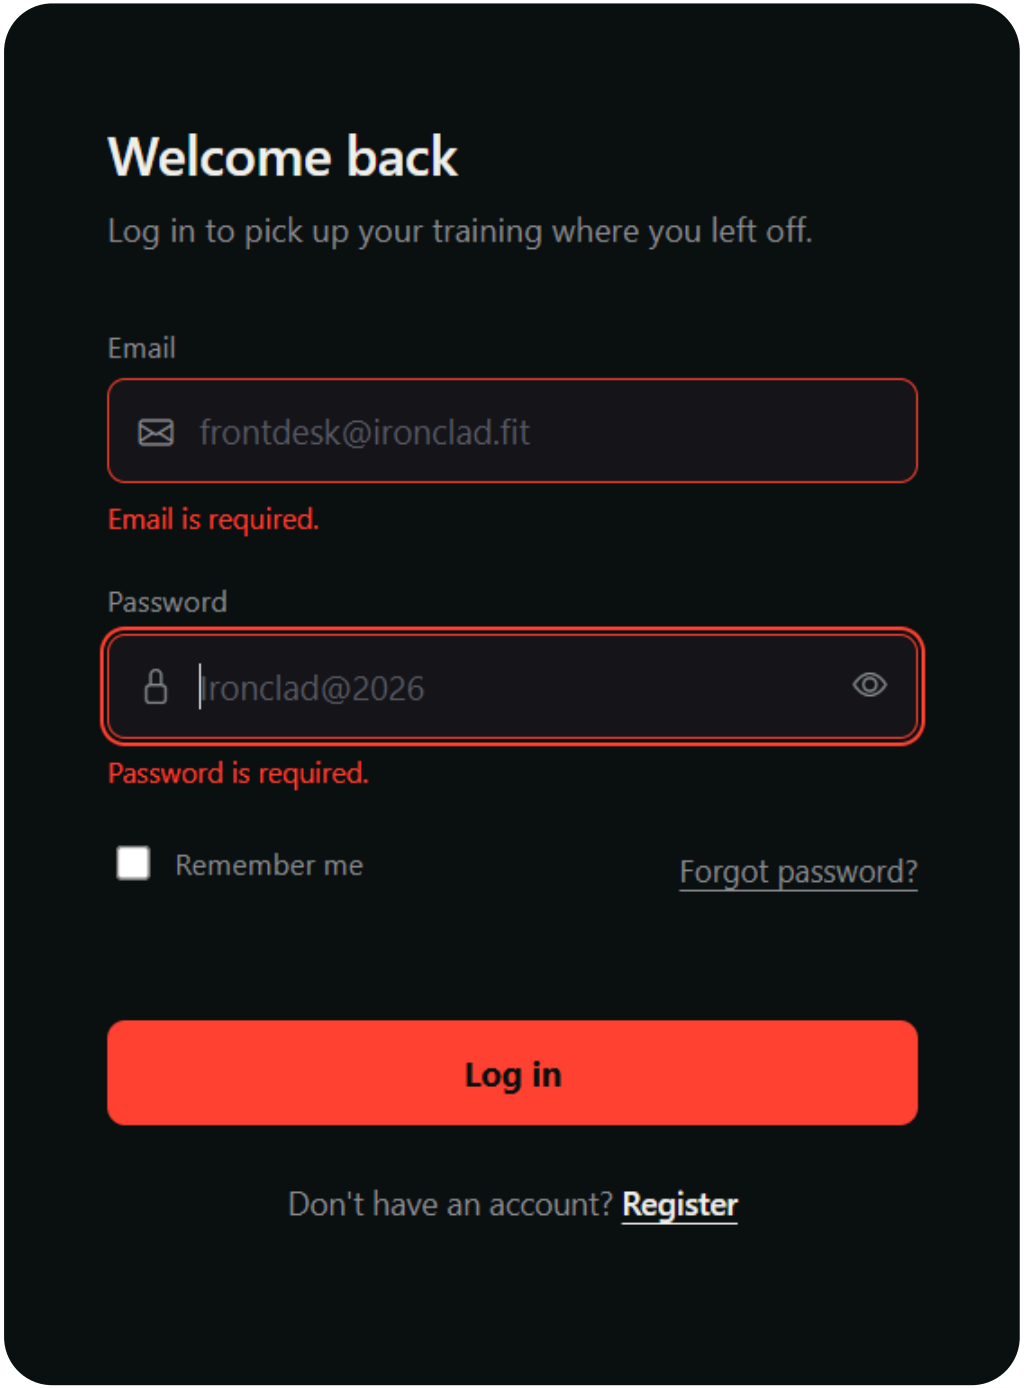
Welcome back
Log in to pick up your training where you left off.
Email
frontdesk@ironclad.fit
Email is required.
Password
ironclad@2026
Password is required.
Remember me
Forgot password?
Log in
Don't have an account? Register

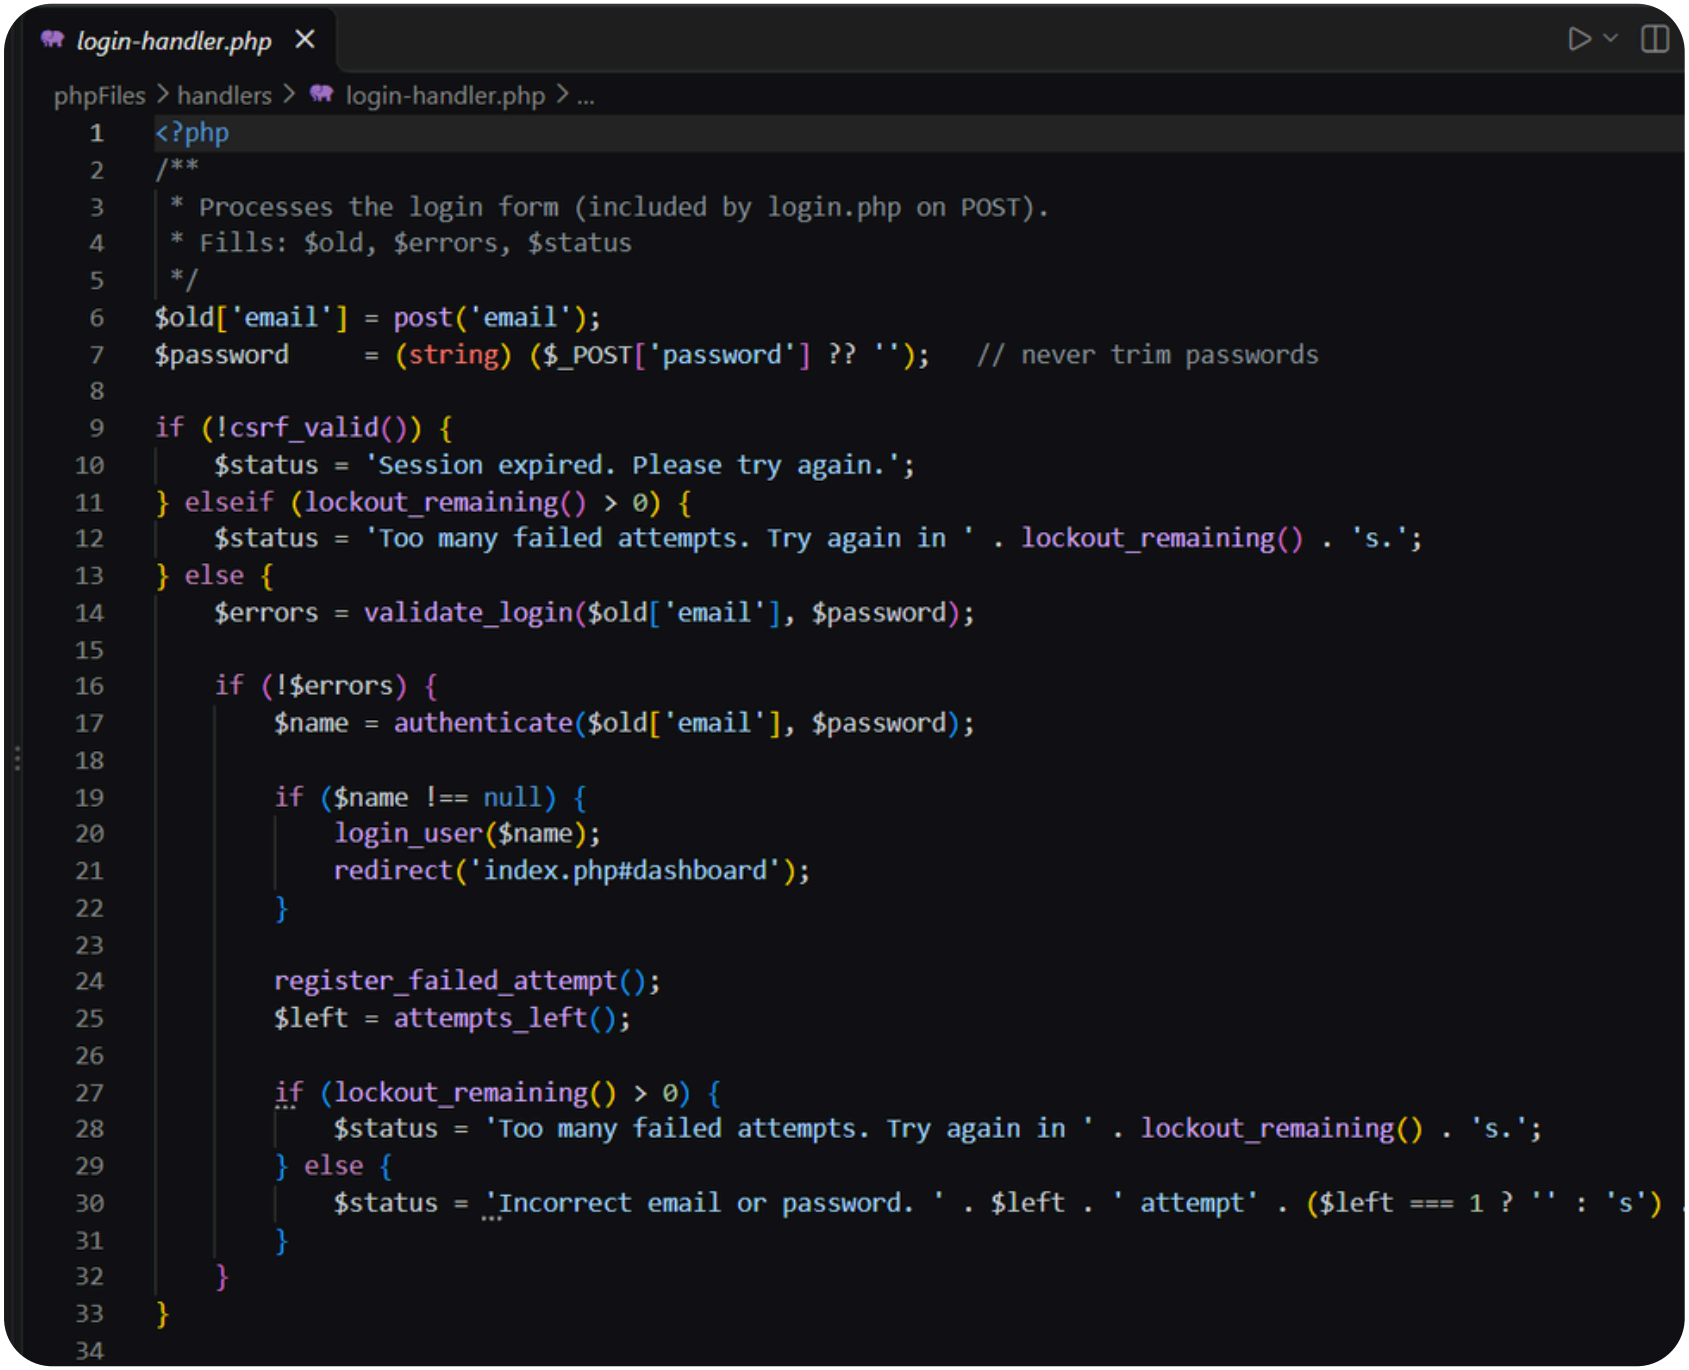
login-handler.php
phpFiles > handlers > login-handler.php > ...
<?php
/**
* Processes the login form (included by login.php on POST).
* Fills: $old, $errors, $status
*/
$old['email'] = post('email');
$password   = (string) ($_POST['password'] ?? '');   // never trim passwords
if (!csrf_valid()) {
$status = 'Session expired. Please try again.';
} elseif (lockout_remaining() > 0) {
$status = 'Too many failed attempts. Try again in ' . lockout_remaining() . 's.';
} else {
$errors = validate_login($old['email'], $password);
if (!$errors) {
$name = authenticate($old['email'], $password);
if ($name !== null) {
login_user($name);
redirect('index.php#dashboard');
}
register_failed_attempt();
$left = attempts_left();
if (lockout_remaining() > 0) {
$status = 'Too many failed attempts. Try again in ' . lockout_remaining() . 's.';
} else {
$status = 'Incorrect email or password. ' . $left . ' attempt' . ($left === 1 ? '' : 's')
}
}
}


OUTPUTS

LOGIN PAGE

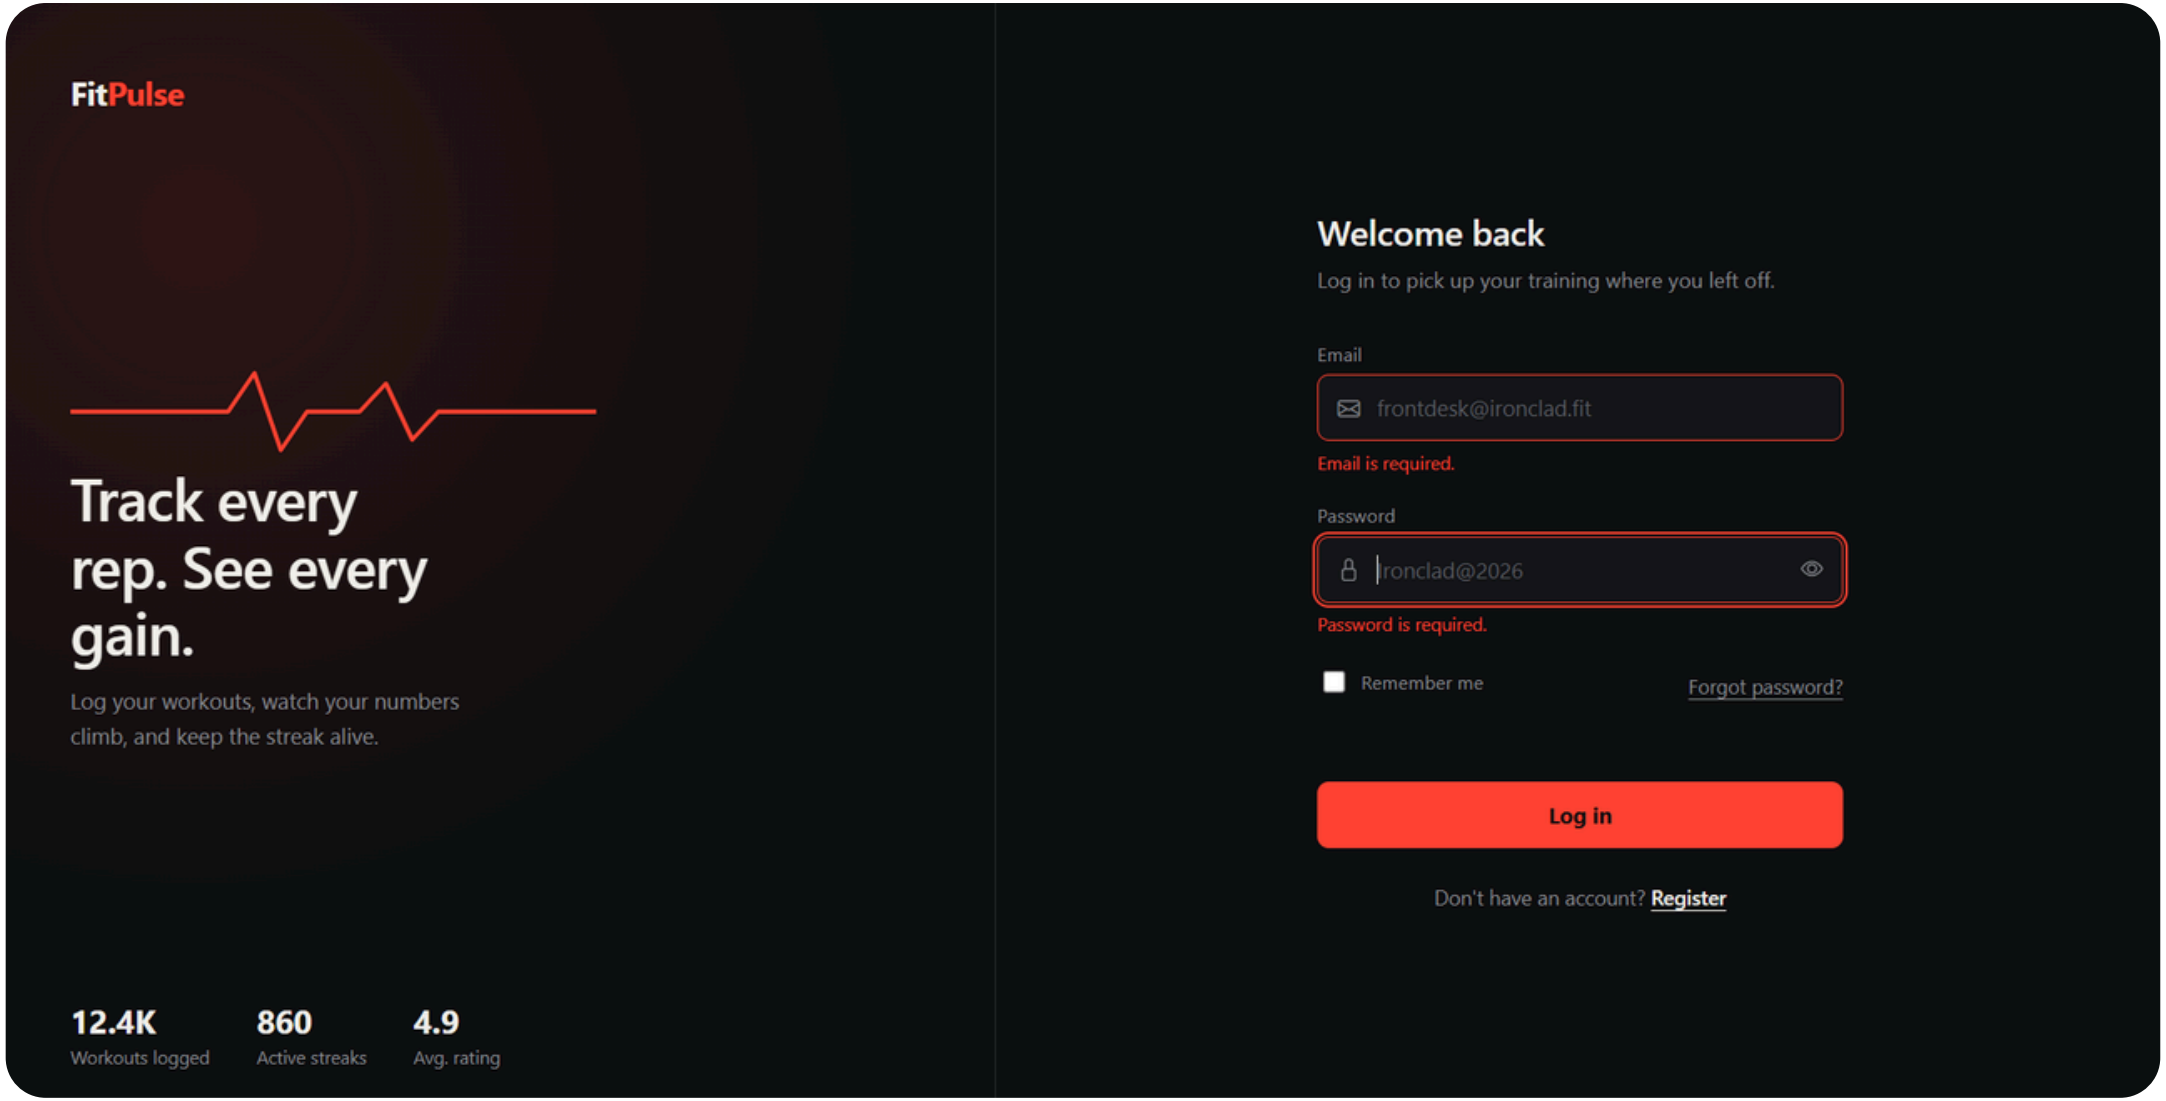


|* submit the login form with an empty email.


, or abc as the email

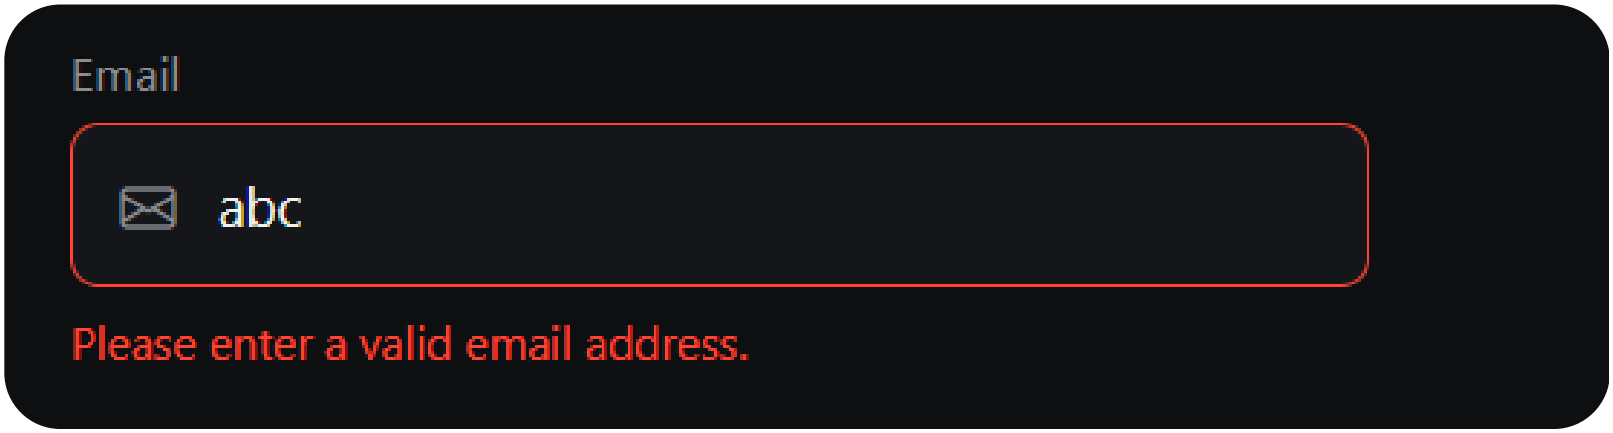


REGISTER PAGE

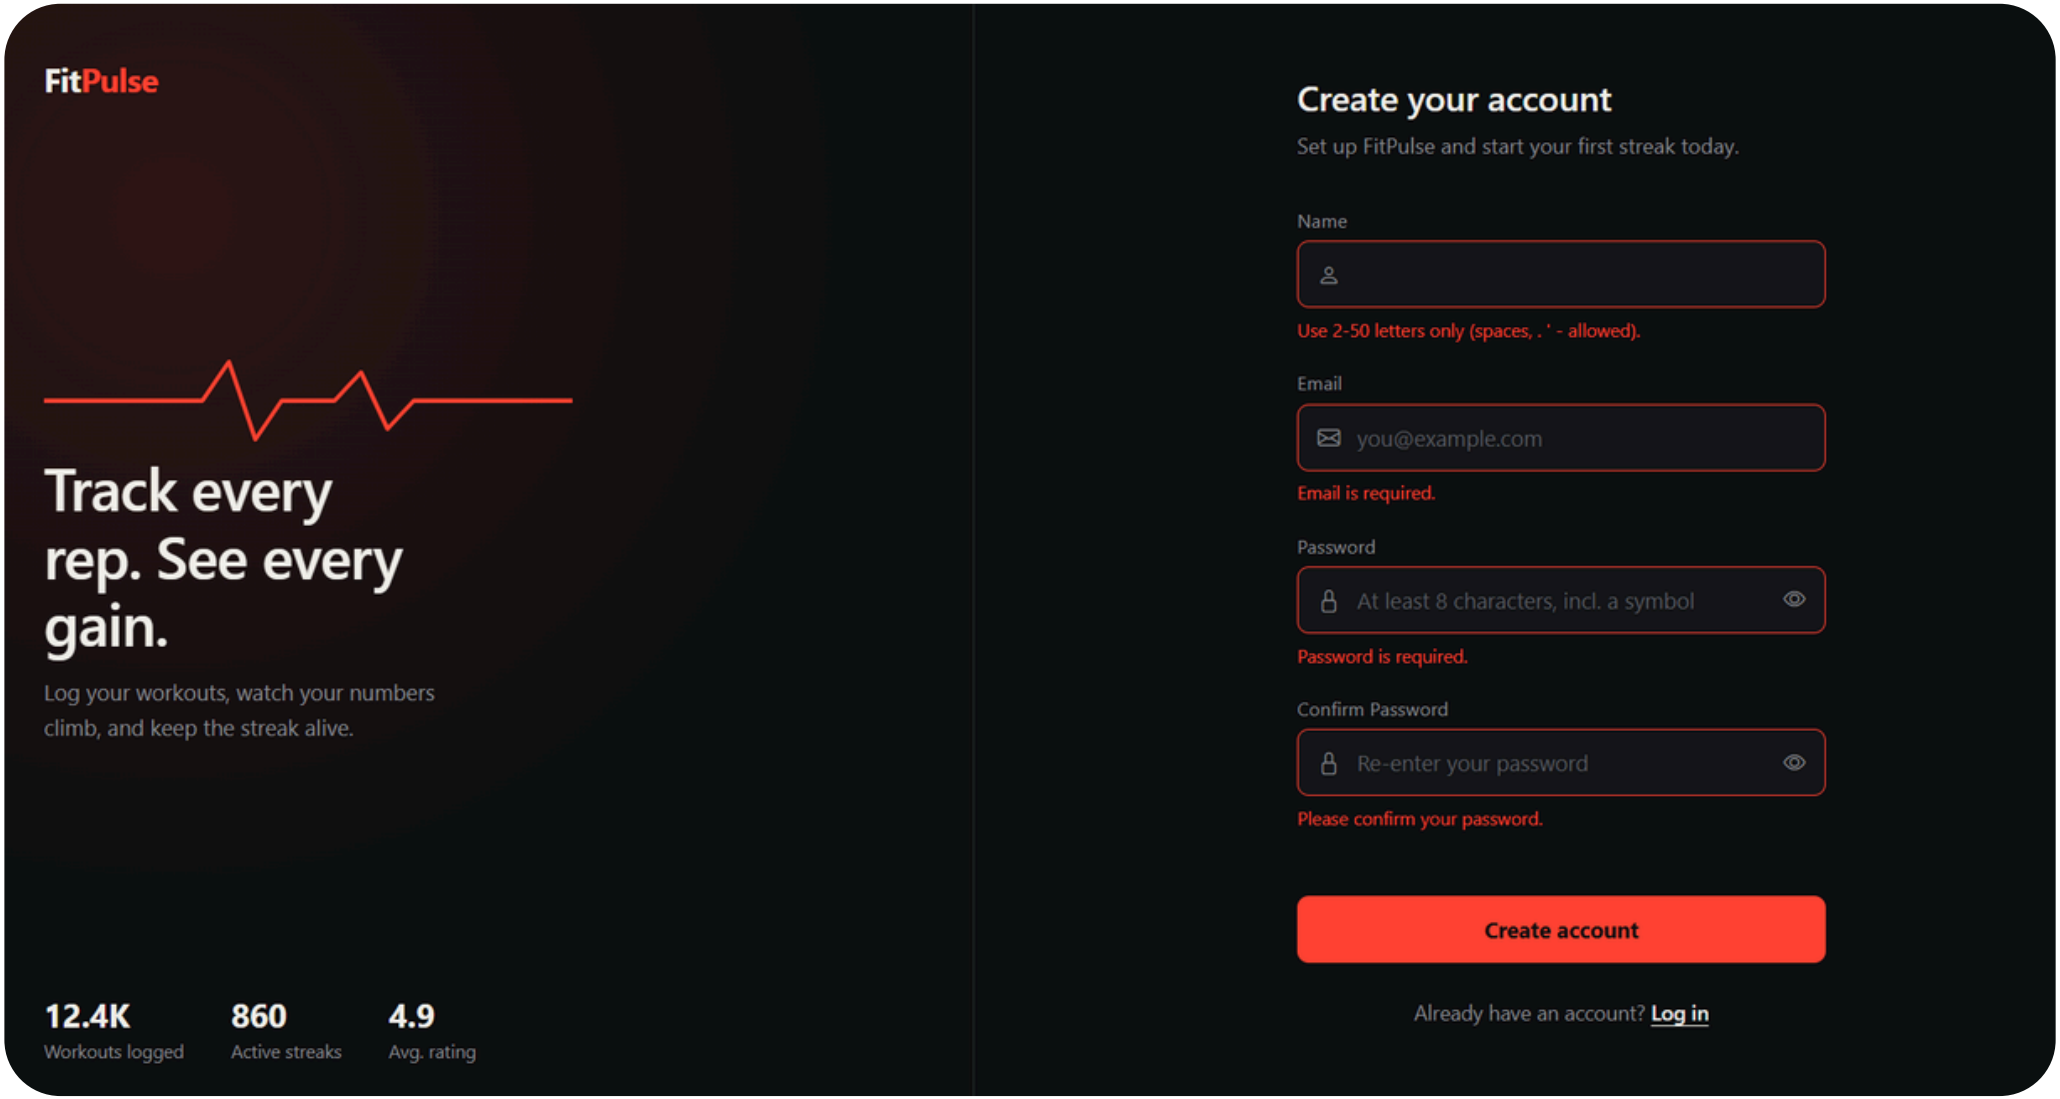


|* upon submitting empty values by pressing create account.

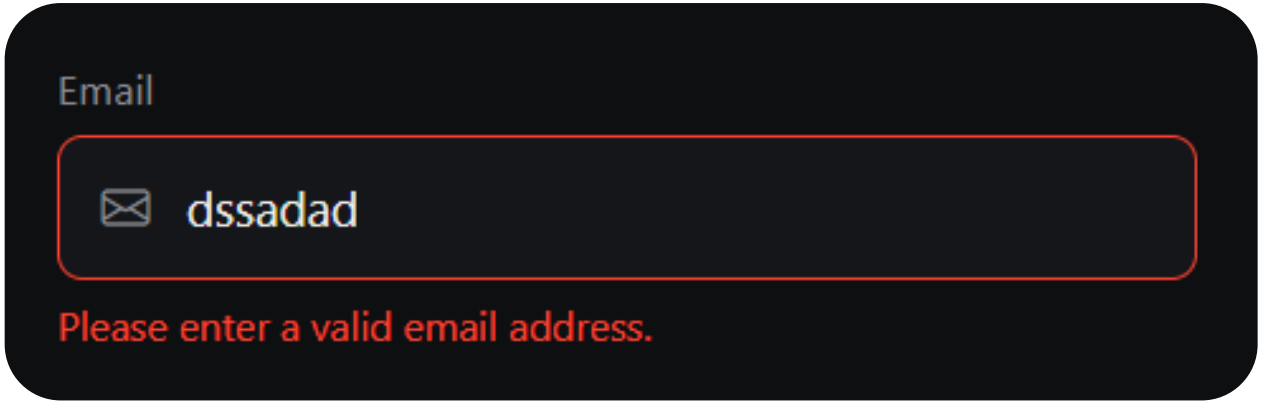



|* Results after putting bad values

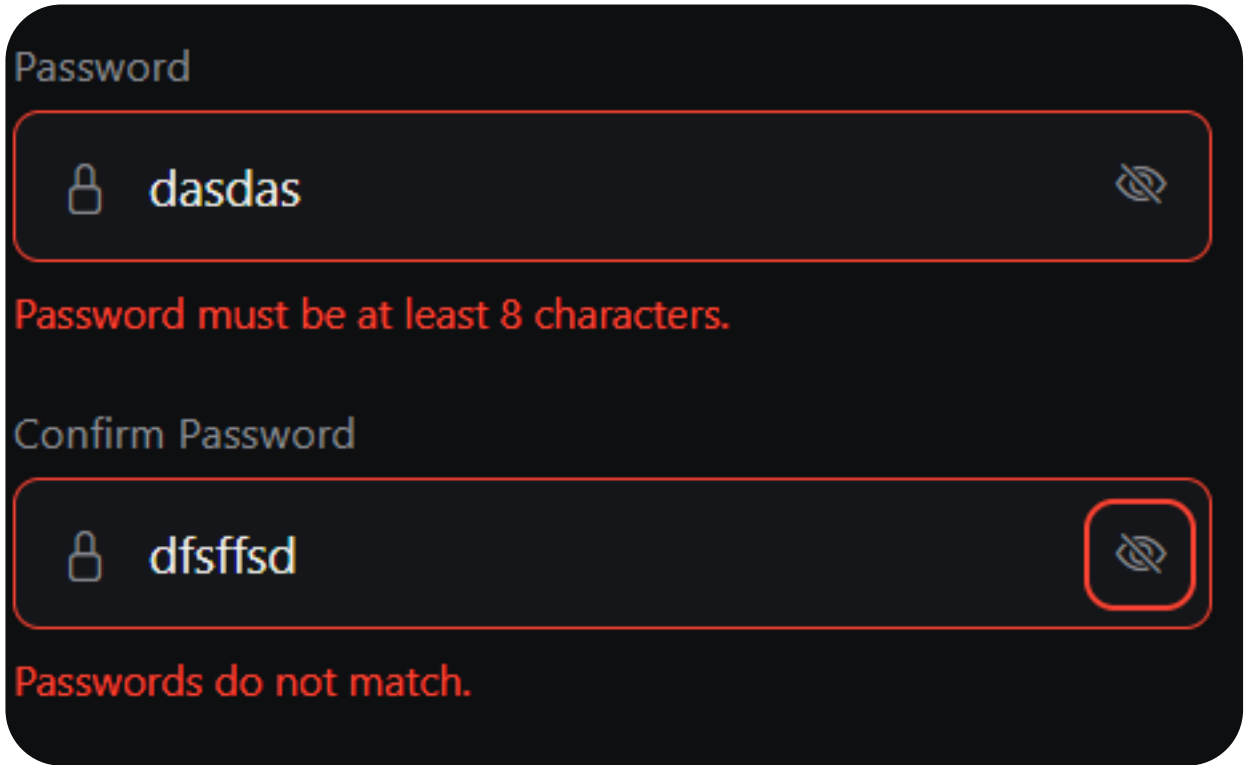

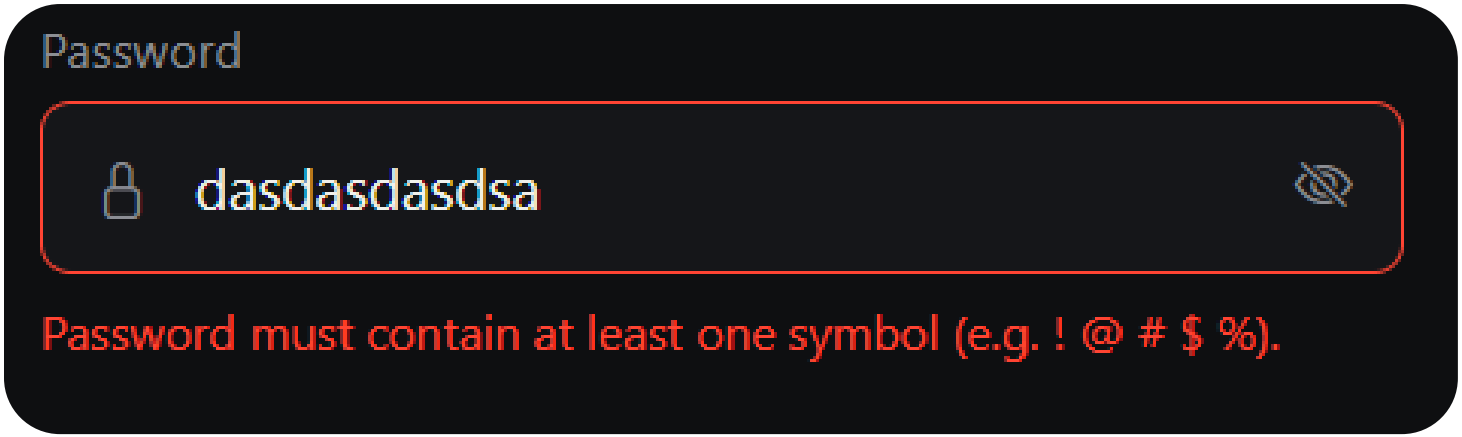


|* additional for password condition

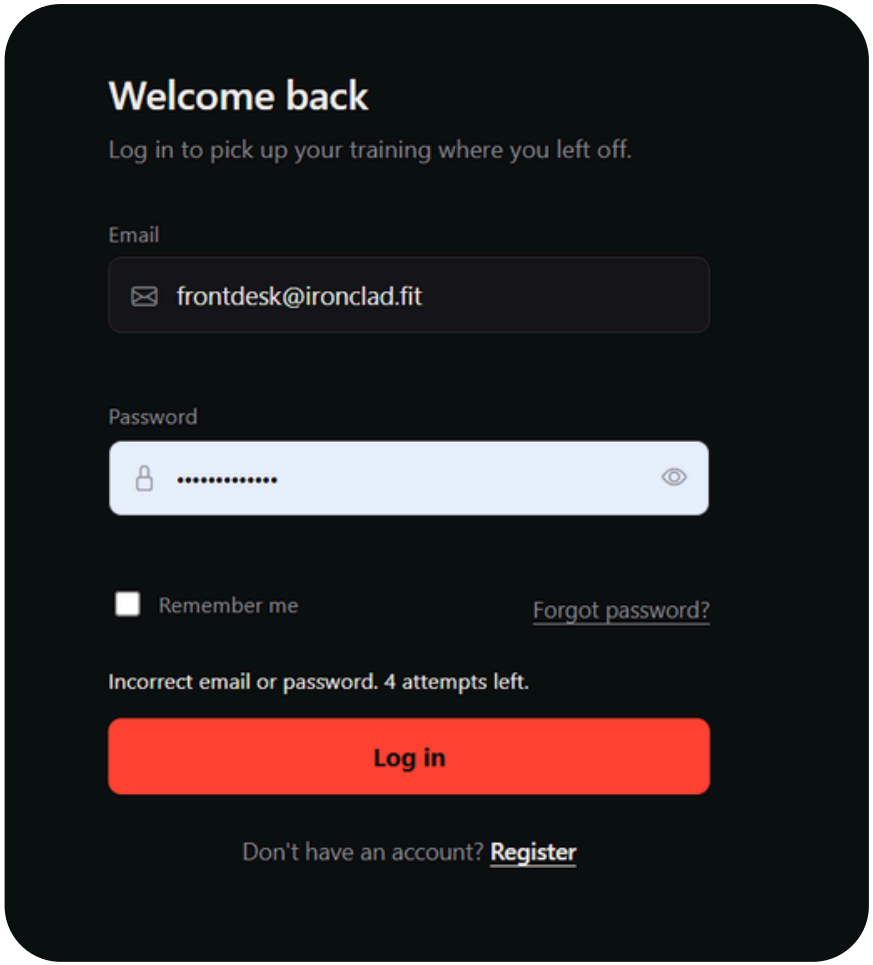


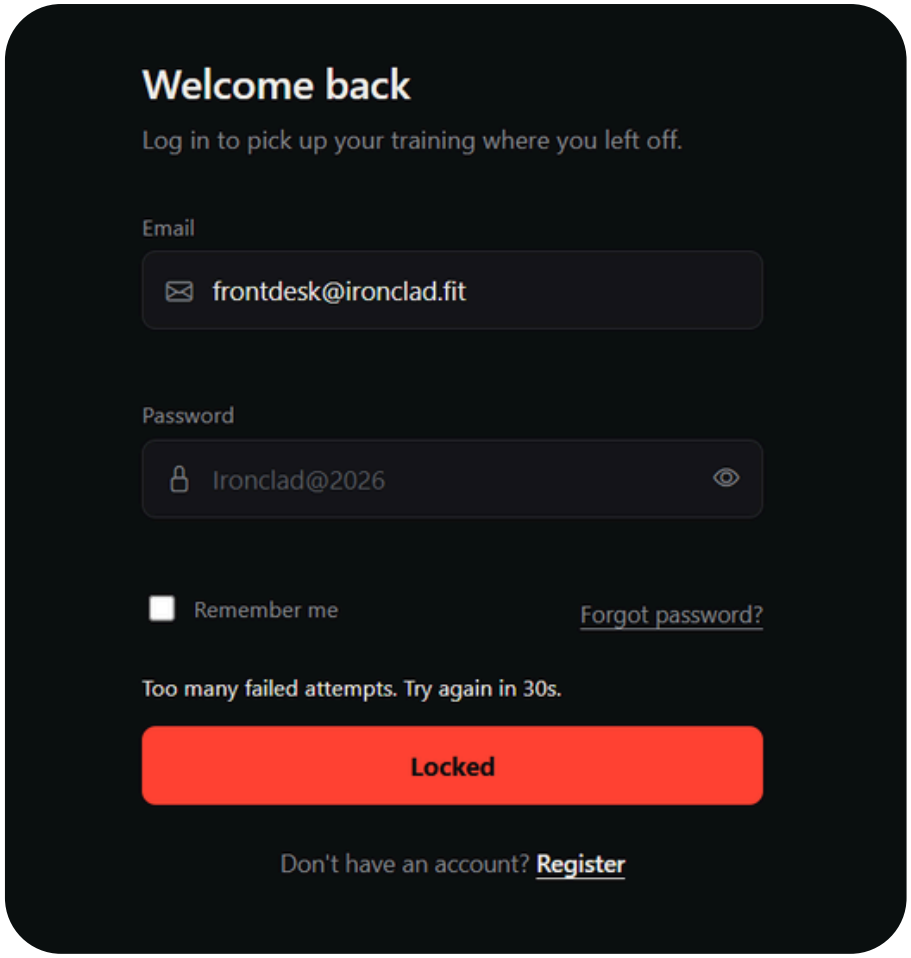

|* wrong password limit and lockout

|* landing/index + welcome on username used

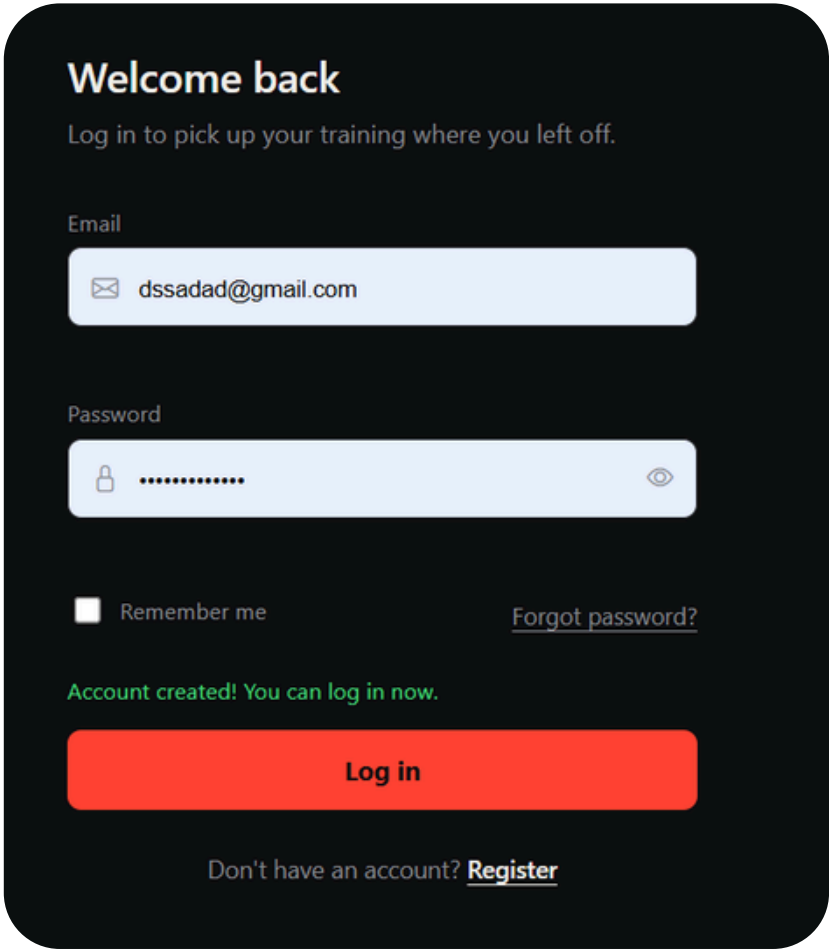


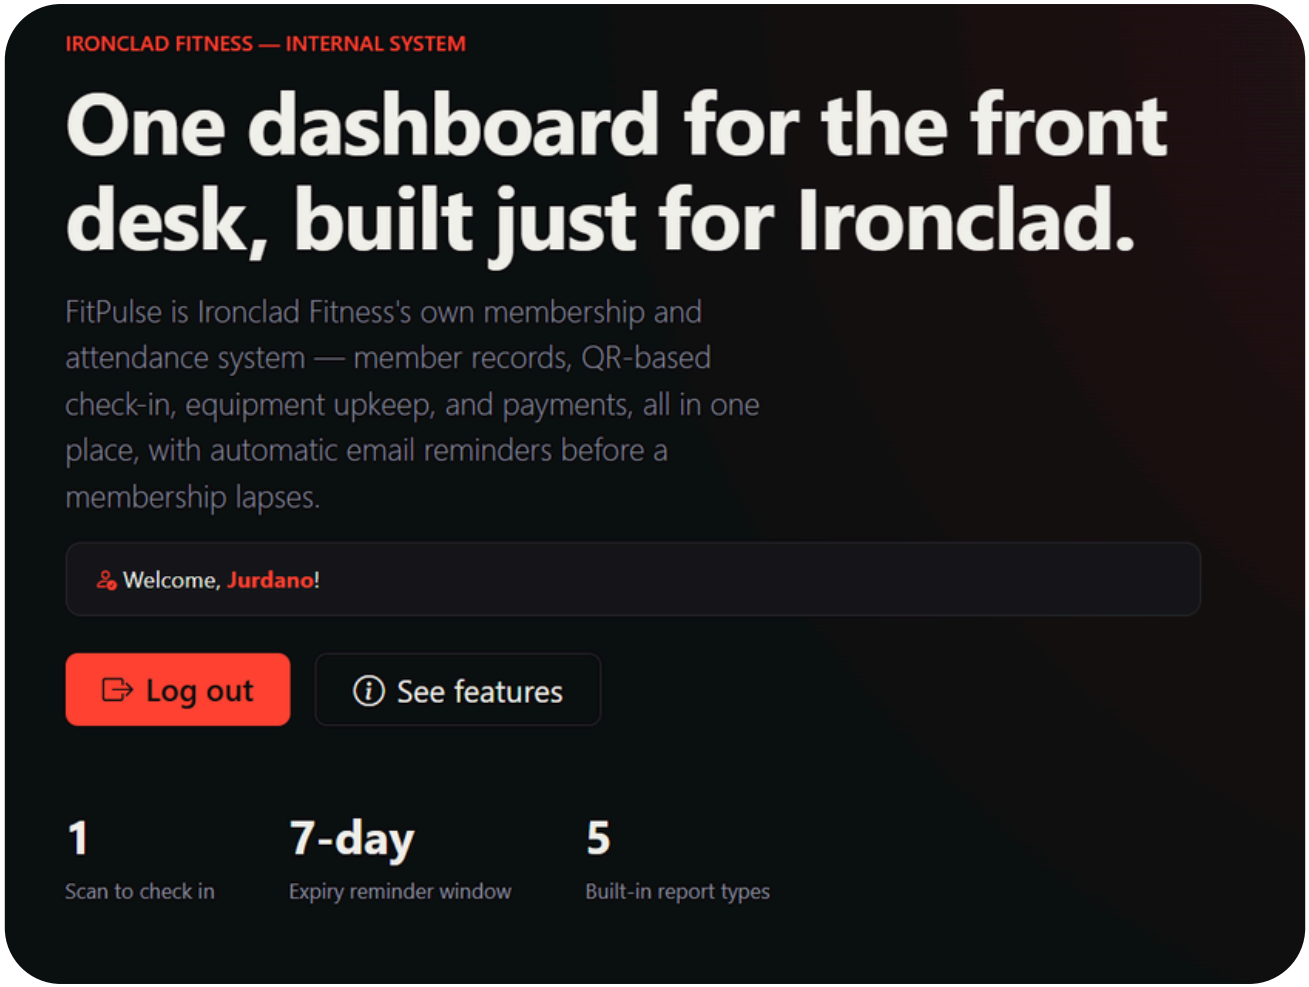

|* account creation succcess

|* Separated section files

layout/header.php + layout/footer.php — Header opens the HTML page and loads the CSS; footer holds the copyright bar.

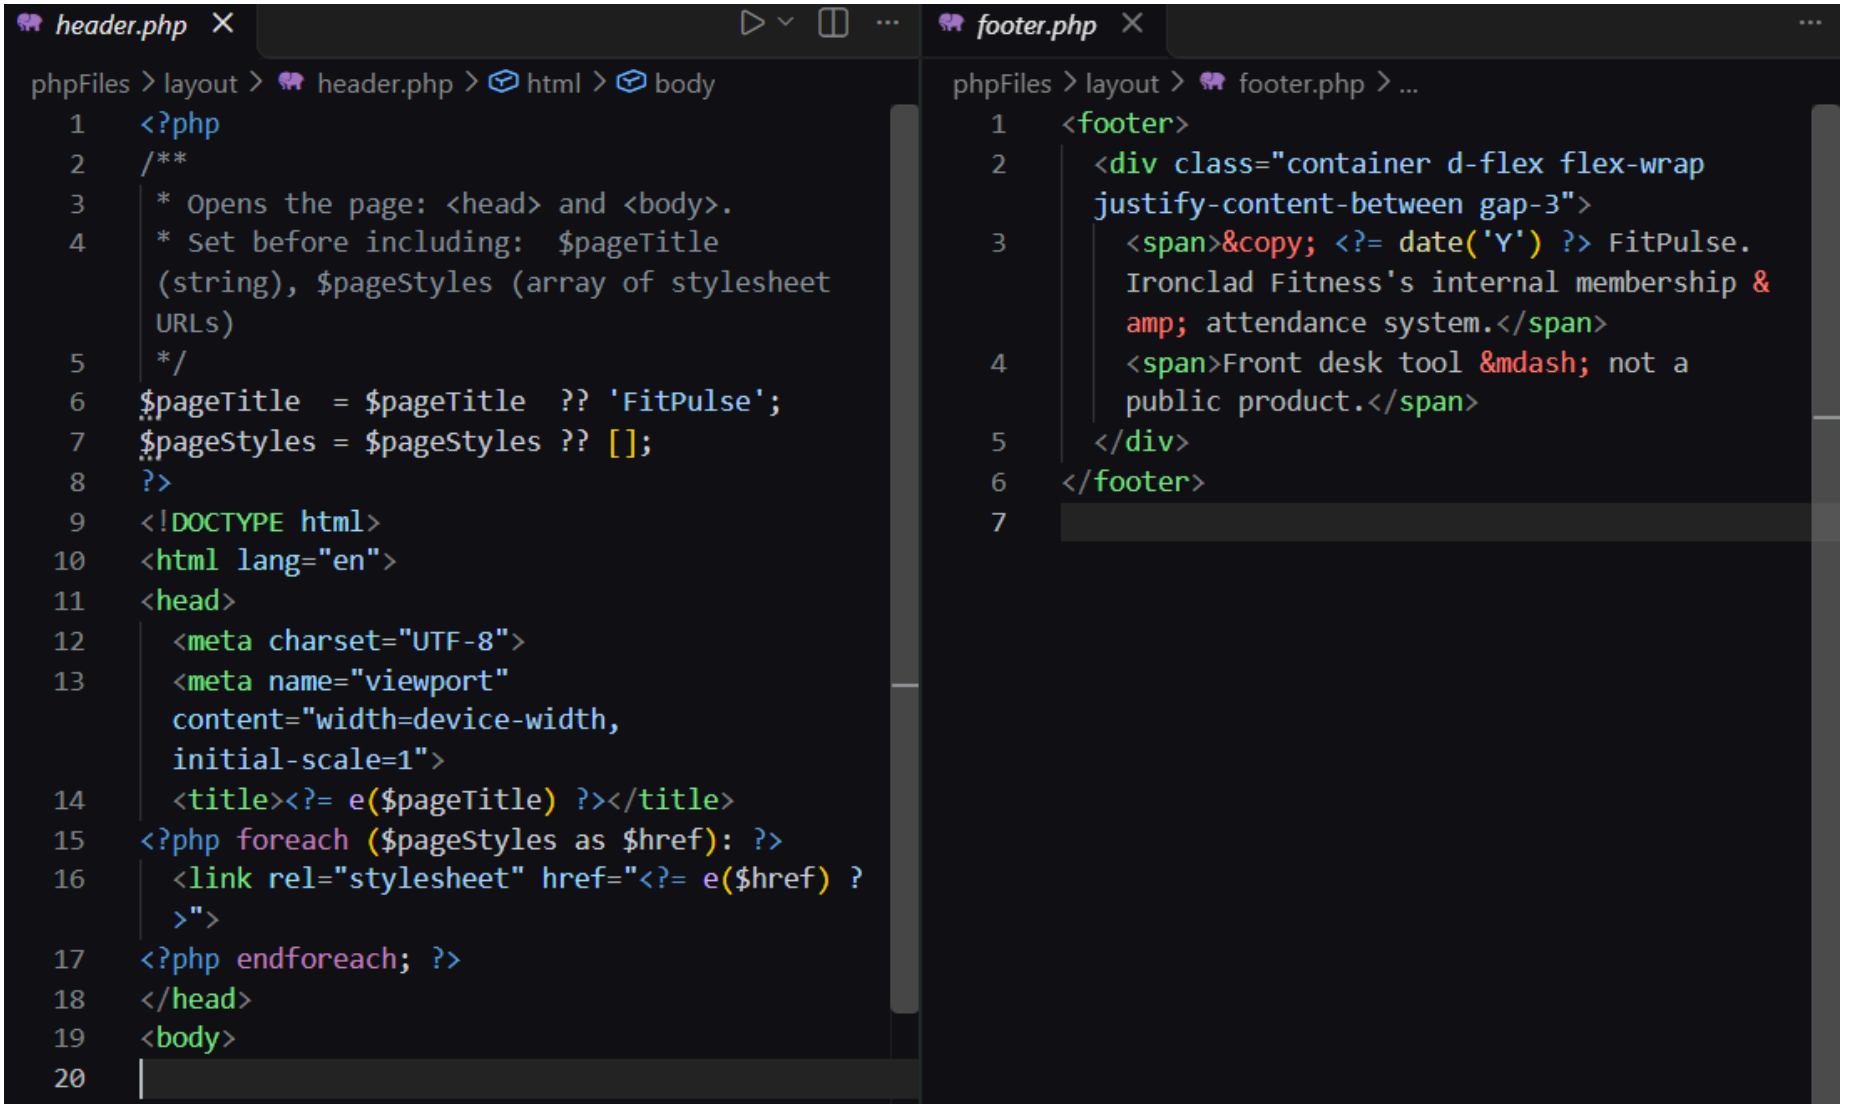

header.php

phpFiles > layout > header.php > html > body


```php
<?php
/**
 * Opens the page: <head> and <body>.
 * Set before including:  $pageTitle
 (string), $pageStyles (array of stylesheet
 URLs)
 */
$pageTitle  = $pageTitle  ?? 'FitPulse';
$pageStyles = $pageStyles ?? [];
?>
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport"
  content="width=device-width,
  initial-scale=1">
  <title><?= e($pageTitle) ?></title>
<?php foreach ($pageStyles as $href): ?>
  <link rel="stylesheet" href="<?= e($href) ?
  >">
<?php endforeach; ?>
</head>
<body>
```

footer.php


phpFiles > layout > footer.php > ...

```php
<footer>
  <div class="container d-flex flex-wrap
  justify-content-between gap-3">
    <span>&copy; <?= date('Y') ?> FitPulse.
    Ironclad Fitness's internal membership &
    amp; attendance system.</span>
    <span>Front desk tool &mdash; not a
    public product.</span>
  </div>
</footer>
```

layout/nav.php — Navigation bar: menu links are stored in an array and printed with a loop.

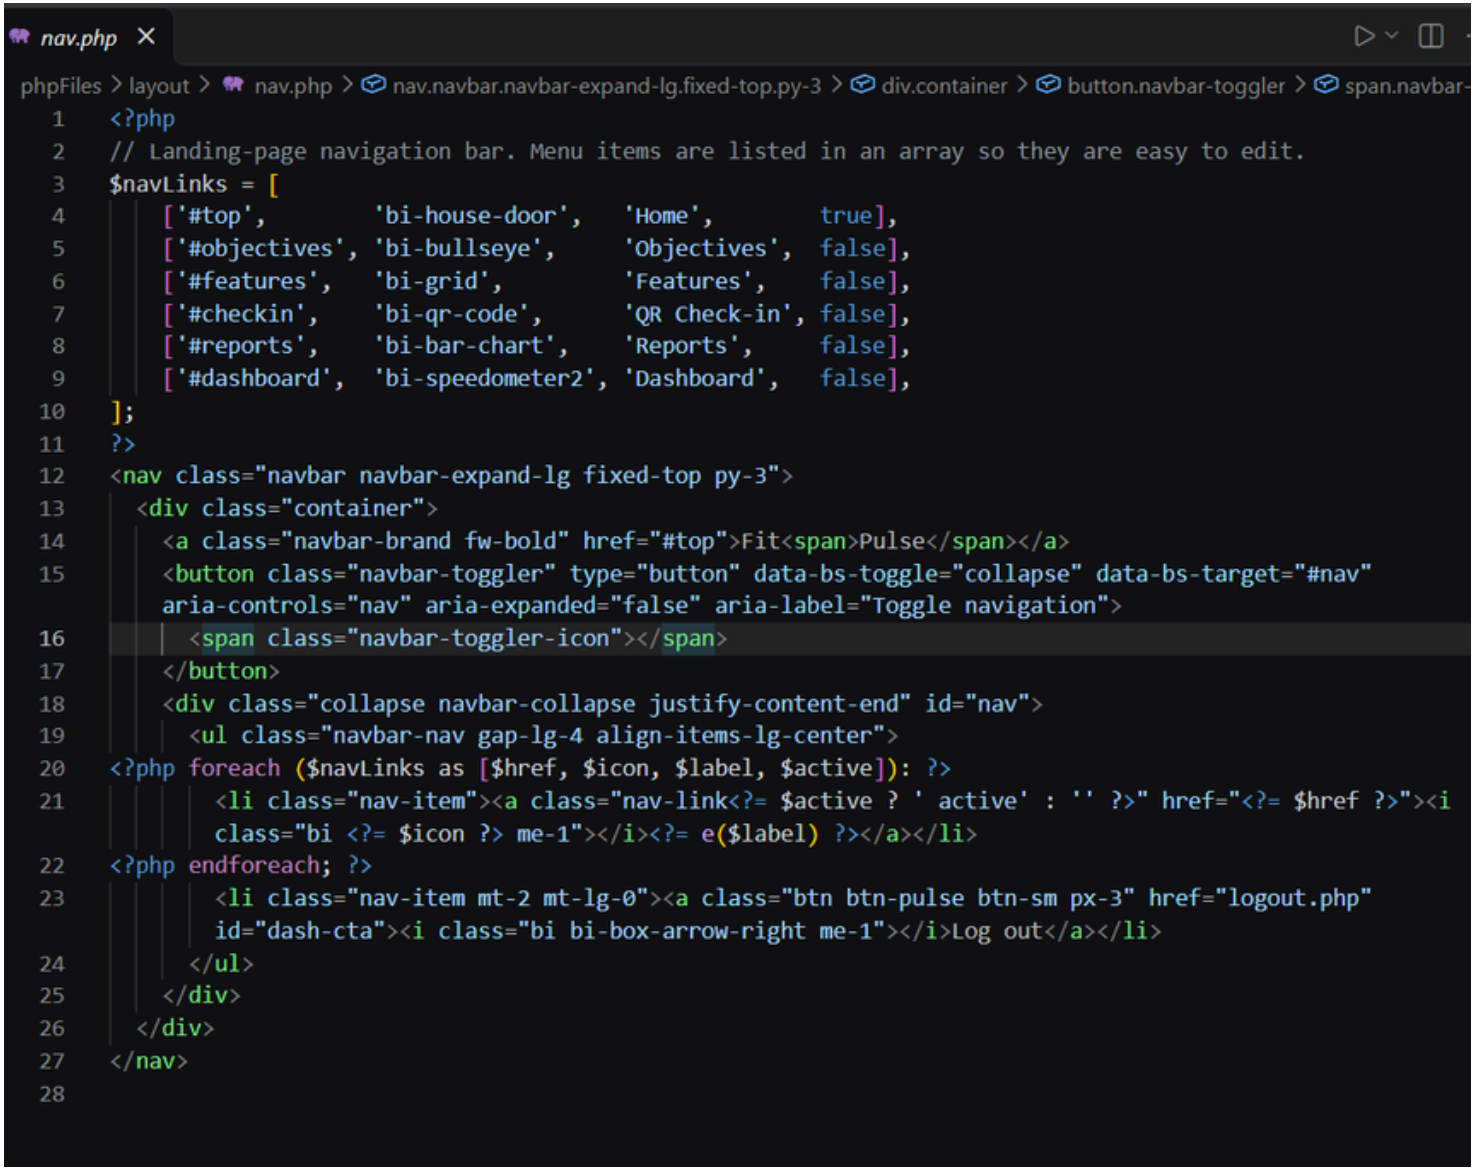

layout/scripts.php + layout/auth-side.php — Scripts closes the page and loads the JS; auth-side is the brand panel shared by login and register.

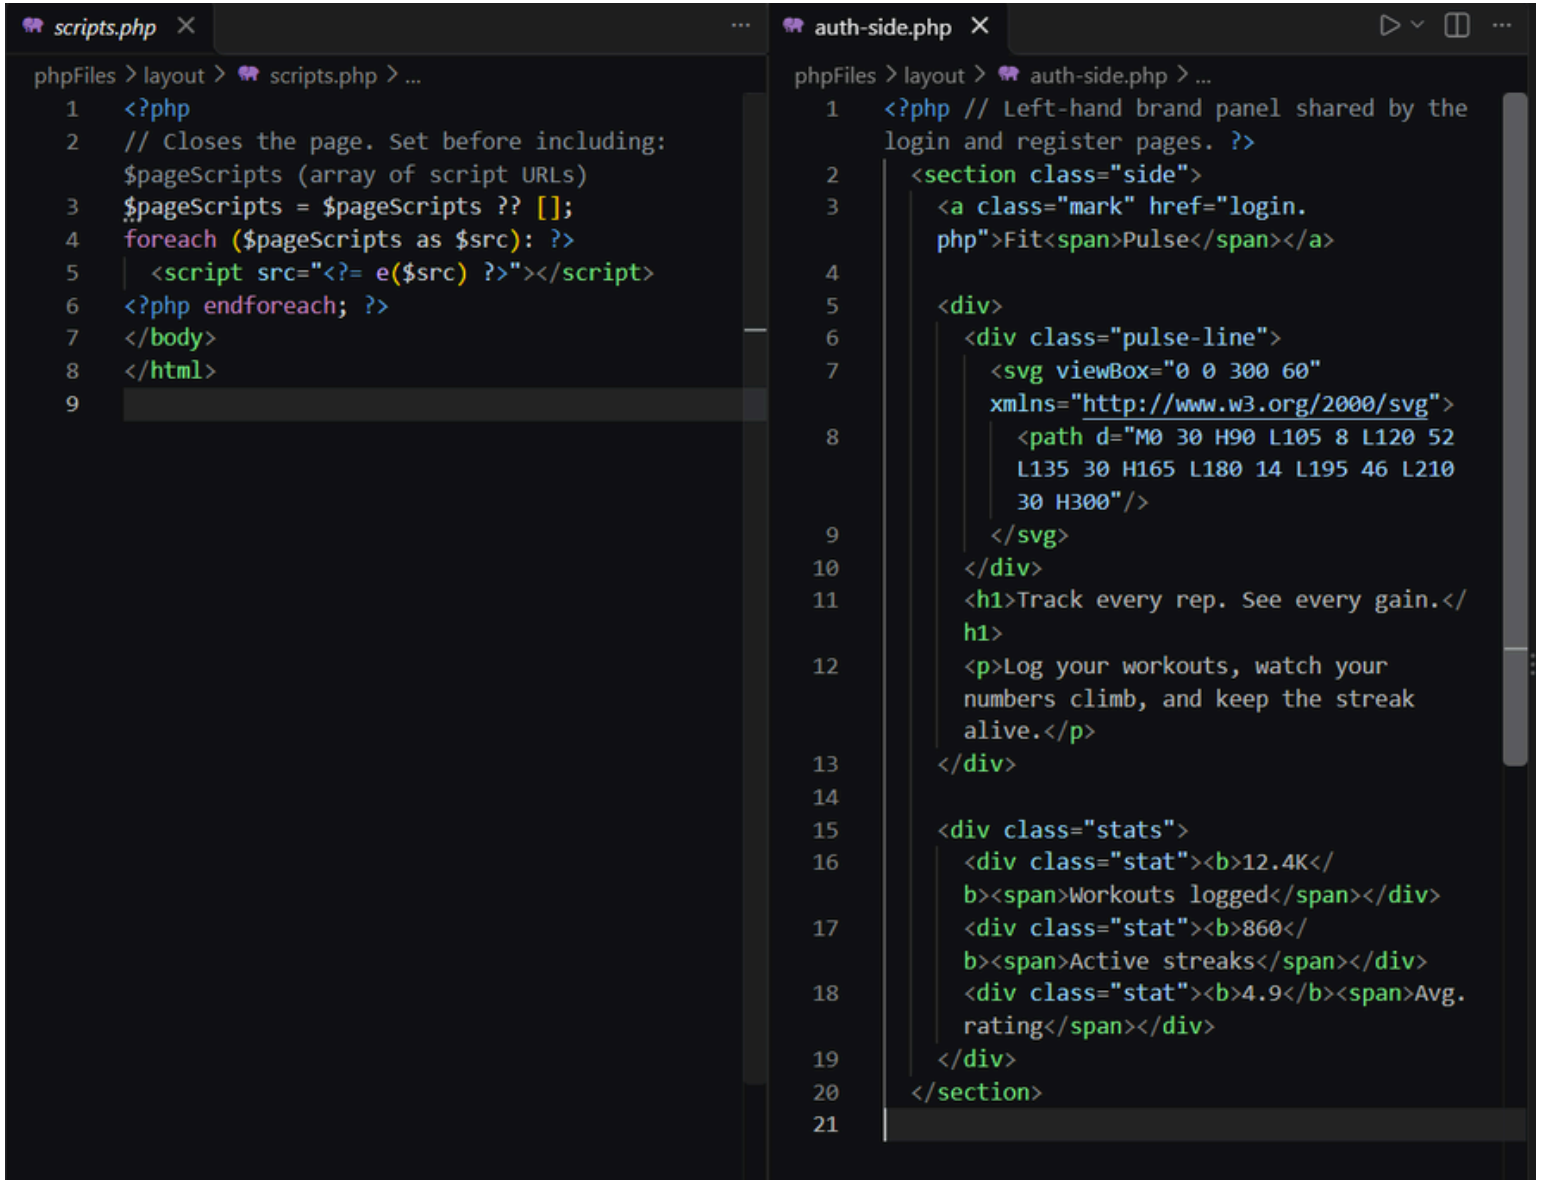

scripts.php

phpFiles > layout > scripts.php > ...


```
1  <?php
2  // Closes the page. Set before including:
   $pageScripts (array of script URLs)
3  $pageScripts = $pageScripts ?? [];
4  foreach ($pageScripts as $src): ?>
5    <script src="<?= e($src) ?>"></script>
6  <?php endforeach; ?>
7  </body>
8  </html>
9
```

auth-side.php

phpFiles > layout > auth-side.php > ...

```
1  <?php // Left-hand brand panel shared by the
   login and register pages. ?>
2    <section class="side">
3      <a class="mark" href="login.
       php">Fit<span>Pulse</span></a>
4
5      <div>
6        <div class="pulse-line">
7          <svg viewBox="0 0 300 60"
           xmlns="http://www.w3.org/2000/svg">
8            <path d="M0 30 H90 L105 8 L120 52
             L135 30 H165 L180 14 L195 46 L210
             30 H300"/>
9          </svg>
10       </div>
11       <h1>Track every rep. See every gain.</
         h1>
12       <p>Log your workouts, watch your
         numbers climb, and keep the streak
         alive.</p>
13     </div>
14
15     <div class="stats">
16       <div class="stat"><b>12.4K</
         b><span>Workouts logged</span></div>
17       <div class="stat"><b>860</
         b><span>Active streaks</span></div>
18       <div class="stat"><b>4.9</b><span>Avg.
         rating</span></div>
19     </div>
20   </section>
21
```

sections/hero.php — Top banner with the 'Welcome, [username]!' message and the Log out button.

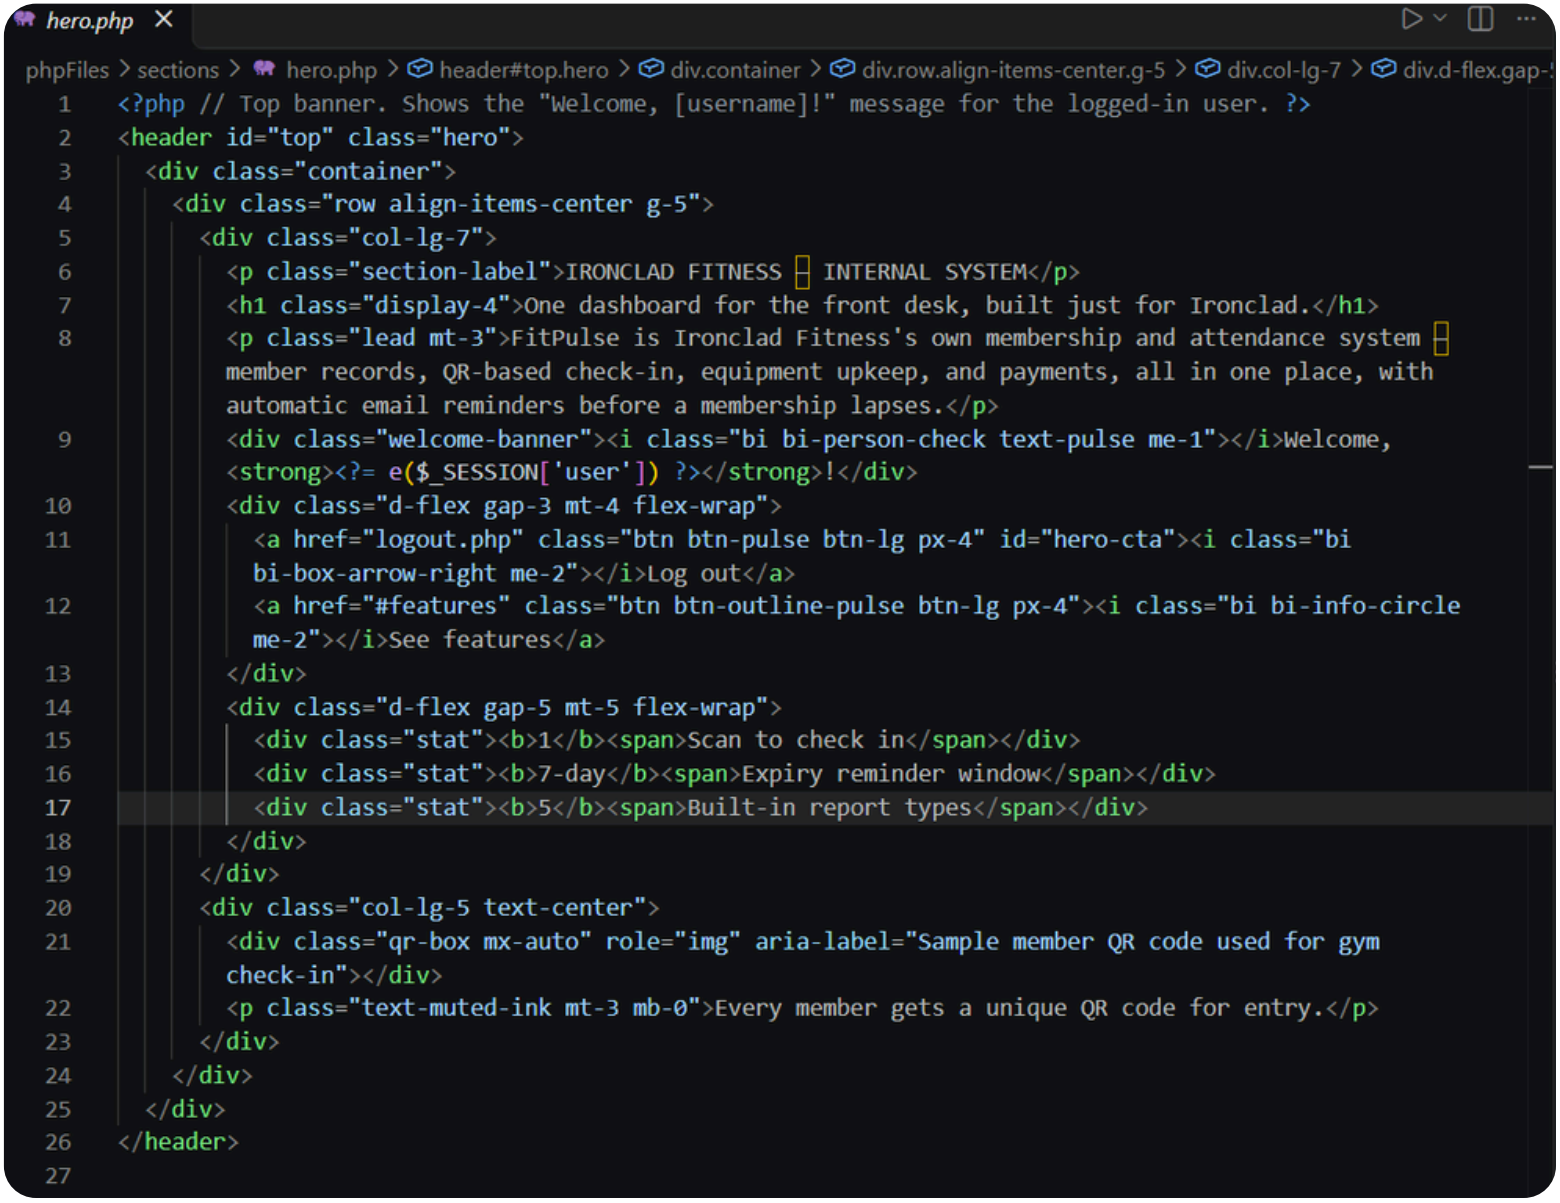


sections/hero.php — Top banner with the 'Welcome, [username]!' message and the Log out button.

hero.php

phpFiles > sections > hero.php > ...

```php
<?php // Top banner. Shows the "Welcome, [username]!" message for the logged-in user. ?>
<header id="top" class="hero">
  <div class="container">
    <div class="row align-items-center g-5">
      <div class="col-lg-7">
        <p class="section-label">IRONCLAD FITNESS · INTERNAL SYSTEM</p>
        <h1 class="display-4">One dashboard for the front desk, built just for Ironclad.</h1>
        <p class="lead mt-3">FitPulse is Ironclad Fitness's own membership and attendance system · member records, QR-based check-in, equipment upkeep, and payments, all in one place, with automatic email reminders before a membership lapses.</p>
        <div class="welcome-banner"><i class="bi bi-person-check text-pulse me-1"></i>Welcome, <strong><?= e($_SESSION['user']) ?></strong>!</div>
        <div class="d-flex gap-3 mt-4 flex-wrap">
          <a href="logout.php" class="btn btn-pulse btn-lg px-4" id="hero-cta"><i class="bi bi-box-arrow-right me-2"></i>Log out</a>
          <a href="#features" class="btn btn-outline-pulse btn-lg px-4"><i class="bi bi-info-circle me-2"></i>See features</a>
        </div>
        <div class="d-flex gap-5 mt-5 flex-wrap">
          <div class="stat"><b>1</b><span>Scan to check in</span></div>
          <div class="stat"><b>7-day</b><span>Expiry reminder window</span></div>
          <div class="stat"><b>5</b><span>Built-in report types</span></div>
        </div>
      </div>
      <div class="col-lg-5 text-center">
        <div class="qr-box mx-auto" role="img" aria-label="Sample member QR code used for gym check-in"></div>
        <p class="text-muted-ink mt-3 mb-0">Every member gets a unique QR code for entry.</p>
      </div>
    </div>
  </div>
</header>
```

forms/login-form.php + forms/register-form.php — The login and register forms in plain HTML, with PHP printing errors and previous input.

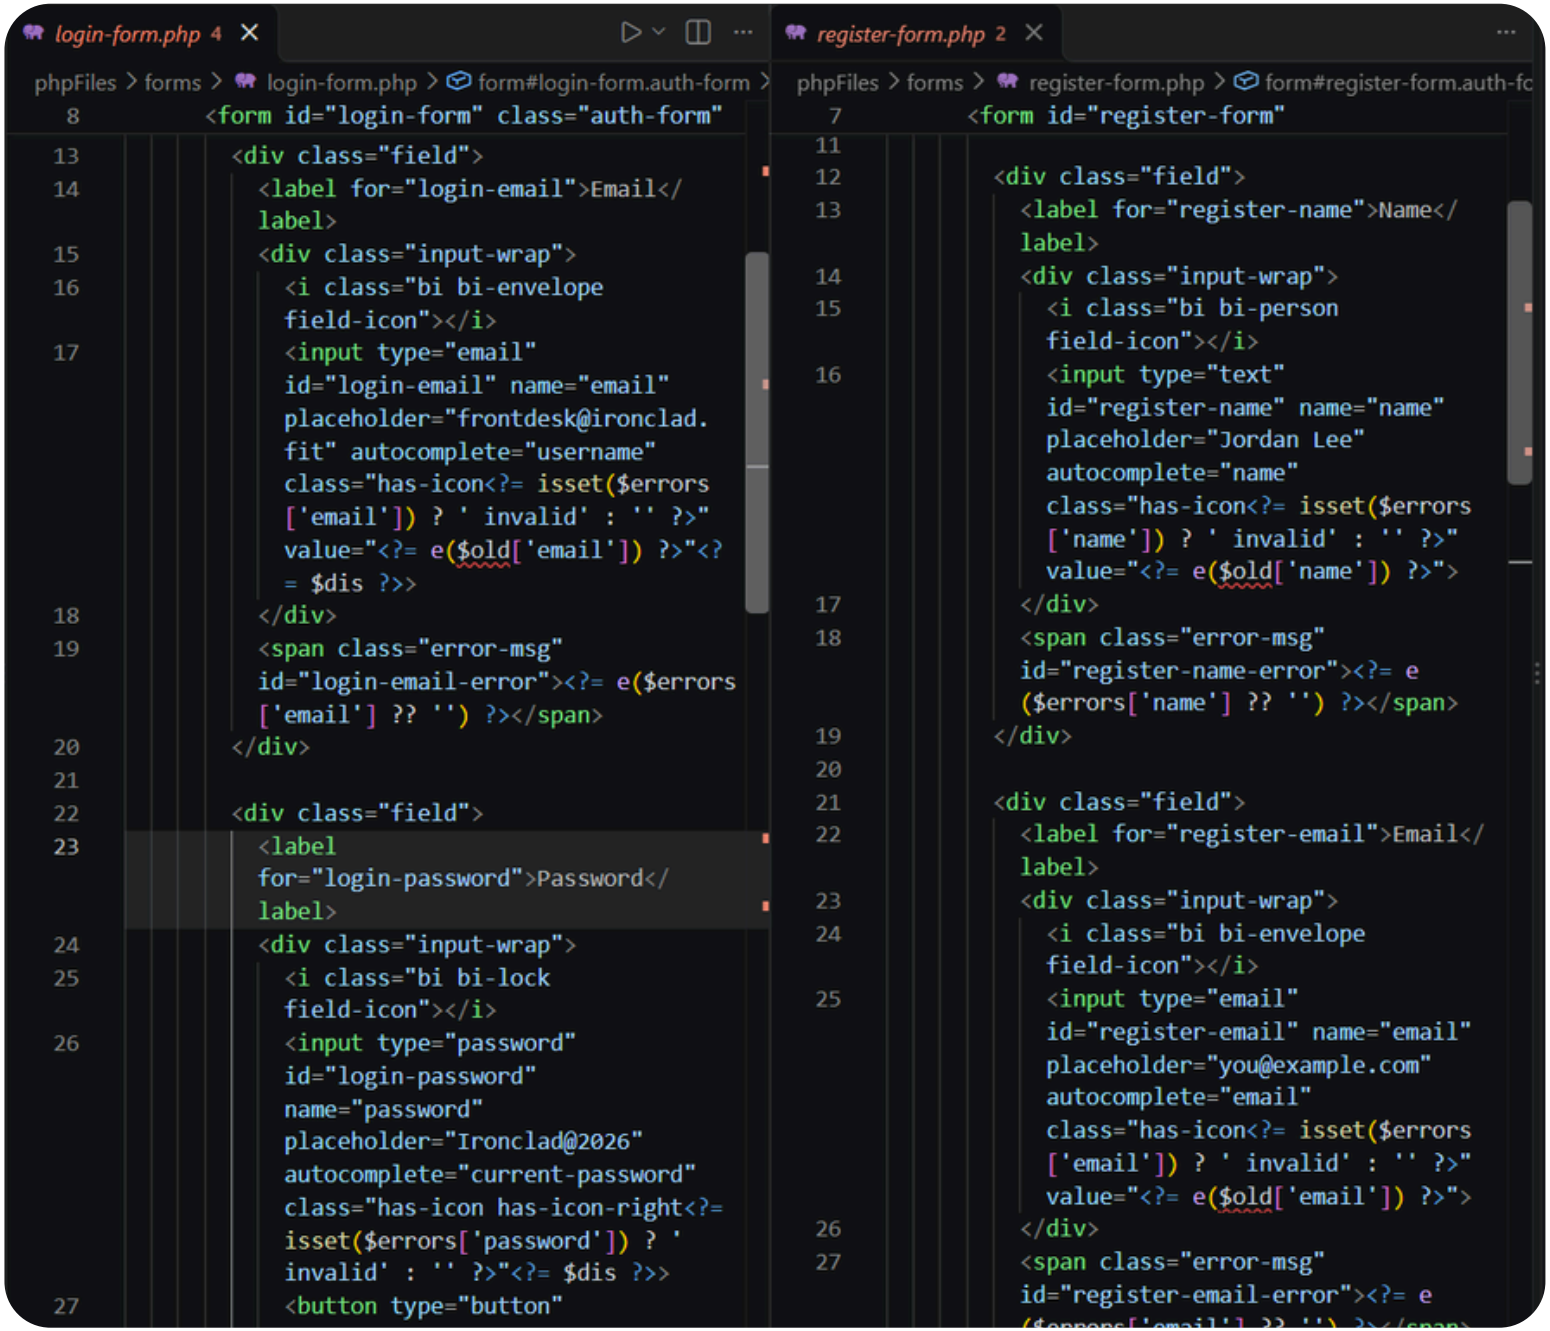

login-form.php 4

phpFiles > forms > login-form.php > form#login-form.auth-form


```
8       <form id="login-form" class="auth-form"
13        <div class="field">
14          <label for="login-email">Email</
            label>
15          <div class="input-wrap">
16            <i class="bi bi-envelope
              field-icon"></i>
17            <input type="email"
              id="login-email" name="email"
              placeholder="frontdesk@ironclad.
              fit" autocomplete="username"
              class="has-icon<?= isset($errors
              ['email']) ? ' invalid' : '' ?>"
              value="<?= e($old['email']) ?>"<?
              = $dis ?>>
18          </div>
19          <span class="error-msg"
            id="login-email-error"><?= e($errors
            ['email'] ?? '') ?></span>
20        </div>
21
22        <div class="field">
23          <label
            for="login-password">Password</
            label>
24          <div class="input-wrap">
25            <i class="bi bi-lock
              field-icon"></i>
26            <input type="password"
              id="login-password"
              name="password"
              placeholder="Ironclad@2026"
              autocomplete="current-password"
              class="has-icon has-icon-right<?=
              isset($errors['password']) ? '
              invalid' : '' ?>"<?= $dis ?>>
27            <button type="button"
```

register-form.php 2


phpFiles > forms > register-form.php > form#register-form.auth-fc

```
7       <form id="register-form"
11
12        <div class="field">
13          <label for="register-name">Name</
            label>
14          <div class="input-wrap">
15            <i class="bi bi-person
              field-icon"></i>
16            <input type="text"
              id="register-name" name="name"
              placeholder="Jordan Lee"
              autocomplete="name"
              class="has-icon<?= isset($errors
              ['name']) ? ' invalid' : '' ?>"
              value="<?= e($old['name']) ?>">
17          </div>
18          <span class="error-msg"
            id="register-name-error"><?= e
            ($errors['name'] ?? '') ?></span>
19        </div>
20
21        <div class="field">
22          <label for="register-email">Email</
            label>
23          <div class="input-wrap">
24            <i class="bi bi-envelope
              field-icon"></i>
25            <input type="email"
              id="register-email" name="email"
              placeholder="you@example.com"
              autocomplete="email"
              class="has-icon<?= isset($errors
              ['email']) ? ' invalid' : '' ?>"
              value="<?= e($old['email']) ?>">
26          </div>
27          <span class="error-msg"
            id="register-email-error"><?= e
```


sections/features.php — Features accordion, generated from an array of feature titles and descriptions.

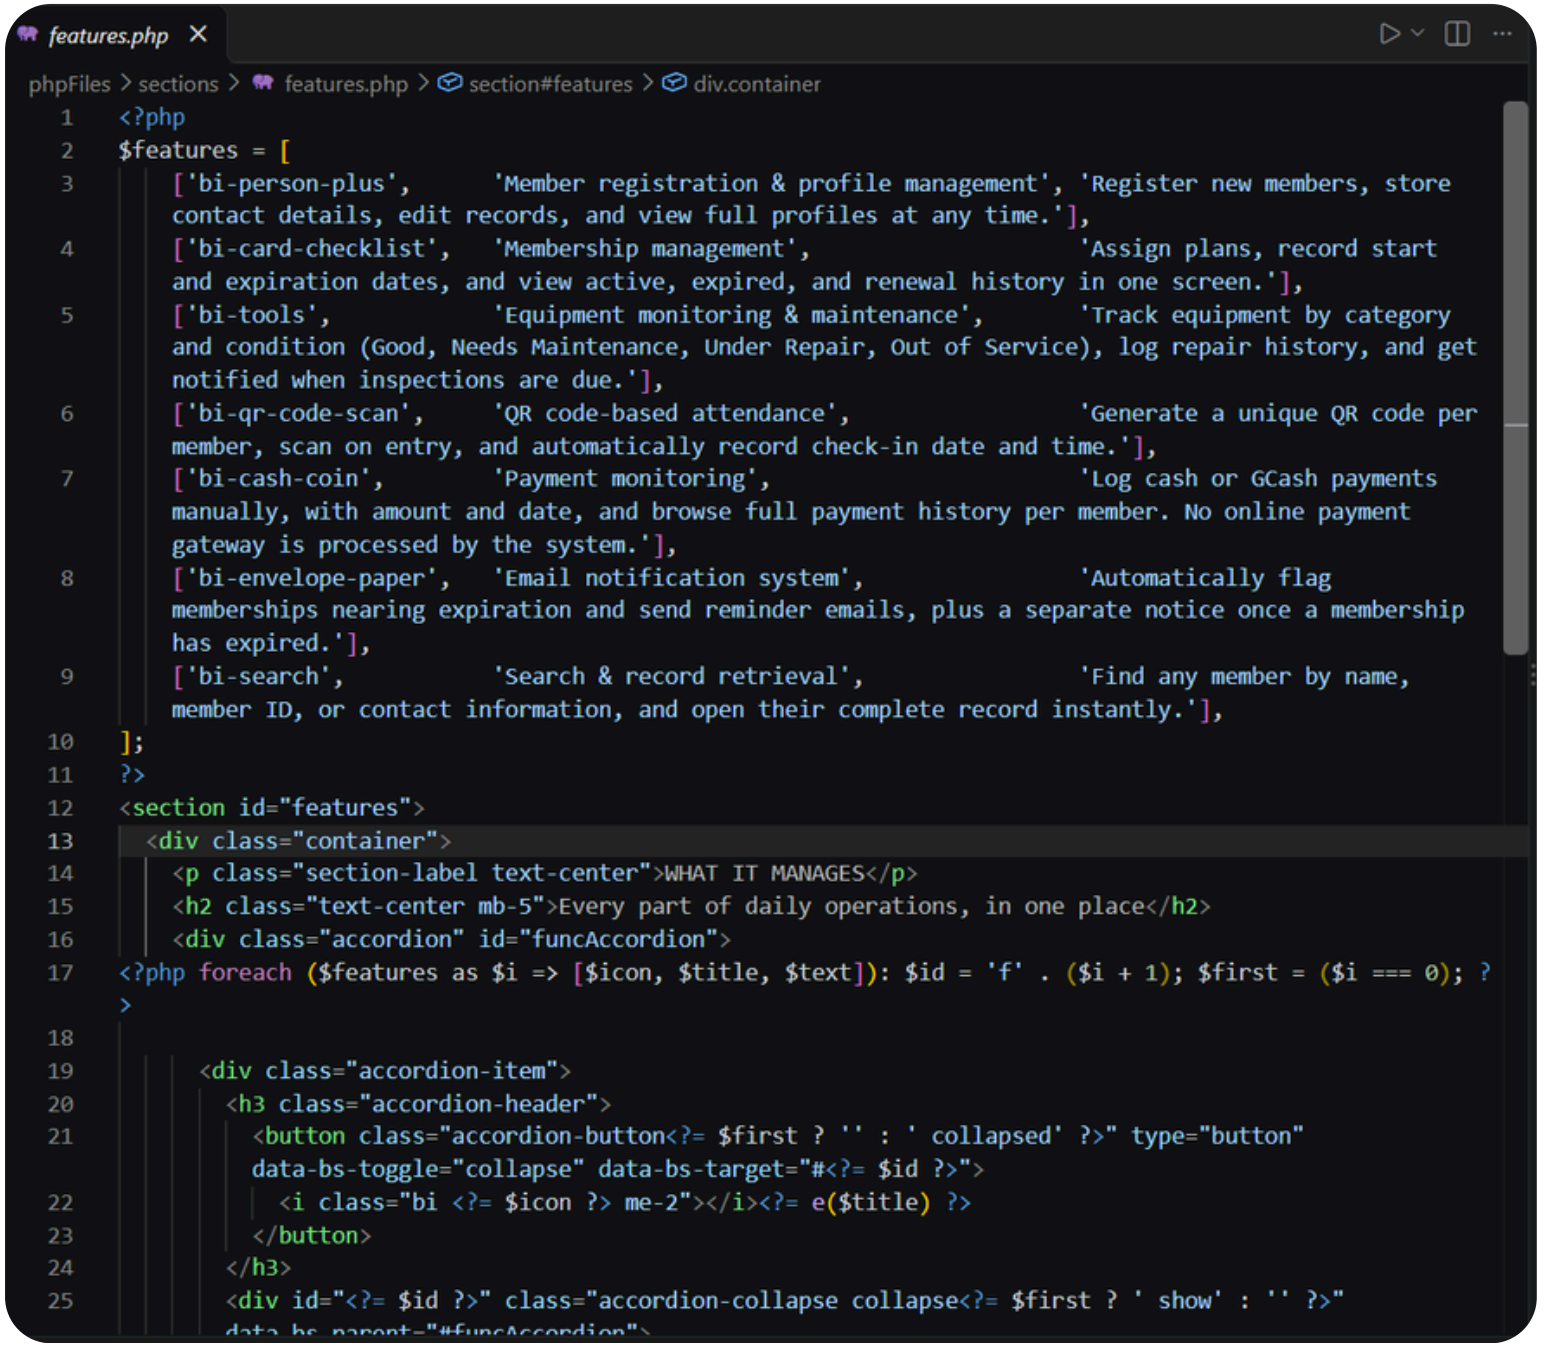

sections/reports.php — Reports section: the five report types shown as cards

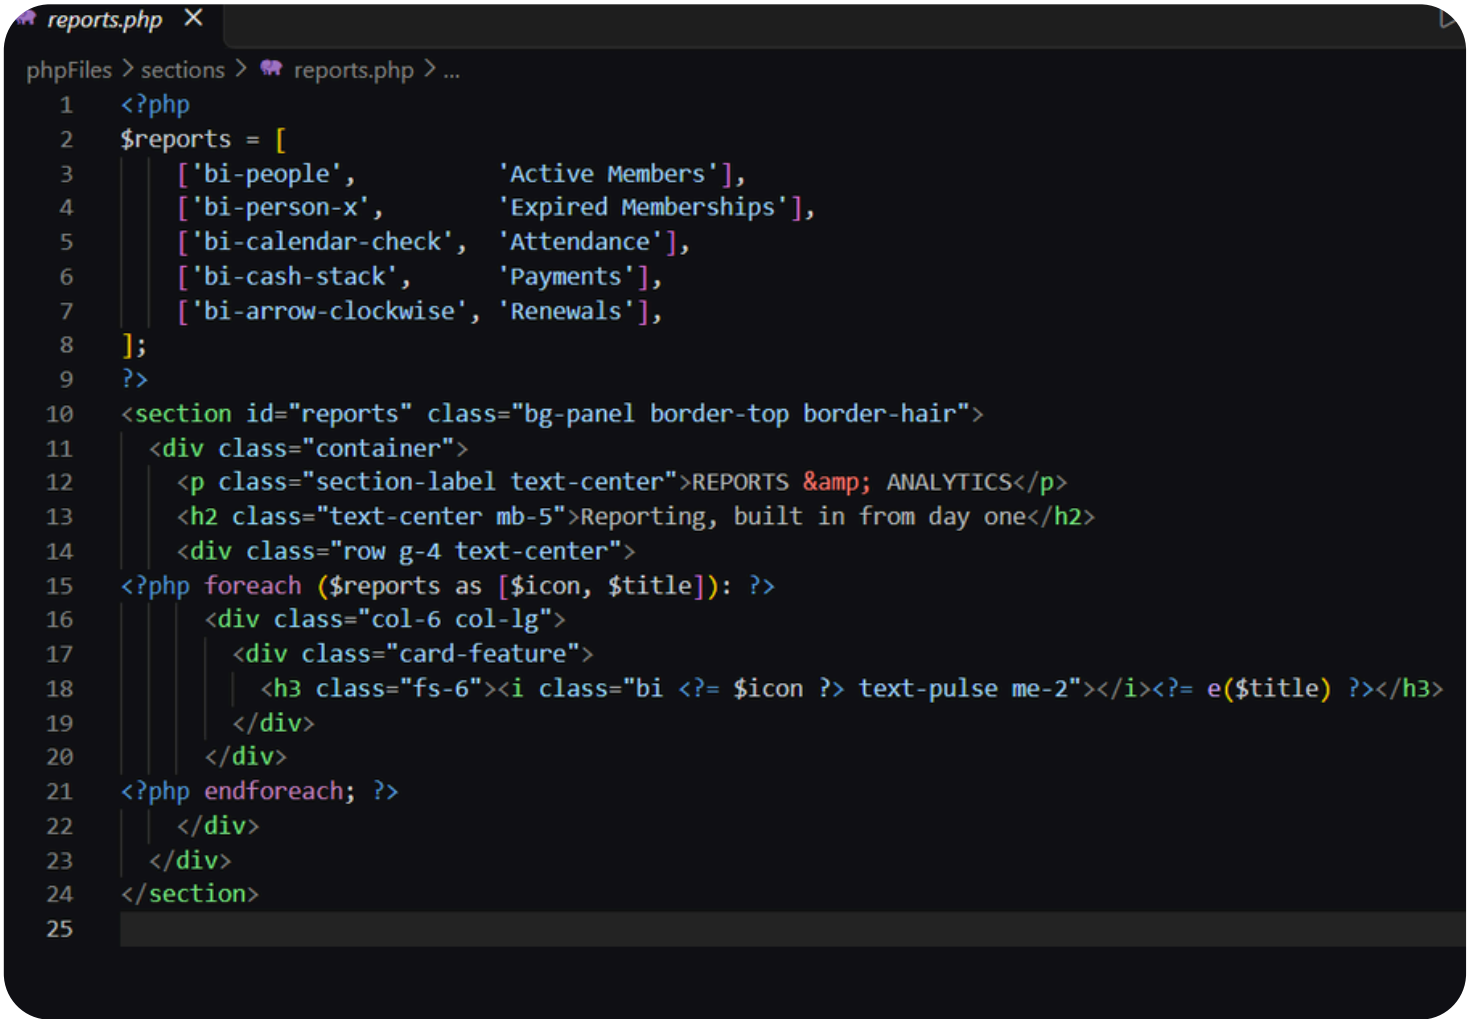

sections/dashboard.php — Staff dashboard preview: stats, weekly chart, status chart and recent check-ins.

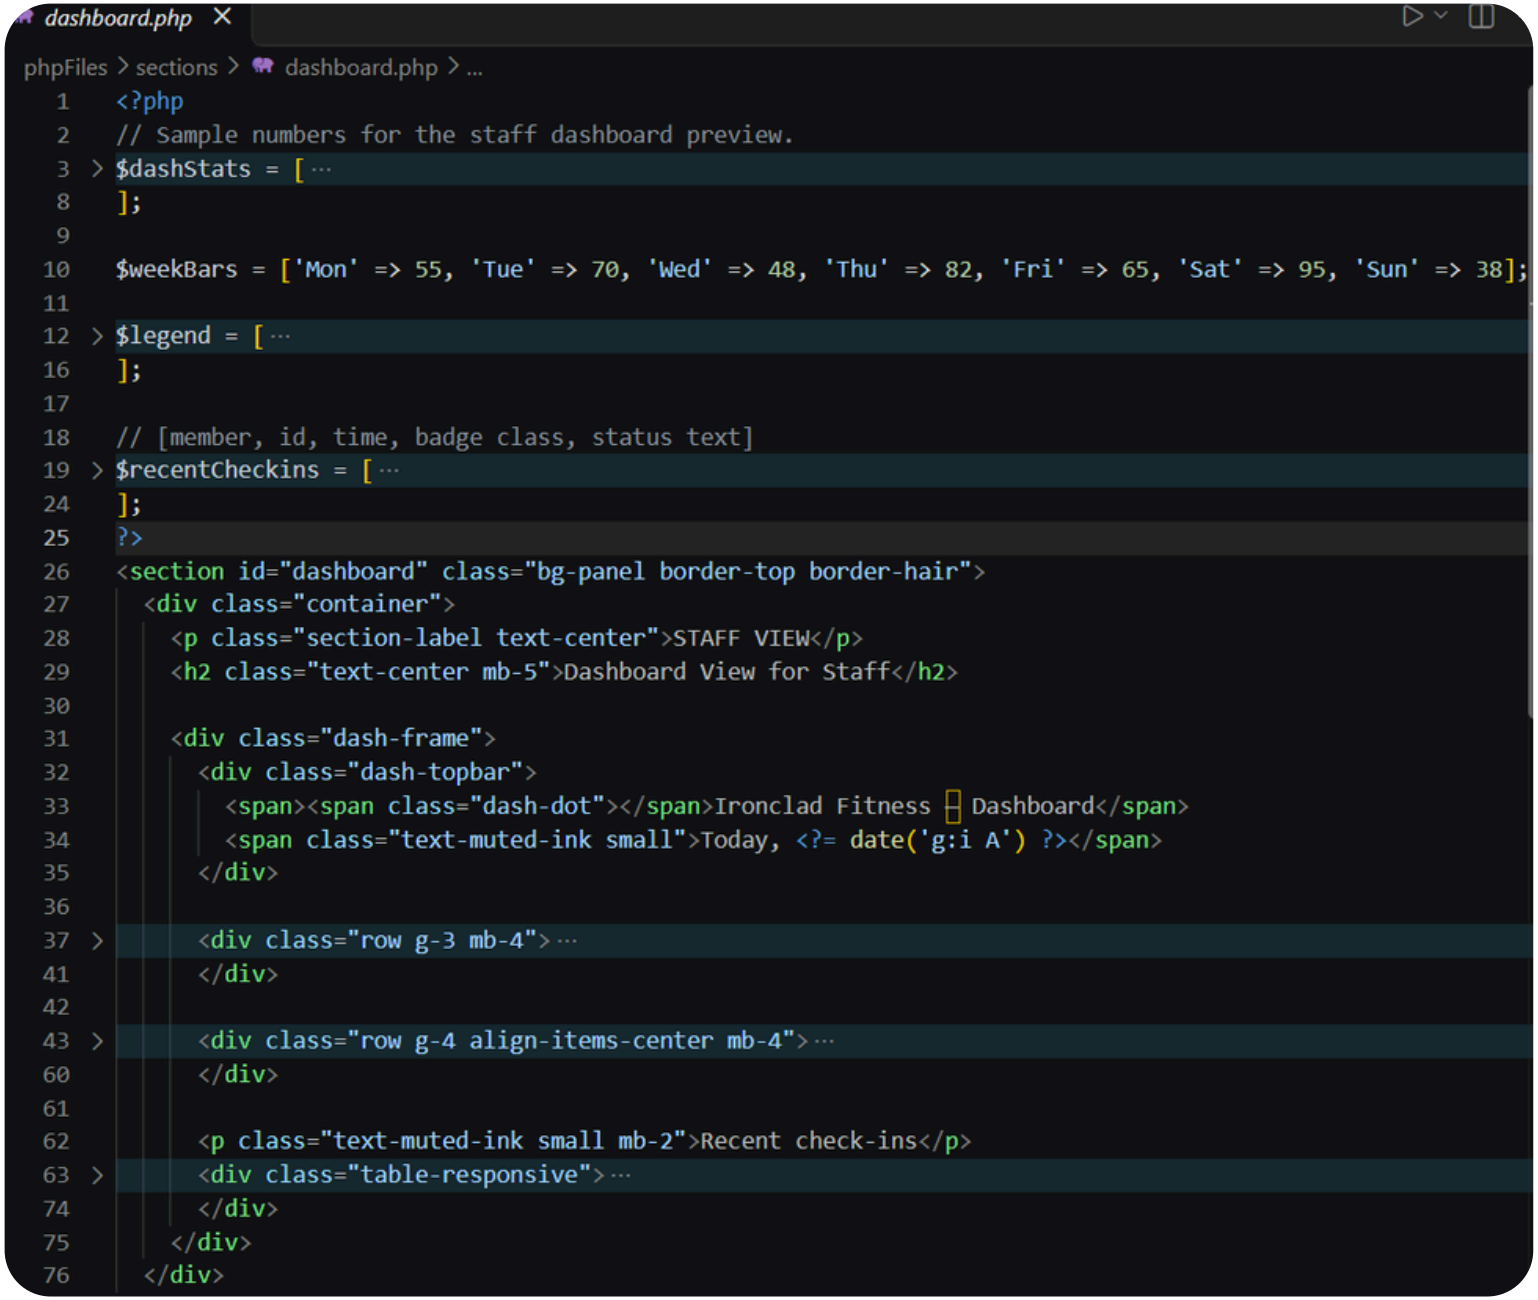

sections/objectives.php + sections/checkin.php — Objectives cards and the QR check-in section.

