

Day23

Recall definition: A is **mapping reducible** to B means there is a computable function $f : \Sigma^* \rightarrow \Sigma^*$ such that *for all* strings x in Σ^* ,

$$x \in A \quad \text{if and only if} \quad f(x) \in B.$$

Notation: when A is mapping reducible to B , we write $A \leq_m B$.

Theorem (Sipser 5.23): If $A \leq_m B$ and A is undecidable, then B is undecidable.

Last time we proved that $A_{TM} \leq_m HALT_{TM}$ where

$$HALT_{TM} = \{ \langle M, w \rangle \mid M \text{ is a Turing machine, } w \text{ is a string, and } M \text{ halts on } w \}$$

and since A_{TM} is undecidable, $HALT_{TM}$ is also undecidable. The function witnessing the mapping reduction mapped strings in A_{TM} to strings in $HALT_{TM}$ and strings not in A_{TM} to strings not in $HALT_{TM}$ by changing encoded Turing machines to ones that had identical computations except looped instead of rejecting.

True or False: $\overline{A_{TM}} \leq_m \overline{HALT_{TM}}$

True or False: $HALT_{TM} \leq_m A_{TM}$.

Proof: Need computable function $F : \Sigma^* \rightarrow \Sigma^*$ such that $x \in HALT_{TM}$ iff $F(x) \in A_{TM}$. Define

$F =$ “ On input x ,

1. Type-check whether $x = \langle M, w \rangle$ for some TM M and string w . If so, move to step 2; if not, output $\langle \quad \quad \quad \rangle$
2. Construct the following machine M'_x :

3. Output $\langle M'_x, w \rangle$.”

Verifying correctness: (1) Is function well-defined and computable? (2) Does it have the translation property $x \in HALT_{TM}$ iff its image is in A_{TM} ?

Input string	Output string
$\langle M, w \rangle$ where M halts on w	
$\langle M, w \rangle$ where M does not halt on w	
x not encoding any pair of TM and string	

Theorem (Sipser 5.28): If $A \leq_m B$ and B is recognizable, then A is recognizable.

Proof:

Corollary: If $A \leq_m B$ and A is unrecognizable, then B is unrecognizable.

Strategy:

- (i) To prove that a recognizable language R is undecidable, prove that $A_{TM} \leq_m R$.
- (ii) To prove that a co-recognizable language U is undecidable, prove that $\overline{A_{TM}} \leq_m U$, i.e. that $A_{TM} \leq_m \overline{U}$.

$$E_{TM} = \{\langle M \rangle \mid M \text{ is a Turing machine and } L(M) = \emptyset\}$$

Can we find algorithms to recognize

E_{TM} ?

$\overline{E_{TM}}$?

Claim: $A_{TM} \leq_m \overline{E_{TM}}$. And hence also $\overline{A_{TM}} \leq_m E_{TM}$

Proof: Need computable function $F : \Sigma^* \rightarrow \Sigma^*$ such that $x \in A_{TM}$ iff $F(x) \notin E_{TM}$. Define

$F =$ “ On input x ,

1. Type-check whether $x = \langle M, w \rangle$ for some TM M and string w . If so, move to step 2; if not, output $\langle \quad \quad \quad \rangle$
2. Construct the following machine M'_x :

3. Output $\langle M'_x \rangle$.”

Verifying correctness: (1) Is function well-defined and computable? (2) Does it have the translation property $x \in A_{TM}$ iff its image is **not** in E_{TM} ?

Input string	Output string
$\langle M, w \rangle$ where $w \in L(M)$	
$\langle M, w \rangle$ where $w \notin L(M)$	
x not encoding any pair of TM and string	

Day24

Recall: A is **mapping reducible to** B , written $A \leq_m B$, means there is a computable function $f : \Sigma^* \rightarrow \Sigma^*$ such that *for all* strings x in Σ^* ,

$$x \in A \quad \text{if and only if} \quad f(x) \in B.$$

So far:

- A_{TM} is recognizable, undecidable, and not-co-recognizable.
- $\overline{A_{TM}}$ is unrecognizable, undecidable, and co-recognizable.
- $HALT_{TM}$ is recognizable, undecidable, and not-co-recognizable.
- $\overline{HALT_{TM}}$ is unrecognizable, undecidable, and co-recognizable.
- E_{TM} is unrecognizable, undecidable, and co-recognizable.
- $\overline{E_{TM}}$ is recognizable, undecidable, and not-co-recognizable.

$$EQ_{TM} = \{ \langle M_1, M_2 \rangle \mid M_1 \text{ and } M_2 \text{ are both Turing machines and } L(M_1) = L(M_2) \}$$

Can we find algorithms to recognize

EQ_{TM} ?

$\overline{EQ_{TM}}$?

Goal: Show that EQ_{TM} is not recognizable and that $\overline{EQ_{TM}}$ is not recognizable.

Using Corollary to **Theorem 5.28**: If $A \leq_m B$ and A is unrecognizable, then B is unrecognizable, it's enough to prove that

$$\begin{array}{ll} \overline{HALT_{TM}} \leq_m EQ_{TM} & \text{aka } HALT_{TM} \leq_m \overline{EQ_{TM}} \\ \overline{HALT_{TM}} \leq_m \overline{EQ_{TM}} & \text{aka } HALT_{TM} \leq_m EQ_{TM} \end{array}$$

Need computable function $F_1 : \Sigma^* \rightarrow \Sigma^*$ such that $x \in HALT_{TM}$ iff $F_1(x) \notin EQ_{TM}$.

Strategy:

Map strings $\langle M, w \rangle$ to strings $\langle M'_x,$   \rangle . This image string is not in EQ_{TM} when $L(M'_x) \neq \emptyset$.



We will build M'_x so that $L(M'_x) = \Sigma^*$ when M halts on w and $L(M'_x) = \emptyset$ when M loops on w .

Thus: when $\langle M, w \rangle \in HALT_{TM}$ it gets mapped to a string not in EQ_{TM} and when $\langle M, w \rangle \notin HALT_{TM}$ it gets mapped to a string that is in EQ_{TM} .

Define

$F_1 =$ “ On input x ,

1. Type-check whether $x = \langle M, w \rangle$ for some TM M and string w . If so, move to step 2; if not, output \langle
2. Construct the following machine M'_x :

3. Output $\langle M'_x,$   \rangle ”

Verifying correctness: (1) Is function well-defined and computable? (2) Does it have the translation property $x \in HALT_{TM}$ iff its image is **not** in EQ_{TM} ?

Input string	Output string
$\langle M, w \rangle$ where M halts on w	
$\langle M, w \rangle$ where M loops on w	
x not encoding any pair of TM and string	

Conclude: $HALT_{TM} \leq_m \overline{EQ_{TM}}$

Need computable function $F_2 : \Sigma^* \rightarrow \Sigma^*$ such that $x \in HALT_{TM}$ iff $F_2(x) \in EQ_{TM}$.

Strategy:

Map strings $\langle M, w \rangle$ to strings $\langle M'_x, \text{start} \rightarrow \text{q}_0 \rangle$. This image string is in EQ_{TM} when $L(M'_x) = \Sigma^*$.

We will build M'_x so that $L(M'_x) = \Sigma^*$ when M halts on w and $L(M'_x) = \emptyset$ when M loops on w .

Thus: when $\langle M, w \rangle \in HALT_{TM}$ it gets mapped to a string in EQ_{TM} and when $\langle M, w \rangle \notin HALT_{TM}$ it gets mapped to a string that is not in EQ_{TM} .

Define

$F_2 =$ “ On input x ,

1. Type-check whether $x = \langle M, w \rangle$ for some TM M and string w . If so, move to step 2; if not, output $\langle \text{start} \rightarrow \text{q}_0 \rangle$
2. Construct the following machine M'_x :

3. Output $\langle M'_x, \text{start} \rightarrow \text{q}_0 \rangle$ ”

Verifying correctness: (1) Is function well-defined and computable? (2) Does it have the translation property $x \in HALT_{TM}$ iff its image is in EQ_{TM} ?

Input string	Output string
$\langle M, w \rangle$ where M halts on w	
$\langle M, w \rangle$ where M loops on w	
x not encoding any pair of TM and string	

Conclude: $HALT_{TM} \leq_m EQ_{TM}$

Day25

Two models of computation are called **equally expressive** when every language recognizable with the first model is recognizable with the second, and vice versa.

True / False: NFAs and PDAs are equally expressive.

True / False: Regular expressions and CFGs are equally expressive.

Church-Turing Thesis (Sipser p. 183): The informal notion of algorithm is formalized completely and correctly by the formal definition of a Turing machine. In other words: all reasonably expressive models of computation are equally expressive with the standard Turing machine.

*Some examples of models that are **equally expressive** with deterministic Turing machines:*

May-stay machines The May-stay machine model is the same as the usual Turing machine model, except that on each transition, the tape head may move L, move R, or Stay.

Formally: $(Q, \Sigma, \Gamma, \delta, q_0, q_{accept}, q_{reject})$ where

$$\delta : Q \times \Gamma \rightarrow Q \times \Gamma \times \{L, R, S\}$$

Claim: Turing machines and May-stay machines are equally expressive. *To prove ...*

To translate a standard TM to a may-stay machine: never use the direction *S*!

To translate one of the may-stay machines to standard TM: any time TM would Stay, move right then left.

Multitape Turing machine A multitape Turing machine with k tapes can be formally represented as $(Q, \Sigma, \Gamma, \delta, q_0, q_{acc}, q_{rej})$ where Q is the finite set of states, Σ is the input alphabet with $\sqcup \notin \Sigma$, Γ is the tape alphabet with $\Sigma \subsetneq \Gamma$, $\delta : Q \times \Gamma^k \rightarrow Q \times \Gamma^k \times \{L, R\}^k$ (where k is the number of states)

If M is a standard TM, it is a 1-tape machine.

To translate a k -tape machine to a standard TM: Use a new symbol to separate the contents of each tape and keep track of location of head with special version of each tape symbol. Sipser Theorem 3.13

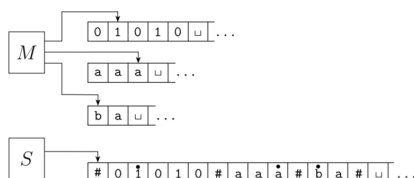


FIGURE 3.14
Representing three tapes with one

Enumerators Enumerators give a different model of computation where a language is **produced, one string at a time**, rather than recognized by accepting (or not) individual strings.

Each enumerator machine has finite state control, unlimited work tape, and a printer. The computation proceeds according to transition function; at any point machine may “send” a string to the printer.

$$E = (Q, \Sigma, \Gamma, \delta, q_0, q_{print})$$

Q is the finite set of states, Σ is the output alphabet, Γ is the tape alphabet ($\Sigma \subsetneq \Gamma, \sqcup \in \Gamma \setminus \Sigma$),

$$\delta : Q \times \Gamma \times \Gamma \rightarrow Q \times \Gamma \times \Gamma \times \{L, R\} \times \{L, R\}$$

where in state q , when the working tape is scanning character x and the printer tape is scanning character y , $\delta((q, x, y)) = (q', x', y', d_w, d_p)$ means transition to control state q' , write x' on the working tape, write y' on the printer tape, move in direction d_w on the working tape, and move in direction d_p on the printer tape. The computation starts in q_0 and each time the computation enters q_{print} the string from the leftmost edge of the printer tape to the first blank cell is considered to be printed.

The language **enumerated** by E , $L(E)$, is $\{w \in \Sigma^* \mid E \text{ eventually, at finite time, prints } w\}$.

Theorem 3.21 A language is Turing-recognizable iff some enumerator enumerates it.

Proof, part 1: Assume L is enumerated by some enumerator, E , so $L = L(E)$. We'll use E in a subroutine within a high-level description of a new Turing machine that we will build to recognize L .

Goal: build Turing machine M_E with $L(M_E) = L(E)$.

Define M_E as follows: $M_E =$ “On input w ,

1. Run E . For each string x printed by E .
2. Check if $x = w$. If so, accept (and halt); otherwise, continue.”

Proof, part 2: Assume L is Turing-recognizable and there is a Turing machine M with $L = L(M)$. We'll use M in a subroutine within a high-level description of an enumerator that we will build to enumerate L .

Goal: build enumerator E_M with $L(E_M) = L(M)$.

Idea: check each string in turn to see if it is in L .

How? Run computation of M on each string. *But:* need to be careful about computations that don't halt.

Recall String order for $\Sigma = \{0, 1\}$: $s_1 = \varepsilon$, $s_2 = 0$, $s_3 = 1$, $s_4 = 00$, $s_5 = 01$, $s_6 = 10$, $s_7 = 11$, $s_8 = 000$, ...

Define E_M as follows: $E_M =$ “*ignore any input*. Repeat the following for $i = 1, 2, 3, \dots$

1. Run the computations of M on s_1, s_2, \dots, s_i for (at most) i steps each
2. For each of these i computations that accept during the (at most) i steps, print out the accepted string.”

Nondeterministic Turing machine

At any point in the computation, the nondeterministic machine may proceed according to several possibilities: $(Q, \Sigma, \Gamma, \delta, q_0, q_{acc}, q_{rej})$ where

$$\delta : Q \times \Gamma \rightarrow \mathcal{P}(Q \times \Gamma \times \{L, R\})$$

The computation of a nondeterministic Turing machine is a tree with branching when the next step of the computation has multiple possibilities. A nondeterministic Turing machine accepts a string exactly when some branch of the computation tree enters the accept state.

Given a nondeterministic machine, we can use a 3-tape Turing machine to simulate it by doing a breadth-first search of computation tree: one tape is “read-only” input tape, one tape simulates the tape of the nondeterministic computation, and one tape tracks nondeterministic branching. Sipser page 178

Summary


Two models of computation are called **equally expressive** when every language recognizable with the first model is recognizable with the second, and vice versa.

To prove the existence of a Turing machine that decides / recognizes some language, it’s enough to construct an example using any of the equally expressive models.

But: some of the **performance** properties of these models are not equivalent.

Day20

Acceptance problem	
for Turing machines	$A_{TM} \quad \{\langle M, w \rangle \mid M \text{ is a Turing machine that accepts input string } w\}$
Language emptiness testing	
for Turing machines	$E_{TM} \quad \{\langle M \rangle \mid M \text{ is a Turing machine and } L(M) = \emptyset\}$
Language equality testing	
for Turing machines	$EQ_{TM} \quad \{\langle M_1, M_2 \rangle \mid M_1 \text{ and } M_2 \text{ are Turing machines and } L(M_1) = L(M_2)\}$

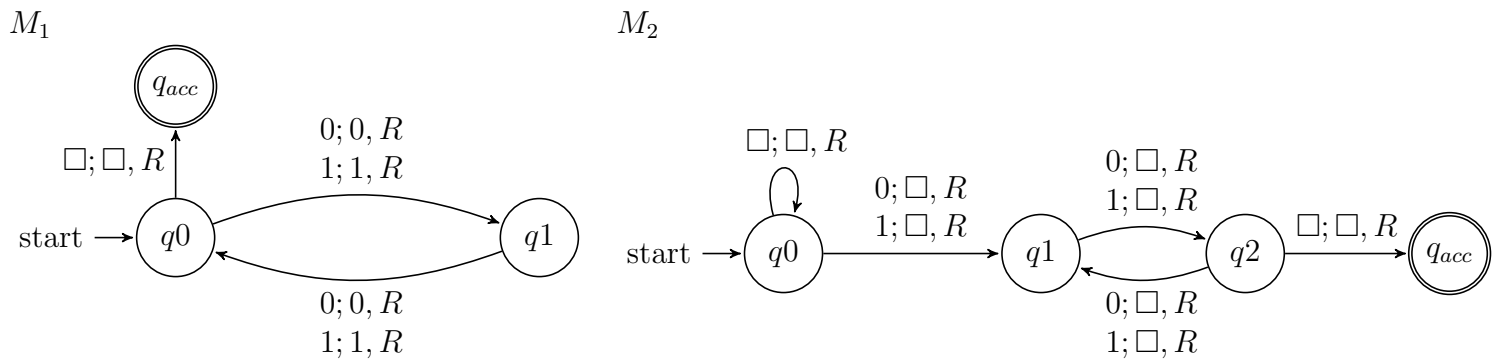

Example strings in A_{TM}

Example strings in E_{TM}

Example strings in EQ_{TM}

Theorem: A_{TM} is Turing-recognizable.

Strategy: To prove this theorem, we need to define a Turing machine R_{ATM} such that $L(R_{ATM}) = A_{TM}$.

Define $R_{ATM} =$ “

Proof of correctness:

We will show that A_{TM} is undecidable. *First, let's explore what that means.*

To prove that a computational problem is **decidable**, we find/ build a Turing machine that recognizes the language encoding the computational problem, and that is a decider.

How do we prove a specific problem is **not decidable**?

How would we even find such a computational problem?

Counting arguments for the existence of an undecidable language:

- The set of all Turing machines is countably infinite.
- Each recognizable language has at least one Turing machine that recognizes it (by definition), so there can be no more Turing-recognizable languages than there are Turing machines.
- Since there are infinitely many Turing-recognizable languages (think of the singleton sets), there are countably infinitely many Turing-recognizable languages.
- Such the set of Turing-decidable languages is an infinite subset of the set of Turing-recognizable languages, the set of Turing-decidable languages is also countably infinite.

Since there are uncountably many languages (because $\mathcal{P}(\Sigma^*)$ is uncountable), there are uncountably many unrecognizable languages and there are uncountably many undecidable languages.

Thus, there's at least one undecidable language!

What's a specific example of a language that is unrecognizable or undecidable?

To prove that a language is undecidable, we need to prove that there is no Turing machine that decides it.

Key idea: proof by contradiction relying on self-referential disagreement.

Theorem: A_{TM} is not Turing-decidable.

Proof: Suppose **towards a contradiction** that there is a Turing machine that decides A_{TM} . We call this presumed machine M_{ATM} .

By assumption, for every Turing machine M and every string w

- If $w \in L(M)$, then the computation of M_{ATM} on $\langle M, w \rangle$ _____
- If $w \notin L(M)$, then the computation of M_{ATM} on $\langle M, w \rangle$ _____

Define a **new** Turing machine using the high-level description:

$D =$ “ On input $\langle M \rangle$, where M is a Turing machine:

1. Run M_{ATM} on $\langle M, \langle M \rangle \rangle$.
2. If M_{ATM} accepts, reject; if M_{ATM} rejects, accept.”

Is D a Turing machine?

Is D a decider?

What is the result of the computation of D on $\langle D \rangle$?

Summarizing:

- A_{TM} is recognizable.
- A_{TM} is not decidable.

Recall definition: A language L over an alphabet Σ is called **co-recognizable** if its complement, defined as $\Sigma^* \setminus L = \{x \in \Sigma^* \mid x \notin L\}$, is Turing-recognizable.

and Recall Theorem (Sipser Theorem 4.22): A language is Turing-decidable if and only if both it and its complement are Turing-recognizable.

- A_{TM} is recognizable.
- A_{TM} is not decidable.
- $\overline{A_{TM}}$ is not recognizable.
- $\overline{A_{TM}}$ is not decidable.

Day21

Mapping reduction

Motivation: Proving that A_{TM} is undecidable was hard. How can we leverage that work? Can we relate the decidability / undecidability of one problem to another?

If problem X is **no harder than** problem Y
... and if Y is easy,
... then X must be easy too.

If problem X is **no harder than** problem Y
... and if X is hard,
... then Y must be hard too.

“Problem X is no harder than problem Y ” means “Can answer questions about membership in X by converting them to questions about membership in Y ”.

Definition: For any languages A and B , A is **mapping reducible to** B means there is a computable function $f : \Sigma^* \rightarrow \Sigma^*$ such that *for all* strings x in Σ^* ,

$$x \in A \quad \text{if and only if} \quad f(x) \in B.$$

Notation: when A is mapping reducible to B , we write $A \leq_m B$.

Intuition: $A \leq_m B$ means A is no harder than B , i.e. that the level of difficulty of A is less than or equal the level of difficulty of B .

TODO

1. What is a computable function?
2. How do mapping reductions help establish the computational difficulty of languages?

Computable functions

Definition: A function $f : \Sigma^* \rightarrow \Sigma^*$ is a **computable function** means there is some Turing machine such that, for each x , on input x the Turing machine halts with exactly $f(x)$ followed by all blanks on the tape

Examples of computable functions:

The function that maps a string to a string which is one character longer and whose value, when interpreted as a fixed-width binary representation of a nonnegative integer is twice the value of the input string (when interpreted as a fixed-width binary representation of a non-negative integer)

$$f_1 : \Sigma^* \rightarrow \Sigma^* \quad f_1(x) = x0$$

To prove f_1 is computable function, we define a Turing machine computing it.

High-level description

“On input w

1. Append 0 to w .
2. Halt.”

Implementation-level description

“On input w

1. Sweep read-write head to the right until find first blank cell.
2. Write 0.
3. Halt.”

Formal definition ($\{q_0, q_{acc}, q_{rej}\}, \{0, 1\}, \{0, 1, \sqcup\}, \delta, q_0, q_{acc}, q_{rej}$) where δ is specified by the state diagram:

The function that maps a string to the result of repeating the string twice.

$$f_2 : \Sigma^* \rightarrow \Sigma^* \quad f_2(x) = xx$$

The function that maps strings that are not the codes of NFAs to the empty string and that maps strings that code NFAs to the code of a DFA that recognizes the language recognized by the NFA produced by the macro-state construction from Chapter 1.

The function that maps strings that are not the codes of Turing machines to the empty string and that maps strings that code Turing machines to the code of the related Turing machine that acts like the Turing machine coded by the input, except that if this Turing machine coded by the input tries to reject, the new machine will go into a loop.

$$f_4 : \Sigma^* \rightarrow \Sigma^* \quad f_4(x) = \begin{cases} \varepsilon & \text{if } x \text{ is not the code of a TM} \\ \langle \langle Q \cup \{q_{trap}\}, \Sigma, \Gamma, \delta', q_0, q_{acc}, q_{rej} \rangle \rangle & \text{if } x = \langle \langle Q, \Sigma, \Gamma, \delta, q_0, q_{acc}, q_{rej} \rangle \rangle \end{cases}$$

where $q_{trap} \notin Q$ and

$$\delta'((q, x)) = \begin{cases} (r, y, d) & \text{if } q \in Q, x \in \Gamma, \delta((q, x)) = (r, y, d), \text{ and } r \neq q_{rej} \\ (q_{trap}, \sqcup, R) & \text{otherwise} \end{cases}$$

Definition: A is **mapping reducible to** B , $A \leq_m B$ means there is a computable function $f : \Sigma^* \rightarrow \Sigma^*$ such that *for all* strings x in Σ^* ,

$$x \in A \quad \text{if and only if} \quad f(x) \in B.$$

In this case, we say the function f **witnesses** that A is mapping reducible to B .

Making intuition precise ...

Theorem (Sipser 5.22): If $A \leq_m B$ and B is decidable, then A is decidable.

Theorem (Sipser 5.23): If $A \leq_m B$ and A is undecidable, then B is undecidable.

Day22

Recall definition: A is **mapping reducible to** B means there is a computable function $f : \Sigma^* \rightarrow \Sigma^*$ such that *for all* strings x in Σ^* ,

$$x \in A \quad \text{if and only if} \quad f(x) \in B.$$

Notation: when A is mapping reducible to B , we write $A \leq_m B$.

Intuition: $A \leq_m B$ means A is no harder than B , i.e. that the level of difficulty of A is less than or equal the level of difficulty of B .

Example: $A_{TM} \leq_m A_{TM}$ $A_{TM} = \{\langle M, w \rangle \mid M \text{ is a TM and } w \text{ is a string and } w \in L(M)\}$

To prove, need a witnessing function $f : \Sigma^ \rightarrow \Sigma^*$ that is (1) computable and (2) for each $x \in \Sigma^*$, $x \in A_{TM}$ iff $f(x) \in A_{TM}$*

Corollary: For any language L , $L \leq_m L$, as witnessed by

Example: $A_{DFA} \leq_m \{ww \mid w \in \{0,1\}^*\}$

To prove, need a witnessing function $f : \Sigma^ \rightarrow \Sigma^*$ that is (1) computable and (2) for each $x \in \Sigma^*$, $x \in A_{DFA}$ iff $f(x) \in \{ww \mid w \in \{0,1\}^*\}$*

Corollary: For any language decidable language X and any set Y with at least one string string in Y and at least one string not in Y , $X \leq_m Y$, as witnessed by

Next: consider mapping reductions between potentially undecidable languages.

Halting problem

$$HALT_{TM} = \{\langle M, w \rangle \mid M \text{ is a Turing machine, } w \text{ is a string, and } M \text{ halts on } w\}$$


We know A_{TM} is undecidable. If we could prove that $A_{TM} \leq_m HALT_{TM}$ then we could conclude that $HALT_{TM}$ is undecidable too.

Could we adapt our approach from before by tweaking the identity map?

Define $F : \Sigma^* \rightarrow \Sigma^*$ by

$$F(x) = \begin{cases} const_{out} & \text{if } x \neq \langle M, w \rangle \text{ for any Turing machine } M \text{ and string } w \text{ over the alphabet of } M \\ \langle M'_x, w \rangle & \text{if } x = \langle M, w \rangle \text{ for some Turing machine } M \text{ and string } w \text{ over the alphabet of } M. \end{cases}$$

where $const_{out} = \langle \text{start} \rightarrow q0 \quad \text{ } \quad q_{acc}, \varepsilon \rangle$ and M'_x is a Turing machine that computes like M except, if the computation of M ever were to go to a reject state, M'_x loops instead.

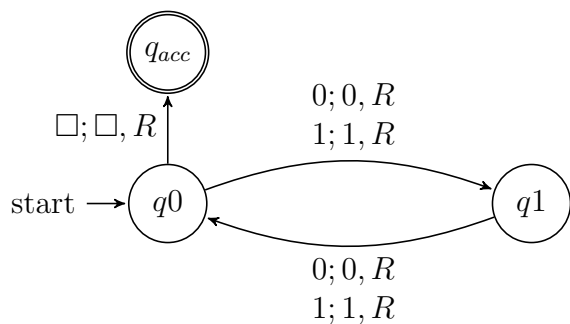

$$F(\langle \quad \quad \quad , \varepsilon \rangle) =$$

To use this function to prove that $A_{TM} \leq_m HALT_{TM}$, we need two claims:

Claim (1): F is computable

Claim (2): for every x , $x \in A_{TM}$ iff $F(x) \in HALT_{TM}$.

Day26

In practice, computers (and Turing machines) don't have infinite tape, and we can't afford to wait unboundedly long for an answer. "Decidable" isn't good enough - we want "Efficiently decidable".

For a given algorithm working on a given input, how long do we need to wait for an answer? How does the running time depend on the input in the worst-case? average-case? We expect to have to spend more time on computations with larger inputs.

A language is **recognizable** if _____

A language is **decidable** if _____

A language is **efficiently decidable** if _____

A function is **computable** if _____

A function is **efficiently computable** if _____

Definition (Sipser 7.1): For M a deterministic decider, its **running time** is the function $f : \mathbb{N} \rightarrow \mathbb{N}$ given by

$$f(n) = \max \text{ number of steps } M \text{ takes before halting, over all inputs of length } n$$

Definition (Sipser 7.7): For each function $t(n)$, the **time complexity class** $TIME(t(n))$, is defined by

$$TIME(t(n)) = \{L \mid L \text{ is decidable by a Turing machine with running time in } O(t(n))\}$$

An example of an element of $TIME(1)$ is

An example of an element of $TIME(n)$ is

Note: $TIME(1) \subseteq TIME(n) \subseteq TIME(n^2)$

Definition (Sipser 7.12) : P is the class of languages that are decidable in polynomial time on a deterministic 1-tape Turing machine

$$P = \bigcup_k TIME(n^k)$$

Theorem (Sipser 7.8): Let $t(n)$ be a function with $t(n) \geq n$. Then every $t(n)$ time deterministic multitape Turing machine has an equivalent $O(t^2(n))$ time deterministic 1-tape Turing machine.

Definitions (Sipser 7.1, 7.7, 7.12): For M a deterministic decider, its **running time** is the function $f : \mathbb{N} \rightarrow \mathbb{N}$ given by

$$f(n) = \max \text{ number of steps } M \text{ takes before halting, over all inputs of length } n$$

For each function $t(n)$, the **time complexity class** $TIME(t(n))$, is defined by

$$TIME(t(n)) = \{L \mid L \text{ is decidable by a Turing machine with running time in } O(t(n))\}$$

P is the class of languages that are decidable in polynomial time on a deterministic 1-tape Turing machine

$$P = \bigcup_k TIME(n^k)$$

Definition (Sipser 7.9): For N a nondeterministic decider. The **running time** of N is the function $f : \mathbb{N} \rightarrow \mathbb{N}$ given by

$$f(n) = \max \text{ number of steps } N \text{ takes on any branch before halting, over all inputs of length } n$$

Definition (Sipser 7.21): For each function $t(n)$, the **nondeterministic time complexity class** $NTIME(t(n))$, is defined by

$$NTIME(t(n)) = \{L \mid L \text{ is decidable by a nondeterministic Turing machine with running time in } O(t(n))\}$$

$$NP = \bigcup_k NTIME(n^k)$$

True or False: $TIME(n^2) \subseteq NTIME(n^2)$

True or False: $NTIME(n^2) \subseteq TIME(n^2)$

Every problem in NP is decidable with an exponential-time algorithm

Nondeterministic approach: guess a possible solution, verify that it works.

Brute-force (worst-case exponential time) approach: iterate over all possible solutions, for each one, check if it works.

Day27

Examples in P

Can't use nondeterminism; Can use multiple tapes; Often need to be "more clever" than naïve / brute force approach

$$PATH = \{\langle G, s, t \rangle \mid G \text{ is digraph with } n \text{ nodes there is path from } s \text{ to } t\}$$

Use breadth first search to show in P

$$RELPRIME = \{\langle x, y \rangle \mid x \text{ and } y \text{ are relatively prime integers}\}$$

Use Euclidean Algorithm to show in P

$$L(G) = \{w \mid w \text{ is generated by } G\}$$

(where G is a context-free grammar). Use dynamic programming to show in P .

Examples in NP

"Verifiable" i.e. NP , Can be decided by a nondeterministic TM in polynomial time, best known deterministic solution may be brute-force, solution can be verified by a deterministic TM in polynomial time.

$$HAMPATH = \{\langle G, s, t \rangle \mid G \text{ is digraph with } n \text{ nodes, there is path from } s \text{ to } t \text{ that goes through every node exactly once}\}$$

$$VERTEX - COVER = \{\langle G, k \rangle \mid G \text{ is an undirected graph with } n \text{ nodes that has a } k\text{-node vertex cover}\}$$

$$CLIQUE = \{\langle G, k \rangle \mid G \text{ is an undirected graph with } n \text{ nodes that has a } k\text{-clique}\}$$

$$SAT = \{\langle X \rangle \mid X \text{ is a satisfiable Boolean formula with } n \text{ variables}\}$$

Problems in P	Problems in NP
(Membership in any) regular language	Any problem in P
(Membership in any) context-free language	
A_{DFA}	SAT
E_{DFA}	$CLIQUE$
EQ_{DFA}	$VERTEX - COVER$
$PATH$	$HAMPATH$
$RELPRIME$	\dots
\dots	

Notice: $NP \subseteq \{L \mid L \text{ is decidable}\}$ so $A_{TM} \notin NP$

Million-dollar question: Is $P = NP$?

One approach to trying to answer it is to look for *hardest* problems in NP and then (1) if we can show that there are efficient algorithms for them, then we can get efficient algorithms for all problems in NP so $P = NP$, or (2) these problems might be good candidates for showing that there are problems in NP for which there are no efficient algorithms.

Definition (Sipser 7.29) Language A is **polynomial-time mapping reducible** to language B , written $A \leq_P B$, means there is a polynomial-time computable function $f : \Sigma^* \rightarrow \Sigma^*$ such that for every $x \in \Sigma^*$

$$x \in A \quad \text{iff} \quad f(x) \in B.$$

The function f is called the polynomial time reduction of A to B .

Theorem (Sipser 7.31): If $A \leq_P B$ and $B \in P$ then $A \in P$.

Proof:

Definition (Sipser 7.34; based in Stephen Cook and Leonid Levin's work in the 1970s): A language B is **NP-complete** means (1) B is in NP **and** (2) every language A in NP is polynomial time reducible to B .

Theorem (Sipser 7.35): If B is NP-complete and $B \in P$ then $P = NP$.

Proof:

Day28

NP-Complete Problems

3SAT: A literal is a Boolean variable (e.g. x) or a negated Boolean variable (e.g. \bar{x}). A Boolean formula is a **3cnf-formula** if it is a Boolean formula in conjunctive normal form (a conjunction of disjunctive clauses of literals) and each clause has three literals.

$$3SAT = \{\langle \phi \rangle \mid \phi \text{ is a satisfiable 3cnf-formula}\}$$

Example string in $3SAT$

$$\langle (x \vee \bar{y} \vee \bar{z}) \wedge (\bar{x} \vee y \vee z) \wedge (x \vee y \vee z) \rangle$$

Example string not in $3SAT$

$$\langle (x \vee y \vee z) \wedge (x \vee y \vee \bar{z}) \wedge (x \vee \bar{y} \vee z) \wedge (x \vee \bar{y} \vee \bar{z}) \wedge (\bar{x} \vee y \vee z) \wedge (\bar{x} \vee y \vee \bar{z}) \wedge (\bar{x} \vee \bar{y} \vee z) \wedge (\bar{x} \vee \bar{y} \vee \bar{z}) \rangle$$

Cook-Levin Theorem: $3SAT$ is NP-complete.

Are there other NP-complete problems? To prove that X is NP-complete

- *From scratch*: prove X is in NP and that all NP problems are polynomial-time reducible to X .
- *Using reduction*: prove X is in NP and that a known-to-be NP-complete problem is polynomial-time reducible to X .

CLIQUE: A k -**clique** in an undirected graph is a maximally connected subgraph with k nodes.

$$CLIQUE = \{\langle G, k \rangle \mid G \text{ is an undirected graph with a } k\text{-clique}\}$$

Example string in *CLIQUE*

Example string not in *CLIQUE*

Theorem (Sipser 7.32):

$$3SAT \leq_P CLIQUE$$

Given a Boolean formula in conjunctive normal form with k clauses and three literals per clause, we will map it to a graph so that the graph has a clique if the original formula is satisfiable and the graph does not have a clique if the original formula is not satisfiable.

The graph has $3k$ vertices (one for each literal in each clause) and an edge between all vertices except

- vertices for two literals in the same clause
- vertices for literals that are negations of one another

Example: $(x \vee \bar{y} \vee \bar{z}) \wedge (\bar{x} \vee y \vee z) \wedge (x \vee y \vee z)$

Model of Computation	Class of Languages
<p>Deterministic finite automata: formal definition, how to design for a given language, how to describe language of a machine? Nondeterministic finite automata: formal definition, how to design for a given language, how to describe language of a machine? Regular expressions: formal definition, how to design for a given language, how to describe language of expression? <i>Also:</i> converting between different models.</p>	<p>Class of regular languages: what are the closure properties of this class? which languages are not in the class? using pumping lemma to prove nonregularity.</p>
<p>Push-down automata: formal definition, how to design for a given language, how to describe language of a machine? Context-free grammars: formal definition, how to design for a given language, how to describe language of a grammar?</p>	<p>Class of context-free languages: what are the closure properties of this class? which languages are not in the class?</p>
<p>Turing machines that always halt in polynomial time</p> <p>Nondeterministic Turing machines that always halt in polynomial time</p>	<p>P</p> <p>NP</p>
<p>Deciders (Turing machines that always halt): formal definition, how to design for a given language, how to describe language of a machine?</p>	<p>Class of decidable languages: what are the closure properties of this class? which languages are not in the class? using diagonalization and mapping reduction to show undecidability</p>
<p>Turing machines formal definition, how to design for a given language, how to describe language of a machine?</p>	<p>Class of recognizable languages: what are the closure properties of this class? which languages are not in the class? using closure and mapping reduction to show unrecognizability</p>

Given a language, prove it is regular

Strategy 1: construct DFA recognizing the language and prove it works.

Strategy 2: construct NFA recognizing the language and prove it works.

Strategy 3: construct regular expression recognizing the language and prove it works.

“Prove it works” means ...

Example: $L = \{w \in \{0,1\}^* \mid w \text{ has odd number of 1s or starts with } 0\}$

Using NFA

Using regular expressions

Example: Select all and only the options that result in a true statement: “To show a language A is not regular, we can...”

- a. Show A is finite
- b. Show there is a CFG generating A
- c. Show A has no pumping length
- d. Show A is undecidable

Example: What is the language generated by the CFG with rules

$$S \rightarrow aSb \mid bY \mid Ya$$

$$Y \rightarrow bY \mid Ya \mid \varepsilon$$

Example: Prove that the language $T = \{\langle M \rangle \mid M \text{ is a Turing machine and } L(M) \text{ is infinite}\}$ is undecidable.

Example: Prove that the class of decidable languages is closed under concatenation.