Optimising CI using Test Case Prioritisation

June 19, 2020

Pieter De Clercq

Promotors: prof. dr. Volckaert, prof. dr. ir. De Turck | Supervisors: Jasper Vaneessen, Dwight Kerkhove

Overview

1. Problem

Overview

1. Problem
2. Solutions

Overview

1. Problem
2. Solutions
3. Implementation

Overview

1. Problem
2. Solutions
3. Implementation
4. Results

Overview

1. Problem
2. Solutions
3. Implementation
4. Results
5. Demo

But first

Just what is CI?

Continuous Integration

Example: Android app

Continuous Integration





Continuous Integration

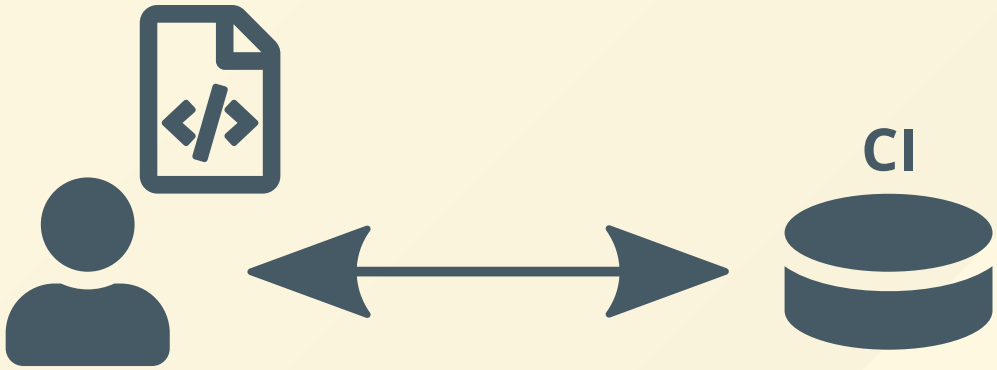

Continuous Integration

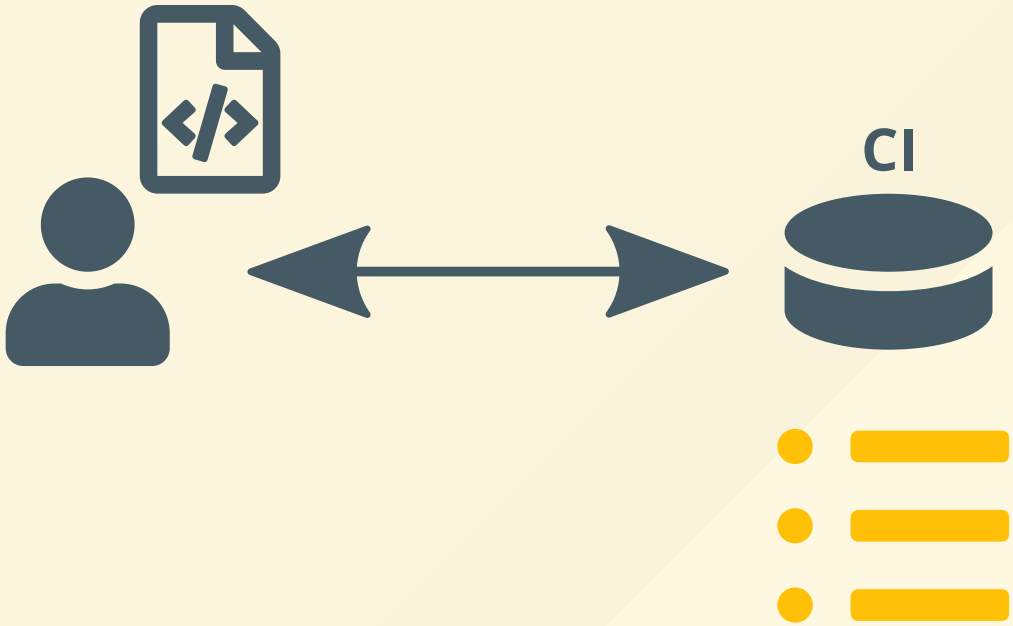

Continuous Integration

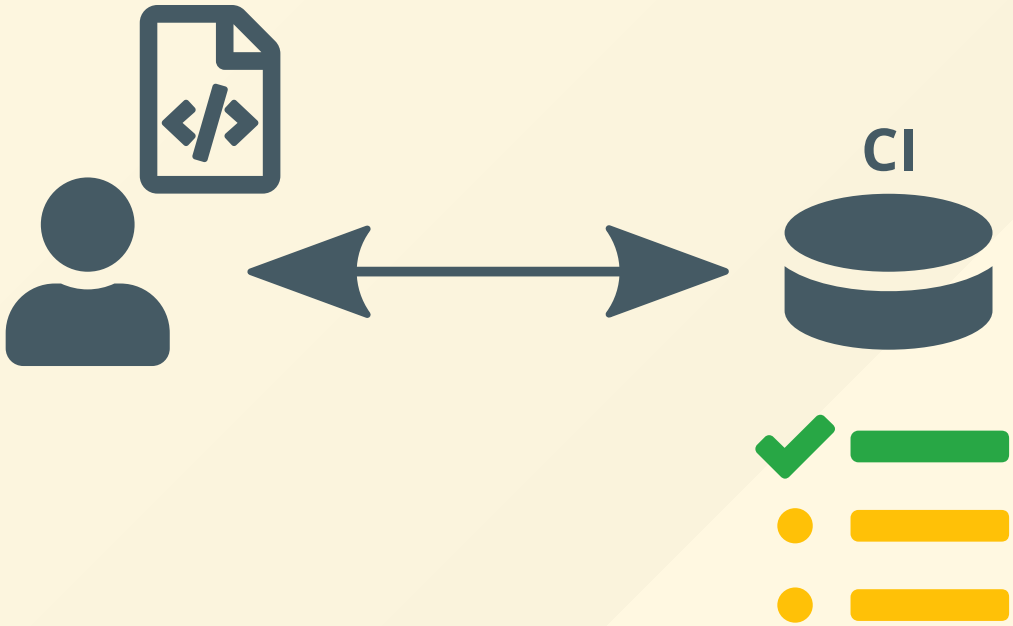

Continuous Integration

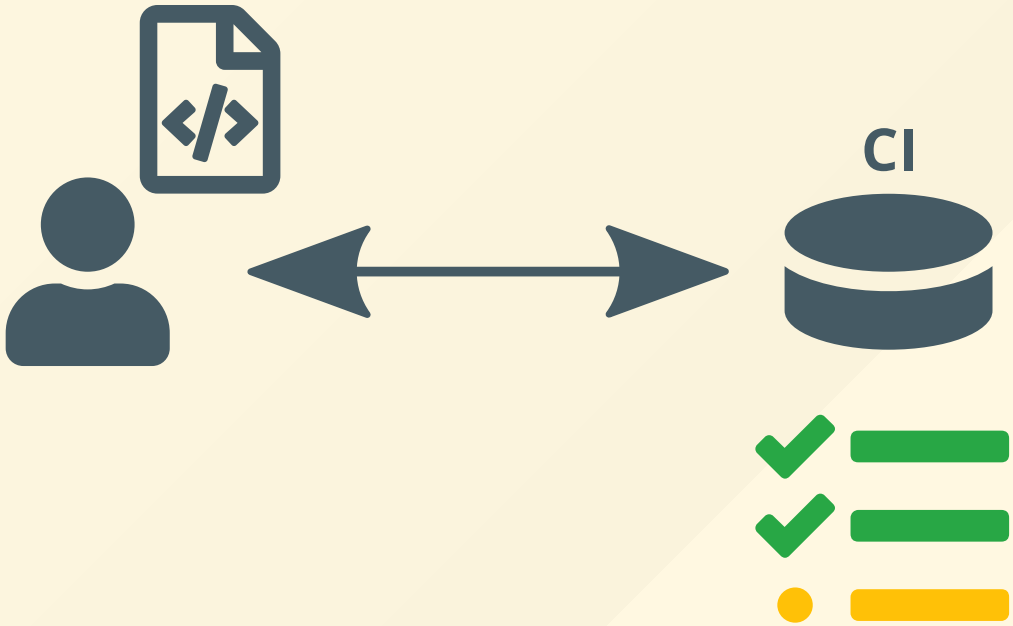

Continuous Integration

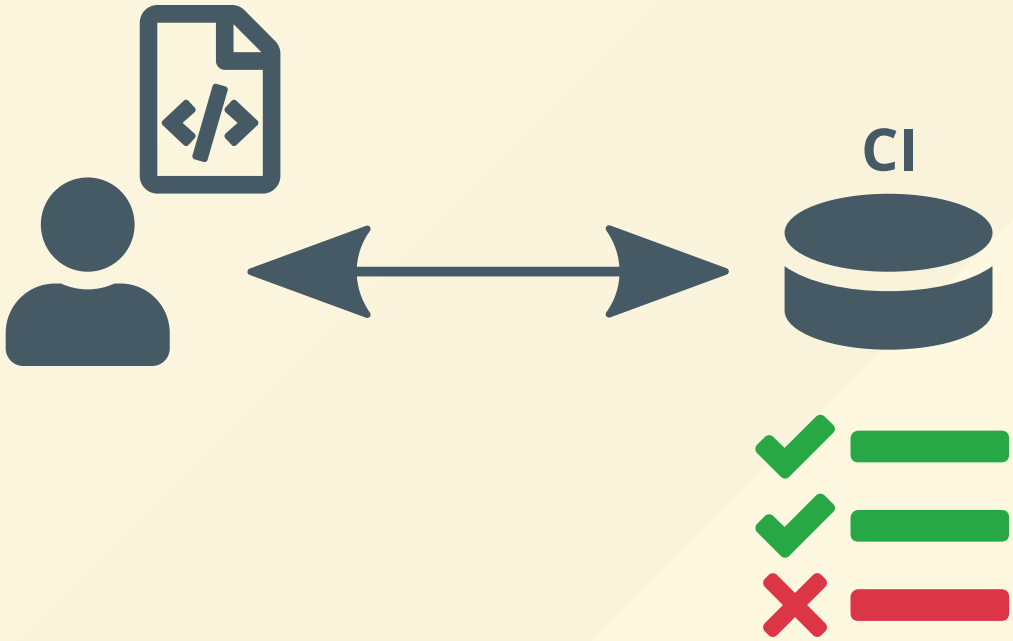

Continuous Integration

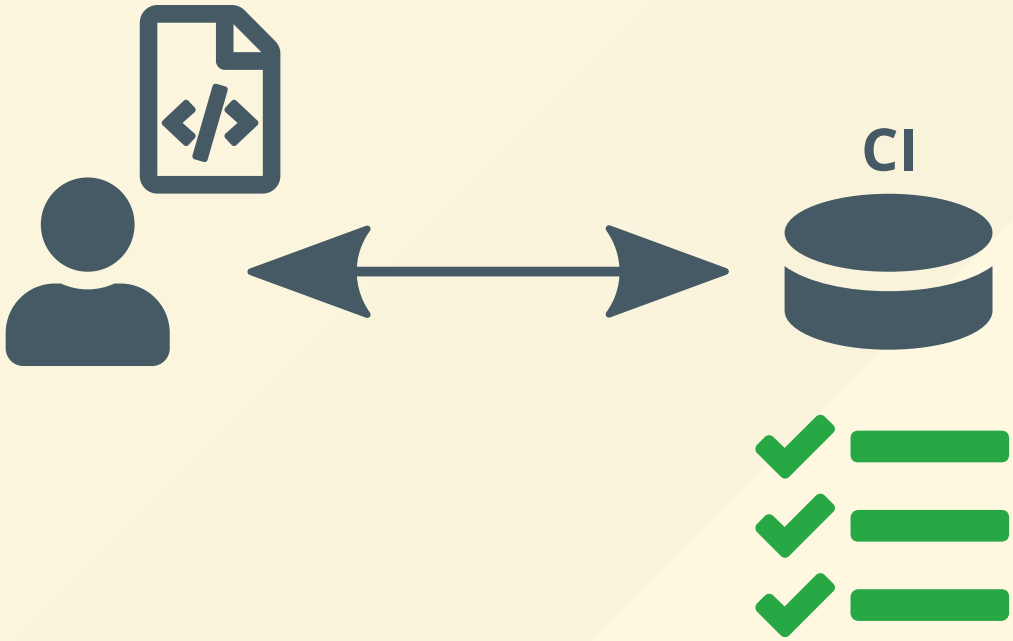

Continuous Integration

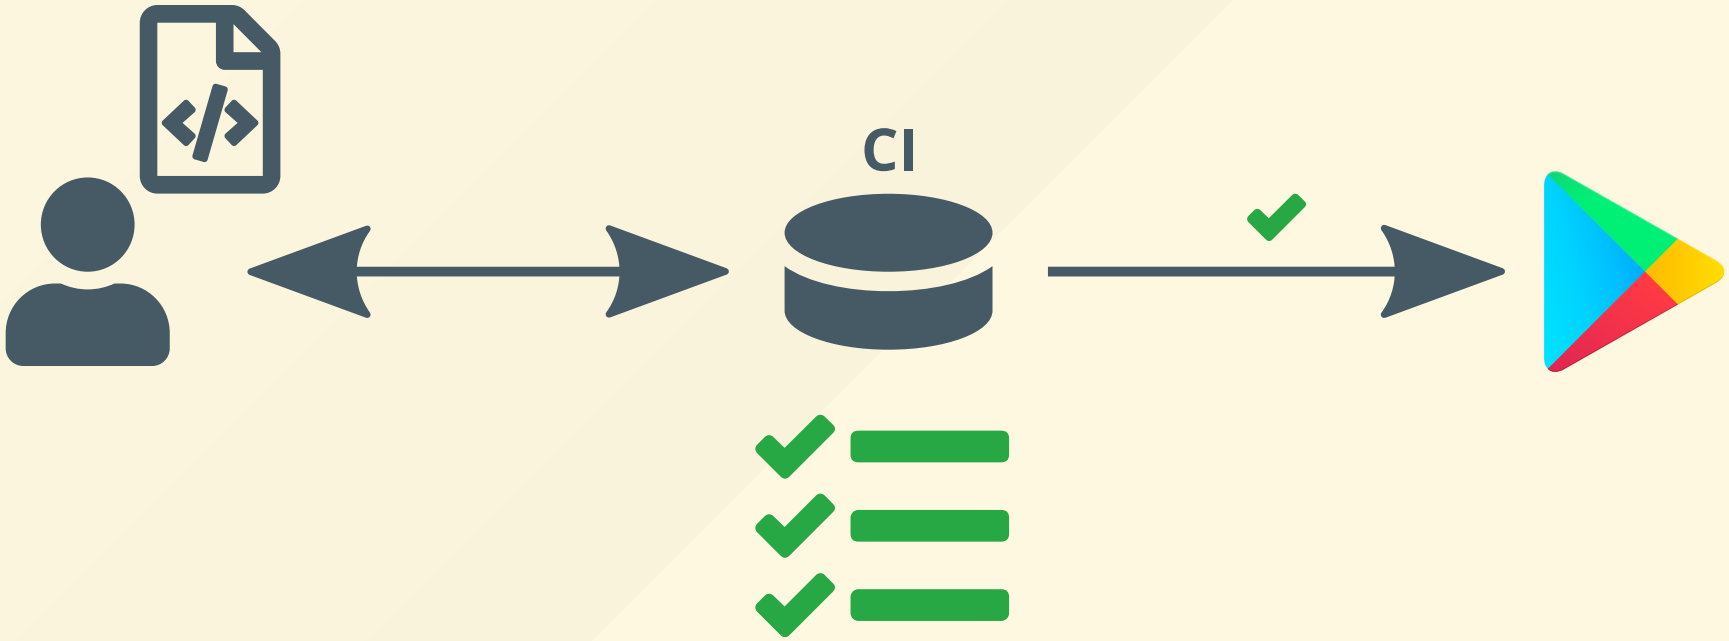

Problem?

Tests!

Tests

Tests

Tests

Solutions

Solutions

Test Case Selection

Solutions / Test Case Selection

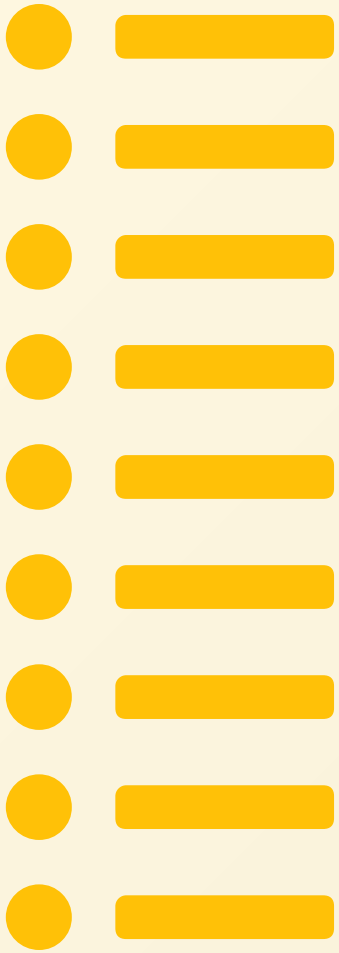

Solutions / Test Case Selection

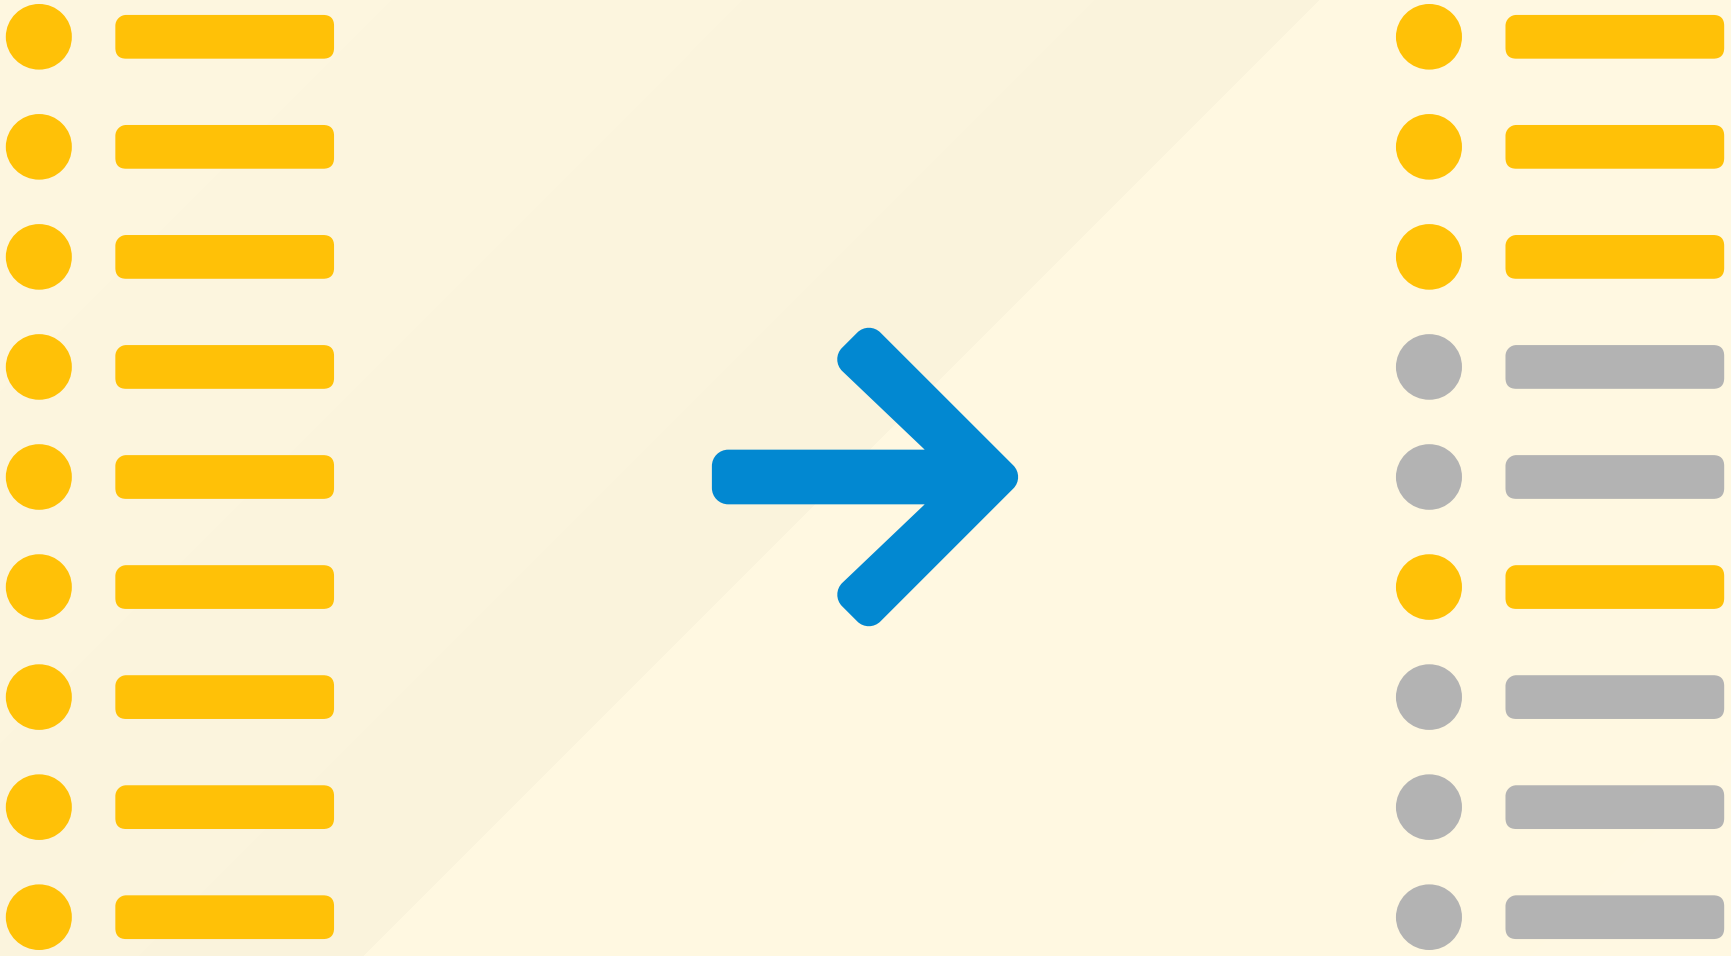

Solutions

Test Suite Minimisation

Solutions / Test Suite Minimisation

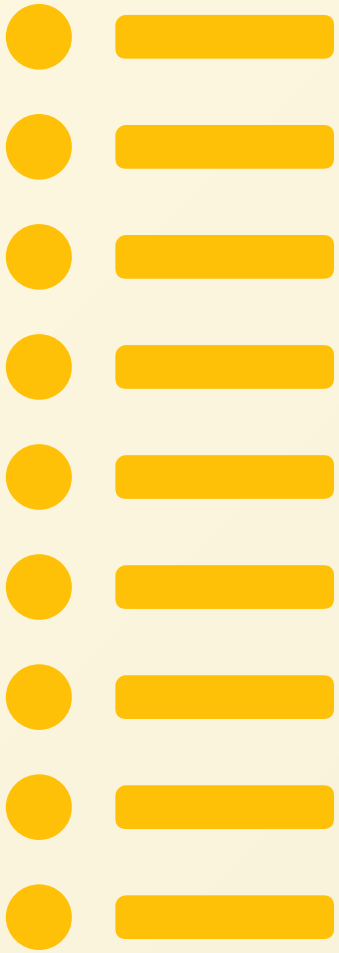

Solutions / Test Suite Minimisation

Solutions

Test Case Prioritisation

Solutions / Test Case Prioritisation

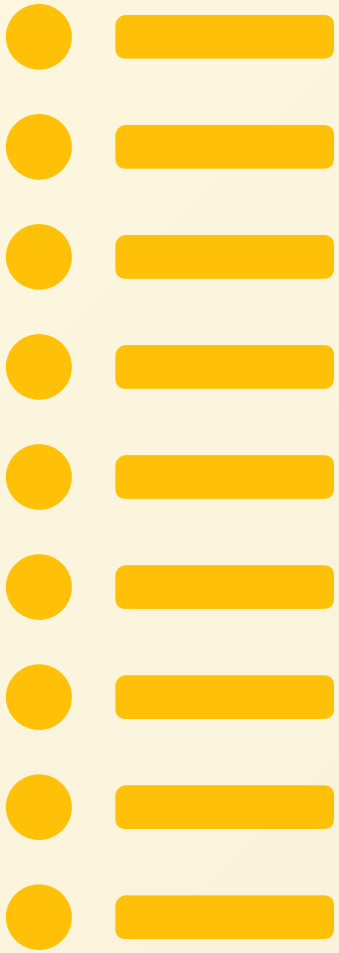

Solutions / Test Case Prioritisation

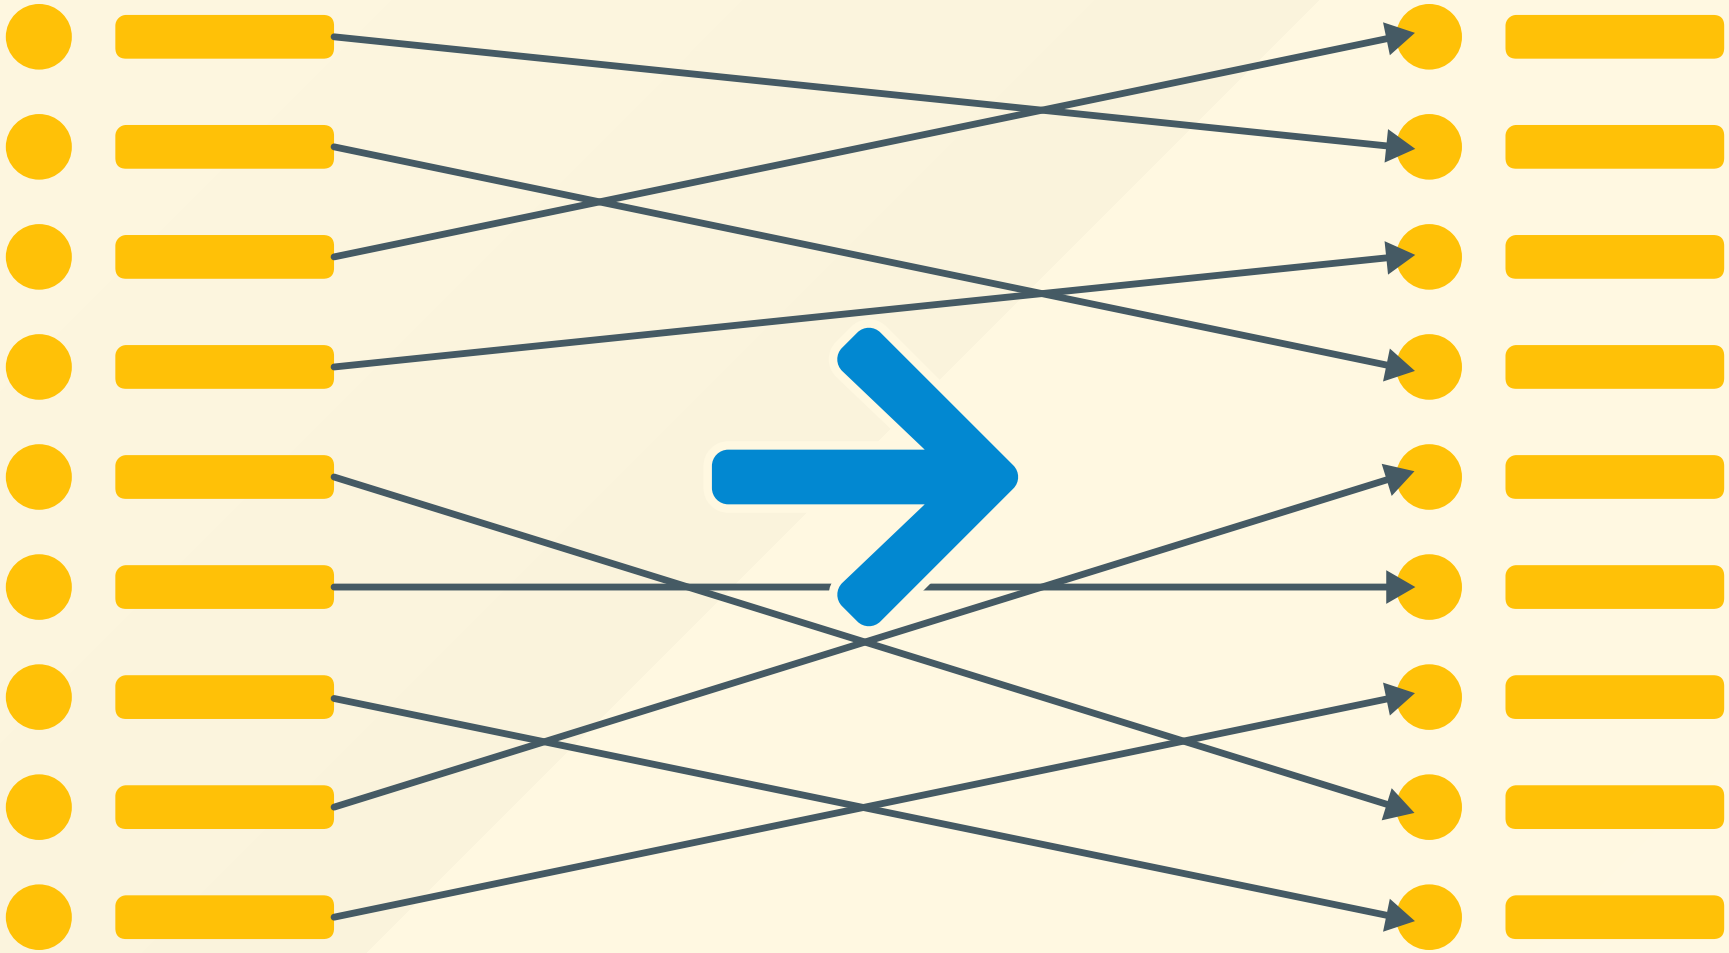

So.. problem solved!

..right?


Well yes, but actually no

State of the art

State of the art

Java

State of the art

Java

Other languages

Implementation

Implementation

Implementation

Implementation

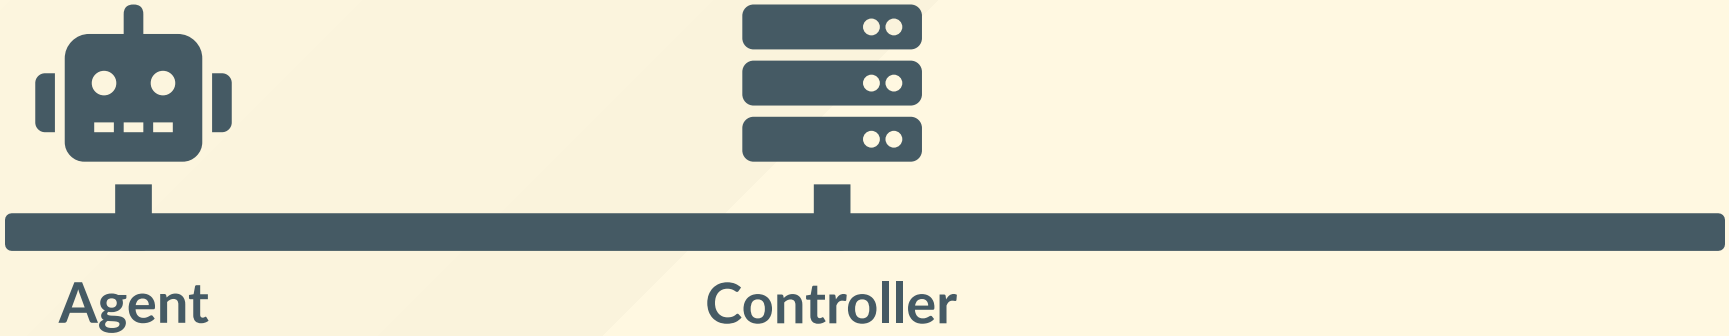

Implementation

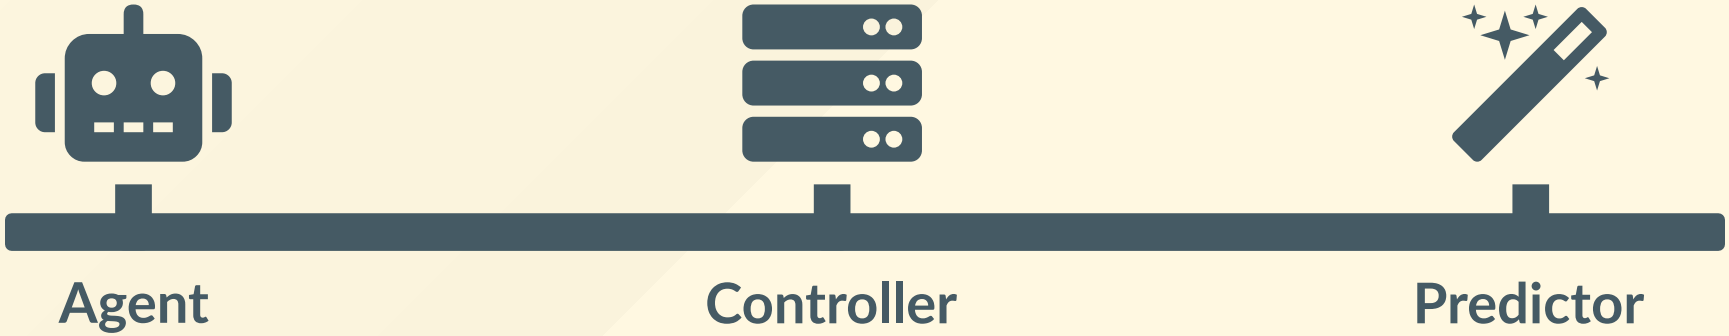

Implementation

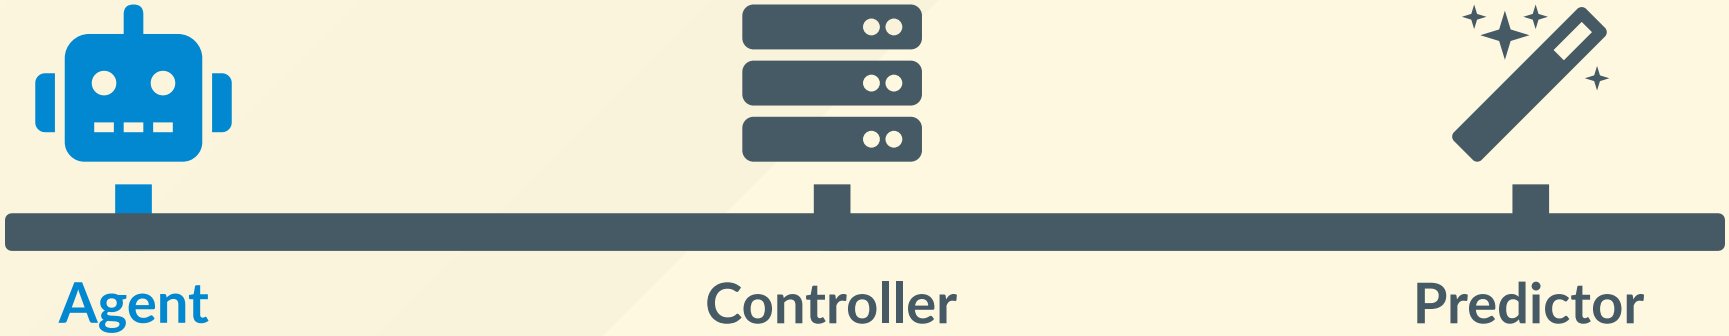

Implementation / Agent

Execute tests

Implementation / Agent

Execute tests

Feedback

Implementation

Implementation / Controller

Routing

Implementation / Controller

Routing

Analysis

Implementation

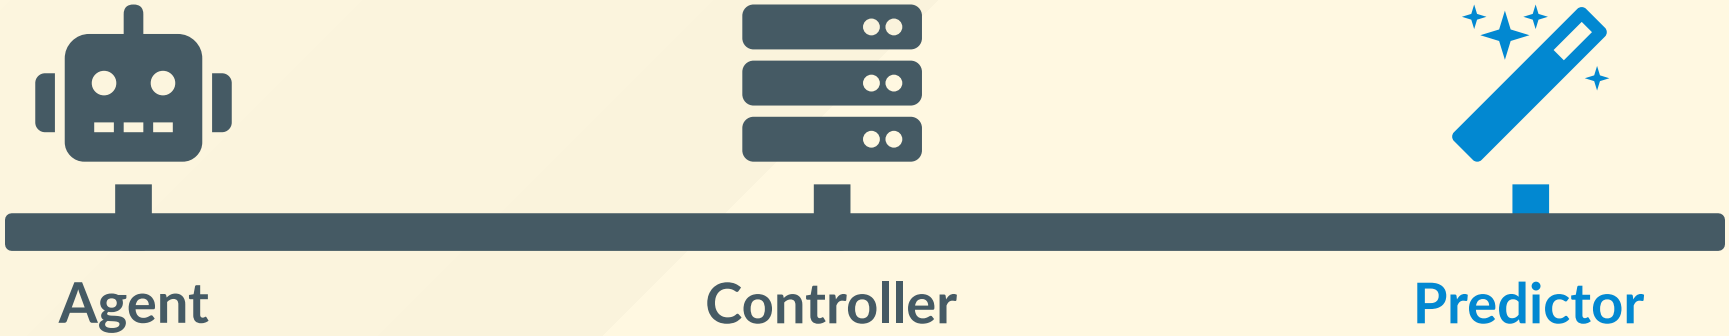

Implementation / Predictor

Determine order

Implementation / Predictor

Determine order



10 algorithms

Implementation / Predictor

Determine order



10 algorithms

Extensible

```
# Generate a random order.
def predict(test_cases, coverage, results, duration):
        return shuffle(test_cases)
```

Implementation / Alpha-algorithm

Implementation / Alpha-algorithm

1. Unstable, affected test cases (by duration)

Implementation / Alpha-algorithm

1. Unstable, affected test cases (by duration)
2. Affected test cases (by duration)

Implementation / Alpha-algorithm

1. Unstable, affected test cases (by duration)
2. Affected test cases (by duration)
3. Test cases based on added coverage

Implementation / Alpha-algorithm

1. Unstable, affected test cases (by duration)
2. Affected test cases (by duration)
3. Test cases based on added coverage
4. Other test cases `[redundant]`

Implementation / Meta predictor

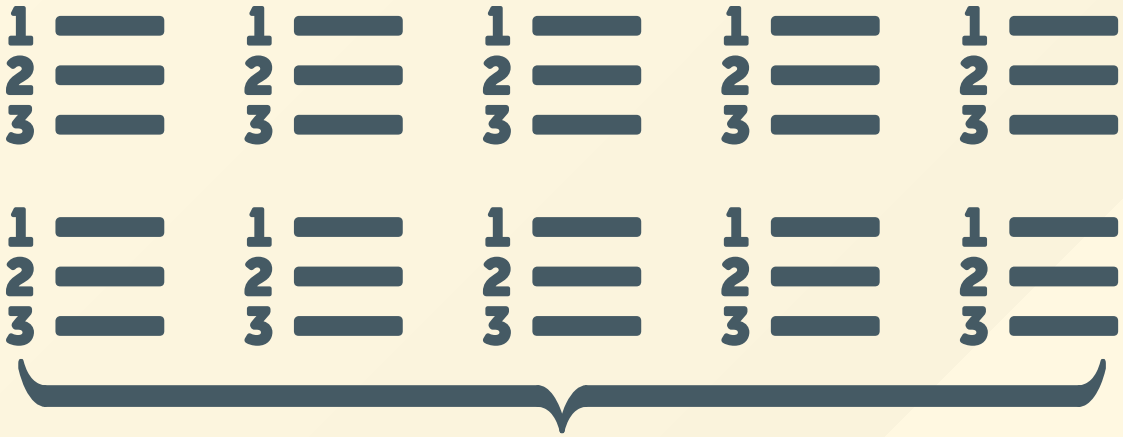

Implementation / Meta predictor

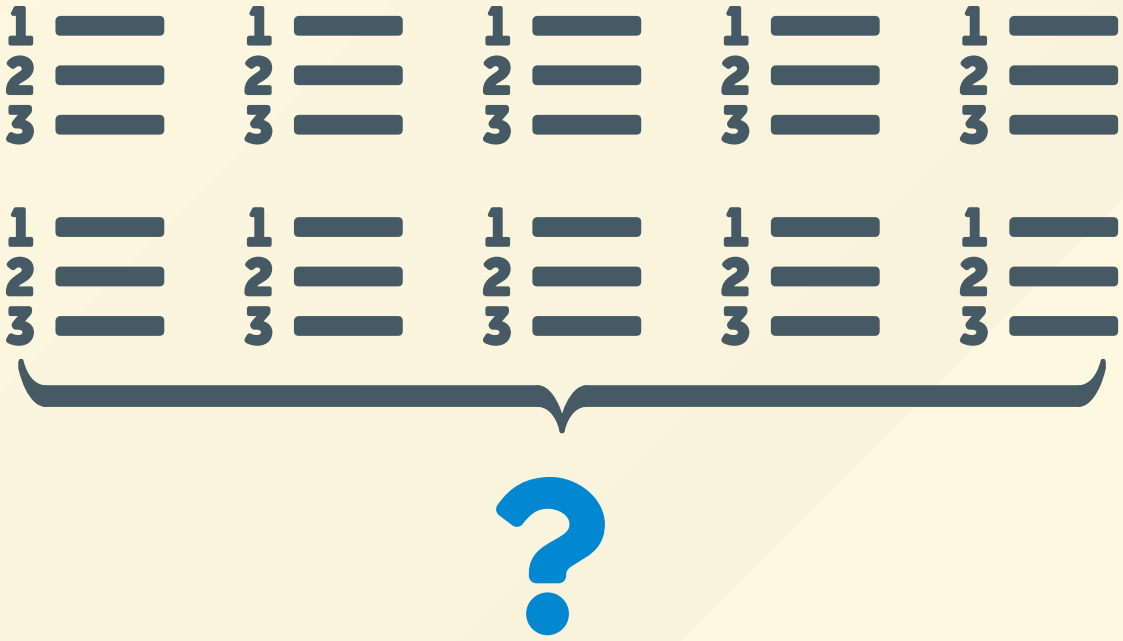

Implementation / Meta predictor

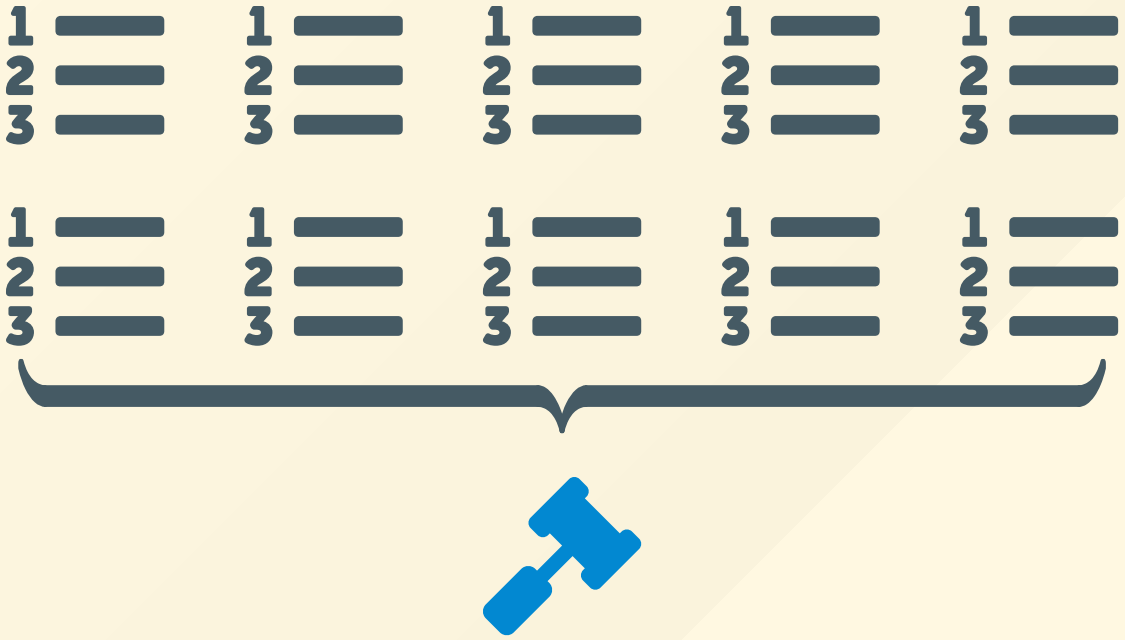

Implementation / Meta predictor

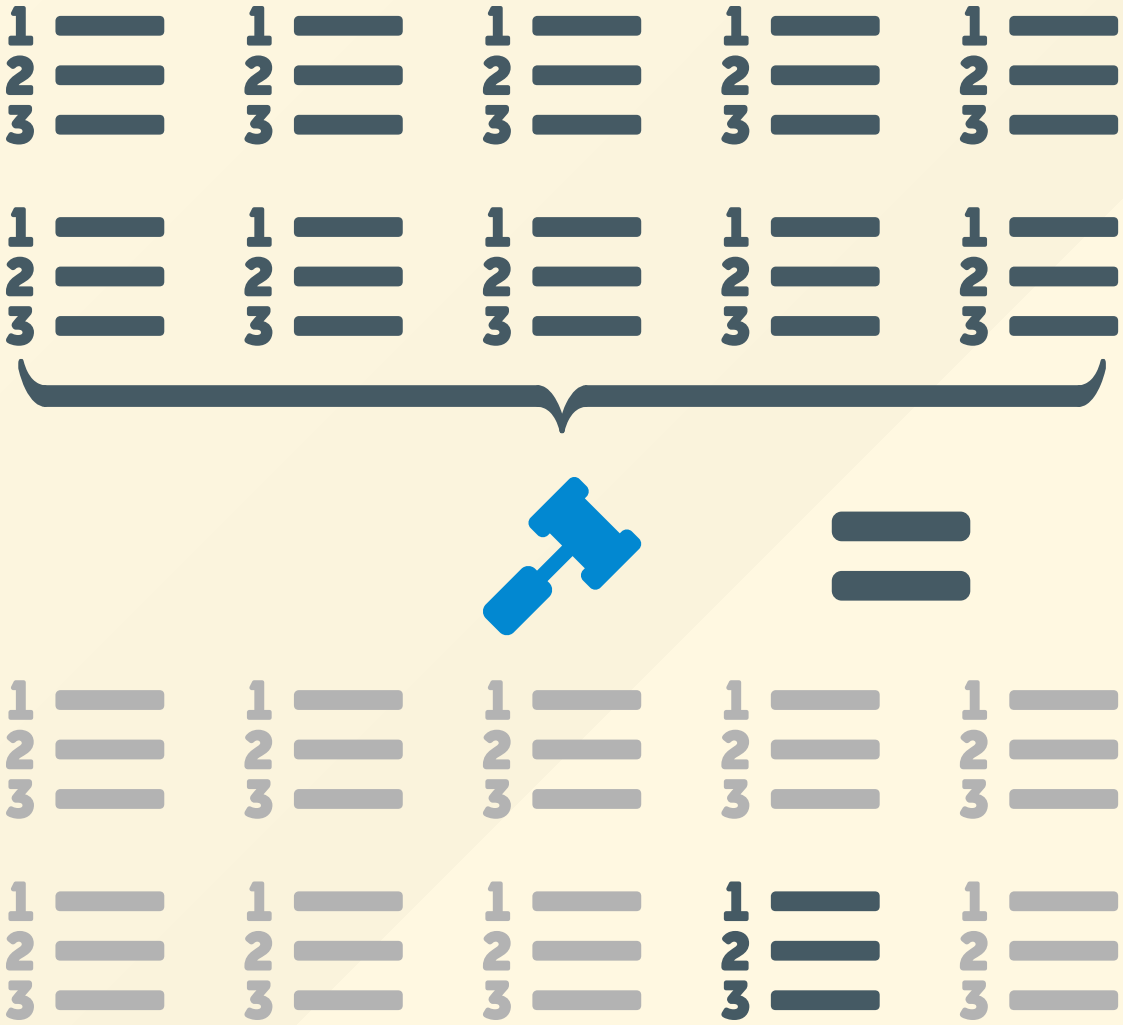

ALGORITHM	SCORE
Alpha	20
Greedy	10
HGS	-3

Results

Results

Performance on Dodona (Tests)

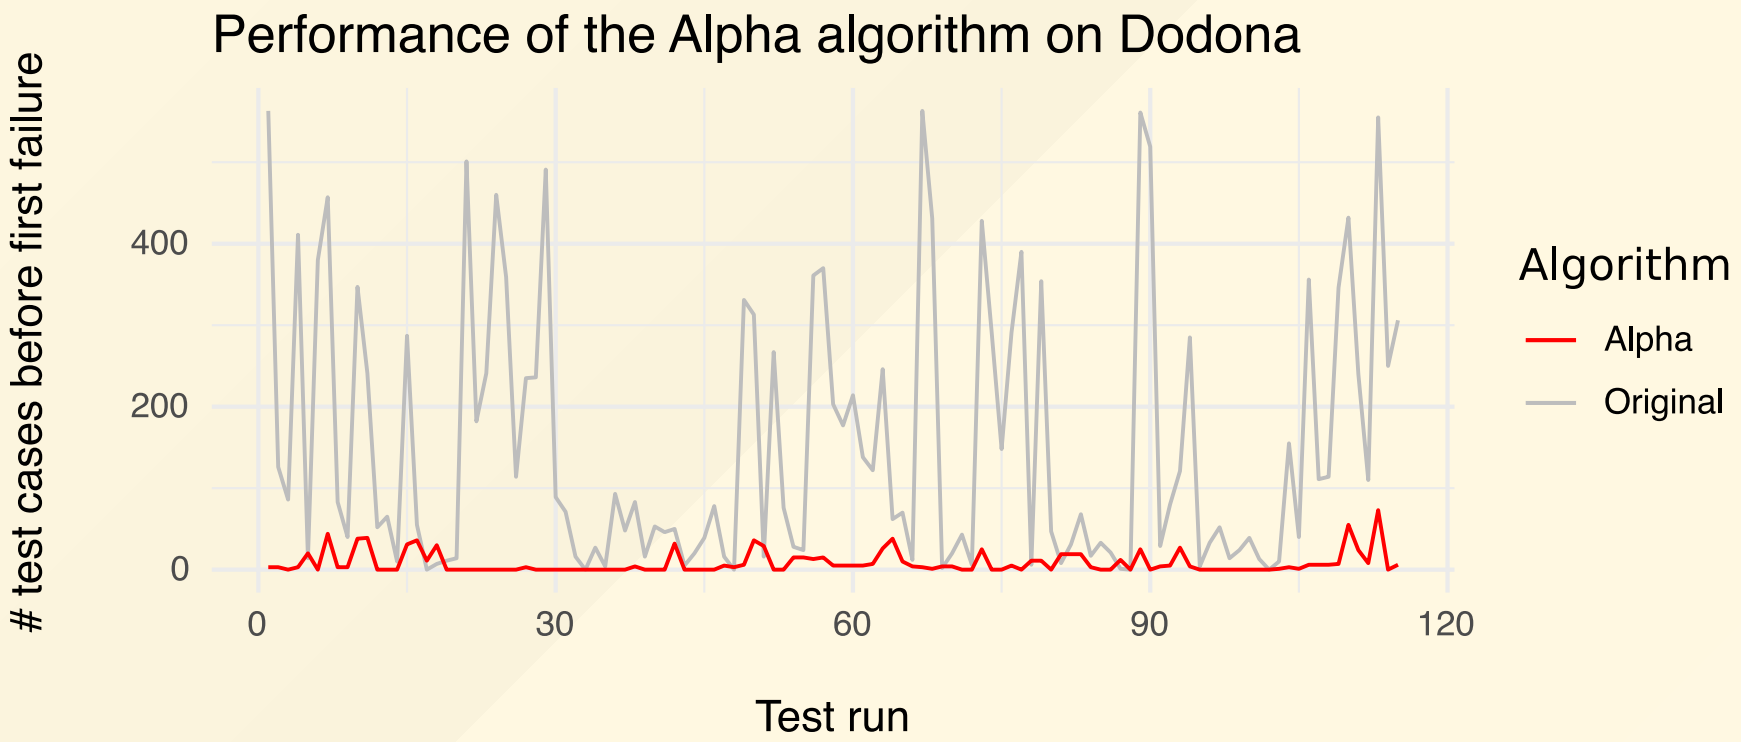

 # test cases: < 25x

until first observed failure

Results

Performance on Dodona (Duration)

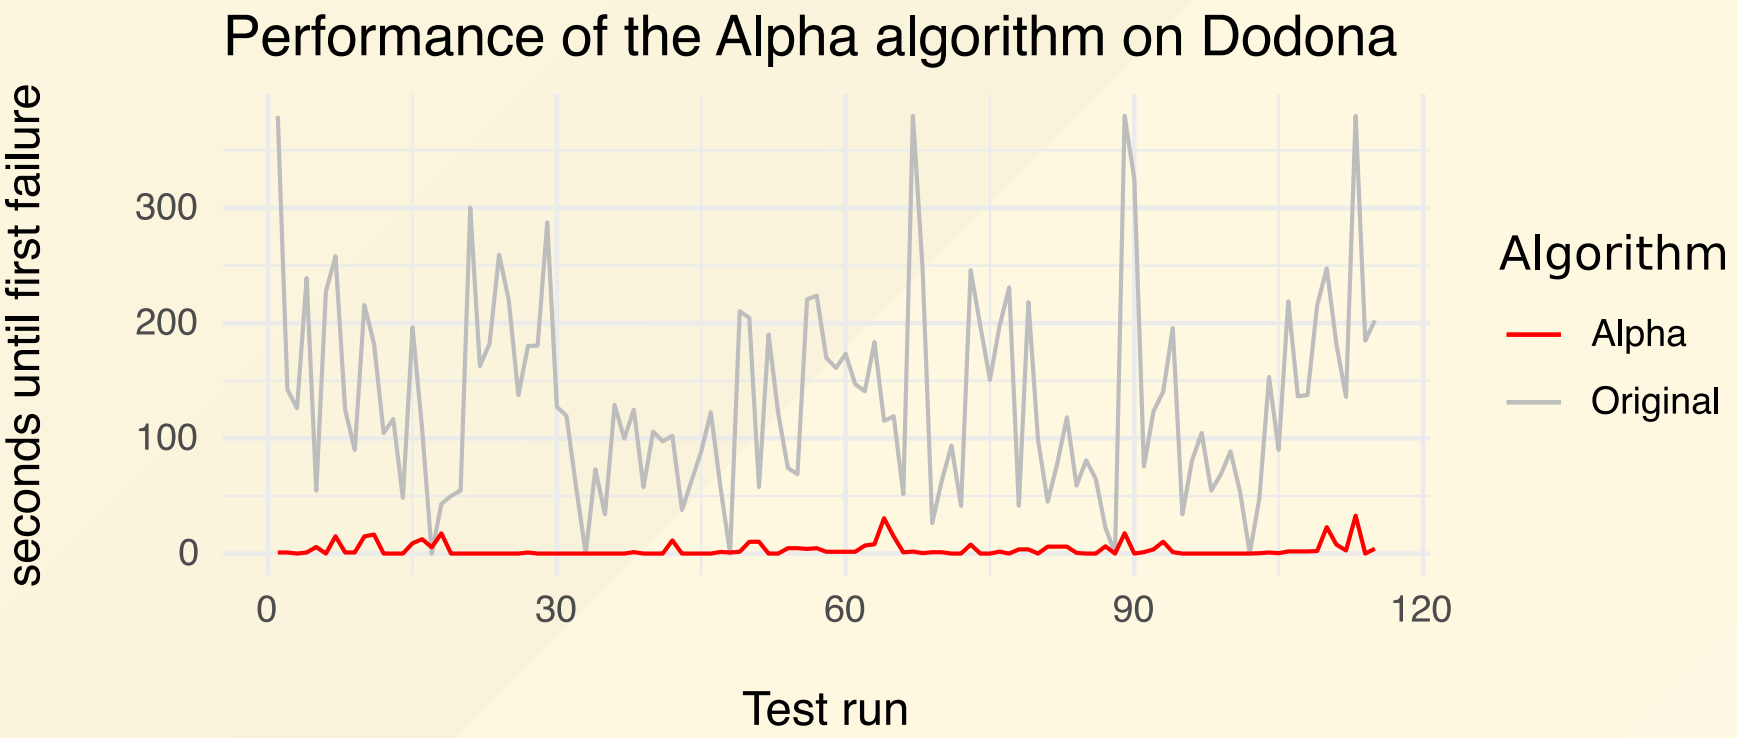

duration: < 40x

until first observed failure

Demo

Wrapping up

Conclusion

Conclusion

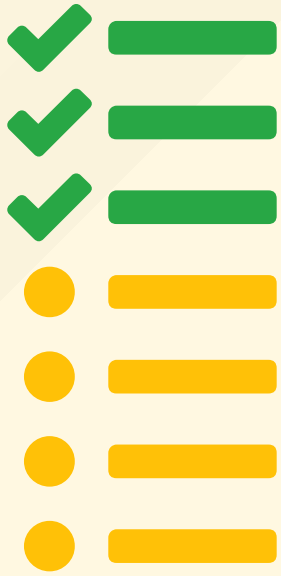

Conclusion

Test Case Prioritisation

Conclusion



Waiting time

Productivity

Questions?

References

- Slides created using Marp.
- Icons are property of FontAwesome.