



Placement Empowerment Program

Cloud Computing and DevOps Centre

Write a Shell Script to Manage Cloud Resources:
Create a script to launch, stop, and terminate cloud VMs
using the CLI.

Name: Samuel James Billy Graham

Department: CSE



Introduction

Managing cloud resources efficiently is critical in today's clouddriven IT landscape. AWS Command Line Interface (CLI) provides a powerful tool for interacting with AWS services programmatically. By leveraging shell scripting, we can automate repetitive tasks like launching, stopping, and terminating virtual machines (VMs). This Proof of Concept (POC) demonstrates the use of AWS CLI integrated with a shell script to simplify VM management, showcasing automation's role in reducing manual effort and increasing productivity.

Overview

This POC focuses on creating a shell script to manage AWS EC2 instances using the AWS CLI. The script allows users to:

1. Launch new EC2 instances with pre-configured settings.
2. Stop running EC2 instances to optimize costs.
3. Terminate EC2 instances when no longer needed.
4. List currently running EC2 instances for better resource tracking.

The script uses a menu-driven approach, where users can choose specific actions, making it user-friendly and flexible. It is tested using Git Bash on Windows and adheres to AWS Free Tier limitations to ensure cost-effective implementation.

Objective


The primary objective of this POC is to:

1. Automate the management of AWS EC2 instances through shell scripting.
2. Provide an easy-to-use interface for launching, stopping, terminating, and listing instances.
3. Demonstrate the capabilities of AWS CLI and shell scripting for cloud resource management.
4. Build a foundational understanding of automation practices in cloud computing.

Step-by-Step Overview Step

1:

1. Go to [AWS Management Console](#).
2. Enter your username and password to log in.

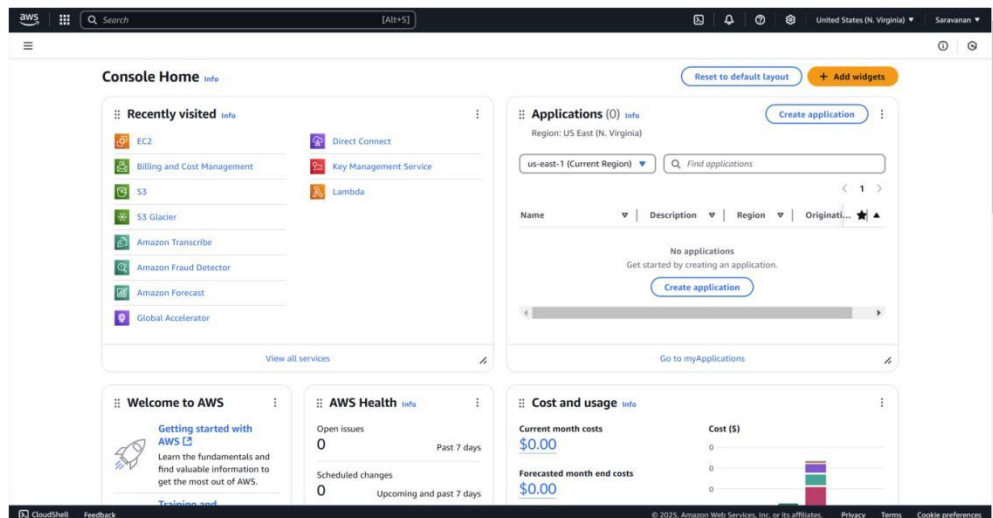

Step 2:

Make sure your AWS CLI is installed and configured.

```
C:\Users\Hi>aws --version  
aws-cli/2.23.11 Python/3.12.6 Windows/11 exe/AMD64
```



Step 3:

1. Go to the **EC2 Dashboard**.
2. In the left sidebar, click **Key Pairs** under **Network & Security**.

3. Click **Create Key Pair**.

4. Enter a name (e.g., MyKeyPair) and choose **.pem** format.

5. Download the .pem file and keep it safe—you'll need it to SSH into your instance.

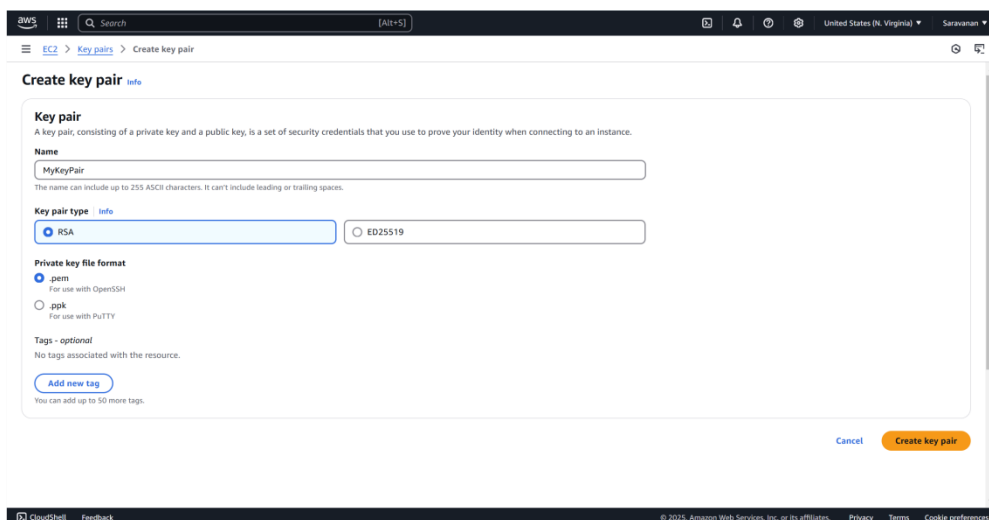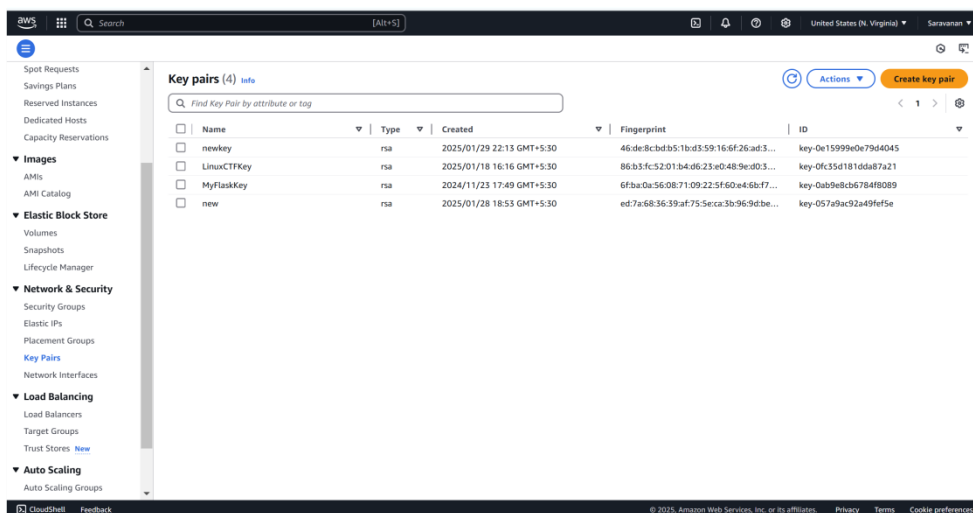

Step 4:

1. Go to the **AWS EC2 Dashboard**.

2. In the left sidebar, click **Security Groups**.

3. Click **Create Security Group**.

4. Enter a name (e.g., MySecurityGroup) and a description.

5. Add the following inbound rule:

- **Type:** SSH
- **Protocol:** TCP
- **Port Range:** 22
- **Source:** Anywhere (0.0.0.0/0) (Note the Id after created)


Name	Security group ID	Security group name	VPC ID	Description
-	sg-047b1313c8801b239	launch-wizard-1	vpc-0f36f0944c12862e5	launch-wizard-1 created ;
-	sg-09f4dfc39f34ba3c9	launch-wizard-2	vpc-0f36f0944c12862e5	launch-wizard-2 created ;
-	sg-07823c5c21d6de6b7	launch-wizard-13	vpc-0f36f0944c12862e5	launch-wizard-13 created ;
-	sg-5d0306a04eccc52f1a	launch-wizard-26	vpc-0f36f0944c12862e5	launch-wizard-26 created ;
✓	sg-0e920fef5e94f0026	MySecurityGroup	vpc-0f36f0944c12862e5	My Security Group which
-	sg-0152a400d9551f792	launch-wizard-24	vpc-0f36f0944c12862e5	launch-wizard-24 created ;
-	sg-00fae5315856e9a9d	launch-wizard-4	vpc-0f36f0944c12862e5	launch-wizard-4 created ;
-	sg-0f34e7ad3a8f9a2ce	security-group-for-outbound-rfs-d-nig...	vpc-0f36f0944c12862e5	[DO NOT DELETE] Securit

sg-0e920fef5e94f0026 - MySecurityGroup			
Details			
Security group name	Security group ID	Description	VPC ID
MySecurityGroup	sg-0e920fef5e94f0026	My Security Group which I created	vpc-0f36f0944c12862e5
Owner	Inbound rules count	Outbound rules count	
343218194491	1 Permission entry	1 Permission entry	

Step 5:


1. In the **AWS EC2 Dashboard**, click **Subnets** in the left sidebar.

2. Note the **Subnet ID** of one of your subnets. Example: subnet0abcd1234.

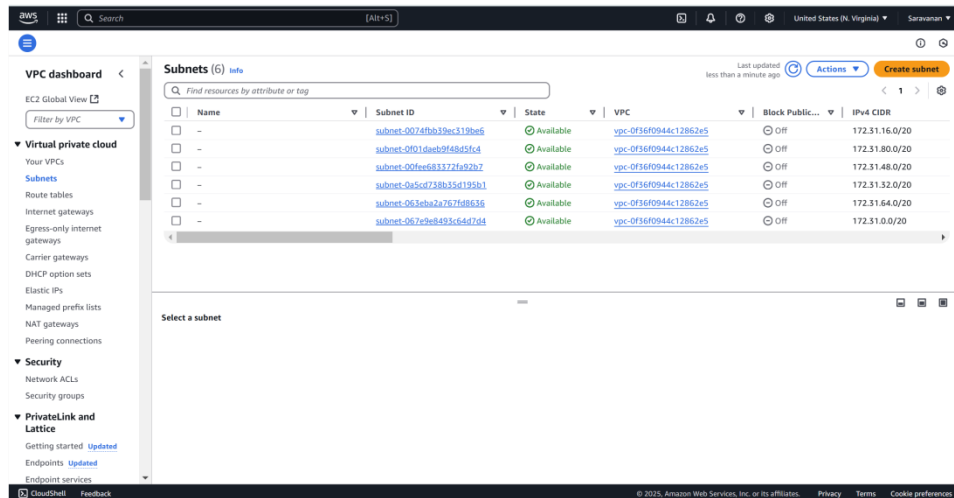

Step 6:

1. In the **AWS EC2 Dashboard**, click **Launch Instance**.
2. Search for "Amazon Linux 2" and select it.
3. Note the **AMI ID** (e.g., ami-0c02fb55956c7d316).

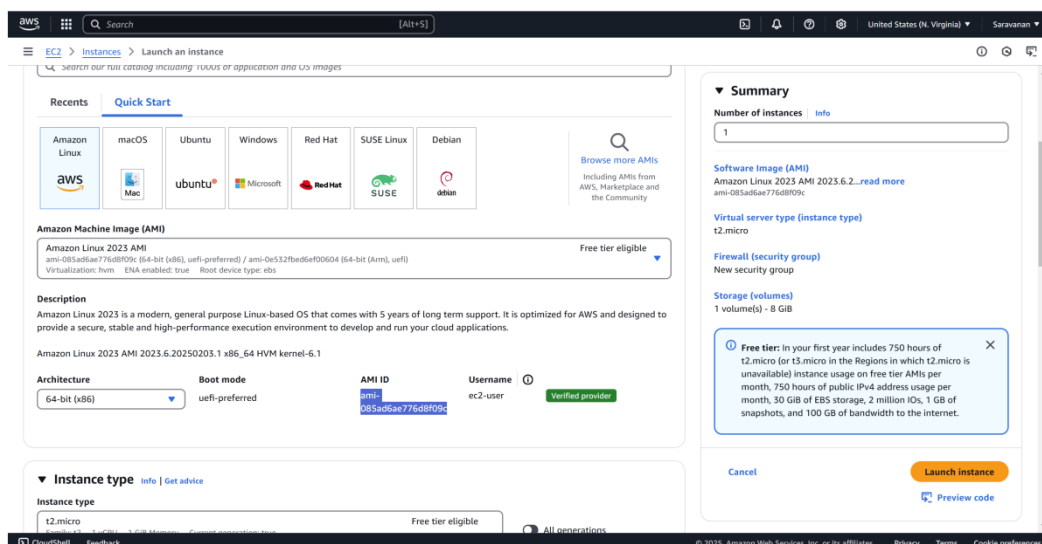

Step 7:

Here's a simple shell script to manage cloud resources (launch, stop, and terminate VMs) using the AWS CLI.

Open **Notepad**.

Paste the script into the Notepad.

Replace the placeholders (YourKeyPairName, YourSecurityGroupID, etc.) with your actual values:

- **Key Pair Name:** Replace with the name of your key pair.
- **Security Group ID:** Replace with your security group ID.
- **Subnet ID:** Replace with your subnet ID. □ **AMI ID:** Replace with the AMI ID.

```
#!/bin/bash

# A simple shell script to manage AWS EC2 instances.
# Prerequisites: AWS CLI must be installed and configured.

function launch_instance() {
    echo "Launching a new EC2 instance..."
    INSTANCE_ID=$(aws ec2 run-instances \
        --image-id ami-085ad6ae776d8f09c \
        --instance-type t2.micro \
        --key-name MyKeyPair \
        --security-group-ids sg-0e920fef5e94f0026 \
        --subnet-id subnet-0074fbb39ec319be6 \
        --query 'Instances[0].InstanceId' \
        --output text)

    echo "Instance launched successfully! Instance ID: $INSTANCE_ID"
}

function stop_instance() {
    echo "Enter the Instance ID to stop:"
    read INSTANCE_ID
    aws ec2 stop-instances --instance-ids $INSTANCE_ID
    echo "Instance $INSTANCE_ID has been stopped."
}

function terminate_instance() {
    echo "Enter the Instance ID to terminate:"
    read INSTANCE_ID
    aws ec2 terminate-instances --instance-ids $INSTANCE_ID
    echo "Instance $INSTANCE_ID has been terminated."
}
```



```

function display_menu() {
    echo "\nCloud Resource Management Script"
    echo "1. Launch a new EC2 instance"
    echo "2. Stop an existing EC2 instance"
    echo "3. Terminate an EC2 instance"
    echo "4. Exit"
    echo "Choose an option:"
}

while true; do
    display_menu
    read OPTION


    case $OPTION in
        1)
            launch_instance
            ;;
        2)
            stop_instance
            ;;
        3)
            terminate_instance
            ;;
        4)
            echo "Exiting the script. Goodbye!"
            exit 0
            ;;
        *)
            echo "Invalid option. Please try again."
            ;;
    esac
done

```

Step 8:

1. Click **File** → **Save As**.
2. In the **Save As** window:
 - **File Name:** Enter `manage_cloud_resources.sh`.
 - **Save as type:** Select **All Files** from the dropdown.
 - **Encoding:** Select **UTF-8** (if available). □ **Location:** Save it in Desktop.

Important: Make sure the file has the `.sh`

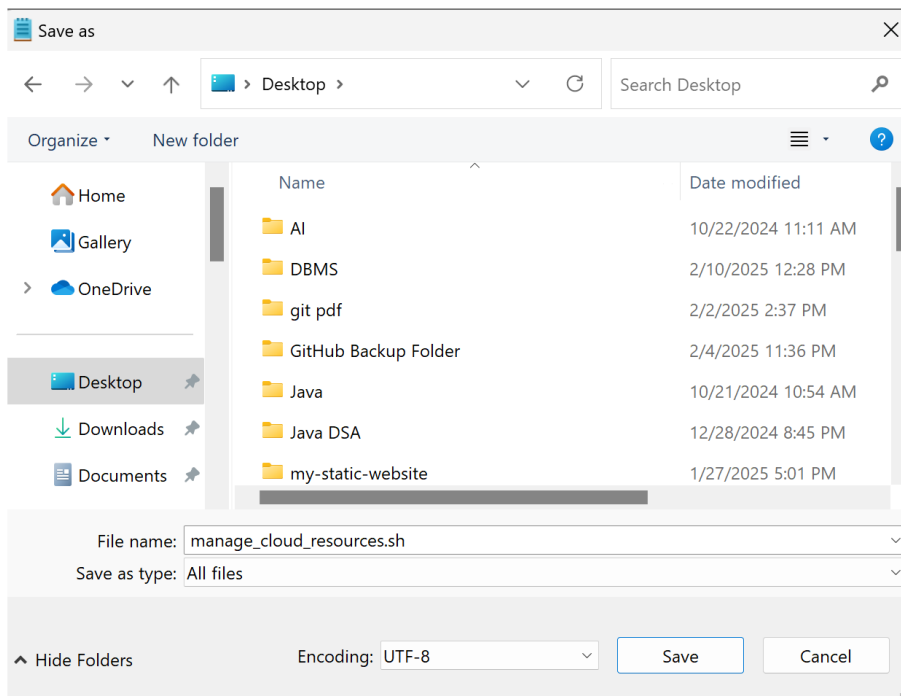

Step 9:

1. Open Git Bash
2. Run the following command in Git Bash:

chmod +x manage_cloud_resources.sh


```
Hi@Saravanan MINGW64 ~ (master)
$ cd desktop

Hi@Saravanan MINGW64 ~/desktop (master)
$ chmod +x manage_cloud_resources.sh
```

Step 10:

Run the script using:

`./manage_cloud_resources.sh`

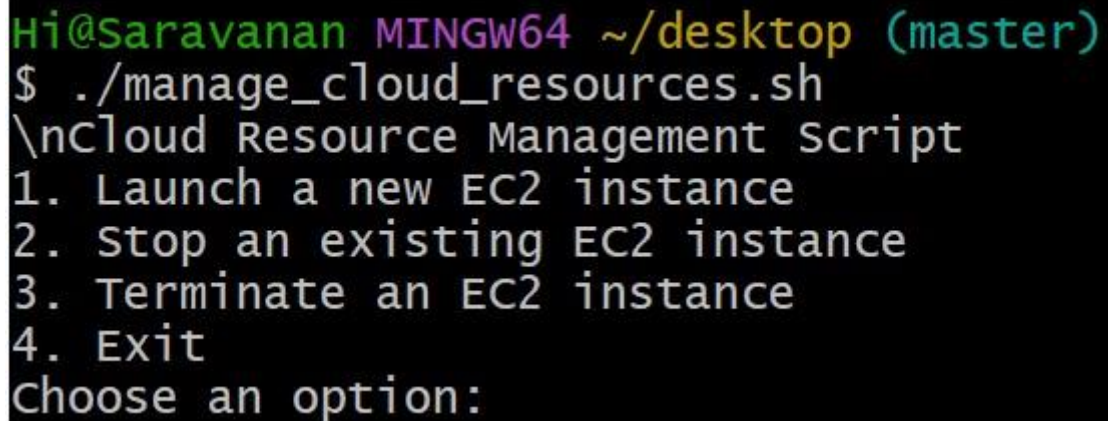A terminal window with a black background and colored text. The prompt is 'Hi@Saravanan MINGW64 ~/desktop (master)'. The user enters './manage_cloud_resources.sh'. The output is a menu for 'Cloud Resource Management Script' with four options: 1. Launch a new EC2 instance, 2. Stop an existing EC2 instance, 3. Terminate an EC2 instance, and 4. Exit. The prompt 'Choose an option:' is shown at the bottom.

```
Hi@Saravanan MINGW64 ~/desktop (master)
$ ./manage_cloud_resources.sh
\nCloud Resource Management Script
1. Launch a new EC2 instance
2. Stop an existing EC2 instance
3. Terminate an EC2 instance
4. Exit
Choose an option:
```

Step 10:

1. Select 1 to launch an instance.
2. The script will create an EC2 instance and display its **Instance ID**.
Make a note of this ID for the next steps.

Step 11:

```
Hi@Saravanan MINGW64 ~/desktop (master)
$ ./manage_cloud_resources.sh
\nCloud Resource Management Script
1. Launch a new EC2 instance
2. Stop an existing EC2 instance
3. Terminate an EC2 instance
4. Exit
Choose an option:
1
Launching a new EC2 instance...
Instance launched successfully! Instance ID: i-05a758441ee1aa253
```

1. Select 2 to stop an instance.
2. Enter the **Instance ID** of the instance you launched earlier.
3. The script will stop the instance.

Step 12:

```
\nCloud Resource Management Script
1. Launch a new EC2 instance
2. Stop an existing EC2 instance
3. Terminate an EC2 instance
4. Exit
Choose an option:
2
Enter the Instance ID to stop:
i-05a758441ee1aa253
{
  "StoppingInstances": [
    {
      "InstanceId": "i-05a758441ee1aa253",
      "CurrentState": {
        "Code": 64,
        "Name": "stopping"
      },
      "PreviousState": {
        "Code": 16,
        "Name": "running"
      }
    }
  ]
}

Instance i-05a758441ee1aa253 has been stopped.
```

1. Select 3 to terminate an instance.
2. Enter the **Instance ID** of the instance you launched earlier.
3. The script will terminate the instance.

Step 13:

```
\nCloud Resource Management Script
1. Launch a new EC2 instance
2. Stop an existing EC2 instance
3. Terminate an EC2 instance
4. Exit
Choose an option:
3
Enter the Instance ID to terminate:
i-05a758441ee1aa253
{
  "TerminatingInstances": [
    {
      "InstanceId": "i-05a758441ee1aa253",
      "CurrentState": {
        "Code": 48,
        "Name": "terminated"
      },
      "PreviousState": {
        "Code": 80,
        "Name": "stopped"
      }
    }
  ]
}

Instance i-05a758441ee1aa253 has been terminated.
```

Successfully completed the PoC!

