

ABS Level I Basic

Data model

Version 2.0

Business Plan

Allianz 

Agenda

- 1 Introduction
- 2 Basic concepts
- 3 Data model extensions
- 4 Summary



Contents of the module


What can you expect in this unit?

You get an insight into:

The features and structure of the company-wide data model

The basic concepts within the data model

The options for extending the core data model

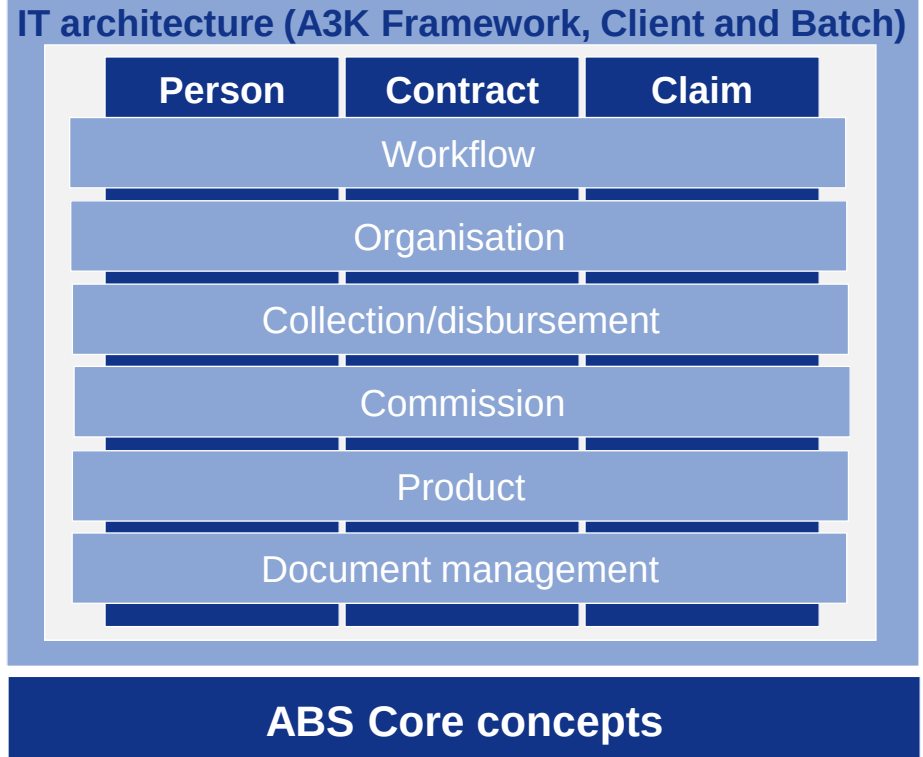

The company-wide data model is used to store all data relevant to inventory management within a database

1

- 1** Introduction
- 2** Basic concepts
- 3** Data model extensions
- 4** Summary



Company-wide unified data model (UDM)

What distinguishes UDM?

Is the basis for

- The ABS Client/Server and batch system
- And for an integrated system

It also supports

- multiple-client capability
- multilingual capability
- multicurrency capability
- historisation
- sub-ledger accounting
- workflow control

It serves to regulate language use and to define concepts

- Logical and physical models are identical
- the data model is identical online (host) as well as offline (agent laptop)
- However, “offline” not all tables are filled completely

While creating ABS data from various subsystems were consolidated into one company-wide unified data model.

Division of the data model

How is UDM divided?

Subdivision of UDM in:

Operational data

- Contain all relevant data for inventory management and are subdivided into 9 functional objects
- Contain the “Business Object”
- Contain work tables for special areas of application


Defining data

- Contains defining data, which is divided into 32 defining data areas
- Are read only by the ABS application, cannot be changed in productive system

Division ensures easier maintenance of the data model.

Representation of UDM (extract)

How is a data model designed?

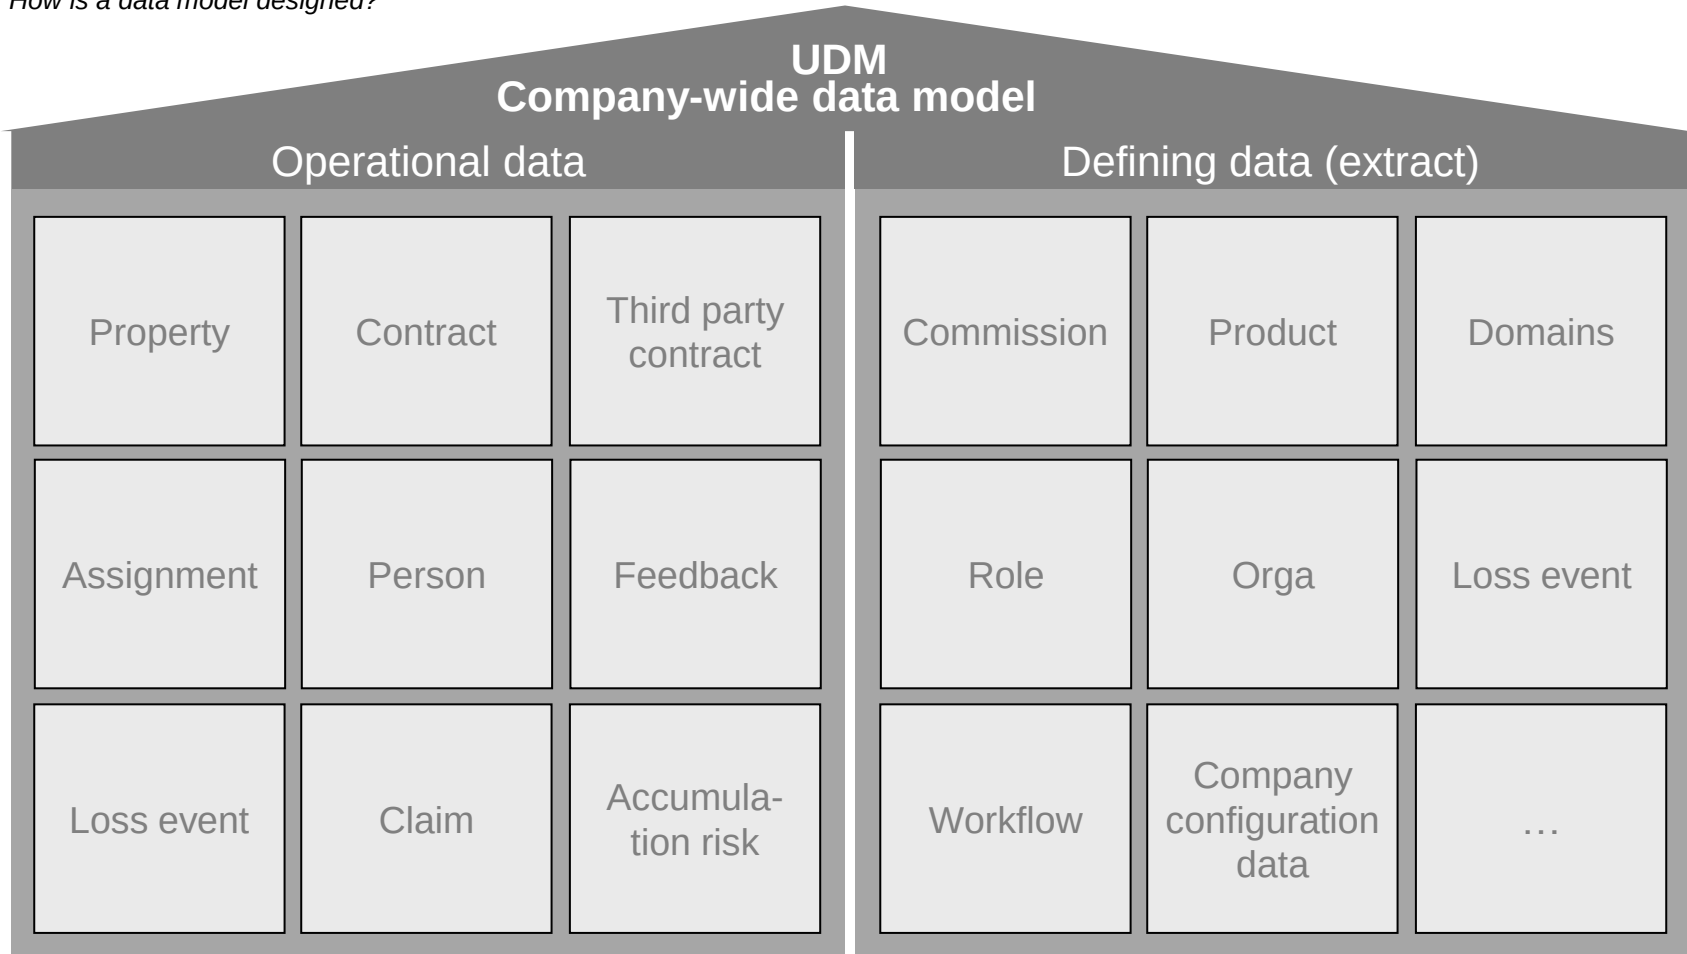

While operational data are written by the ABS application, definition and maintenance of defining data mostly takes place via special applications.


2

- 1 Introduction
- 2 Basic concepts**
- 3 Data model extensions
- 4 Summary



Basic concepts

Which terms are used in relation to the UDM?

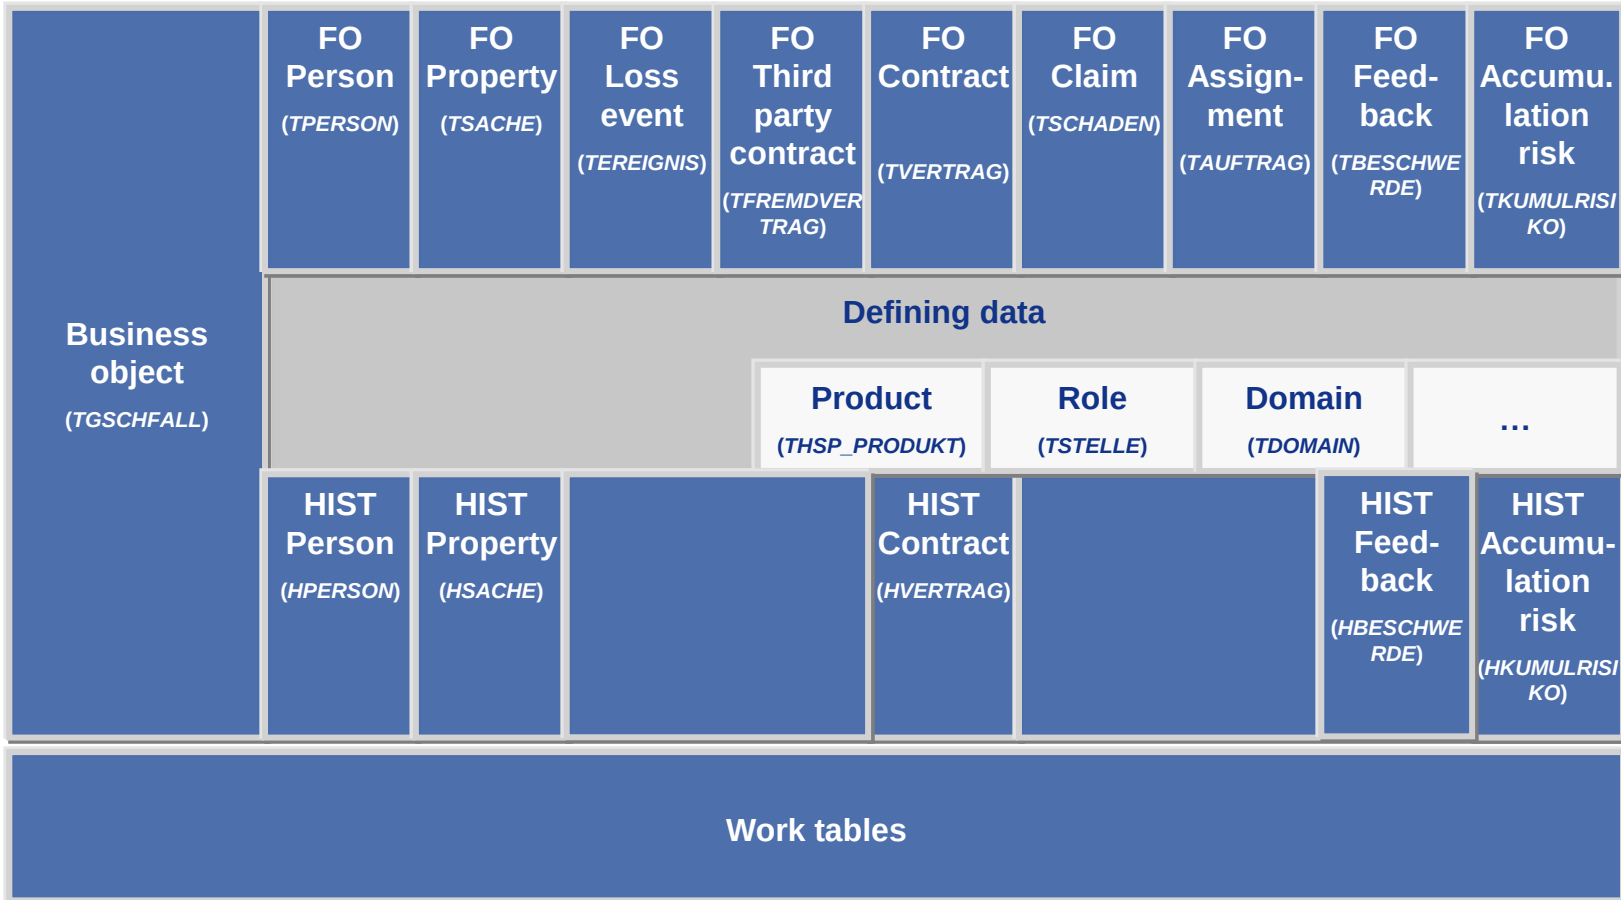

Functional objects access defining data. Processing takes place via the business object with the help of performance increasing work tables.

Basic concepts - Functional Objects

What are functional objects?

Functional Objects:

are bundles of tables and related functionalities

A functional Object contains all information relevant for insurances:

1. for objects of the real world: Person, Property, Loss Event and
2. for objects of the business world: Contract, Claim, Assignment, Third Party Contract, Feedback, and Accumulation Risk

Functional Objects bundle the operational tables according to their functional usage.

Basic concepts - Business Object

What is a business object?

The Business Object controls processing of the functional objects

Is a bundle of tables and functionalities provided to the functional objects

Whenever a functional object is created a corresponding business object is created.

Each change to a functional object is logged using the “business object activity”.


Examples of the functionalities are:

- Business process status
- Logging / historization
- Process slips / scheduled tasks

 The Business Object enables processing of insurance processes over multiple functional objects.

Business Object functionalities

How are the tables of the business object connected to each other?

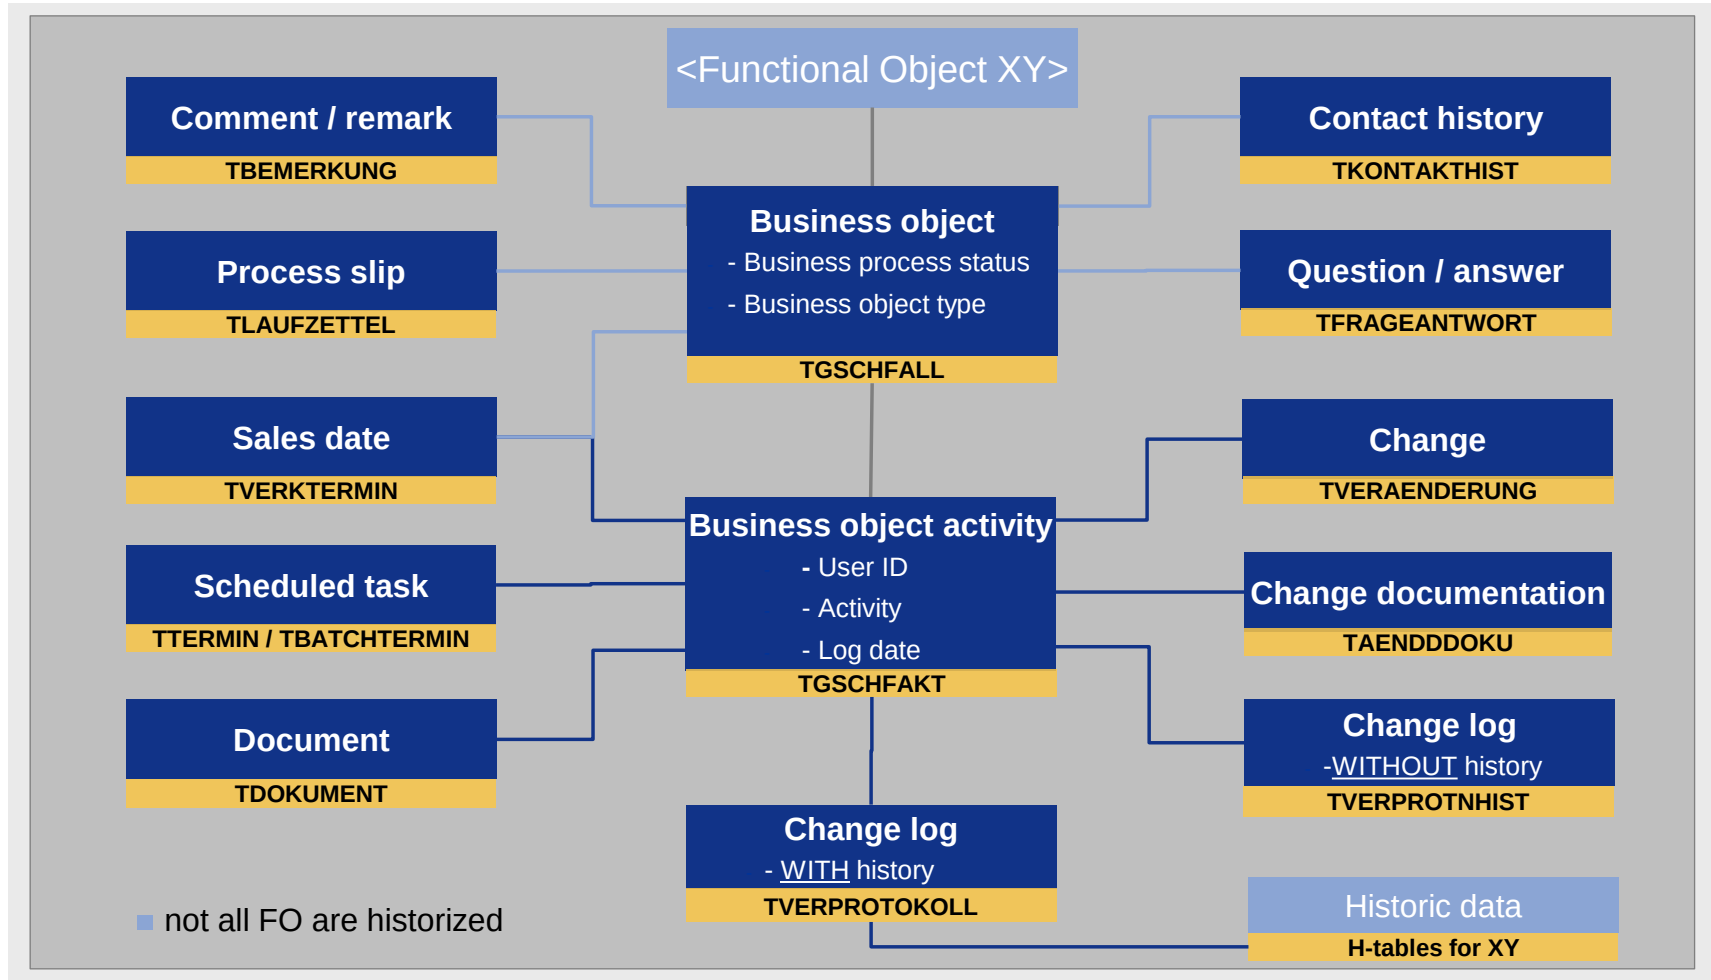

The Business Object consists of special tables with functionalities provided to the Functional Objects.

Basic concepts - work tables

Where are work tables used?

The work tables:

Tables with redundant information for improving the performance - e.g. for worklists

For automatic allocation of object identifiers like policy number and claim number

Tables for controlling batch services, e.g. batch protocol, restart control

Entries in these tables are mostly created by batches and deleted after processing

Work tables accelerate the work process and support handling processing in ABS.

Basic concepts - Defining data (DD)

What are DD?

Defining data:

are subdivided into 32 pre-specified areas (e.g. domains, letter writing, product, funds, company configuration data, workflow, commission)

ABS uses defining data in read only mode

Core offers special applications for maintaining DD e.g. Configuration Suite

Update and maintenance of defining data tables takes place in a test & development environment, after checks and validations, data is synchronized with the production database

Changes to the defining data can be documented via log tables

Defining data guide the processes in ABS.

Basic concepts - defining data examples

Which DDs exist and how are they maintained?

Area	Usage	Maintenance / update
Product	Model products and define related functionalities needed for handling these products in ABS.	Product explorer (PEx)
Domains	- Define valid values for attributes. - Contain descriptions of these values as long texts.	Configuration Suite
Commission	Controls functionalities related to the commission calculation	Configuration Suite
Loss event	Controls various functionalities during claim processing	Product explorer (PEx)
Orga	Maps the organizational structure.	Configuration Suite
Roles	Contain information about authorizations and their interactions with the Organizational structure.	Configuration Suite

3

- 1 Introduction
- 2 Basic concepts
- 3 Data model extensions**
- 4 Summary



Options for extending the data model (1/3)

How can the core data model be modified?

Extension of the data model by the Core (CCC):

Inclusion of individual attributes in the existing Core tables

Inclusion of new tables in the data model of the Core.

Example - extending of core table TVERTRAG with a new attribute:

TVERTRAG	
VERTR#	CHAR(36) <PK>
COMPANY	CHAR(2)
DIRECTORATE	CHAR(2)
POLLFNR	CHAR(2)
VERTART	CHAR(2)
PHASE	CHAR(2)
BEGDAT	DATE
WIRKBEGDAT	DATE
...	
COLLECTIVE TRANSFER_FLAG	CHAR(1)

Options for extending the data model (2/3)

How can the core data model be modified?

Modelling of additional customer-specific tables:

Modelling of new customer-specific tables, which are coupled 1:1 as appendixes to a table of the Core data model

Modelling of new customer-specific tables, which – if required - are also coupled with the Core data model

Example - extension of the core table TVERTRAG by a customer-specific table TDE1_VERTRAG:

TVERTRAG	
VERTR#	CHAR(36) <PK>
COMPANY	CHAR(2)
DIRECTORATE	CHAR(2)
POLLFNR	CHAR(2)
VERTART	CHAR(2)
PHASE	CHAR(2)
BEGDAT	DATE
WIRKBEGDAT	DATE
...	

TDE1_VERTRAG	
DE1_VERTR#	CHAR(36) <PK>
VORSYS	CHAR(3)
DE1_BOTYP	CHAR(3)
DE1_ZUSTAND	CHAR(1)
...	
VERTR#	CHAR(36) <FK>

Options for extending the data model (3/3)

How can the core data model be modified?

Use of vertical (“generic”) tables:

Attributes are mapped using an existing vertical table provided by the Core. These tables are provided for fundamental core tables (i.e. TVERTRAG, TPERSON, TSCHADEN, ...)

Configuration takes place manually via the Configuration Suite.

Used for information:

- which are only significant for a small part of a functional object (e.g. during migration)
- which change structurally relatively frequently (e.g. product-specific contract information)
- are needed at short notice without the option of adjusting the data model

4

- 1 Classification and overview
- 2 Basic concepts
- 3 Data model extensions
- 4 Summary**



Summary

What should we keep in mind?

You should now have knowledge about the following:

The features and structure of the UDM.

Features of a Functional Object, Business Object, Business Object functionalities; defining data and work tables

Data model extensions

Sample test question



Quiz navigation


1	2	3	4	5	6	7	8	9	10	11
12	13	14	15	16	17	18	19	20	21	22
23	24	25	26	27	28	29	30	31	32	33
34	35	36	37	38	39	40	41	42	43	44
45	46	47	48	49	50	51	52	53	54	55
56	57	58	59	60	61	62	63	64	65	66
67	68	69	70	71	72	73	74	75	76	77
78	79	80	81	82	83	84	85	86	87	88
89	90	91	92	93	94	95	96	97	98	99
100	101	102	103	104	105	106	107	108	109	110
111	112	113	114	115	116	117	118	119	120	

[Finish attempt...](#)
Time left **1:26:56**

Question 8

Not yet answered

Marked out of 1.00


[Next](#)

03-0002: Which of the following statements are true?

Select one or more:

- ☐ A. The data model is identical online as well as offline .
- ☐ B. The logical and physical data models are identical.
- ☐ C. The online and offline data models are not identical.



*

All rights regarding training materials and documentation or parts thereof, including rights of translation, reprint and reproduction, are held by **metafinanz**. All **metafinanz** materials will be provided electronically. Participants are permitted to print out the materials. No part of the training materials may be reworked, duplicated, distributed, divulged or publicly communicated in any manner whatsoever, including for the purpose of providing training, without prior written consent of **metafinanz**.

Information on technical procedures, developments and knowledge is imparted without regard for existent patents or other intellectual property rights. It is the responsibility of the customer and participants to inform themselves of any restrictions in this regard before using or exploiting such information commercially.

Software provided during the course of the training may not be removed, copied in whole or in part, duplicated, altered, deleted or used after the end of the training. This stipulation excludes sample code and exercises discussed during training.