


The end-to-end customer journey, validated


Every step from first hearing about Early Letters to leaving it, with the happy path and the unhappy paths at each stage. Each row says what the customer does, what the system does, the code that does it, the tests that cover it, and whether it is built, designed, missing or in conflict with the rules.

Verdict: not ready to release. The website, the waitlist and the welcome email are real and tested. The server side of accounts, family, deletion and billing is built and tested against an embedded database. The phone app is a local-only shell: it has no sign-in, no sync, no purchase, no transcription in a shipped build, no audio playback and no family flow. A person with a build today could write letters and lose them with the phone.

126 steps and 107 unhappy paths audited; 13 are blockers and 41 are major. Fixes are under way (see page "Fix programme"); this document is the state **before** they land.

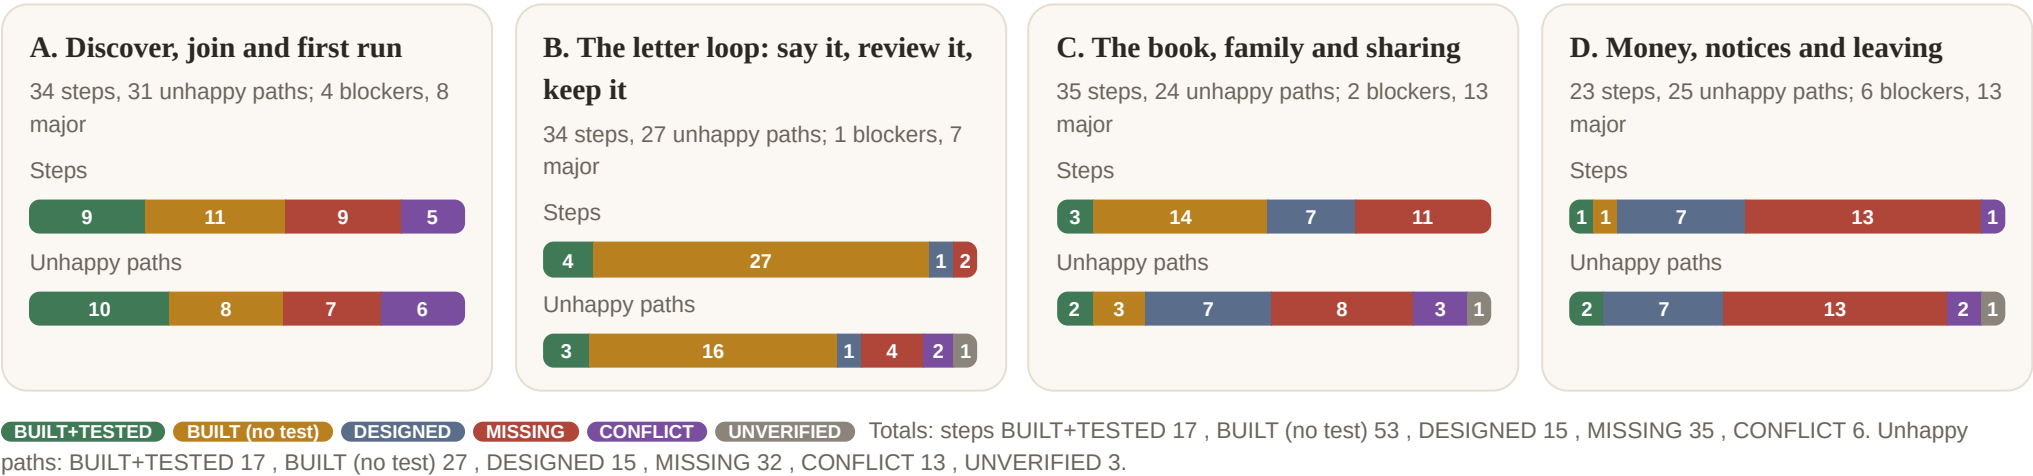

The journey on one page

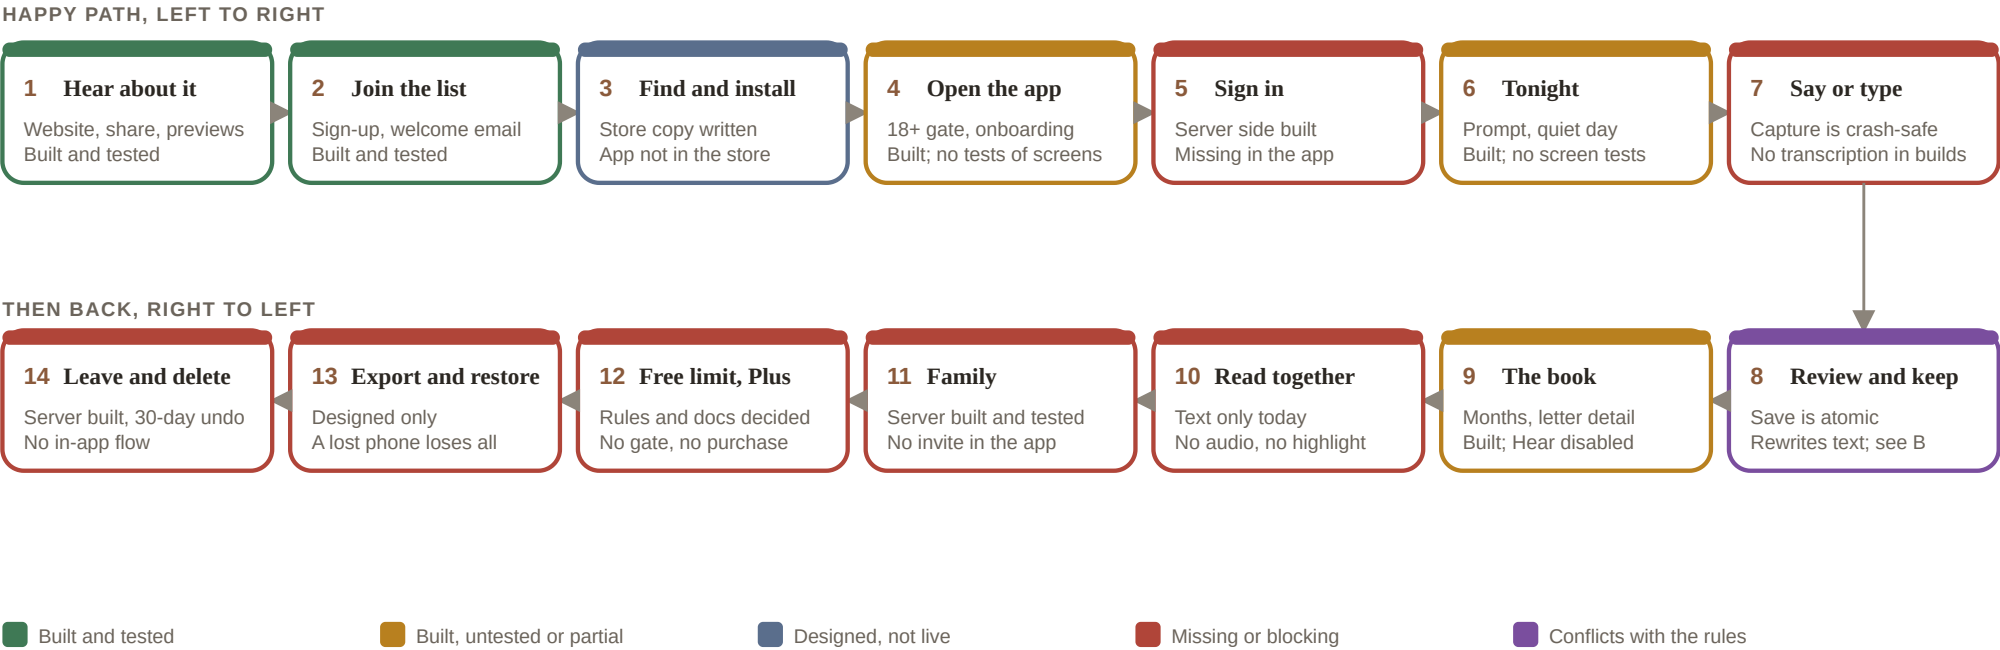

Colour is the overall state of that stage today, from the audit tables that follow. Stages 5 to 14 are where the product is not yet a product. The happy path has 14 stages; the unhappy paths hang off every one of them and are listed by segment.

What blocks a release

Blocker	What is true today	Rows
1. No transcription in any shipped build	The audio decoder and model downloader are not built (BL-140, 141, 143), so a spoken letter cannot become words. Review falls back to keeping the recording; nothing is lost.	B-U7
2. A lost phone loses everything	No sync, backup or restore exists in the app, so the data-safety promise is not yet true.	C-U13

3. No sign-in, no purchase, no letter limit	Sign in with Apple and email link are missing in the app. There is no purchase code; the Plus button is disabled; saves are unconditional, so the 2-free-letter rule exists only in documents.	A, D
4. A family invite cannot be sent, received or landed on	Invite button disabled, no landing page or app route (a link without the app is a 404), the 8-character code is not in the schema.	C-U1, C13, C15
5. The product rewrites words outside the rules	normalizeChars and .trim() change typed and spoken text with no recorded edit (an em dash becomes a comma). "Not much today" stores a product-written sentence under the parent's name. Both break the constitution.	B
6. Placeholders in release identity	Bundle id, publisher domain and support email are example.com; the Settings privacy link opens example.com. The bundle id is permanent after the first upload.	A
7. Public claims ahead of the product	The store listing and website promise backup, family writing, export, Hindi-English mixing, seven languages and Plus pricing; none exist in the app yet.	A

How this was validated, and what it cannot show

Four reviewers, each owning one segment, read the product requirements, the technical designs and the real code, then ran the existing test suites offline. Every claim has a file and line. A step is **BUILT+TESTED** only if a test covers it; **DESIGNED** means it exists only in documents; **CONFLICT** means documents and code disagree with each other or with the constitution.

Suite run today	Result
apps/web	148 (151 after the unsubscribe fix)
apps/mobile	52 (CLAUDE.md says 31: stale)
packages/core	237
packages/content	16
packages/analytics	39
database (npm run test:db, embedded Postgres)	8 files, 795 checks, 0 failures
packages/design-tokens	8
experiments	11

Not seen on a device. Capture and interruptions, transcription speed, playback, kill-and-recover, backgrounding, headset removal and the real feel of any screen were read from code, not observed. **Not run against live services:** Supabase, Apple, Resend delivery in real inboxes, the Vercel rate-limit rule. **Not legal advice:** every legal statement is marked for counsel.

Each segment ends with its own list of what could not be verified. Treat anything marked UNVERIFIED as unknown, not as fine.

No screen or component test exists anywhere in the app. Mobile tests cover pure logic only.

Segment A: first hearing about Early Letters to a first-run app ready for the first letter

Validated 2026-10-04 by reading code and running tests. Nothing in the repo was changed. Line numbers are from the files as read today. Note: docs/prd/A-entry-and-auth.md and B-first-run-and-family.md changed on disk while I worked; I used the current text. `git status` shows untracked `.claude/`, `docs/release/`, `scripts/` that I did not create.

0. Bottom line

- Website and waitlist (A1-A9) are real, tested and close to launch-ready. The app side stops at "first-run profile, then Tonight".
- In the app, NOT built: sign-in (Apple, email link and code), the Keep the book sheet, every consent ask except the microphone, notifications, language choice, goals, invites, universal links, model download. The mobile package has no Supabase, analytics, Sentry or notifications dependency (apps/mobile/package.json:123-170).
- Server side of sign-in IS built and tested: profile-on-signup trigger, `policy_acceptances` and `record_policy_act`, `create_child` and a first-run batch RPC.
- Public claims run ahead of the product. The store listing and website promise backup, family writing, Hindi-English mixing, seven languages, export and Plus pricing. None of these exist in the app today.
- Most serious defects found: (1) a child's name, birthday and signs-as can never be edited after first run; (2) the birthday defaults silently to today; (3) Landing (production default) never shows the App Store badge at launch; (4) one-click unsubscribe from a real mail client gets a 303 instead of 200; (5) Settings Privacy link opens example.com.

1. Test results (run today, offline)

Suite	Result
apps/web <code>npx vitest run</code>	12 files, 148 tests passed
apps/mobile <code>npx vitest run</code>	7 files, 52 tests passed (CLAUDE.md says 31; stale)
packages/content	16 passed
packages/core	237 passed
packages/analytics	39 passed
<code>npm run test:db</code> (works offline, embedded Postgres)	8 files passed: access_matrix 479, children_entitlements 46, classification 6, data_governance 96, perf 15, purge_batching 16, rls 40, security_family 97 (795 checks)
Not run (out of segment)	design-tokens (4), experiments (11)

Coverage gap: there are no component or screen tests anywhere. Mobile tests cover only pure logic (age gate rules, dates, migrations, sweep, motion, type scale, lamp-wash). Web has no tests for Landing, NotifyForm, the /unsubscribe page, or /delete-account.

2. Steps

Test file abbreviations: NT = apps/web/test/notify.test.ts, UT = test/unsubscribe.test.ts, WT = test/welcome-email.test.ts, SM = src/lib/site-mode.test.ts, LT = test/launch.test.ts, LG = src/lib/legal/legal.test.ts, AG = apps/mobile/test/age-gate.test.ts, MG = apps/mobile/test/migrations.test.ts, CE = supabase/tests/children_entitlements.test.mjs, RULES = packages/content/test/rules.test.ts.

Id	Customer action	System response	Code	Tests	STATUS
A1	Opens earlyletters.com	Production serves the "coming soon" Landing; previews and local serve the scroll film. Override with <code>SITE_MODE</code> .	apps/web/src/app/page.tsx:6-9; src/lib/site-mode.ts:127-131; src/components/landing/Landing.tsx:26-196	SM (4). Landing page itself untested.	BUILT+TESTED (switch tested, page render not)
A2	Types email, taps "Keep me informed"	Form shows only if <code>RESEND_API_KEY</code> and <code>RESEND_SEGMENT_ID</code> were set at build time; otherwise a mailto line. Client check, then POST, inline status. Honeypot field hidden.	Landing.tsx:22,163-177; src/components/cta/NotifyForm.tsx:382-452; src/lib/notify/client.ts:331-363	NT "client helper" (391-455). Component untested.	BUILT+TESTED (server and helper; component no test)
A3	(server) POST /api/notify	Order: per-IP limit 5 per 10 min, origin check, JSON check, honeypot (fake success), time-on-page under 1.5 s (rate_limited), email validation, config, provider ceiling 60 per min, Resend <code>contacts.create</code> into segment, then welcome. Same answer for new and existing address.	src/lib/notify/handler.ts:91-134; email.ts:24-47; rate-limit.ts; provider.ts:283-306; api/notify/route.ts	NT (63 tests: valid, invalid, bots, rate limit, already subscribed, provider errors, config, logs carry no PII)	BUILT+TESTED
A4	Receives welcome email	One short hello from hello@earlyletters.com with personal one-click unsubscribe link and RFC 8058 headers; mailto fallback if no secret. Failure is logged, sign-up kept.	provider.ts:314-335; welcome-email.ts:61-86; email/layout.ts; content/site.ts:228-253	NT 479-545; WT (4)	BUILT+TESTED . Real delivery, SPF/DKIM/DMARC on the domain: UNVERIFIED (ops).
A5	Clicks Unsubscribe in email (page) or mail app one-click	Page asks first (GET changes nothing), form POSTs to /api/unsubscribe, 303 back to done page. One-click path should answer 200.	src/app/unsubscribe/page.tsx:229-266; src/lib/notify/unsubscribe-handler.ts:164-195; unsubscribe.ts:99-140; api/unsubscribe/route.ts	UT (8). Page untested.	CONFLICT . Code comment (handler.ts:144-146) and UT:66 say one-click answers 200, but a real RFC 8058 request is form-encoded, so it hits the form branch and gets 303. See A-U9.
A6	Reads Privacy, Terms, Consumer health data, Subprocessors	Markdown from docs/legal rendered at build; sanitised; "This document is being finalised." note and noindex while status is not final. All four are <code>draft-for-counsel</code> , effective date TBD.	src/app/(legal)/page.tsx; src/lib/legal/load.ts:185-201; components/site/LegalDocument.tsx:11-40; docs/legal/.md frontmatter	LG (10, renders real documents)	BUILT+TESTED . Content not final (counsel).
A7	Opens /delete-account	Static page: in-app steps, what is removed and kept, email route.	src/app/(legal)/delete-account/page.tsx:18-74; src/lib/legal/delete-account-copy.ts:242-324	none	CONFLICT . Page tells people to use "Settings, then Your data, Delete account", but the app row is disabled "Accounts arrive with sign in" (apps/mobile/src/app/settings/index.tsx:73). Describes sign-in, 30-day undo and Apple tokens that do not exist yet.
A8	Taps "Share with friends and family"	Native share sheet or copies the plain site URL; no tracking.	src/components/site/ShareButton.tsx:68-100	none	BUILT (no test)

Id	Customer action	System response	Code	Tests	STATUS
A9	(launch day) site flips to "On iPhone" with App Store badge	<code>NEXT_PUBLIC_APP_STORE_URL</code> validated; badge appears in Header and S11 of the film only. The production Landing does not import <code>launch</code> .	src/lib/launch.ts:21-114; Header.tsx:26,52; scenes/S11Start.tsx:35-44; Landing.tsx (no import)	LT (13)	CONFLICT . Logic is tested, but Landing, the default production page, never shows the badge. See A-U12.
A10	Reads App Store listing	Name, subtitle, promo, keywords, description, what's new, captions.	packages/content/src/store.en.ts:8-70	RULES:110-122 (limits, keywords, banned characters)	CONFLICT . Limits pass; claims do not match the app or the website. See section 4.
A11	Installs, first launch	Splash held until fonts load, never waits on network. Age gate renders before any route.	apps/mobile/src/app/_layout.tsx:17,47-72; app.config.ts:90-97 (paper splash, no mark: TODO at :60)	none	BUILT (no test) . Envelope mark and brand moment (A-REQ-001, -003) not built. Model download (BL-065, transcribe-whisper.ts:9) not built, so the first spoken letter has no words until it is.
A12	Answers "Are you 18 or older?"	Nothing preselected; Yes stores <code>ageGate.passed=1</code> ; No stores only the time, shows stop screen for 24 h; clock set back never shortens it; relaunch past 24 h asks again; deep links also gated.	src/lib/age-gate.logic.ts:31-42; src/lib/age-gate.ts:57-95; src/components/gate/age-gate-screen.tsx:124-206; _layout.tsx:49,65-72; content strings.en.ts:794-803	AG (5, logic only). Screen and hook untested.	BUILT+TESTED (logic). iOS Declared Age Range (PRD-REQ-019) not built.
A13	Sees welcome screen	One static screen, "Begin the book". "I already have a book" and "I was invited" exist in copy but are not rendered.	onboarding.tsx:117-118,222-228; strings.en.ts:32-38	none	CONFLICT . D-043 (DECISIONS.md:298-300) says welcome, then gate, then first run. Code and PRD-REQ-019 do gate first, then welcome. Sign in and invited buttons MISSING.
A14	Reads "Exactly as you said it" promise	Promise, voice kept on phone, "we can mishear", private by default.	onboarding.tsx:230-245	none	BUILT (no test)
A15	Types child's name (can add twins)	1 to 60 chars, any script; Continue disabled if any row empty; up to 6 names.	onboarding.tsx:121,155-163,247-286,184	none	BUILT (no test)
A16	Chooses Birthday or "Not here yet", picks a date	Birthday max today; due date today to +305 days. Date state starts at today (birthday) or +60 days (due) with no "chosen" flag.	onboarding.tsx:139-140,287-318	none	BUILT (no test) . Differs from B-REQ-001 (Continue disabled until chosen); see A-U15.
A17	Enters what child calls them	Required, 1 to 30 chars, chips, preview "From Papa".	onboarding.tsx:141,322-358,184	none	BUILT (no test)
A18	Taps final CTA	One <code>addChild</code> per name, active child set, haptic, <code>route.r.replace('/', '')</code> to Tonight. No guard against a double tap.	onboarding.tsx:165-181; store.ts:234-245	none (MG covers schema only)	BUILT (no test)
A19	Twins in first run	Shared date and signs-as; each child its own book; server batch RPC allows 1 to 6, first-run free.	onboarding.tsx:166-177; supabase 20261003010000_children_and_entitlements.sql:253-342	CE (46 checks, incl. 7 children refused)	BUILT+TESTED server; client BUILT (no test)
A20	Picks languages spoken with child (B F1.4)	Not asked. Transcription always <code>auto</code> .	transcribe-whisper.ts:80 (<code>input.language ?? 'auto'</code>); no caller sets it	none	MISSING (B-REQ-003 is P0)

Id	Customer action	System response	Code	Tests	STATUS
A21	Picks Hindi script	Not asked.	none	none	MISSING ; D-031 still open (DECISIONS.md:39)
A22	(automatic) names become spelling hints	Child name and signature fed to the model prompt.	store.ts:287-293; review.tsx:120; transcribe.ts:77-80	none	BUILT (no test)
A23	Taps Speak, microphone prompt	Asked just in time on first recording, not in onboarding. Denied shows "We can't hear you yet" with Type instead and Open Settings. Info.plist purpose string comes from brand.	listen.tsx:117-135,227-250; strings.en.ts:699-704; app.config.ts:100-110; permission-copy.ts:256-260	none	BUILT (no test)
A24	Notification permission	Never asked; reminders screen only saves a choice. No notifications dependency.	settings/reminders.tsx; strings.en.ts remindersNotYet	none	MISSING (C-REQ-001). First run correctly never asks (K-02).
A25	Analytics opt-in (third ask)	No consent sheet, no analytics SDK in the app, so nothing is ever sent. Package exists.	packages/analytics/src/consent.ts; apps/mobile/package.json (no @scribe/analytics)	packages/analytics 39 tests	MISSING in app; package BUILT+TESTED
A26	"Keep the book" sheet, Sign in with Apple, email link plus 6-digit code	None of it exists in the app. <code>currentUserId()</code> returns null; Settings account row disabled.	store.ts:303-307; settings/index.tsx:26-28	none	MISSING . D-044: Apple plus email at v1.0.
A27	Taps magic link in email	No web page <code>/auth/confirm</code> or <code>/a</code> ; AASA lists <code>/a</code> , <code>/i</code> , <code>/j</code> , <code>/r</code> only; no <code>associatedDomains</code> in app config.	apps/web/src/app/.well-known/apple-app-site-association/route.ts:15-44; app.config.ts:65-73	route.test.ts (3) for the AASA file only	MISSING . DOCS CONFLICT: PRD A F5 uses <code>/auth/confirm?token_hash=..</code> (A-entry-and-auth.md:74); TDD 04 uses <code>/a#th=..</code> (04-security-identity.md:227).
A28	(server) account created	<code>auth.users</code> insert creates <code>profiles</code> row.	supabase 20260930000000_scribe_core.sql:27-36	rls and access_matrix suites	BUILT+TESTED
A29	Terms and age confirmation recorded; sensitive-data consent	<code>policy_acceptances</code> append-only, <code>record_policy_act</code> RPC with <code>signin_sheet</code> and <code>consent_sheet</code> methods. No client calls it.	20261002020000_data_governance.sql:624-676,695,1031-1043	access_matrix:130; data_governance.test.mjs:145-148 (17 refs)	BUILT+TESTED server; client MISSING
A30	Local letters move to the account	Server first-run batch exists. No client re-ownership, no sync.	20261003010000...sql:311-342; store.ts (no code)	CE	MISSING client (A-REQ-015)
A31	Adds another child later (Settings > Add)	Form with name, expecting toggle, date; second book shows Plus gate stub (button disabled).	components/child/add-child-form.tsx:22-131; plus-gate.tsx:160-188; store.ts:320-324	none	BUILT (no test) . Plus purchase not built.
A32	Edits child name, birthday or signs-as later	Rows are read-only. <code>updateChild</code> is only called for the reminders toggle.	settings/children/[id].tsx:36-39,49-53	none	MISSING (see A-U15, A-U16)
A33	Opens Privacy from Settings	Opens <code>brand.company.privacyUrl</code> , still <code>https://example.com/privacy</code> . Terms row disabled.	settings/index.tsx:76-77; packages/brand/index.ts:27-34	none	BUILT (no test) , placeholder URL. Release blocker (BL-100).

Id	Customer action	System response	Code	Tests	STATUS
A34	"I was invited" / paste code	No entry, no route.	none	none	MISSING (A F7)

3. Unhappy paths

Id	Trigger	Expected per docs	Actual per code	STATUS	Sev	Exact fix
A-U1	Typo or invalid email on the website	Inline error, nothing stored	Client regex (client.ts:334) then server <code>normalizeEmail</code> (handler.ts:105) returns <code>invalid</code> , message "That did not go through. Please check your email" (site.ts:221). Typo with valid shape (gmial.com) is accepted and stored.	BUILT+TESTED (NT 117-151)	MINOR	Optional: "did you mean" hint for common domains. No fix needed for validity.
A-U2	JavaScript off or form submitted natively	Form comment says native submit POSTs and works (NotifyForm.tsx:409-411)	Native post is form-encoded; <code>readJsonObject</code> requires <code>application/json</code> (handler.ts:77-78), so the visitor sees raw JSON <code>{"ok":false,"error":"invalid"}</code> on a blank page.	CONFLICT (comment vs code), no test	MINOR	In handler, accept <code>application/x-www-form-urlencoded</code> , read <code>email</code> and <code>company</code> , and 303 to <code>?notified=1</code> . Add a test.
A-U3	Bot fills honeypot	Fake success, nothing stored	handler.ts:101 returns ok; nothing stored or sent.	BUILT+TESTED (NT 154)	n/a	none
A-U4	Bot submits instantly	Rejected	<code>t</code> under 1500 ms returns <code>rate_limited</code> (handler.ts:103). A bot that omits <code>t</code> bypasses it (field optional) but still hits the IP limit and honeypot.	BUILT+TESTED (NT 163)	MINOR	Require <code>t</code> once all callers send it.
A-U5	Rate limit (one visitor repeats)	429 with Retry-After	5 per 10 min per IP in memory per serverless instance (rate-limit.ts header says it only slows). The real control is a Vercel WAF rule. WAF rule is in ops runbook only.	BUILT+TESTED in code; WAF rule UNVERIFIED	MAJOR	Confirm the Vercel WAF rate-limit rule exists on POST <code>/api/notify</code> before launch.
A-U6	Resend down, slow or key wrong	Calm error, retry later, no PII in logs	<code>server</code> outcome, message "on our side" (site.ts:223). 8 s abort per call. Logs carry only error name and status. Bad key shape caught (handler.ts:62-75). If the contact saves but the welcome send hangs 8 s, total can pass the client 15 s timeout; visitor sees an error although saved, retries, and gets a second welcome (see A-U8).	BUILT+TESTED (NT 261-330, 457-477)	MINOR	Send the welcome without awaiting it (fire after response with <code>after()</code>), keep the contact create awaited.
A-U7	Welcome email not delivered (bounce, spam, domain not verified)	Sign-up still saved	UNVERIFIED Failure is logged and swallowed (provider.ts:331-337). Visitor is told "Look out for a short hello". No retry. Domain verification and DMARC: UNVERIFIED.	BUILT+TESTED (NT 499-516); delivery UNVERIFIED	MINOR	Before launch, send a real test to Gmail, iCloud and Outlook and read headers. Reword success line to not promise the hello.

Id	Trigger	Expected per docs	Actual per code	STATUS	Sev	Exact fix
A-U8	Same address entered again, or someone enters another person's address	Same answer; no one-way enumeration	UNVERIFIED Existing contact path still calls sendWelcome (handler.ts:126), so each repeat sends another welcome to that address (up to 5 per 10 min per IP). No double opt-in. A previously unsubscribed contact stays unsubscribed (provider.ts:294-295) but is told they are on the list and gets a welcome. Resend behaviour on create for an existing unsubscribed contact: UNVERIFIED.	BUILT+TESTED as designed (NT 228-258, 532)	MAJOR	Send the welcome only when <code>contacts.create</code> newly created the contact (not on the 409 path). For an unsubscribed contact, return a distinct internal outcome and word the reply neutrally. Consider double opt-in. Add a test.
A-U9	Mail app one-click unsubscribe (RFC 8058: POST, Content-Type: application/x-www-form-urlencoded, body List-Unsubscribe=One-Click)	2xx	UNVERIFIED Handler sets isForm on content type alone (unsubscribe-handler.ts:170), reads token from query, unsubscribes, then returns 303 to /unsubscribe?done=1 (:189). UT:66 sends the one-click without a content type, so it does not test the real request. Whether Gmail or Apple Mail accept a 303: UNVERIFIED.	CONFLICT	MAJOR	Treat as the page form only when the body has a <code>token</code> field (<code>form.has('token')</code>); otherwise answer 200. Add a test that sends the real header and body.
A-U10	Unsubscribe link tampered, truncated or expired	Safe failure	Bad signature: page shows "That link did not work" with mailto help (page.tsx:235-236); POST returns 400 or redirects <code>invalid=1</code> . Tokens never expire (by design). Without <code>UNSUBSCRIBE_SECRET</code> every link is invalid and emails use mailto only.	BUILT+TESTED (UT 50-62, 83-90); page untested	MINOR	none. Add a page render test.
A-U11	Unsubscribe link opened twice or by a scanner	Idempotent; scanner must not unsubscribe	GET only renders the confirm page; only POST acts; second POST just sets unsubscribed again.	BUILT+TESTED (UT 111 exports only POST)	n/a	none
A-U12	Launch day: App Store URL set	Badge replaces the form	Landing ignores <code>launch.mode</code> : still "Coming soon to iPhone" and the email form. The badge exists only in the film (Header, S11). Also the real badge asset is not in the repo (AppStoreBadge.tsx:63-65, text stand-in).	CONFLICT	BLOCKER (for launch day)	In Landing.tsx import <code>launch</code> and <code>AppStoreBadge</code> ; show <code>placement="start"</code> badge in the closing section and hero when <code>launch.mode === 'live'</code> ; add <code>public/brand/app-store-badge.svg</code> and <code>NEXT_PUBLIC_APP_STORE_BADGE=1</code> . Add a render test.
A-U13	Under 18 or "No" at the gate	Stop screen, nothing created, 24 h block, then question again	Matches (age-gate.logic.ts:31-42; age-gate-screen.tsx:163-184). Only the time of the No is stored. Uninstall and reinstall clears the block (SQLite settings, not Keychain). Changing the phone clock forward ends it early. iOS Declared Age Range not used.	BUILT+TESTED (logic); bypass by reinstall UNVERIFIED on device	MINOR	DESIGNED Accept as designed, or keep the stop time in Keychain. Implement Declared Age Range before submission if counsel requires (PRD-REQ-019).
A-U14	Wrong age (adult answers No by mistake)	"I answered by mistake" after 24 h	Matches; button only after the window (age-gate-screen.tsx:165-180).	BUILT (no test) BUILT (UI untested)	MINOR	none
A-U15	Birthday not touched, or wrong, or impossible	Continue disabled until a date is chosen (B-REQ-001); impossible dates refused	Birthday state starts at today (onboarding.tsx:139) and is saved as is, so a parent who skips the picker records a newborn born today and letters file under month 0. Future dates are blocked by the picker (<code>maximumDate</code> , :309). No lower bound, so 1850 is accepted locally; the server rejects dates before 1900 (create_child_row, children_entitlements.sql:280-281), which will fail at first sync.	CONFLICT (docs vs code)	MAJOR	Add a <code>birthdaySet</code> flag; keep Continue disabled until the picker changes (copy <code>birthdayHelp</code> already says why). Set <code>minimumDate</code> to 1900-01-01 and, ideally, 25 years back.

Id	Trigger	Expected per docs	Actual per code	STATUS	Sev	Exact fix
A-U16	Typo in name, wrong birthday or signature found after first run	Editable in Settings (B F2.2a)	Rows are read-only (settings/children/[id].tsx:49-51); no screen calls <code>updateChild</code> for these fields; no "is here" transition from expecting to born. Only fix is deleting the app.	MISSING	MAJOR	Add edit screens for name, date, signs-as and "{child} is here" (calls <code>updateChild</code> , store.ts:247-257, which already supports it).
A-U17	Denies microphone	Calm message, Type instead, no repeat nag	Denied state with Type instead, Open Settings, Close (listen.tsx:118-121,227-250). No pre-permission explanation screen before the OS prompt.	BUILT (no test)	MINOR	Add a one-line primer on the first Speak, test the denied branch.
A-U18	Denies or never sees notification prompt	Primer after first letter	No ask exists.	MISSING	MINOR (nothing breaks)	Build C-REQ-001 card on a later Tonight view.
A-U19	Declines analytics	Nothing sent, no change	Nothing is ever sent because there is no SDK and no sheet.	MISSING UI, safe default	MINOR	Wire @scribe/analytics and the consent sheet (PRD-REQ-001 order).
A-U20	No network at first launch	Entry, first run and first letter work offline	Onboarding and store are local SQLite; no network calls in the launch path. First spoken letter: model is not downloaded (BL-065), so Review offers to keep the recording until words can be made.	BUILT (no test) ; model MISSING	MAJOR	Ship the model download (Wi-Fi, resumable, SHA-256) or bundle a small model; show a calm "words will appear when ready" state on first letter.
A-U21	No network at sign-in	Buttons disabled with offline copy; Later stays	No sign-in.	MISSING	n/a now	Build with A26.
A-U22	Magic link expired, used, or opened on another device or in mail in-app browser	Page does not verify on load; shows code and Open app; one-tap resend	No page, no app handler.	MISSING	BLOCKER (when sign-in ships)	Build the confirm page; fix one URL shape in PRD A and TDD 04 first.
A-U23	Mail scanner prefetches the sign-in link	Token not burned	Not applicable yet (no link). The unsubscribe link is safe (A-U11).	MISSING (auth); BUILT for unsubscribe	BLOCKER (when sign-in ships)	Confirm page must not call <code>verify0tp</code> on load.
A-U24	Account already exists, wrong provider (Apple relay vs email)	"No book here yet" card, last-method hint	UNVERIFIED Not built. Server has no email-link logic in repo; Supabase auth config (OTP expiry 3600 s, manual linking, redirect allowlist, custom SMTP) is not in the repo: UNVERIFIED.	MISSING / UNVERIFIED	MAJOR (when sign-in ships)	Commit auth settings as config or document dashboard settings in ops.
A-U25	Kills the app during onboarding	Resume without losing data	Nothing is saved until the last tap; relaunch lands on Tonight, which redirects to onboarding from the welcome step (tabs/index.tsx:77). Typed names are lost. No partial child row.	BUILT (no test)	MINOR	none needed; optionally keep draft in memory store.
A-U26	Double tap on the final button	One set of children	<code>finish</code> has no guard (onboarding.tsx:165-181); a fast double tap can create duplicate books.	BUILT (no test)	MINOR	Add a <code>done</code> ref/state that disables the button; or create inside one transaction and early return.

Id	Trigger	Expected per docs	Actual per code	STATUS	Sev	Exact fix
A-U27	Twins	Same date, each own book, free, no Plus sheet	Matches (onboarding.tsx:166-177; max 6). Same signs-as for all. Names listed "Asha and Dev". Server batch tested.	BUILT (no test) BUILT (client no test); server TESTED	n/a	Add a store-level test for multi-child creation.
A-U28	Child name edge cases (blank, emoji, Devanagari, very long)	1 to 60 chars, any script	Blank blocked; sliced to 60; trimmed only at save. Whitespace-only blocked. Duplicate names allowed.	BUILT (no test)	MINOR	none
A-U29	Expecting date out of range	Today to +10 months	Picker enforces today to +305 days (:298-299); server allows up to +310 and back 400 days.	BUILT (no test)	MINOR	none
A-U30	Store listing promises vs app reality	Truthful metadata (App Review 2.3.1)	See section 4.	CONFLICT	BLOCKER for submission	Trim the listing to what ships (see section 4).
A-U31	Legal pages still draft	Final Privacy Policy before submission	All four documents <code>draft-for-counsel</code> , effective date TBD, site shows "being finalised" and noindex. Resend is the live store for waitlist addresses and welcome mail but is not in subprocessors.md (only a <code>{EMAIL_PROVIDER}</code> placeholder for auth SMTP, line 32).	CONFLICT	MAJOR	Add Resend (and name it as waitlist and notice sender) to docs/legal/subprocessors.md; counsel to finalise.

4. Claims versus reality (listing, site, docs)

Claim	Where	Reality in code
Optional backup, encrypted, recovery key, Vault mode	store.en.ts:23	BUILT (no test) backupNotYet in Settings; nothing built
Invite family to write from their phone	store.en.ts:32; caption "Grandparents can write too"	<code>listMembers</code> returns []; invite button disabled (tabs/family.tsx)
Speak Hindi, English, both in one sentence, any mix	store.en.ts:35	No language setting; site.ts header says "no mixing two languages in one letter" (site.ts:9). Listing and website disagree with each other.
Seven languages, each in its own script	site.ts:171	Model path is auto-detect only; Hindi script default undecided (D-031)
Export letters, recordings, PDF any time	store.en.ts:44	Export row disabled (<code>exportNotYet</code>)
Plus \$3.99 per month, \$29.99 per year, trials	store.en.ts:53; site.ts:201	BUILT (no test) Plus gate button disabled; subscription flow not built
"Both parents write in the same book"	site.ts:150	No accounts, no sync
"Delete account" in Settings > Your data	delete-account-copy.ts:253	Row disabled
Beta paragraph in listing	store.en.ts:55	D-030 recommends removing it (DECISIONS.md:38); still in the file

Claim	Where	Reality in code
Scheme was lumiraletters (gap)	TDD 04:47	Fixed: brand.scheme is scribe (stale doc)
Bundle id, privacy URL, support email	packages/brand/index.ts:27-34	Still example.com placeholders; website hardcodes earlyletters.com (site.ts:263,269; next.config.ts:67)

5. Docs that disagree with each other

- 1. Order of welcome screen and 18+ gate: D-043 (welcome, then gate) vs PRD-REQ-019 and code (gate first).
- 2. Magic-link URL: PRD A F5 /auth/confirm?token_hash= vs TDD 04 /a#th= and the AASA file (/a).
- 3. A-REQ-005, -012 in PRD.md still reference story 4 and intro actions that the 1.3 banner removes.
- 4. CLAUDE.md test counts are stale (mobile 52 not 31; web 148 are not listed at all).
- 5. Privacy-policy subprocessors page lists "magic-link landing page" as hosted on Vercel; it does not exist.

6. UNVERIFIED

Resend domain verification and deliverability; Vercel WAF rate-limit rule; Supabase Auth dashboard settings (OTP expiry, SMTP, redirect allowlist, manual linking); Gmail and Apple Mail handling of a 303 on one-click unsubscribe; Resend behaviour when creating a contact that already exists and is unsubscribed; reinstall bypass of the age gate on a real device; the whole app on a real iPhone (I ran no simulator).

Segment B: the core loop (open the app, say or type a letter, keep it)

Read-only validation. Repo state at HEAD 96bda86. Nothing in the repo was changed. Scratch scripts: `journey/b-prompts.mts`, `b-norm.mts`, `b-undo.mts` (this folder).

Test runs (executed)

Suite	Result
<code>npx vitest run in packages/core</code>	6 files, 237 passed , 0 failed (verify 82, core 40, repeats 40, fuzz 2 at 10,000 generated edit lists, plan 58 (entitlements, not segment B), providers)
<code>npx vitest run in apps/mobile</code>	7 files, 52 passed , 0 failed (sweep 12, migrations 8, type-scale 15, dates 6, age-gate 5, lamp-wash 4, motion 2)
<code>npm run test:db</code>	UNVERIFIED NOT re-run by me. The server <code>raw_transcript</code> trigger is UNVERIFIED by me (it is asserted by CLAUDE.md and supabase/tests).

Doc drift: CLAUDE.md says "mobile (31)" but there are 52 tests, and says "104 prompts" but `PROMPTS` holds **103** unique keys (run via `b-prompts.mts`). Minor.

There are **no tests** for `listen.tsx`, `recorder.ts`, `write.tsx`, `review.tsx`, store save or discard, Tonight, or the letter detail. Every mobile screen row below is "BUILT (no test)" except where a pure function is tested.

Constitution check: does any path write or rewrite words outside EditType through verifyEdits?

- Machine path on spoken words: `faithfulClean` (`packages/core/src/pipeline.ts:166-208`) sends dictionary, filler, repeat, model and rule edits through `verifyEdits` (`verify.ts:423`). Review calls it with `level: 'clean'` and a dictionary only (`review.tsx:127`). No model or punctuation providers are wired into the app (grep: no `ruleEdits`, `modelEdits` or `accept Suggestions` in `apps/mobile`). **Verified. Good.**
- Violation 1 (CONFLICT, major):** `normalizeChars` and `.trim()` run outside `EditType` and outside `verifyEdits`, on typed text and spoken text alike. `cleanedText = normalizeChars(applyEdits(raw, applied)).trim()` (`review.tsx:180`); also `pipeline.ts:201, 225` and `segments()` at `pipeline.ts:251`. For a typed letter, `applied` is always `[]` (`review.tsx:126`), yet `finalText` still differs from what the person typed. Executed in `b-norm.mts`: She said "hi" – and I'm so proud... Born 2020–2021. becomes She said "hi", and I'm so proud... Born 2020-2021. The em dash became a comma and no edit is recorded, so it cannot be reversed. iOS smart punctuation produces curly quotes by default, so this hits ordinary typing. Raw is preserved (typed text is stored as `raw_transcript`), so it is recoverable, but not through the verified and reversible path.
- Violation 2 (CONFLICT, major): "Not much today" writes product-authored sentences into the person's entry.** `index.tsx:83-103` stores `rawTranscript = finalText = "{weekday}". Not much today. Just {child}, and us, and an ordinary day."`, `captureMode: 'typed'`, signed with the parent's name. `COMPONENTS.md:400` specifies the hint "Marks today without writing anything." `templateAlt` (`strings.en.ts:190-194`) holds mood lines such as "Tired tonight. Loved {child} all day anyway." and is unused today.
- Person's own inline edit (`userText`, `review.tsx:431-440`) is stored as `finalText` without verification. That is correct under the constitution because it is the person typing, but `machineEdits` is still saved alongside text that no longer equals `applyEdits(raw, applied)` (`review.tsx:256-257`).
- `raw_transcript` immutability on device: enforced only by SQL shape (`setDraftTranscript ... WHERE raw_transcript IS NULL`, `store.ts:661-663`; `ON CONFLICT` omits raw, `store.ts:398-402`; `setWordsForWaitingEntry` guard, `store.ts:499-514`). The local SQLite has no trigger. The Postgres trigger is server-side (UNVERIFIED by me).

- `withoutEdit` (pipeline.ts:223-226) re-derives text from the remaining edits without re-running `verifyEdits`. In `b-undo.mts` a rule-punctuation put-back gave `um Today Asha la` ughed... and `verifyEdits` re-check rejected nothing, so I could not demonstrate a violation. It is latent and not reachable now, since the punctuation provider is not wired. UNVERIFIED, minor.

Step table

ID	Customer action	System response	Code (file:line)	Tests	STATUS
B1	Opens app on an ordinary evening	Tonight shows greeting, dateline "Child · age", one prompt, Speak, Type and Not much today. Redirects to onboarding if no family.	apps/mobile/src/app/(tabs)/index.tsx:26-81, 111-176	none for the screen; <code>ageOn</code> in <code>core.test.ts:258-270</code>	BUILT (no test)
B2	(system) picks tonight's prompt	<code>selectPrompt</code> is deterministic by <code>date:shuffle</code> seed. Kind order hard, together, family, gap (5 or more days), opening. Band by age months. Avoids the last 10 keys. Opening prefers age-specific prompts 2 nights in 3. Age 61 months or more falls back to <code>any</code> .	packages/core/src/prompts.ts:24-93; index.tsx:59-74; content: 103 prompts	core.test.ts:285-309; I executed all bands 0 to 100 months (<code>b-prompts.mts</code>)	BUILT+TESTED (count is 103, not 104). Note: <code>hardStretch:false</code> , <code>role:'parent'</code> , <code>together:false</code> are constants (index.tsx:63-67), so hard, family and together prompts are never shown. Together is intentionally flagged off (PRD-REQ-005). There is no "hard day" control: DESIGNED.
B3	Taps "New prompt"	Re-seeds, animated swap.	index.tsx:127-135	none	BUILT (no test)
B4	Taps Speak	Haptic, push <code>/listen</code> with <code>promptKey</code> .	index.tsx:105-109	none	BUILT (no test)
B5	Listening opens, mic permission	Uses existing grant or asks. Denied shows the "We can't hear you yet" card with Type instead, Open Settings and Close. No first-Speak primer (TDD 03 3.1 recommended one).	listen.tsx:115-121, 227-247	none	BUILT (no test) ; primer DESIGNED
B6	Recording starts	Audio mode <code>doNotMix</code> ; <code>prepareToRecordAsync</code> , then the draft row is written (state <code>recording</code> , file path), then <code>record()</code> . AAC M4A mono 64 kbps. Never records in background.	listen.tsx:39-50, 123-129; recorder.ts:384-395; audio-mode.ts:263-274	sweep.test.ts covers the recovery side only	BUILT (no test)
B7	Sees the aura and timer	Aura driven by metering on the UI thread (no per-frame setState), 20 Hz poll, "still here" nudge after 8 s below -50 dB, VoiceOver announces once a minute, Reduce Motion respected.	listen.tsx:75-92, 250; components/capture/listening-aura.tsx:41-90	none (lamp-wash, motion tests are unrelated)	BUILT (no test)
B8	Pause and resume	<code>recorder.pause()</code> or <code>record()</code> ; aura shows paused.	listen.tsx:181-193	none	BUILT (no test)
B9	Taps Finish	<code>finalizeTake</code> stops, sets audio mode idle, hashes SHA-256, marks draft <code>ready</code> (or <code>unrecoverable</code> if 0 bytes), haptic, <code>router.replace('/review')</code> . Idempotent per draft.	listen.tsx:104-113, 195; recorder.ts:402-437	none	BUILT (no test)
B10	Taps Let it go (discard)	Confirm alert, then stop, delete file, delete draft. The only place audio is deleted.	listen.tsx:197-221; recorder.ts:440-445	none	BUILT (no test)
B11	Draft progress every 5 s	<code>audio_duration_ms</code> written so a recovered take has a length.	listen.tsx:94-101; store.ts:620-626	none	BUILT (no test)

ID	Customer action	System response	Code (file:line)	Tests	STATUS
B12	Taps Type	<code>/write</code> with the prompt shown. Text autosaves to a draft 500 ms after typing stops.	write.tsx:260-288, 326	none	BUILT (no test)
B13	Taps Save in write	Persists, haptic, <code>router.replace('/review')</code> . Button disabled when text is blank.	write.tsx:298-304, 320	none	BUILT (no test)
B14	Review opens on a spoken take	MISSING Phase transcribing runs <code>getTranscriber()</code> ; whisper missing means waiting. Raw is set once with <code>setDraftTranscript</code> . Words are cleaned once with <code>faithfulClean</code> .	review.tsx:97-98, 125-154; transcribe.ts:69-74	engine: <code>verify.test.ts</code> (82), <code>core.test.ts</code> , <code>repeats.test.ts</code> , <code>verify.fuzz.test.ts</code>	BUILT (no test) Engine BUILT+TESTED. Screen BUILT (no test). Whisper path: see B-U7 (never available).
B15	Reads the review text	Edits shown as dotted underlines; a pure removal is a 28 pt mark with a 44 pt target; every edit is also a list row (VoiceOver path).	components/capture/transcript.tsx:28-83; review.tsx:176-179, 507-524	<code>segments()</code> is exercised in core tests only (reversibility, <code>core.test.ts:226</code>)	BUILT (no test) BUILT (no test for the component)
B16	Taps an edit, "Put it back"	Card shows the original and the tidied text; <code>withoutEdit</code> re-derives; accent wash 1.6 s; Undo re-inserts.	review.tsx:183-201, 465-498; pipeline.ts:223-226	<code>core.test.ts:226-257</code> (reversibility)	BUILT+TESTED (engine). UI untested.
B17	"N small fixes" count	<code>plural(applied.length, "1 small fix", "{count} small fixes")</code> ; zero shows "Word for word. Nothing needed fixing."	review.tsx:502-506; lib/copy.ts:67	<code>dates.test.ts:33</code> ("1 small fix")	BUILT+TESTED (copy only)
B18	"Keep it word for word" / "Show what I said"	Clears all edits or shows raw.	review.tsx:203-209, 441-447, 526-534	none	BUILT (no test)
B19	Inline edit of the words	<code>TextInput</code> over <code>finalText</code> ; stored as <code>userText</code> . After this, the edit rows, restore and show-original controls vanish (<code>review.tsx:502</code>) and <code>wordForWord</code> does not clear <code>userText</code> . There is no way back to the machine text except leaving.	review.tsx:431-440, 502, 539-541	none	BUILT (no test) ; see B-U12
B20	"Please have a read" note (K-14)	Shown once after the first spoken transcript, never for typed.	review.tsx:116, 379-392	none	BUILT (no test)
B21	"Does this sound like you?"	Stored as <code>sounds_like_me</code> .	review.tsx:544-565	none	BUILT (no test)
B22	Picks whose book	Dateline taps open the sheet if more than one child; changes the draft's child. The "To {child}" label is not literally shown.	review.tsx:211-220, 360-367	none	BUILT (no test)
B23	Hear it (playback in review)	Mini player; audio mode playback, then idle.	review.tsx:156-172, 350-355	none	BUILT (no test)

ID	Customer action	System response	Code (file:line)	Tests	STATUS
B24	Taps Add to {child}'s book or Keep private	Commit order is commit, haptic, animate: ensureAudioHash , then saveLetterFromDraft (one transaction: INSERT entry plus DELETE draft), then finishSave (success haptic, state, spring settle, chip fade, back after 900 ms). Reentry guarded by saving ref.	review.tsx:227-274, 573-582; store.ts:437-446; recorder.ts:453-462	migrations.test.ts covers schema only; no save-transaction test	BUILT (no test)
B25	Voice-only save	When no words: "keep the recording" saves a waiting letter (private).	review.tsx:277-296, 584-590; store.ts:452-482	none	BUILT (no test)
B26	Typed letter into Review	Starts at ready , level verbatim, no machine edits. Text is still passed through normalizeChars (see Violation 1).	review.tsx:93-106, 180	none	BUILT (no test) ; CONFLICT (normalizeChars)
B27	Not much today	One tap writes a not_much entry with product text; toast "Kept. Rest well." No undo, no "Add a few words".	index.tsx:83-103, 163-171	none	BUILT (no test) ; CONFLICT (Violation 2)
B28	Returns after a back-out, kill or crash	Tonight lists the newest waiting draft; tap opens /review (spoken) or /write (typed). Only the newest is shown.	index.tsx:37-41, 139-147; store.ts:654-659	none	BUILT (no test) ; see B-U19
B29	Recording storage and launch sweep	Once per process after the gate: finalize recording drafts with bytes, mark empty unrecoverable , drop rows with no file, rebase moved paths, re-attach stray files as drafts on the active child, report the rest, never delete audio.	sweep.logic.ts:76-118; sweep.ts:163-225; _layout.tsx:59-61	sweep.test.ts (12 tests, plan only; the apply step in sweep.ts is untested)	BUILT (no test) Plan BUILT+TESTED; apply BUILT (no test)
B30	Opens the letter	Dateline from occurredOn plus child age, text, signature, provenance, "show original" when raw differs from final, in-book toggle, delete with undo. Play button is disabled ("Playback is not wired yet") .	app/letter/[id].tsx:90-96, 153-167	dates.test.ts:27 (dateline)	MISSING Reading BUILT (no test). Playback on detail: MISSING (disabled, line 155)
B31	Month filing by age	occurredOn = local date of draft.createdAt ; chapter = completed months (ageOn with end-of-month clamp); before birth goes to "Before You".	review.tsx:249; store.ts:166-168; chapters.ts:20-24; age.ts:193-209, 237-239	core.test.ts:258-270 (ageOn, chapterOf); dates.test.ts:22	BUILT+TESTED (core). Screen wiring untested.
B32	Safety tiers (on device only)	classify() exists and is tested. Nothing in apps/mobile calls it and there is no tier UI or local storage. Server side is clean: safety_events is dropped (supabase/migrations/20261002020000_data_governance.sql:277).	packages/core/src/safety.ts:139-143	core.test.ts:311-328	MISSING Core BUILT+TESTED; app wiring MISSING (BL-142, D-034; copy is marked pending clinician review)
B33	Word alignment (for Read together)	No alignment projection exists (no "alignment" symbol in apps or packages).	none	none	DESIGNED (TDD 03 3.8, BL-145)
B34	Whisper transcription	Adapter exists, but see B-U7.	transcribe-whisper.ts:103-175; transcribe.ts:69-74	none	BUILT (no test) BUILT (not functional)

Unhappy paths

ID	Trigger	Expected per docs	Actual per code	STATUS	Severity	Exact fix
B-U1	Mic permission denied at start	Typed path plus Open Settings, no repeated OS prompt (TDD 03 3.1)	Denied card with Type instead, Open Settings, Close (listen.tsx:227-247). If prepareToRecordAsync or any start step throws before a draft exists, the catch sets denied too (listen.tsx:131-135), so a storage or audio-session failure shows "Allow the microphone in Settings", which is wrong.	BUILT (no test) ; mislabelled on non-permission errors	MINOR	Add a separate error phase with copy.errors.generic and Type instead; keep denied only for !permission.granted.
B-U2	Mic permission revoked mid-recording	Keep the take	iOS terminates the app when mic permission changes in Settings. The draft row (state recording) exists, so the next launch sweep finalizes it (sweep.logic.ts:92-96).	BUILT+TESTED (plan: sweep.test.ts:12). Device behaviour UNVERIFIED.	n/a	None. Verify on a device.
B-U3	Phone call, Siri, alarm interrupts	TDD 03 FM-1 and 3.2 rule 2: treat as pause, persist, never auto-resume	Code ends the take and opens Review (listen.tsx:152-165), not pause. Detection is likely broken: the effect depends on [status.durationMillis, phase, recorder] (listen.tsx:160). When the native recorder stops, durationMillis freezes, so the effect does not re-run and isRecording is never re-read. The screen can sit on "listening" with a frozen timer while the parent talks into nothing. The audio before the interruption is kept; the rest is lost. RecorderState.isRecording exists (node_modules/expo-audio/build/Audio.types.d.ts:282) but is not used.	BUILT (no test) BUILT, UNVERIFIED on device (no test); likely defect plus a doc deviation (CONFLICT with FM-1 on pause versus finish)	MAJOR	Include status.isRecording in the effect deps and test !status.isRecording & seenLive.current (listen.tsx:152-160), or poll recorder.isRecording on a 250 ms interval. Decide pause versus finish per FM-1 and update TDD or code.
B-U4	App backgrounded mid-recording	Stop and finalize within 1 s, keep (FM-2)	UNVERIFIED AppState background calls endTake('background') (listen.tsx:142-148); finalize is idempotent (recorder.ts:402-437). inactive is ignored on purpose. Whether iOS lets stop() and the hash finish after backgrounding is UNVERIFIED.	BUILT (no test) ; timing UNVERIFIED	MINOR	Add a device test (T-CAP-03) and a unit test of finalizeTake idempotency with a fake recorder.
B-U5	App killed or crashed mid-recording	Draft recovered, audio kept (FM-3)	UNVERIFIED Draft row exists before the mic is live (recorder.ts:386); the sweep finalizes or marks unrecoverable and never deletes (sweep.logic.ts:76-118). Whether a killed M4A is readable (moov atom) is UNVERIFIED (TDD 03 3.2 rule 4 flags it).	BUILT+TESTED (plan only)	MINOR	Run the 500-iteration kill test (BL-043). If unreadable files are common, switch to ADTS or remux.
B-U6	Battery or storage full; disk full	Warn below 1 GB, refuse below 50 MB, auto-finish below 20 MB (FM-5)	No free-space check anywhere (grep: no disk-space call in apps/mobile). Copy errors.storageLow exists in strings.en.ts:722 and is unused. A write error mid-take reaches the hasError callback (listen.tsx:71-74) and ends the take (the callback sets interrupted, which triggers endTake). Save failure on a full disk shows the generic message and keeps the draft (review.tsx:270-273).	MISSING (pre-check); partial recovery BUILT	MAJOR	Before beginTake, read free space (Paths.availableDiskSpace); warn at 1 GB with errors.storageLow, refuse at 50 MB; every 30 s while recording auto-finish at 20 MB (TDD 03 3.2 rule 5).
B-U7	MISSING Transcription model missing, not downloaded, or no decoder	Voice-only letter waits for words (FM-9)	MISSING availability() always returns 'decoder-missing' when the module and model exist (transcribe-whisper.ts:145-150) and pcmFor throws for any non-WAV (lines 133-137), and recordings are M4A. So getTranscriber() returns null in preview and production builds (transcribe.ts:69-74) and no spoken letter can ever be transcribed in a shipped build. Review falls to waiting with "keep the recording" (review.tsx:400-419, 584-590). The model downloader does not exist (BL-143), so the 574 MB turbo (or 190 MB small, FM fallback) never arrives. Only the dev sample transcriber works, and only in the development profile (build-env.ts:40).	BUILT (no test) BUILT (stub) / MISSING (decoder BL-140, engine BL-141, downloader BL-143). The fallback is safe: nothing is lost.	BLOCKER for "talk and get words"	Build scribe-audio-decode (BL-140), the chunk planner and whisper engine (BL-141), and the model manager (BL-143: Wi-Fi default, resumable, SHA-256 check). Until then say plainly in the UI that words will arrive later.

ID	Trigger	Expected per docs	Actual per code	STATUS	Severity	Exact fix
B-U8	Transcription slow or crash	Single job per draft, resume after kill (FM-6, FM-7, FM-18); budget 30 s for 2 min	No timeout, no progress, no cancel (the AbortSignal is never passed, review.tsx:138). No background abort or resume. <code>transcribe()</code> stale-attempt guard exists (review.tsx:133, 139). A crash lands in <code>waiting</code> with Try again (review.tsx:144-148, 409-413). A killed job leaves a draft with no transcript, so the next open starts over.	BUILT (no test) PARTIAL (BUILT, no test)	MAJOR once B-U7 is fixed	Add an <code>AbortController</code> , a timeout, an app-background abort, a persisted job state (BL-142).
B-U9	Silence or noise only	VAD returns <code>no_speech</code> , raw is <code>''</code> , Review offers typed path with "nothing to write down" copy (FM-11, 3.5.7)	<code>stripNonSpeech</code> is tested but called nowhere (grep). No VAD. If the engine returned <code>''</code> , Review enters <code>ready</code> with an empty card, Save disabled (<code>!finalText.trim()</code>), review.tsx:575) and no type-instead or keep-recording button (those render only in <code>waiting</code> or sample, review.tsx:584). The only way forward is the unlabeled "Edit text" link (review.tsx:539). Reopening re-runs transcription because <code>rawTranscript</code> <code>''</code> is falsy (review.tsx:97-98).	MISSING	MAJOR (once transcription works)	In <code>transcribe()</code> , when <code>res.raw.trim()===''</code> go to <code>waiting</code> with a no-words message and both buttons; call <code>stripNonSpeech</code> on engine output (core, text.ts:99); add VAD (BL-141).
B-U10	Language mismatch or mixed language	Languages and Hindi script drive transcription (B-REQ-003); wrong language handled by show-original, audio, typing (FM-14)	The app has no language setting (grep). <code>transcribe</code> input <code>language</code> is never passed, so it is always <code>'auto'</code> (review.tsx:138; transcribe-whisper.ts:160). No Hindi script choice. Show original and Edit text exist.	MISSING	MAJOR (B-REQ-003 is P0)	Store languages and script on the family or child; pass <code>language</code> and the dictionary prompt into <code>transcribe</code> . Add corpus tests (TDD 03 7.3).
B-U11	<code>verifyEdits</code> rejects an edit	Edit silently not applied; rejects reported	<code>faithfulClean</code> returns <code>rejected</code> , and Review ignores it (review.tsx:127). The person sees only accepted edits. Rejections are not stored.	BUILT+TESTED (core: verify.test.ts, fuzz)	MINOR	None needed for faithfulness. Optionally keep <code>rejected</code> for the debug view.
B-U12	User edits the text, then wants to undo	Reversible	After typing in the inline editor, <code>userText</code> replaces the transcript view, hides the edit rows, "Keep it word for word" and "Show what I said" (review.tsx:448-451, 502), and nothing resets <code>userText</code> . The person cannot return to the cleaned text without leaving Review, and edits typed in Review are lost on Close. <code>machineEdits</code> is saved next to a <code>finalText</code> it no longer explains (review.tsx:256-257).	BUILT (no test) ; gap	MINOR	Add a "Back to the tidied words" action that sets <code>userText=null</code> ; when <code>userText</code> is set, save <code>machineEdits</code> as shown but also store <code>editedByAuthor</code> , or save <code>machineEdits=[]</code> and mark the author layer (TDD 03 4.4).
B-U13	Put it back, then Undo	Restores the edit	MISSING <code>undoPutBack</code> re-inserts the edit without re-verification (review.tsx:194-201). A second put-back before dismissing the first overwrites the stored undo (restored holds one entry, review.tsx:109, 188). A child switch re-runs <code>faithfulClean</code> on a dictionary change and wipes all put-backs silently (review.tsx:125-128, dictionary memo at 119-122).	BUILT (no test)	MINOR	Keep a stack of removed edits. Make the clean effect depend on <code>raw</code> , not on <code>dictionary</code> , or merge existing restorations.
B-U14	Save fails (disk or database)	Letter intact, retry	MISSING <code>saveLetterFromDraft</code> is one transaction (store.ts:437-446). On a throw: <code>saving=false</code> , message shown, draft intact (review.tsx:270-273). The message is the generic copy with no cause, and <code>AudioMissingError</code> has no specific copy.	BUILT (no test)	MINOR	MISSING Test with a faulty DB adapter (the kill-during-save gate, PRD 7.4: 500 iterations). Add distinct copy for missing audio.

ID	Trigger	Expected per docs	Actual per code	STATUS	Severity	Exact fix
B-U15	Double tap on Save	One letter	<code>saving</code> ref set synchronously before the first await (review.tsx:237-241): one save. Residual: <code>finishSave</code> schedules <code>router.back()</code> after 900 ms (review.tsx:233) and the saved card also calls <code>router.back()</code> on press (line 322), so a tap during the animation calls back twice. In write.tsx, <code>done()</code> has no re-entry guard, so two taps in one frame can queue two <code>router.replace</code> calls (write.tsx:298-304).	BUILT (no test) ; minor residual	MINOR	Clear the timer on press, or navigate only once; add a <code>once</code> ref in <code>done()</code> .
B-U16	Back gesture or Close during Review	Letter never discarded (constitution; PRD-REQ-025)	Review has <code>gestureEnabled:false</code> (_layout.tsx:82). Close calls <code>router.back()</code> (review.tsx:347). The draft, audio and stored raw transcript remain, and Tonight shows the waiting row (index.tsx:139-147). Words are not lost . Only unsaved in-Review state is lost (inline edit text, put-backs, sounds-like-me answer). A first-ever tap on Close while <code>transcribing</code> leaves the job running with no record of the result.	BUILT (no test) ; words safe	MINOR	Persist <code>userText</code> on the draft (a column) so a back-out keeps the person's own edits too.
B-U17	Typed letter empty	Save disabled; empty typed draft is nothing	Save disabled when blank (write.tsx:320). <code>persist</code> creates no draft for blank text (lines 262-265). Close deletes an empty typed draft that has no audio (line 293).	BUILT (no test)	none	Add tests for write.tsx draft lifecycle.
B-U18	Typed letter: swipe-down or system dismiss within 500 ms of typing	Nothing lost ("a closed sheet or a crash loses nothing", write.tsx header)	Unmount cleanup only clears the timer; it does not flush (write.tsx:283-288). Write is a modal with the swipe gesture enabled (_layout.tsx:80). Up to 500 ms of typing is lost on swipe-dismiss, backgrounding, or a kill.	BUILT (no test) BUILT; defect	MAJOR (words lost, against the durability rule)	In the unmount cleanup and on <code>AppState.inactive/background</code> , call <code>persist(latestText)</code> synchronously (keep text in a ref); debounce to 250 ms.
B-U19	Many waiting drafts	All visible	Tonight shows only <code>listDrafts(childId)[0]</code> (index.tsx:40). Older drafts, including sweep-recovered ones, have no list entry on Tonight. They are visible only through Settings > Recordings (not read for this task).	BUILT (no test) BUILT; gap	MINOR	UNVERIFIED Show a count or list, or open a "Waiting" screen. UNVERIFIED whether Settings lists drafts.
B-U20	Child switched mid-flow	"To {child}" visible during recording and Review, changeable before save (PRD-REQ-012)	Listen captures the child at mount (listen.tsx:64, 125) and shows "To {child}" (line 255) but it is not changeable there; Review can change it (review.tsx:216-220). Tonight has no child switcher (only <code>book.tsx:49</code> uses <code>ChildSwitcher</code>), so changing the active child requires leaving Tonight. The write screen uses the active child, not the draft's child, for the dateline (write.tsx:250, 307).	CONFLICT PARTIAL / CONFLICT with PRD-REQ-012 (Tonight "For {child}" switcher)	MINOR	Add <code>ChildSwitcher</code> to Tonight; in write.tsx read the child from the draft when <code>draftId</code> is given.
B-U21	Clock or time zone change; device date wrong	Age uses local calendar days (age.ts header)	<code>occurredOn</code> is computed at save from <code>draft.createdAt</code> in the device's current time zone (review.tsx:249; store.ts:166-168), not the zone at creation. A wrong device clock files the letter in the wrong month with no warning (<code>ageOn</code> before birth returns negative days, so the chapter goes to "Before You", chapters.ts:22). There is no way to change a letter's date after saving (no date control in letter/[id].tsx). Tonight's <code>today</code> is computed on render and is not refreshed after midnight without a focus change (index.tsx:56).	BUILT (no test) BUILT (no test for the wiring); gap	MINOR	Store the creation time zone offset with the draft, or save <code>occurredOn</code> at draft creation; add "Change the date" on the letter. Warn when the device date is before the birthday or far in the future.
B-U22	Headset or Bluetooth mic unplugged	Take kept	UNVERIFIED Same detection as B-U3 (isRecording poll), so same flaw. A route change may keep recording on the built-in mic. UNVERIFIED.	UNVERIFIED	MINOR	Test on a device after fixing B-U3.

ID	Trigger	Expected per docs	Actual per code	STATUS	Severity	Exact fix
B-U23	Very long recording	Not specified beyond the storage budget	No maximum length. 64 kbps is about 29 MB per hour. The aura and timer are fine. Transcription of a long file has no chunking (BL-141). The <code>finalizeTake</code> hash reads the whole file into memory (<code>f.bytes()</code>), recorder.ts:370), a spike for hours of audio.	MISSING (cap and streaming hash)	MINOR	Stream the hash or use a native module (TDD 03 3.3); add a soft limit prompt after a long recording.
B-U24	Discard fails to delete the file	Audio gone after confirmed discard	<code>new File(uri).delete()</code> errors are swallowed (listen.tsx:211-216), then the draft row is deleted. The next launch sweep sees an unclaimed file and re-attaches it as a draft on Tonight (sweep.logic.ts:112-115), so a "discarded" recording can reappear.	BUILT (no test) BUILT; defect	MINOR	If the delete throws, record the file name in a local <code>discarded_audio</code> table and have the sweep skip it, or retry the delete at the next launch.
B-U25	Free-letter limit reached while a letter is in progress	Never discarded; stays on phone, Plus offered (PRD-REQ-025)	No allowance check exists on save (<code>hasPlus()</code> is a stub, store.ts:302-304), so nothing is blocked or discarded now.	DESIGNED	none now	Implement per PRD-REQ-024 and -025 with a test that an over-limit save keeps the draft.
B-U26	Not much today tapped twice	One line per day	Button swaps to a toast after the first tap (index.tsx:163-171), but two taps in one frame can write two entries, and the state resets on every focus (line 52), so it can be repeated all day. No undo toast (COMPONENTS.md:324 says there should be one).	BUILT (no test)	MINOR	Use a re-entry ref; check whether a <code>not _much</code> entry already exists for <code>today</code> ; add undo.
B-U27	Typed text with iOS smart punctuation	Words saved as typed	Curly quotes and em dashes are rewritten at save (Violation 1).	CONFLICT	MAJOR	Normalize only machine-produced text, or store typed <code>finalText</code> untouched and normalize at render.

Honest summary of what a real customer gets today

- Typing a letter and keeping it works end to end on device, but the typed words go through `normalizeChars` (Violation 1), and "Not much today" writes words the person did not say (Violation 2).
- Speaking a letter records and keeps audio safely (draft first, sweep, idempotent finalize), and Review can keep it as a voice-only letter. **No words can be produced in a shipped build** (B-U7). The engine, verifier, and Review underline UI are done and tested, but nothing feeds them real transcripts outside the development profile.
- Safety tiers are not wired. The letter detail has no playback. Alignment is not built. There is no language setting.
- Screens have no automated tests. The engine and sweep plan do.

UNVERIFIED (could not check here)

Device behaviour of interruptions, backgrounding, kill recovery and headset removal; `npm run test:db` and the server trigger; Settings > Recordings content; Book rendering of `not _much` entries; sync (not built; sign-in is not built).

Segment C: life with the book (validation, read-only)

Repo state: clean (git status empty before and after). Date 2026-10-04.

Test results (run offline, all passed)

- `npm run test:db`: 8 files, ALL PASSED. access_matrix 479 checks (504 matrix cells), children_entitlements 46, classification 6, data_governance 96, perf 15, purge_batching 16, rls 40, security_family 97 (total 795).
- `npm test -w @scribe/mobile`: 7 files, 52 tests passed (CLAUDE.md says "mobile (31)": doc drift, minor).
- `npm test -w @scribe/core`: 237 passed (matches CLAUDE.md).
- Full `npm test`: also content 16, analytics 39, tokens 8 (CLAUDE.md says 4), experiments 11, web 148. Zero failures.
- Mobile tests cover only dates, migrations, sweep, age-gate, lamp-wash, motion, type-scale (apps/mobile/test). NO test touches Book chapters (chapters.ts), letter detail, read-together, store.ts entry/child functions, Family, Settings. So every "BUILT" mobile row below is BUILT (no test) unless stated.

Headline finding

The server half of "life with the book" (invites, roles, approval, leave, last-parent guard, per-child sharing, delete/restore) is built and heavily tested in Postgres (supabase/migrations + supabase/tests). The phone half is local-only: `currentUserId()` returns null (apps/mobile/src/lib/store.ts:297), `hasPlus()` returns false (:302), `listMembers()` returns [] (:327), no supabase or PowerSync dependency in the mobile app (no match in apps/mobile/package.json; store.ts header says "Sync to Supabase comes later (PowerSync, ADR 0004)"). No client code calls any family RPC. Invite, approval, remove, leave, sync, export, backup, audio playback and Read-together highlight are therefore not reachable by a customer.

Journey rows

ID	Customer action	System response	Code (file:line)	Tests	STATUS
C1	Opens Book tab	Letters grouped by month of age, newest first, header "For {child}", counts and "From X" line per section; Before You chapter	apps/mobile/src/app/(tabs)/book.tsx:101-122 (SectionList); components/book/chapters.ts:383-402 groupChapters, :370 monthFor	none (core chapter0 f /ageOn covered in packages/core tests; chapters.ts untested)	BUILT (no test)
C2	Sees a letter card	Date, 2-line serif excerpt, "From X", Private chip if not in book, "Hear" pill if spoken, VoiceOver label	components/book/letter-card.tsx:276-337	none	BUILT (no test) . The "Hear" pill is a placeholder (:324-332), not a control
C3	Book with no letters	Empty state title/body/CTA to Tonight	book.tsx:87-99	none	BUILT (no test)

ID	Customer action	System response	Code (file:line)	Tests	STATUS
C4	Current month has no letter	"This month" soft card	book.tsx:38,72-81	none	BUILT (no test)
C5	Opens a letter	Reading page, dateline, text, signature, provenance line ("recording on this phone")	app/letter/[id].tsx:113-151	none	BUILT (no test)
C6	Taps "Hear {name}"	Nothing: button is permanently disabled	letter/[id].tsx:153-159 ("Playback is not wired yet") ; letter-card.tsx:325	none	DESIGNED (TDD 03/ADR; UI shell only). Core promise of the product is not playable
C7	"Show exactly what I said"	Toggles raw_transcript vs final_text, own letters only, only when they differ	letter/[id].tsx:94,129-131,161-167	none (server column-hiding tested: security_family, access_matrix)	BUILT (no test)
C8	Move to book / Make private	Updates in_book locally, toast	letter/[id].tsx:98-104,171-174; store.ts:535 setEntryInBook	none	BUILT (no test) . Local only; no sync
C9	Delete a letter	Tombstone, undo screen stays until tapped, no timed nav	letter/[id].tsx:106-111,50-72; store.ts:541-549	server delete_entry/restore_entry: data_governance.test.mjs (TC-08 etc.), access_matrix	BUILT (no test) locally; server BUILT+TESTED
C10	Read together	Large Print, one letter at a time oldest first, crossfade, prev/next, end screen	app/read-together.tsx:236-369; book.tsx:61-71 (button only if some in-book letter)	none	BUILT (no test)
C11	Word highlight / hearing while reading	No audio, no highlight; line says recording is on the phone	read-together.tsx:2-5 comment ("arrives with the audio player"), :152	none	DESIGNED . Highlight status: MISSING in code
C12	Free Read together sessions	3 free sessions counted per phone in a setting, then Plus gate with disabled Plus button	lib/read-together.ts:378-395; read-together.tsx:39,52-60,64-77	none	BUILT (no test) . CONFLICT: TDD 02 OQ-B8 recommends per book on server (docs/tdd/02-sync-backend.md:598); code is per device; D-009 says per Free book
C13	Invite by link	Family tab invite button	(tabs)/family.tsx:70-75 <Button disabled> "needs sign-in". Server: create_child_invite security_family.sql:317-347 (role explicit, parent only, 7d parent / 14d family, 20/day limit, hashed token)	security_family.test.mjs:43-44,55,62,69,72; access_matrix.test.mjs:144	MISSING Server BUILT+TESTED; app MISSING (button disabled)
C14	Invite by 8-character code	Read-aloud code (PRD B F5.4)	No code column or function in migrations (token is 64 hex chars, security_family.sql:341)	none	MISSING (not even in server schema)
C15	Invitee opens link, accepts	accept_child_invite adds membership; idempotent for same user	security_family.sql:366-398; AASA serves /a /i /j /r (apps/web/src/app/.well-known/apple-app-site-association/route.ts:10-12). No route in apps/mobile/src/app handles /i or /j; no /i page in apps/web	security_family.test.mjs:55, 62,69,72; route.test.ts (AASA only)	MISSING Server BUILT+TESTED; app MISSING; web landing MISSING

ID	Customer action	System response	Code (file:line)	Tests	STATUS
C16	Role choice Co-parent vs Family, "What does {child} call them?"	Role explanation cards are static text; no chooser	family.tsx:111-125 (static roles list); server role + signs_as: security_family.sql:317	server role tests as C13	DESIGNED Server BUILT+TESTED; app DESIGNED (copy only)
C17	Family letter arrives for approval; parent adds or keeps aside	Contributor insert becomes approval pending; either parent decides, first action wins; contributor cannot set approval	security_family.sql:415-492 (entries_family_rules), :502-530 review_family_letter, :532-544 withdraw	security_family.test.mjs:10 1,111,115-119,130-132; access_matrix.test.mjs:120 ,147	MISSING Server BUILT+TESTED; app "Letters from family" screen MISSING
C18	Contributor sees status ("With {inviter}", "In the book")	approval column readable by author	security_family.test.mjs:116	same	MISSING Server BUILT+TESTED; app MISSING
C19	Parent turns on auto-add per family member	set_member_auto_add	security_family.sql:546-558	data_governance.test.mjs ("parent sets auto-add", "contributor cannot")	MISSING Server BUILT+TESTED; app MISSING
C20	Remove a family member (parent) with "also take their letters out"	PRD B F7	No RPC or policy lets a parent delete another member's child_members row (only child_members_leave own row, scribe_core.sql:255). Audit branch for 'member_removed' exists (data_governance.sql:~375) but nothing can trigger it from a client. No "take letters out" function; deleted_reason 'leave' allowed in check (data_governance.sql:91) but never set	none (access_matrix has leave only: access_matrix.test.mjs:125)	MISSING (server and app). Only service role runbook can remove
C21	Leave a book keeping letters (default)	Delete own membership via RLS; own letters remain, readable by leaver	scribe_core.sql:255; data_governance.sql:353-367 last-parent guard; letters stay in book_entries for remaining members	access_matrix.test.mjs:125 ; rls.test.mjs:90; data_governance.test.mjs: 79,163	MISSING Server BUILT+TESTED (keep option only); app MISSING
C22	Leave and "Take my letters out"	PRD B F7	Not implemented as a leave option. Only request_book_deletion with a co-parent does "leave and tombstone own letters" (security_family.sql:661-672)	data_governance.test.mjs: 156-163	DESIGNED PARTIAL: DESIGNED for plain leave; BUILT+TESTED via delete-book path
C23	Per-child sharing	Each book has own members/roles; invite to one book never opens another; leak checks	child_members per child; book_entries view security_family.sql:~566-585	data_governance.test.mjs: 120-123 ("no member of Asha's first book can see anything of another book"), access_matrix.test.mjs	BUILT+TESTED Server BUILT+TESTED; app: "Family can read" toggle hard-disabled (settings/children/[id].tsx:57)
C24	Multiple children and switcher	"For Asha" sheet, add child, active child remembered	components/child/child-switcher.tsx:15-81; child-store; store.ts:207-270; whose-book-sheet.tsx	none for UI; server create_child idempotent etc. children_entitlements.test.mjs	BUILT (no test) locally

ID	Customer action	System response	Code (file:line)	Tests	STATUS
C25	Hide a child's book	Hide with confirm; only offered when more than one child; NO "Hidden books" screen to restore	settings/children/[id].tsx:27-40,60-64; unhideChild/listHiddenChildren exist in store.ts:264-269 but no UI references them	none	BUILT (no test) but restore path MISSING in UI: hidden book is unrecoverable by a customer
C26	"Delete this book"	PRD B-REQ-016	BUILT (no test) No UI on child settings page. Server request_book_deletion / cancel built	data_governance.test.mjs: 154-189	MISSING Server BUILT+TESTED; app MISSING
C27	Second book needs Plus	PlusGate on add child when newChildNeedsPlus; Plus button disabled; dev bypass only in dev builds	store.ts:321-324; add-child-form.tsx:26,35; plus-gate.tsx:124	none; server create_child entitlement tested children_entitlements.test.mjs	BUILT (no test) ; product rule OPEN (D-051 open edge)
C28	Sync between devices (co-parent sees new letter in 5 s)	None: store is local SQLite, synced_at column unused by any uploader	lib/store.ts:5 header; db/migrations.ts:79 synced_at; no powersync in package.json	TDD 02 says chaos/parity suites planned (docs/tdd/02-sync-backend.md:477-482), none exist	DESIGNED (TDD 02, ADR 0004)
C29	Use the app offline	Fully offline today because everything is local	store.ts, sweep tests	sweep.test.ts, migrations.test.ts	BUILT+TESTED for capture/storage; "offline sync queue" DESIGNED
C30	Export everything (PDF, ZIP)	Settings row is disabled with "not yet"	settings/index.tsx:72; no zip/pdf/print/share dependency or code found in apps/mobile (search for zip, expo-print, expo-sharing: nothing). Book copy exists packages/content/src/book.en.ts	none	DESIGNED (BL-150 docs/BACKLOG.md:379-382; C-REQ-017, C-NFR-007). Printing: not in v1 (K-32), status: DESIGNED/P2
C31	Settings: reminders	BUILT (no test) Choice saved; scheduling not built (page says so)	settings/reminders.tsx:25-37, copy.settingsMore.remindersNotYet at :147	none	MISSING Setting BUILT (no test); notifications MISSING
C32	Settings: appearance and reading size	Theme System/Light/Dark applied in _layout; reading size drives letter and preview	settings/appearance.tsx:22-52; child-store.ts:22-31; reading-size-sheet.tsx	none	BUILT (no test)
C33	Settings: recordings screen	Honest text, orphan audio count, backup button disabled	settings/recordings.tsx:99-132	sweep.test.ts covers orphan logic	BUILT+TESTED (orphan sweep); backup turn-on MISSING
C34	New phone restore (backup, Plus)	Nothing: no account, no sync, no audio backup	store.ts:297-302; recordings.tsx:121-125; audio_blobs table does not exist (data_governance.sql:864 "When audio_blobs lands")	none	DESIGNED (ADR 0006, TDD 06 section 6). Text restore needs sync (MISSING); audio restore needs backup (MISSING)
C35	Account and delete account	Disabled rows	settings/index.tsx:36-38,73	server deletion tested data_governance.test.mjs: 165-205	MISSING Server BUILT+TESTED; app MISSING

Unhappy paths

ID	Trigger	Expected per docs	Actual per code	STATUS	Severity	Exact fix
C-U1	Invite link opened without the app installed	PRD B F6: web contribution page; v1.0 override: contributors join in iOS app, web page moves to v1.1 (PRD B banner line 5)	AASA lists /i,/j (route.ts:10); no /i or /j page in apps/web; no app route. A tap with no app lands on a 404	MISSING	BLOCKER (for any family invite)	Add apps/web/src/app/i/page.tsx and j/page.tsx: show child's first name only, inviter, App Store button, keep token in URL fragment; add Expo Router route <code>i</code> and <code>j</code> that read the fragment and call <code>accept_child_invite</code> after sign-in
C-U2	Expired invite	Invitee sees errors.inviteExpired; inviter sees "Invite expired" + Send again	Server raises SCINV 'invite expired' (security_family.sql:392); tested security_family.test.mjs:72. Errors cannot be told apart by code (all SCINV, only message differs); no app UI	MISSING Server BUILT+TESTED; app MISSING	MAJOR	Give expired/used/revoked distinct SQLSTATES or return a status enum from accept; map to copy errors.inviteExpired
C-U3	Reused / forwarded invite	Single-use; parent sees who joined and can remove	Second accepter gets 'invite already used' (:389); same user retry idempotent (:388). Tested (security_family.test.mjs:69 revoked, :62 member). Removal by parent not possible (C20)	MISSING Server BUILT+TESTED; remove MISSING	MAJOR	Add <code>remove_member(p_child, p_member, p_take_letters bool)</code> RPC (parents only, audits member_removed)
C-U4	Wrong account (signed in as inviter or already a member)	No role change via invite	Refused 'already a member' (:395-398); tested security_family.test.mjs:55,62	BUILT+TESTED (server)	MINOR	App must show friendly copy; none in app yet
C-U5	Invitee under 18	18+ attestation required before any content (LEGAL-REQ-002)	accept_child_invite calls require_content_consent (:400) which needs terms, age_attested and sensitive-data (security_family.sql:160-207). Tested security_family.test.mjs:174-177 (consent withdrawn gives SCCON). Local age gate exists (apps/mobile age-gate tests) but no sign-in so no link between gate and server attestation	MISSING Server BUILT+TESTED; app wiring MISSING	MAJOR	When sign-in lands, send record_policy_act('terms', ... age_attested true) from the local ageGate.passed state before accept; show SCCON sheet instead of dropping the invite
C-U6	Grandparent has no recording (audio is only on the phone of the author)	K-33: family hear audio only via backup; letter shows "recording on {name}'s phone"	Cards and reader show the line recordingOnPhone (letter-card.tsx:291; letter/[id].tsx:150; read-together.tsx:152). No audio_blobs; contributor/readers never get audio. For a grandparent's own letter on a parent's phone: no way to send audio	DESIGNED	MAJOR	Decide K-40 (shared voice) now; build audio_blobs + entry-audio bucket + playback UI; until then keep the honest line
C-U7	Parent rejects (keeps aside) a family letter	"{signsAs} will not be told"; contributor sees "With {inviter}"	review_family_letter 'set_aside' (:502-530); author still sees approval 'set_aside' (security_family.test.mjs:116)	MISSING Server BUILT+TESTED; app MISSING	MAJOR	Build "Letters from family" list and contributor status chip

ID	Trigger	Expected per docs	Actual per code	STATUS	Severity	Exact fix
C-U8	Member removed: what happens to their letters	Added letters stay unless "also take out" ticked (set aside, never deleted); removed member keeps read+export	No removal API (C20). On self-leave, letters stay in book_entries for others and the leaver still reads own via author clause. Contradiction: Leave-with-removal is only through book deletion path (tombstones with deleted_reason book_deletion)	MISSING / partial	MAJOR	Implement remove_member and leave_book(p_take_letters) RPCs; for "take out" set approval='set_aside', in_book=false (not delete); set deleted_reason 'leave' only for true deletion
C-U9	Last parent leaves	Guard: a sole parent with contributors deletes instead	Trigger raises SCLPG (data_governance.sql:353-367); tested data_governance.test.mjs:79	BUILT+TESTED (server); app copy MISSING	MINOR	Catch SCLPG, show "Delete this book instead" screen
C-U10	Two parents edit the same letter offline then sync	Edits are by the author only; no parent may edit another's words. Same author on two devices: last writer wins per field, loser kept in entry_versions (TDD 02 3.6, docs/tdd/02-sync-backend.md:308); text never machine-merged	Mobile has NO edit-text screen (letter/[id].tsx has none) so the case cannot occur today. Server: version trigger stores prior final_text on change (scribe_core.sql:209-216); SCPAIR (final_text+machine_edits+edit_level atomic) from TDD is NOT in migrations (grep: no SCPAIR); RLS blocks non-author update (entries_author_update scribe_core.sql:264)	DESIGNED (resolution) / MISSING (SCPAIR)	MINOR now, major once editing and sync ship	Add SCPAIR trigger when sync uploader is written; no client edit UI until then
C-U11	Delete a letter that is shared (in book, read by co-parent)	Tombstone propagates; co-parent view loses it; restorable	CONFLICT Server: delete_entry (security_family.sql:710-720) and book_entries hides deleted for non-authors (view :566+). Local: deleteEntry only tombstones locally (store.ts:541). CONFLICT : local undeleteEntry clears deleted_at (store.ts:546) but server refuses plain undelete with SCTMB 'use restore_entry()' (data_governance.sql:150) and edit of a deleted row (:161); TDD 02 line 18 lists this as a known break	CONFLICT	MAJOR (becomes blocker when sync ships: an Undo after sync would be permanently rejected)	In store.ts make delete call the delete_entry RPC when synced_at is set and undo call restore_entry; never write deleted_at back to null by upsert
C-U12	Sync fails or partial	Writes queued, never lost; consent pause (SCCON) not drop; rejected_writes shown; offline-first	No sync code. Server error taxonomy exists (SCIMM, SCTMB, SCCON, SCDEL, SCAPR, SCLPG, SCPAR). rejected_writes and upload queue not in migrations	DESIGNED	MAJOR	Implement uploader per TDD 02 section 3.5; add rejected_writes table; test with fault-injection suite TDD 02:482
C-U13	Device lost; restore on new phone without Plus	Text restores from server for synced letters; audio lost unless exported; honest copy; export nudges (C-REQ-018)	No account or sync: a lost phone loses everything today. recordings.tsx:121-125 backup disabled. Copy honesty exists (settings.recordings.onPhoneBody)	DESIGNED	BLOCKER for launch promise "your letters are safe"; at minimum beta must say it	Ship sign-in plus text sync before inviting real families; ship export (C30) before any marketing claim; keep-safe nudge per C-REQ-018
C-U14	Export of a large book fails or device out of space	Streaming ZIP64 from local files, manifest of hashes, resumable; clear storage error; never partial silent	BUILT (no test) Export not built. Settings row disabled (settings/index.tsx:72)	DESIGNED (BL-150, C-NFR-007 under 2 min for 230 MB)	MAJOR	Check free space (expo-file-system getFreeDiskStorageAsync) before starting; stream to a temp dir; write manifest last; on failure delete partial and keep a retry button

ID	Trigger	Expected per docs	Actual per code	STATUS	Severity	Exact fix
C-U15	Export while offline	Works fully offline (C-REQ-017)	BUILT (no test) Not built; design says local-only	DESIGNED	MINOR	Do not call entitlement or network in the export path (C-NFR-004)
C-U16	Read together with a letter that has no audio (typed)	Reads as text; says no recording	read-together.tsx:152 shows rt.noRecording for typed; for waiting-for-words letters they are filtered out (:49)	BUILT (no test)	MINOR	Add a vtest for the filter and the typed branch once audio lands
C-U17	Read together for a spoken letter whose audio file is gone	Skip audio, still show text	MISSING No audio path exists to fail; AudioMissingError only at save (store.ts:423-437)	UNVERIFIED (nothing plays)	MINOR	Cover when the player is added
C-U18	Child switched while on Book / Read together	Content follows the active child; reader uses params childId	book.tsx:25-30 re-reads on active change and subscribes; read-together.tsx:35-37 and :49 memo keyed on child.id	BUILT (no test)	MINOR	Add test: letters of child A never appear after switching to B
C-U19	Free Read together sessions exhausted	Plus gate; Plus button disabled today so nobody can pass in production	plus-gate.tsx:124; read-together.tsx:61-77; dev bypass gated by devShortcutsAllowed (build-env.ts)	BUILT (no test) ; a user cannot pay	MAJOR (until purchases ship)	Gate must not ship to TestFlight users with a dead button, either raise the free count remotely or hold the gate
C-U20	Book for a second child without Plus (open product question)	D-014, PRD-REQ-015: second book is Plus; D-051 open edge: what a second book gets without Plus is undecided	Code blocks: newChildNeedsPlus (store.ts:321-324) with a gate that has a dead Plus button, so the family cannot start a second book at all. Server create_child enforces entitlements and first-run children (children_entitlements.test.mjs, 46 checks)	CONFLICT between code (hard block) and docs (open question, "every existing book stays writable")	MAJOR	Founder to decide; interim: allow second book with the same letter allowance as the first, enforced server-side
C-U21	Hidden book restore	Settings > Hidden books, restorable	No Hidden books UI (unhideChild unused in tsx)	MISSING	MAJOR	Add settings/children/hidden.tsx listing listHiddenChildren() with Restore; also show "Hidden books" in switcher per PRD B F2.2
C-U22	Contributor-created letter shows in own phone as in book	Client in_book means "send to parents"; server sets pending	No contributor mode in app; isOwnEntry (child-store.ts:12-15) assumes all local entries are own	DESIGNED	MAJOR	When sign-in lands, branch toggleInBook copy on role: "Send to parents" instead of "Move to book"
C-U23	Family-can-read toggle	Parents control whether family sees the book (default off)	Toggle disabled in app (settings/children/[id].tsx:57); server column and view logic tested (data_governance.test.mjs:129-131)	MISSING Server BUILT+TESTED; app MISSING	MINOR	Wire to children.family_can_read once sync exists
C-U24	Doc drift in test counts	CLAUDE.md lists mobile 31, tokens 4	Actual 52 and 8	CONFLICT (docs only)	MINOR	Update CLAUDE.md counts

Counts

BUILT+TESTED: server family/governance rows (C13, C15, C17-C19, C21, C23, C26, C35 server halves; C-U2-U5, C-U7 server, C-U9) and C33 orphans. BUILT (no test): C1-C5, C7-C10, C12, C24-C25, C27, C31-C32 (all local-only). DESIGNED: C6, C11, C28, C30, C34 and most unhappy paths about sync, backup, export, shared audio. MISSING: C14, C20, app halves of every family flow, Hidden books UI, web invite landing, audio playback, code invite. CONFLICT: C12 (per-device vs per-book), C-U11 (local undelete vs server SCTMB), C-U20, C-U24.

UNVERIFIED

- Whether PowerSync Cloud region and replication behave as TDD 02 assumes (all "Assumption" lines).
- iOS device-backup behaviour for audio paths (C OQ5).
- Anything on a real iOS device: I read code and ran node tests only; no simulator.
- The 8-char code: PRD says it exists; no server artefact found, could live in an unwritten migration (TDD 02 M10 lists later migrations, not present).

Segment D: money, notices and leaving

Validated 4 Oct 2026 on branch `release/ios-v1.0` at 1494d35. Read-only: nothing in the repo was changed.

0. Headline findings

- 1. **No purchase code exists.** There is no `expo-iap`, StoreKit, RevenueCat or notifications package in `apps/mobile/package.json` (deps at lines 19-35 list only expo-audio, expo-sqlite and similar). `apps/mobile/src/lib/` has no `plan.ts`. `hasPlus()` is a stub returning `false` (`apps/mobile/src/lib/store.ts:301-304`). `currentUserId()` returns `null` (`store.ts:297-299`), so there is no sign-in, which means no purchase, restore, sign-out or account deletion either. The Plus button is permanently disabled (`apps/mobile/src/components/child/plus-gate.tsx:43`, copy `plusNotYet` "Plus is not open yet in the beta", `packages/content/src/strings.en.ts:757`).
- 2. **The D-051 letter limit exists nowhere in code.** Not in `packages/core/src/plan.ts` (no `add_letter` gate, no `free_letters_allowance`), not in the app save path (`store.ts:437` `saveLetterFromDraft`, `store.ts:418` `saveEntry` insert unconditionally), not on the server (no migration touches entries for Plus; no `free_letters/letter_limit` anywhere in `supabase/`). Today the app has unlimited free letters. The only gate is on a second child's book.
- 3. **CONFLICT (code and tests still encode the 3 Oct plan).** The engine and its tests say first book free and writing never gated; D-051 says 2 letters per account free and writing gated after that. Details in D3 below.
- 4. **Server entitlement layer is built and tested but PENDING.** `supabase/migrations/20261003010000_children_and_entitlements.sql:4` says "PENDING: not yet applied". It has `store_subscriptions`, `store_notifications`, `apply_store_transaction`, `has_plus`, `book_has_plus`, `get_plan_state`, `my_app_account_token`. There is **no** Edge Function directory (`supabase/` holds only `APPLY.md`, migrations, tests), so nothing receives App Store notifications, verifies JWS, reconciles, or sends notices. There are no `notice_windows`, `notice_schedule`, `plan_cards` tables.
- 5. **No notice engine, no trial acknowledgement, no renewal reminders, no price-change notice** exist in code. The schedule is a design (D-022 table, TDD 08 4.3) only.
- 6. **Docs disagree with each other in places** (listed in section 3). Several are real blockers for the build.

1. Test results (run today, offline)

Suite	Result
<code>packages/core</code> <code>vitest</code>	UNVERIFIED 237 of 237 pass on the second run (6 files; <code>plan.test.ts</code> is 58 tests). The first run had 1 failure while <code>test:db</code> ran in parallel; it did not recur, so it looks like a timing test under load (UNVERIFIED which test; it was not <code>plan.test.ts</code> , which passed 58 of 58 on its own).
<code>apps/mobile</code> <code>vitest</code>	52 of 52 pass (7 files). <code>CLAUDE.md</code> says 31, so that number is stale. No mobile test touches plan, Plus, purchase, notices, export or delete.
<code>packages/content</code>	16 of 16 pass
<code>packages/analytics</code>	39 of 39 pass
<code>apps/web</code>	148 of 148 pass (12 files)

Suite	Result
<code>npm run test:db</code>	Works offline (embedded Postgres). 8 files: access_matrix 479, children_entitlements 46, classification 6, data_governance 96, purge_batching 16, rls 40, security_family 97 all pass (780 checks). <code>perf.test.mjs</code> failed once on <code>letter_member p95 4.64 ms within 4 ms</code> while vitest ran at the same time; re-run alone with <code>npm run test:db:perf</code> : ALL PASSED (15 checks, <code>letter_member p95 1.80 ms</code>). So 8 of 8 files pass when run alone. The perf budget is load-sensitive.

Not run: tokens (4) and experiments (11), outside this segment.

2. Step table

Status key: BUILT+TESTED, BUILT (no test), DESIGNED, MISSING, CONFLICT. "Designed" means a document describes it but no code exists.

Id	Customer action	System response (as specified)	Code (file:line)	Tests	STATUS
D1	Saves letters 1 and 2	Free. Letter = saved entry, spoken or typed (PRD-REQ-024)	No counting. Saves are unconditional: <code>apps/mobile/src/lib/store.ts:418-422, :437-448</code> . Review save button <code>apps/mobile/src/app/review.tsx:575-578</code>	none for letters	MISSING (behaves free for every letter, so it accidentally satisfies D1 but with no limit)
D2	Allowance value	Remote config <code>free_letters_allowance</code> , default 2, audit-logged (PRD-REQ-024, D-035)	No remote config table or client exists. Only <code>FREE_READ_TOGETHER_SESSIONS = 3</code> constant (<code>apps/mobile/src/lib/read-together.ts:9</code>)	none	MISSING
D3	Taps save on the 3rd letter (account has 2, no Plus)	Plus sheet opens; letter kept on phone; server refuses a bypassed 3rd (PRD-REQ-024, -025, TDD 08 14.1)	Engine: no <code>add_letter</code> in <code>GatedFeature</code> (<code>packages/core/src/plan.ts:33</code>) or <code>GATED_FEATURES (:40)</code> . <code>'write'</code> and <code>'family_authors'</code> are in <code>Free Forever (:22, :26, :42)</code> and the file header says writing is never gated (<code>:15-16</code>). Only gate: <code>start_book (:167-171, OFFER_FOR :112-117)</code> . App: <code>newChildNeedsPlus (store.ts:321-324)</code> gates a second book only. Server: <code>create_child</code> raises SCPLS for a second book (<code>20261003010000...sql</code> section 5, <code>:253-310</code>); no letter rule.	CONFLICT <code>packages/core/test/plan.test.ts</code> and <code>supabase/tests/children_entitlements.test.mjs</code> , see CONFLICT list below	CONFLICT (tested code asserts the old plan; new rule MISSING)
D4	Sees the payoff at the limit	One Plus sheet: what Plus adds including "new letters after your first 2", two plans none preselected, price first, "Not now" visible, disclosure text (TDD 08 6, in-app-disclosures 3)	<code>plus-gate.tsx:36-61</code> is a placeholder with a disabled button. Dev bypass <code>onContinueDev</code> guarded by <code>devShortcutsAllowed (apps/mobile/src/lib/build-env.ts:40: dev profile AND __DEV__)</code>	none (no mobile component tests)	DESIGNED (placeholder only)

Id	Customer action	System response (as specified)	Code (file:line)	Tests	STATUS
D5	Paywall and Plus sheet copy	Strings in <code>packages/content</code>	Present: <code>plus.legal.renewAnnual/renewMonthly/renewNoTrialAnnual/renewNoTrialMonthly/cancel/termsLink/privacyLink/subscriptionTermsLink/restoreLink/agree</code> and <code>plus.promise (packages/content/src/strings.en.ts:677-691)</code> ; <code>plus.promise</code> already says "first two letters are free ... Every letter you have made stays yours to read, play and export". Absent: <code>plus.legal.letters</code> , <code>plus.ack.body</code> , <code>plus.redeem.row/note</code> , any limit-moment heading, held-letter note, lapsed card, billing-issue card, restore outcomes, trial-final notice text. Docs name <code>plus.legal.renewTrial/renewNoTrial</code> (in-app-disclosures.md section 3) but content uses different keys. <code>plus.legal.agree</code> text differs from the doc ("By continuing..." vs "By subscribing, you agree that Plus renews automatically..."). The sheet component does not render any <code>plus.*</code> string.	<code>packages/content/test/rules.test.ts</code> (16 pass, content rules only)	BUILT (no test) BUILT (partial copy, no sheet uses it)
D6	Pays (monthly \$3.99 / annual \$29.99)	Consent row <code>started</code> , <code>requestPurchase</code> with <code>appAccountToken</code> , JWS to <code>sync_plan</code> , ack	No client. Server pieces: <code>my_app_account_token()</code> (20261003010000...sql:161-169), <code>apply_store_transaction (:180-251)</code> . No <code>sync_plan</code> , no JWS verification, no <code>appstore-notifications</code> function. <code>record_policy_act</code> exists (20261002020000_data_governance.sql:695)	<code>children_entitlements.test.mjs</code> (<code>appAccountToken</code> random and stable; users cannot call <code>apply_store_transaction</code> ; trial notification maps to person; duplicate ignored)	MISSING Server DB part BUILT+TESTED; purchase flow MISSING
D7	Trial starts	In-app ack sheet plus ack email within 1 h with end date, price after, cancel-by date (C-REQ-024, TDD 08 4.3 <code>ack</code>)	Nothing sends email for billing. Website Resend code is waitlist and welcome only (<code>apps/web/src/lib/notify/*</code> , <code>welcome-email.ts</code>)	none	DESIGNED
D8	Gets renewal and trial notices	Table in D-022: ack immediate; trial week E-7d <code>[E-8d,E-5d]</code> (trial <=31 d); trial long E-18d <code>[E-21d,E-16d]</code> (trial >31 d); trial final E-4d12h <code>[E-5d,E-4d]</code> plus one push; annual long E-30d12h <code>[E-31d,E-30d]</code> ; annual short E-7d <code>[E-8d,E-6d]</code> ; monthly anniversary; price increase eff-25d <code>[-30d,-7d]</code> ; cancelled renewal skips all (<code>docs/DECISIONS.md:146-164</code>)	None: no <code>notice_windows</code> , <code>notice_schedule</code> , <code>plan_cards</code> , no scheduler, no pure <code>scheduleFor</code> . <code>store_subscriptions.will_renew</code> exists to feed it (20261003010000...sql:73-90)	none (TDD 08 plans N-1 to N-10 and a year-clock test in <code>supabase/functions/notice-scheduler/</code> , which does not exist)	DESIGNED
D9	Restore purchases	Sheet footer and Settings > Plan; <code>syncIOS</code> then <code>sync_plan</code> ; done in 10 s; never moves an active subscription between two accounts (D-047)	None. No Plan section in Settings (<code>apps/mobile/src/app/settings/index.tsx:36-77</code> has Account, Children, Reminders, Appearance, Recordings, Data, Legal, About). <code>restoreLink</code> string only. Server binds by token and keeps <code>profile_id</code> with <code>coalesce(excluded.profile_id, s.profile_id)</code> (20261003010000...sql:~218) but there is no restore RPC	none; <code>restore_result</code> analytics event exists in catalogue (<code>packages/analytics/src/catalog.ts:693</code>)	DESIGNED
D10	Cancel	One tap to Apple's manage sheet, fallback <code>apps.apple.com/account/subscriptions</code> ; no offer first (LEGAL-REQ-048)	None. No Plan screen, no <code>showManageSubscriptionsIOS</code>	none	DESIGNED

Id	Customer action	System response (as specified)	Code (file:line)	Tests	STATUS
D11	Payment fails at renewal	Billing Grace 16 days (D-048); Plus on during grace; card "There's a problem with your payment. Your letters are fine."; after grace <code>billing_retry = Plus off</code> (C-REQ-027)	Server status mapping: grace and <code>billing_retry</code> handled in <code>apply_store_transaction</code> and <code>has_plus</code> (20261003010000...sql:121-130). Engine <code>planActive</code> handles <code>grace</code> , excludes <code>billing_retry</code> (<code>plan.ts:119</code> , :128-134). No card, no notification of failure	<code>children_entitlements.test.mjs</code> "[C-REQ-027] billing grace keeps Plus"; <code>plan.test.ts</code> rows 8, 30c	MISSING Engine and DB BUILT+TESTED; card and flow MISSING
D12	Plus lapses (more than 2 letters)	Reading, playing, exporting existing letters work; backed-up audio stays; new letters need Plus (PRD-REQ-026, C-REQ-028)	Reads, playback never consult entitlement: <code>plan.ts</code> makes them non-gated by type (:22-26, compile-time overlap check :36-38); server has no Plus clause on entries read (<code>entries_select</code> policy, 20261002020000_data_governance.sql:203). Local app has no entitlement check on reading at all.	<code>plan.test.ts:147-163</code> (free forever not gated; but still lists <code>write</code> as free); <code>children_entitlements.test.mjs:87</code> existing books stay writable. No test for "lapsed with 40 letters can read, play, export" (TDD 08 14.2 item 6 TODO; E2E-L does not exist)	MISSING PARTLY BUILT+TESTED for read/play by absence; new-letter-after-lapse MISSING; export MISSING (see D18)
D13	Refund	Apple decides; REFUND ends entitlement only; letters unchanged; <code>beginRefundRequestIOS</code> under Plan (C-REQ-029)	Server: refunded status ends Plus (<code>has_plus</code> only counts trial/active/grace). No refund request UI	<code>children_entitlements.test.mjs</code> "[C-REQ-029] a refund ends Plus"; <code>plan.test.ts</code> row 30	MISSING Server BUILT+TESTED; UI MISSING
D14	Redeem an offer code	Settings > Plan "Redeem a code" opens StoreKit sheet; server maps <code>OFFER_REDEEMED</code> then <code>SUBSCRIBED / DID_RENEW</code> with real end date; no code table of ours (PRD-REQ-027, D-052, <code>docs/ops/OFFER_CODES.md</code>)	UNVERIFIED None. No row, no <code>OFFER_REDEEMED</code> handling anywhere in supabase/; <code>offer_code_redeemed</code> event not in analytics catalogue (grep: absent); expo-iap absent so "does it expose the redemption sheet" stays UNVERIFIED. <code>apply_store_transaction</code> is type-agnostic (takes a status) so a mapped offer-code period would fit, but nothing computes it	none	DESIGNED
D15	Opens Settings > Plan	Status, dates, coverage line ("Plus is on for {child}'s book"), Manage, Restore, Refund, Redeem	No Plan section exists	none	MISSING
D16	Sign out	Allowed only after unsynced letters sync (A-REQ-033, A-F6.4)	No sign-in, no sign-out. Settings Account row is a disabled "Not signed in" (<code>settings/index.tsx:36-37</code>)	none	MISSING
D17	Reminders and notifications	Cadence choice, time picker 07:00-21:30, quiet hours, pause, channels incl. "Your plan"; one plan push only for trial-final (C-REQ-002 to -007, TDD 08 4.3)	Settings screen saves cadence and pause only: <code>apps/mobile/src/app/settings/reminders.tsx:11-37</code> ; the footer says "Reminders start in a coming beta update" (<code>strings.en.ts:787</code>). No <code>expo-notifications</code> , no scheduling, no time picker, no permission prime, no per-child switch UI wired.	none	MISSING Choice storage BUILT (no test); scheduling MISSING
D18	Exports everything (any plan state, offline)	Local ZIP/PDF, free, never checks entitlement (C-REQ-017, DATA-REQ-050 to -053)	Row is disabled: <code>settings/index.tsx:72</code> with copy "Export arrives in a coming beta update" (<code>strings.en.ts:785</code>). No export code in the app	none	MISSING

Id	Customer action	System response (as specified)	Code (file:line)	Tests	STATUS
D19	Analytics consent and what is logged	Opt-in only; content-free enums; nothing before consent; consent sheet is third ask (PRD-REQ-001, -016, K-01)	MISSING Package built: packages/analytics (catalog, consent state machine consent.ts, PostHog provider). Plus events in catalogue: plus_offer_viewed, plus_offer_dismissed, purchase_started, trial_started, purchase_succeeded, purchase_failed, restore_result (catalog.ts:651-704). Missing for D-051: a letter_limit value in PLUS_TRIGGER (catalog.ts:41 lists chapter_complete, second_child, backup, read_together, themes, settings), allowance-reached / letter-held / Plus-from-limit events, offer_code_redeemed. The mobile app does not import the analytics package (grep for @scribe/analytics in apps/mobile: none) and has no consent sheet or Settings & Privacy rows. Consent copy exists (strings.en.ts settings.privacy at ~591-597)	packages/analytics/test (39 pass)	MISSING Package BUILT+TESTED; app wiring MISSING; D-051 events MISSING
D20	Deletes the account	Export first; subscribers see "Billing continues through Apple" plus Manage link before confirm; reauth; type to confirm; 30-day undo (C-REQ-019, DATA-REQ-053)	Server: request_account_deletion(p_source, p_had_active_subscription) (20261002020000_data_governance.sql:425-469), cancel_account_deletion (:471), prepare_account_purge (:904), finalize_account_deletion (:951; later version 20261003020000_purge_batching.sql:157). App: row is disabled with "Accounts arrive with sign in" (settings/index.tsx:73, strings.en.ts:786). No in-app "billing continues" string (grep: absent). Web page /delete-account exists (apps/web/src/app/(legal)/delete-account/page.tsx, copy apps/web/src/lib/legal/delete-account-copy.ts), says "Plus is not cancelled for you"	supabase/tests/data_governance.test.mjs (96 pass), purge_batching.test.mjs (16 pass), children_entitlements.test.mjs:105-108 (ledger keeps the transaction, drops the person); apps/web/test/copy-rules.test.ts	MISSING Server BUILT+TESTED; web page BUILT; in-app flow MISSING
D21	Website unsubscribe	One-click link in every email; GET never unsubscribes	DESIGNED apps/web/src/app/unsubscribe/page.tsx, apps/web/src/app/api/unsubscribe/route.ts, apps/web/src/lib/notify/unsubscribe-handler.ts (POST only, same-origin, rate limit, Resend contact). Scope is the pre-launch waitlist list only; billing notices are transactional and not designed to be unsubscribable (LEGAL-REQ-053/-054)	apps/web/test/unsubscribe.test.ts (part of 148 pass)	BUILT+TESTED (waitlist only; no link design yet for plan emails)
D22	Contacts support	One support address in packages/brand, shown in Settings > Help and Legal prefilled with app version and plan state, no content	packages/brand/index.ts:27 supportEmail: 'support@example.com' (placeholder; BL-117 release gate). Website footer uses a different address hello@earlyletters.com (apps/web/src/content/site.ts:269, also the unsubscribe error copy :263, and the delete page). No Support row in app Settings.	none	MISSING in app; address inconsistent
D23	Reads Subscription Terms and disclosures	Terms 2.0.0, in-app-disclosures 2.0.0 describe membership	docs/legal/subscription-terms.md, docs/legal/in-app-disclosures.md (both draft-for-counsel, 4 Oct). Terms row "Open in app" is disabled (settings/index.tsx:77). Reminder promise in terms ("16 to 21 days", "about 30 and 7 days", "7 to 30 days before price change") matches D-022	packages/content/test/rules.test.ts; none for the doc-to-string equality that TDD 08 6 item 1 asks for	DESIGNED (counsel review pending)

CONFLICT: exactly which tests assert the old plan

Old plan = 3 Oct decision: first book free, extra books need Plus, writing/reading/playing/export/family authorship free forever.

packages/core/test/plan.test.ts (58 tests, all passing, so they pass because they still assert the old plan): - Header comment lines 1-8: "first book free, first-run batch free ... write, read, play, export and family authorship never gated". - TABLE rows 1 to 12, 29c, 32b (start_book rows, lines 78-92, 124, 132): row 1 first book free (:80), row 2 first-run batch (:81), row 3 second book needs Plus (:82), row 4 hidden book counts (:83), row 5 joined book never counts (:84), row 6 deleted book (:85), row 7 own Plus any number (:86), row 8 grace (:87), row 9 lapsed cannot start another book (:88), row 10 co-parent covering one book (:89), row 11 contributor first book free (:90), row 12 signed out (:9

1), row 29c Xcode entitlement (:124), row 32b first-run surface (:132). - free forever block: :154-157 types 'write' as FreeForever and expects decide to reject it; :160-162 "lists exactly write, read, play, export and family authorship among the free ones" (FREE_FOREVER must contain 'write' and 'family_authors'). D-051 removes new-letter writing and family authorship from free forever (TDD 08 14.1), so these must change. - Property tests that use startedBooks/inFirstRunBatch : :174-175, :219-221 ("a first-run batch child is always free"), and the start_book branch of "never offers Plus where it is already on" (:196-201). - Helper test countStartedBooks (:236-245) tests the book-counting helper that D-051 edge 2 and 6 may retire.

packages/core/src/plan.ts itself: FreeForever includes write and family_authors (:22, :26, :42); GatedFeature lacks add_letter (:33, :40); DecideInput has started Books, inFirstRunBatch and no lettersUsed/freeLettersAllowance (:94-97); OfferTrigger lacks letter_limit (:45).

supabase/tests/children_entitlements.test.mjs (46 checks passing): :33 "[PRD-REQ-015] a second book needs Plus (SCPLS)"; :35 joined book does not count; :36 B's next book needs Plus; :41-48 first-run batch free and one-time; :79 with Plus a second book is allowed; :87 "[C-REQ-028] lapse never closes a book: existing books stay writable" (the PRD-REQ-015 rule, which D-051 marks "under review"); :88 after refund a further book needs Plus. PRD-REQ-015 text itself says "Until decided, build nothing new on it" (PRD.md:276), so these tests are not wrong yet, they are for a rule that may be replaced (edges 2 and 6).

Other things that assert or imply the old plan: - apps/mobile/src/components/child/add-child-form.tsx:26-35 and store.ts:321-324: second-book gate, joined-book stub (store.ts:311-313). - docs/prd/C-habits-pricing-settings.md:330 still has "Decided Oct 1 2026 (founder). Writing, reading, playback, export and family authors are free forever" with no amendment banner at that line. - supabase/migrations/20261002020000_data_governance.sql:402 and :409: deletion_request_steps lists step 'revenuecat' and a comment "as reported by RevenueCat". ADR 0013 replaced RevenueCat; the spec's step name is appstore_mapping (DELETION_AND_EXPORT_SPEC changelog 1.1.0). Never edit an applied migration (CLAUDE.md); it is PENDING though, so check APPLY.md before choosing a fix. - The perf and access-matrix fixtures seed hundreds of letters on accounts that never hold Plus (perf: 1000 families x 400 letters). UNVERIFIED whether they insert as service role (bypass) or as the user; if as the user, a server letter gate will break them.

3. Unhappy paths

Severity: blocker = cannot ship v1.0 or a legal duty is unmet; major = wrong or confusing for paying users; minor = polish.

Id	Trigger	Expected per docs	Actual per code	STATUS	Severity	Exact fix
D-U1	Hits the limit mid-recording / mid-write (PRD-REQ-025)	Starting to compose is never blocked; check at save; in-progress letter never lost, stays on phone, Plus offered, saved when Plus starts (recommended, D-051 edge 3 undecided)	No limit, so nothing is lost today. Drafts persist in a drafts table until save (store.ts:437-448 deletes the draft only inside the save transaction). But the design needs a third state ("held local entry past limit"): the local schema has entries (saved) and drafts, nothing for held. Sync that would need it does not exist (D-023 open)	DESIGNED (undecided at founder level)	BLOCKER	Founder confirms edge 3. Then: add add_letter to GatedFeature; in review.tsx save() (:237) call decide before saveLetterFromDraft; on offer, keep the draft intact (do not call save), open the Plus sheet once, and save on entitlement. Add a core property test "an offer at the limit never changes a draft".
D-U2	Purchase cancelled by the person	No Plus, no error screen, purchase_failed{cancelled} after consent	BUILT (no test) Nothing built	MISSING	MAJOR	In purchase wrapper map userCancelled to quiet return; keep the held letter. Test with StoreKit config file.
D-U3	Purchase pending (Ask to Buy)	"Waiting for approval" note; Plus arrives later through the notification (F-11)	BUILT (no test) Nothing built. Catalogue has error_class: pending (catalog.ts:~691). No strings for the waiting note	MISSING	MAJOR	Add plus.pending string; do not clear the held letter; on later SUBSCRIBED notice, unlock and offer to save the held letter.

Id	Trigger	Expected per docs	Actual per code	STATUS	Severity	Exact fix
D-U4	Payment declined at renewal	Grace 16 days, Plus on, card "There's a problem with your payment. Your letters are fine."; no email (card only); after grace Plus off, letters fine	DB: <code>grace/billing_retry</code> handled and tested; <code>planActive</code> excludes <code>billing_retry</code> . No notification endpoint, no card, no string. Note mismatch: DB <code>has_plus</code> allows 5 minutes of skew after expiry (<code>20261003010000...sql:121-130</code>), core <code>planActive</code> has none and treats the end as exclusive (<code>plan.ts:128-134</code> , <code>plan.test.ts:231-234</code>)	MISSING Engine/DB BUILT+TESTED; flow MISSING	MAJOR	Build <code>appstore-notifications</code> function; add <code>billing_issue</code> card string; align skew rule between SQL and TS or document it.
D-U5	Trial ends unnoticed	Ack at start; D-22 notices; final notice E-4d12h with one push; none sent outside window; missed window pages the founder	No notice engine, no tables, no email path. Legal duty under CA/NY/VA/UT/MA rules (Terms promise "at least 3 days before the last day to cancel")	DESIGNED	BLOCKER	Build BL-P01 <code>scheduleFor</code> + <code>notice_windows</code> first (pure, testable now), then scheduler, ack email, in-app cards. The 1-month trial is 31 days at most, so it falls in the "trial week" row; the 2-month annual trial uses "trial long" <code>[E-21d, E-16d]</code> . Do not enable purchases before this exists.
D-U6	Restore on a new phone	Sign in, tap Restore, Plus within 10 s; letters come back only from sync	No sign-in, no restore, no sync. A new phone today gets nothing (local-only data; free durability rests on iCloud device backup, D-033, open)	MISSING	BLOCKER (for paid users)	Build sign-in, <code>restore() = syncIOS + sync_plan</code> ; show "linked to another account" message per D-047 if blocked.
D-U7	Family member tries to buy	Contributors never see the Plus sheet; quiet line; contributor's own Plus covers no book (R-2, D-036)	Engine returns <code>quiet: 'contributor'</code> for non-start_book features (<code>plan.ts:189</code>) and tests prove it (<code>plan.test.ts:192-194</code> , row 18). For <code>add_letter</code> there is no row, so a family author hitting "the limit" is undefined (edge 1)	MISSING Engine BUILT+TESTED for old features; new gate MISSING	MAJOR	Decide edge 1 (do family letters count). Add rows: contributor in a Plus book -> allow <code>plus_book</code> ; contributor in a Free book at limit -> quiet, never a sheet, and their letter is still saved to the book or held (decide which).
D-U8	Two accounts, one Apple ID	Plus does not hop between accounts; second account sees "linked to another account" (D-047, F-14)	Server stores one row per original transaction with <code>profile_id = coalesce(excluded.profile_id, s.profile_id)</code> so a later notice with the other account's token would remap it	DESIGNED (UNVERIFIED in code)	MAJOR	Add a DB test: a notice for an <code>original_transaction_id</code> already bound to A with a token of B must not move it unless A has no active plan. The current clause lets the newest notice's token win.
D-U9	Refund after letters were added	Plus ends immediately; letters, audio and backups unchanged; new letters need Plus again	Server tests prove entitlement ends and books stay (<code>children_entitlements.test.mjs:86-88</code>). No test that existing letters survive and new letters are refused (no letter rule)	BUILT+TESTED Partly BUILT+TESTED	MAJOR	Add DB test with a letter count above allowance after refund: select and export queries work, insert refused (SCPLS-style), and refused letter row is not deleted.
D-U10	Lapse with more than 2 letters: do read, play, export work?	Yes, always, even with entitlement service unreachable (PRD-REQ-026, TDD 08 14.2 item 6)	BUILT (no test) Reads and playback: no entitlement check exists in app or RLS, so yes today. Export: not built, so cannot work. No test "lapsed + 40 letters + entitlement offline".	MISSING Read/play BUILT (no test); export MISSING	BLOCKER	Write the lapsed fixture test (DB: account with 40 letters, no Plus: select, <code>book_entries</code> , <code>delete_entry</code> all work; client: export with a throwing entitlement stub). Build local export.
D-U11	Offer code expired, already used, or ineligible	Apple's own sheet shows the error; app only refreshes entitlement after; no copy of ours (PRD-REQ-027)	UNVERIFIED Nothing built. Apple facts from the runbook: codes expire 12:00 am Pacific on expiry date, one code per offer per customer, eligibility new/existing/expired. The analytics catalogue has a reason: expired used wrong_code rate_limited enum at <code>catalog.ts:212</code> , but that block is for a different event (UNVERIFIED which), and suggests an own-code design that D-052 rejects	DESIGNED	MINOR	UNVERIFIED Do not build any error mapping of our own. Remove or leave unused the own-code reasons. After the sheet closes, refresh. Tell testers the free period converts unless renewal is turned off (UNVERIFIED whether conversion can be disabled).

Id	Trigger	Expected per docs	Actual per code	STATUS	Severity	Exact fix
D-U12	Offer-code free period and renewal notices	D-022 windows should apply	UNVERIFIED whether Apple notifications for an offer-code period carry the same trial markers; store_subscriptions.status uses trial only "while in a free intro offer" (20261003010000...sql:175), so an offer-code period may be written as active and skip trial notices	UNVERIFIED	MAJOR	In the notification mapper, treat offer type <code>OFFER_REDEEMED</code> free periods as trial for notice purposes; add a fixture and a sandbox run. Needs counsel (does Terms Appendix A treat it as a free trial?).
D-U13	Offline entitlement check	Cached plan, fail open for payers, core never asks (C-NFR-004). Open edge 4: device or server count for letters	Engine accepts <code>online:false</code> and returns <code>quiet:'offline'</code> for an offer (<code>plan.ts:190</code> ; <code>plan.test.ts</code> row 28). No <code>planView()</code> cache. Letter counting location undecided; a device-only count is resettable by reinstall (TDD 08 14.1).	MISSING Engine BUILT+TESTED; cache and counting MISSING / undecided	MAJOR	Founder decides edge 4 (recommended: server check on entry creation). Implement <code>lib/plan.ts</code> cache.
D-U14	Clock tampering	All windows use store instants on the server; client shows server dates (F-10)	Server uses <code>now()</code> in <code>has_plus</code> . Core takes <code>now</code> as input (<code>plan.ts:77</code> header). Device clock only matters for a cached plan and for the free-letter count if it were device-only; trial math is Apple's	DESIGNED ; server BUILT	MINOR	Feed <code>now</code> from server time when online; never compute trial or notice dates on device.
D-U15	Deletes account while subscribed	Must not claim to cancel. Shows "Deleting your account does not cancel Plus. Billing continues through Apple until you cancel" plus Manage link before confirm; deletion not held up by it	Web page says so (<code>delete-account-copy.ts</code> , step "Plus is not cancelled for you"). Server never calls Apple; ledger kept pseudonymised (<code>children_entitlements.test.mjs:105-108</code>). Terms say the same. In-app string does not exist; in-app flow does not exist. <code>request_account_deletion</code> takes <code>p_had_active_subscription</code> (<code>data_governance.sql:425</code>) but nothing populates it	MISSING Web BUILT; server BUILT+TESTED; app MISSING	BLOCKER	Add string <code>settings.delete.billingContinues</code> plus Manage link row and call <code>showManageSubscriptionsIOS</code> before the final confirm; pass <code>p_had_active_subscription</code> from <code>getActiveSubscriptions</code> .
D-U16	Deletion of a shared book	Co-parent: the book stays; only leaver's letters removed; sole parent: 30-day scheduled delete, contributors get export notice	BUILT (no test) Server tests cover it: "the shared book is not scheduled for deletion", "prepare removes only the leaver's letters and no shared book", co-parent and family letters survive, "sole parent schedules book deletion", "whole book folder queued" (<code>data_governance.test.mjs</code> , 96 pass). App: no UI. Export notice to contributors: step <code>contributor_export_notice</code> defined (:402), sender not built	MISSING Server BUILT+TESTED; notice sender and UI MISSING	MAJOR	BUILT (no test) Build the notice sender (email) and the delete-book screen; contributor export link (DATA-REQ-053 server export, P1) not built.
D-U17	Export before deletion	Export is the primary action before Confirm; works in grace period; works offline	No export code (<code>settings/index.tsx:72</code> disabled). Strings exist (<code>settings.export.*</code> , <code>delete.bookExportFirst</code>)	MISSING	BLOCKER	Build local export (ZIP of entries.json, audio, PDF, manifest with hashes) per DELETION_AND_EXPORT_SPEC 4; hook into delete flow.
D-U18	Deletion request by email	Email to the support address with subject "Delete my account"; we send a sign-in link first; same 30-day undo; reply in 10 business days	Page <code>/delete-account</code> carries it with <code>mailto:hello@earlyletters.com</code> . No handler or runbook that creates a <code>deletion_requests</code> row with source <code>support</code> (the check allows <code>'support'</code> , <code>data_governance.sql:393</code>). Counsel questions listed in the copy file header remain open (35 vs 38 days, 10 days wording, undo on email path)	MISSING Page BUILT; process MISSING	MAJOR	Write the support runbook (verify via sign-in link, call <code>request_account_deletion('support')</code> as the user or service path, send receipt). Resolve the counsel list.

Id	Trigger	Expected per docs	Actual per code	STATUS	Severity	Exact fix
D-U19	Support request	One address, from <code>packages/s/brand</code> , no content	Brand placeholder <code>support@example.com</code> vs live site <code>hello@earlyletters.com</code> ; app has no Support row	CONFLICT (two addresses)	MAJOR	Put the real address in <code>packages/brand</code> and have <code>apps/web/src/content/site.ts:269</code> read it; add the Settings row.
D-U20	Price increase	25 days before effective, window <code>[-30d, -7d]</code> , Apple consent-required increases only; lapse at period end for non-consenters (D-022, TDD 08 4.7)	BUILT (no test) Nothing built. PRICE_INCREASE is in the ADR notification list only	DESIGNED	MINOR for v1.0 (none planned)	Keep as runbook; build only the <code>price_change</code> notice row.
D-U21	Unsubscribes from website email	Stops waitlist mail only	Works (POST only, scanner-safe). Does not and must not stop plan notices. No copy anywhere tells a person that plan emails are separate	BUILT+TESTED	MINOR	Add a one-line footer in plan emails: "This is a message about your plan."
D-U22	Second child's book without Plus	Undecided (edge 2, 6)	Today: a second book is blocked forever in a release build: the gate button is disabled and <code>hasPlus()</code> is false (<code>add-child-form.tsx:34-35</code> , <code>plus-gate.tsx:43</code> , <code>store.ts:302</code>). A parent with twins added later cannot add a child at all	MISSING / undecided	MAJOR	Founder decides edges 2 and 6. Until purchases ship, either let the second child through (PRD says free beta) or keep the message; today's dead end is a product bug for preview builds.
D-U23	Read together counts	Edge 5 undecided	Device constant 3, counts at screen open (<code>read-together.ts:9-24</code>); TDD 08 C-3 says this is wrong (count per book, from remote config, at highlight start)	CONFLICT with TDD 08 C-3	MINOR	Build BL-M13 after D-051 edge 5.
D-U24	Analytics consent withdrawn or declined	Nothing sent; Plus unaffected; deletion requests PostHog/Sentry delete	BUILT (no test) Package state machine built; mobile not wired	MISSING Package BUILT+TESTED; wiring MISSING	MAJOR	Wire <code>packages/analytics</code> after the consent sheet; the privacy rows in Settings.
D-U25	Notification permission denied or off	Email and card still go out; only trial-final uses push	No push stack	DESIGNED	MINOR	BUILT (no test) N/A until notifications built.

4. Documentation inconsistencies found (fix these before building)

1. **D-051 removed "free, always" but PRD C line 330 and `C-habits-pricing-settings.md` section 4.1 table still say free forever** with only some inline amendments. The core test file and the code header repeat the old promise.
2. **Notice days differ in three places.** PRD C C-REQ-025 says trial-final at D-3 and "18 and 3 days" for annual; D-022 says E-4d12h and, for the 2-month annual trial, E-18d plus E-4d12h; Subscription Terms says "at least 3 days before the last day to cancel" (consistent with D-022, since C = E-24h gives 3 days 12 hours). TDD 08 4.3 puts `trial_long` hard window at `[E-21d, E-4d]` but D-022 narrows it to `[E-21d, E-16d]` (D-022 text says it supersedes). Build from D-022.

3. **TDD 08 still describes RevenueCat** (l-2 to l-14, 4.1 to 4.9, sheet rule 12). Its banner says to read it as the App Store equivalent; ADR 0013 section "Design" is the build spec. No `sync_plan` exists in the migration.
4. **PRD-REQ-027 and ADR link to** `docs/ops/OFFER_CODES.md` "on branch `docs/offer-codes-runbook`, not yet merged". The file is now present in the working tree at `docs/ops/OFFER_CODES.md` on this branch (it was not there at the start of my run; I did not add it, UNVERIFIED how it arrived). Docs that say "not merged" are stale.
5. **Disclosure string keys differ** between `docs/legal/in-app-disclosures.md` (`renewTrial`, `renewNoTrial`, `agree`, `ack`, `letters`, `redeem`) and `packages/content` (`renewAnnual`, `renewMonthly`, `renewNoTrialAnnual`, `renewNoTrialMonthly`, a different `agree`).
6. **PRD-REQ-024 to -027 and** `PRD 1.4` exist (PRD.md lines 285-288). DECISIONS D-051 says the numbering is -024 to -026 and D-052 adds -027. Consistent.
7. **CLAUDE.md test counts are stale** (mobile 31; actual 52).
8. **Deletion spec says step** `appstore_mapping`; **migration still has** `revenuecat` (see section 2).

5. What is UNVERIFIED (could not be settled from the repo)

- Whether `expo-iap` exposes the offer-code redemption sheet, `beginRefundRequestIOS`, `showManageSubscriptionsIOS` in the current release (ADR 0013 says verified for 5.8.2 on 3 Oct from the published package; not checked by me, package not installed).
- Whether Apple allows exactly 6 months, and whether an offer-code period can be set not to convert (runbook marks both unverified).
- Whether App Review accepts a product gated at the third letter (Guideline 3.1.1 and 3.1.2 were not re-read in D-051).
- Whether the first core failure was a timing-sensitive test (not reproduced).
- Whether perf and access-matrix fixtures bypass any future letter gate.
- Whether Apple writes an offer-code free period with trial markers (D-U12).
- Everything about sandbox behaviour (grace toggle, accelerated time), as no purchase code exists.
- Whether the staging and production Supabase have the pending migration applied (APPLY.md says pending; I did not query any live project).

6. Suggested build order for this segment (all blocked on founder edges 1 to 4 for the letter gate)

1. Founder answers D-051 edges 1, 3 and 4 (family letters, held letter, server vs device count). Everything else in the letter gate waits on these.
2. `packages/core`: `add_letter` gate and `letter_limit` trigger; rewrite `plan.test.ts` rows 1 to 12 and the `write/family_authors` free-forever assertions; add the `lapsed-with-many-letters` property test.
3. `supabase`: letter-count rule beside `create_child`, `free_letters_allowance` config row, DB tests (3rd letter needs Plus, refused letter kept, lapsed account reads and deletes).
4. Pure `scheduleFor` + `notice_windows` from D-022 with the year-clock test (can start now, no dependencies).
5. Edge function `appstore-notifications` (JWS verification, `apply_store_transaction`), then notices, then ack email.

6. Mobile: sign-in, `lib/plan.ts`, Plus sheet replacing `plus-gate.tsx`, Settings > Plan (manage, restore, refund, redeem), local export, in-app delete flow with the billing line.
7. Content: the missing strings listed in D5.

Fix programme and what only you can do

Work in flight

Gap	What is being built	Branch or PR	State
Playback and Read together	Hear button, audio and word highlight where timings exist, free sessions per book	feat/mobile-playback-read-together	In progress
Offline export	ZIP and PDF from the local store; Settings export row	feat/export-offline-book	In progress
Family rules on the server	Remove a member, take letters out on leave, 8-character invite code, consistency trigger	feat/db-family-remove-leave-code	In progress, needs approve-migration
Sync, server	Idempotent push, cursor pull, restore epoch, membership re-pull	feat/db-sync-rpcs	In progress, needs approve-migration
Sync, phone	Local outbox and engine; undelete uses delete and restore	feat/mobile-sync-engine	In progress
Audio storage, server	Encrypted upload and play functions, table, bucket, runbook	feat/audio-storage-server	In progress, needs approve-migration
Unsubscribe and repeat welcome email	One-click answers 200; no second welcome; unsubscribed left alone	PR 77	Fixed and merged
Next wave	Transcription (decoder, model download), constitution fixes (typed text and quiet day), capture fixes (interruptions, typing flush, free space, silence), sign-in and consent, child edit and birthday default, Family tab, invite landing, hidden-book restore, account deletion UI, plan engine for D-051, purchase and offer codes	planned in docs/release/PLAN.md	Not started

Branches are committed in isolated copies and are not merged. Server-side branches are in the area that needs your approve-migration label and an independent review. The sequence for everything else is generated from the backlog in `docs/release/PLAN.md`.

What only the founder can unblock

You	Why it matters
-----	----------------

Apple Developer account, App Store Connect app record, subscription products, bundle id	Needed for any build, TestFlight, purchases and offer codes. The bundle id cannot change after the first upload.
Domain values in packages/brand (publisher domain, support email, privacy URL)	Replace the example.com placeholders; the website already runs on earlyletters.com.
Supabase staging and production projects; Sign in with Apple Services ID; email provider settings	The server code is tested only on an embedded database; nothing has met a real project.
Decisions: D-051 open edges (family letters and the 2 free letters, second child, offline counting, lapse wording)	Blocks the plan-engine rewrite and the paywall at the limit.
Counsel review of the legal drafts, the server-held audio key and the privacy wording	A release gate; the drafts are marked for counsel.
A real iPhone (an SE 3 is the target) for capture, interruptions, transcription speed, playback, TestFlight	Nothing in this audit was seen on a device.
Fonts: Literata and Mukta as TTF or OTF with licence text	The app falls back to Georgia and the system font until supplied.