Testing

Contents

Data	2
Plots	2
Total	2
Per Day	11

Data

```
#political shocks
raw_truths <- read.csv(here("data/political_data", "trump_all_truths.csv"))</pre>
raw_tweets <- read.csv(here("data/political_data", "tweets.csv"))</pre>
#market prices
raw_ONEQ <- read.csv(here("data/market_data", "ONEQ.csv"))</pre>
raw_SMI <- read.csv(here("data/market_data", "SMI.csv"))</pre>
raw_SPY <- read.csv(here("data/market_data", "SPY.csv"))</pre>
raw_VTHR <- read.csv(here("data/market_data", "VTHR.csv"))</pre>
raw_VTI <- read.csv(here("data/market_data", "VTI.csv"))</pre>
raw_SPYy <- read.csv(here("data/market_data", "Spyqyahoo.csv")) #yahoo</pre>
#political shocks
truths <- 1
tweets <- 1
#market prices #only cleaning dates for the time being
ONEQ <- 1
SMI <- 1
raw_SPY$timestamp = as.POSIXct(raw_SPY$timestamp, format = "%Y-%m-%d %H:%M:%S", tz = "UTC")
VTHR <- 1
VTI <- 1
#political shocks
#market prices
day_SPY_0409 = filter(raw_SPY, str_detect(timestamp, "^2025-04-09")) #9th of april
day_SPY_0409$timestamp = as.POSIXct(day_SPY_0409$timestamp,
                                      format = "%Y-%m-%d %H:%M:%S", tz = "EST")
yahoo_ds0409 = filter(raw_SPYy, str_detect(Date, "^2025-04-09"))
yahoo_ds0409$Date = as.POSIXct(yahoo_ds0409$Date,
                                      format = "%Y-%m-%dT%H:%M:%S", tz = "UTC")
yahoo_ds0409$Date = with_tz(yahoo_ds0409$Date, "EST")
```


Plots

Total

```
#SPY
ggplot(raw_SPY, aes(x = timestamp, y = close)) +
  geom_point(color = "blue", size = 0.01) +
  geom_line(aes(group=1), color="blue", linewidth=0.05) +
```

```
labs(title = "SPY Price Over Time",
    x = "Time",
    y = "Close Price")
```

SPY Price Over Time

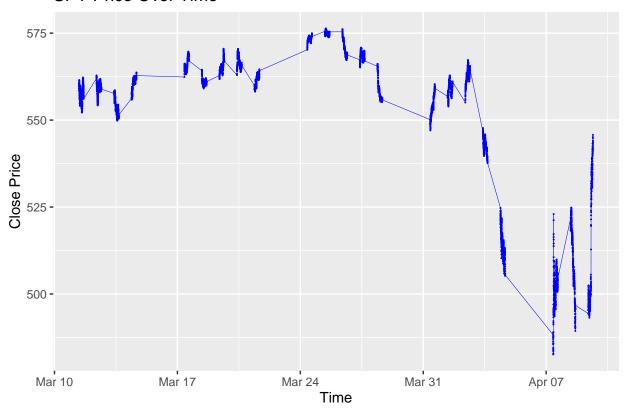

ONEQ Price Over Time




Time


ONEQ Price Over Time




SMI Price Over Time

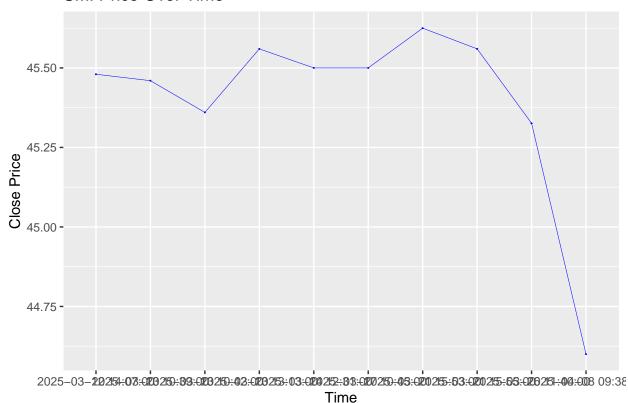

SMI Price Over Time

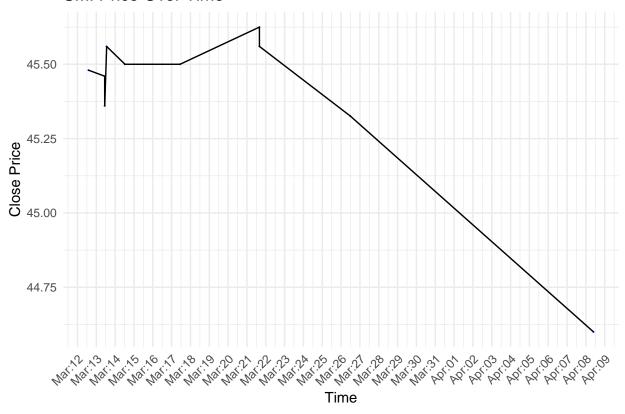


VTHR Price Over Time

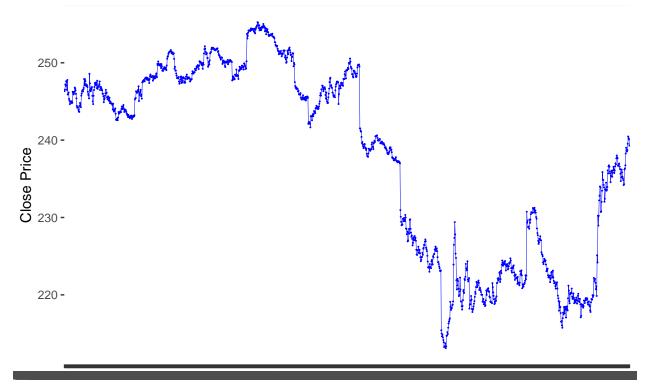

Time

VTHR Price Over Time

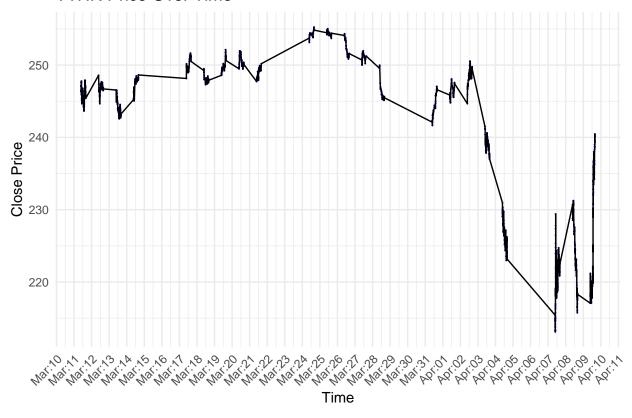


VTI Price Over Time




Time

VTI Price Over Time

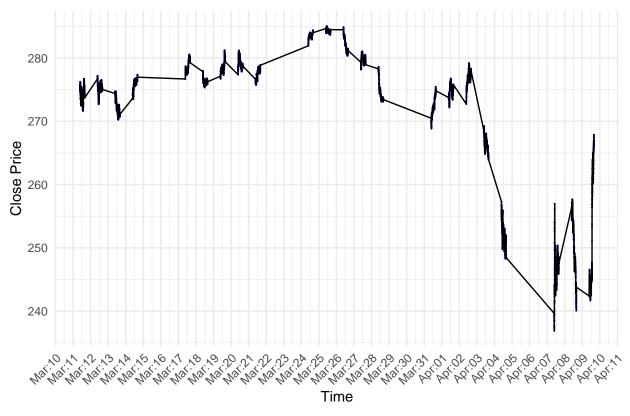

Per Day

SPY alpha Price April 9th

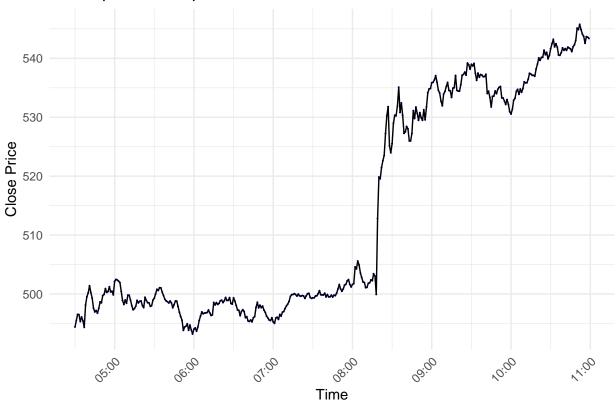

Warning: Removed 3 rows containing missing values or values outside the scale range
('geom_point()').

