OLIcyber – Web 3
GET Request /w Manual Header

a mechanism of artisan authentication. The goal is to get the text of the resource at the address `http://web-03.challs.olicyber.it/flag`, but the server will respond only to requests that will contain the header `X-Password`containing the correct password, `admin`. .

This challenge instructs to access a specific webpage using a specific HTTP request header: 'X-Password', with the value of 'admin'

OLIcyber – Web 3
GET Request /w Manual Header

a mechanism of artisan authentication. The goal is to get the text of the resource at the address `http://web-03.challs.olicyber.it/flag`, but the server will respond only to requests that will contain the header `X-Password`containing the correct password, `admin`. .

One important thing to understand to complete this challenge is HTTP request headers, and how they work, so what are HTTP headers?

OLIcyber – Web 3
HTTP Headers

Each time a web browser accesses a webpage, the browser makes an HTTP request to the server that hosts the page.

OLIcyber – Web 3
HTTP Headers

```
> GET /flag HTTP/1.1
> Host: web-03.challs.olicyber.it
> User-Agent: curl/8.18.0
> Accept: */*
> X-Password: admin
```

In each HTTP request, several headers and their values are passed along to the server to ensure that the browser and server can communicate properly.

OLIcyber – Web 3
HTTP Headers

Some examples of HTTP headers and what info they provide to the web server:

`Host` ← the website being contacted
e.g., web-03.challs.olicyber.it

`User-Agent` ← the type of device that is making the request
e.g., curl/8.18.0

`Accept` ← the type of data that should be sent in response
e.g., */* (any type of data)

OLIcyber – Web 3
HTTP Headers

Please keep in mind that because HTTP headers can be modified by the user before being sent, that means that the values of any HTTP headers could be spoofed (falsified)

OLIcyber – Web 3
HTTP Custom Header

```
> GET /flag HTTP/1.1
> Host: web-03.challs.olicyber.it
> User-Agent: curl/8.18.0
> Accept: */*
> X-Password: admin
```

In practice, you can send whatever HTTP headers you want to with your requests, including custom ones like X-Password

OLIcyber – Web 3
Solve Method 1: Web Browser

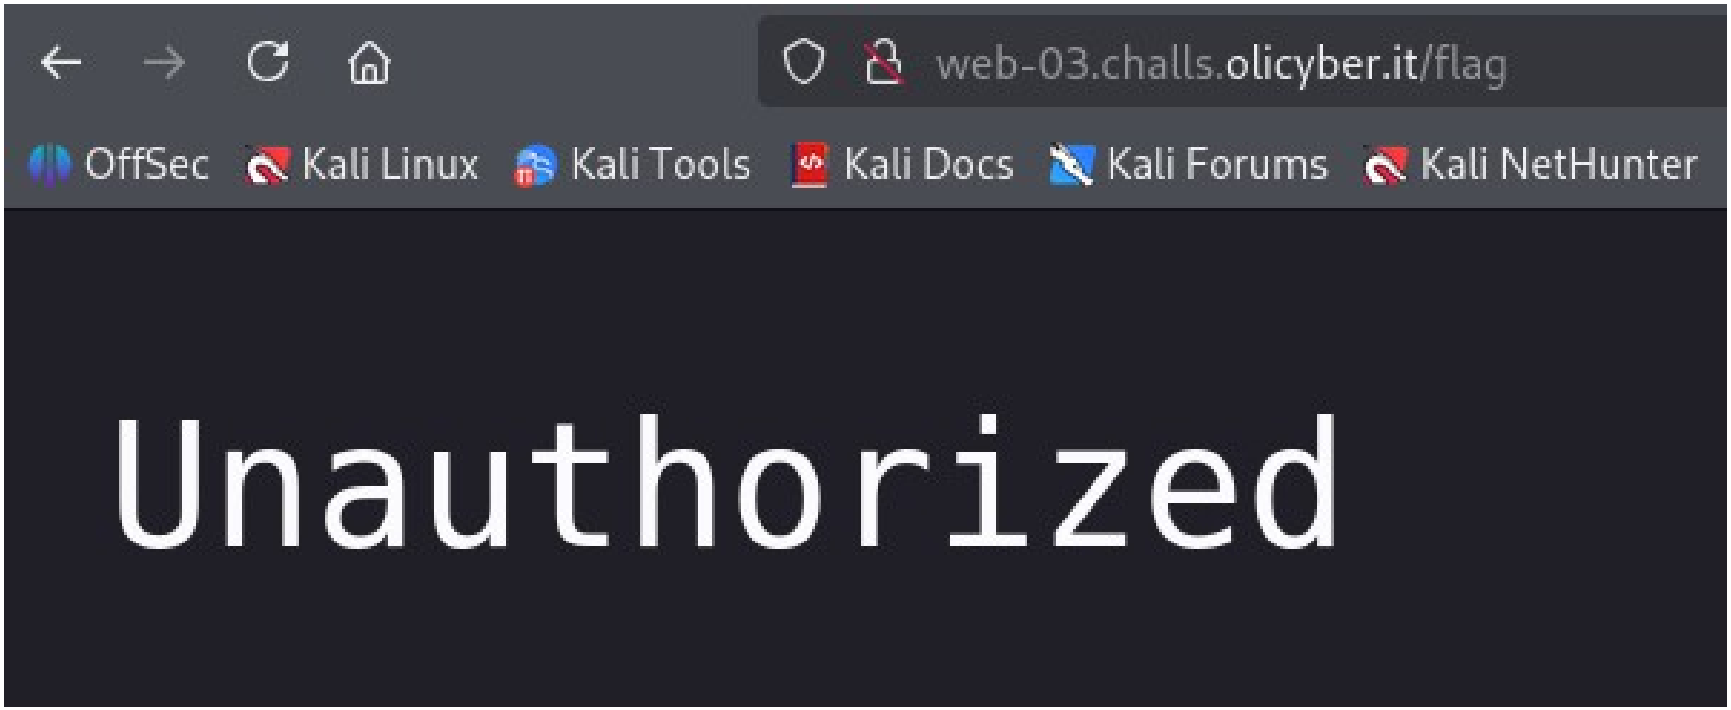

In the web browser, you can navigate to the specified page, then--

OLIcyber – Web 3
Solve Method 1: Web Browser

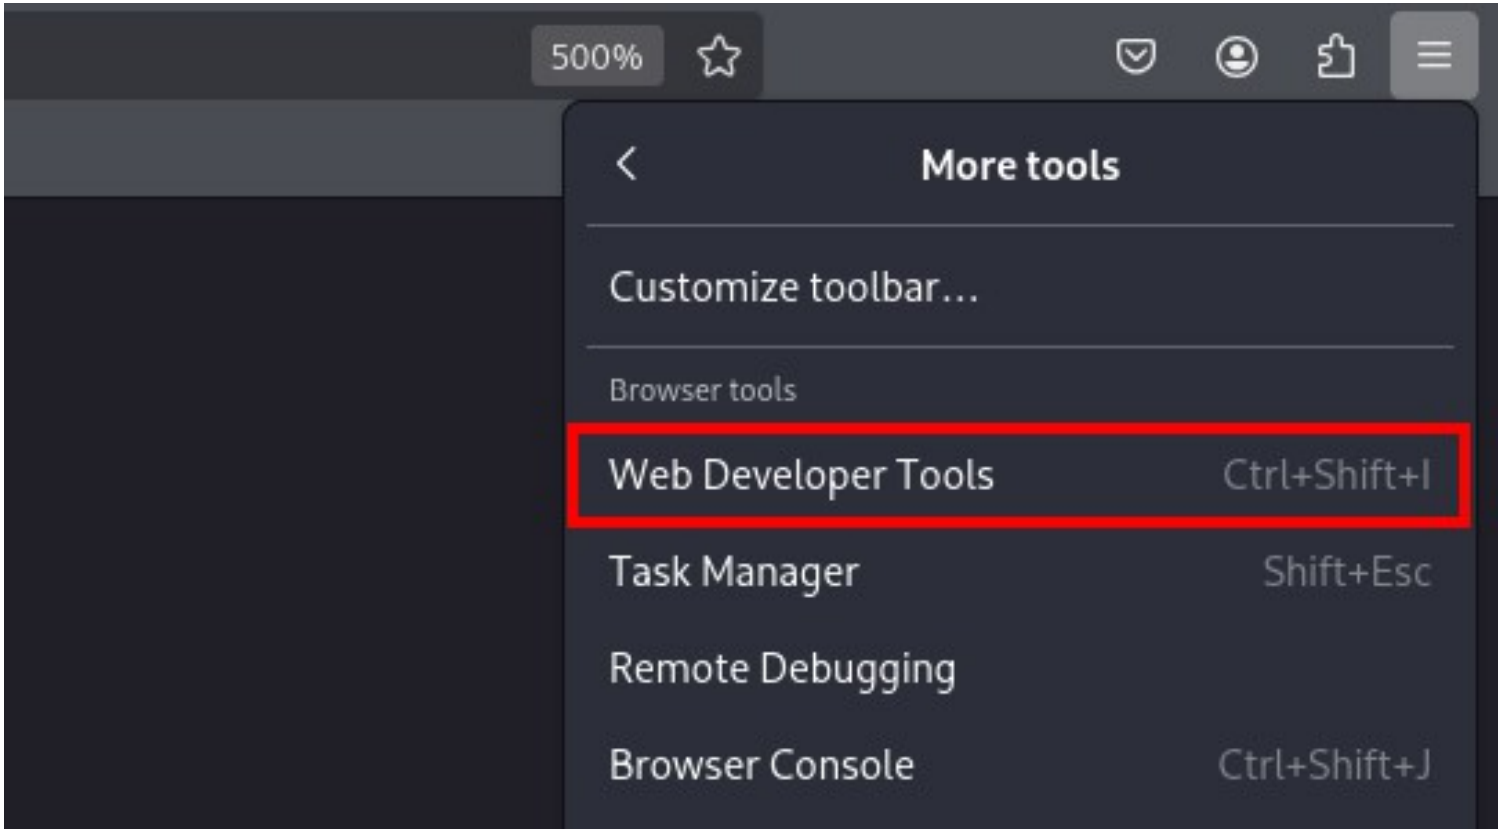

Activate the Web Developer Tools--

OLIcyber – Web 3
Solve Method 1: Web Browser

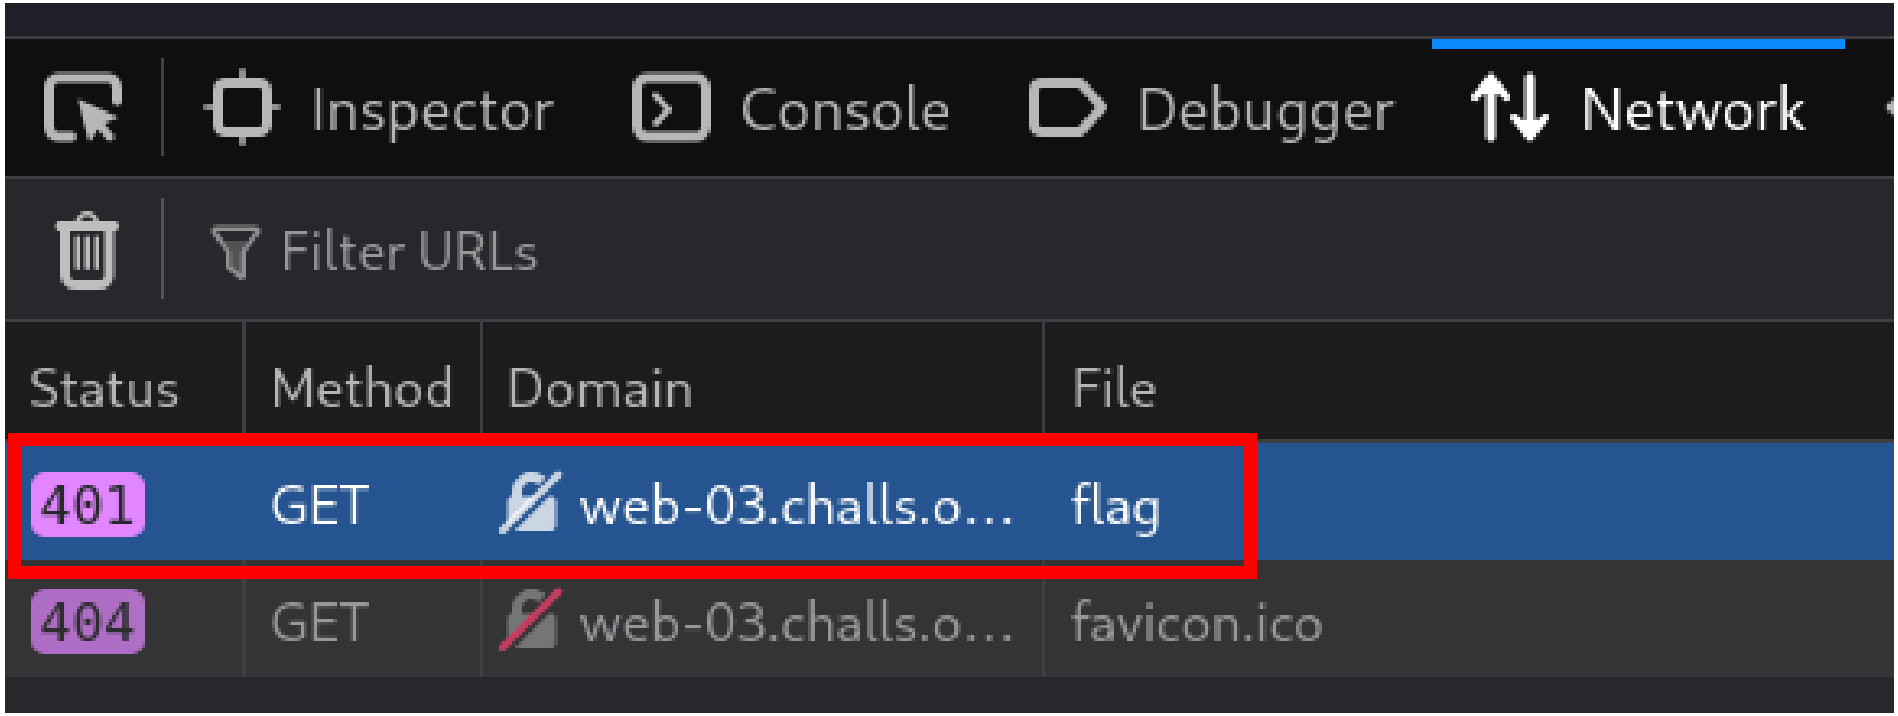

Then go to the Network tab and reload the webpage, then select the failed request

OLIcyber – Web 3
Solve Method 1: Web Browser

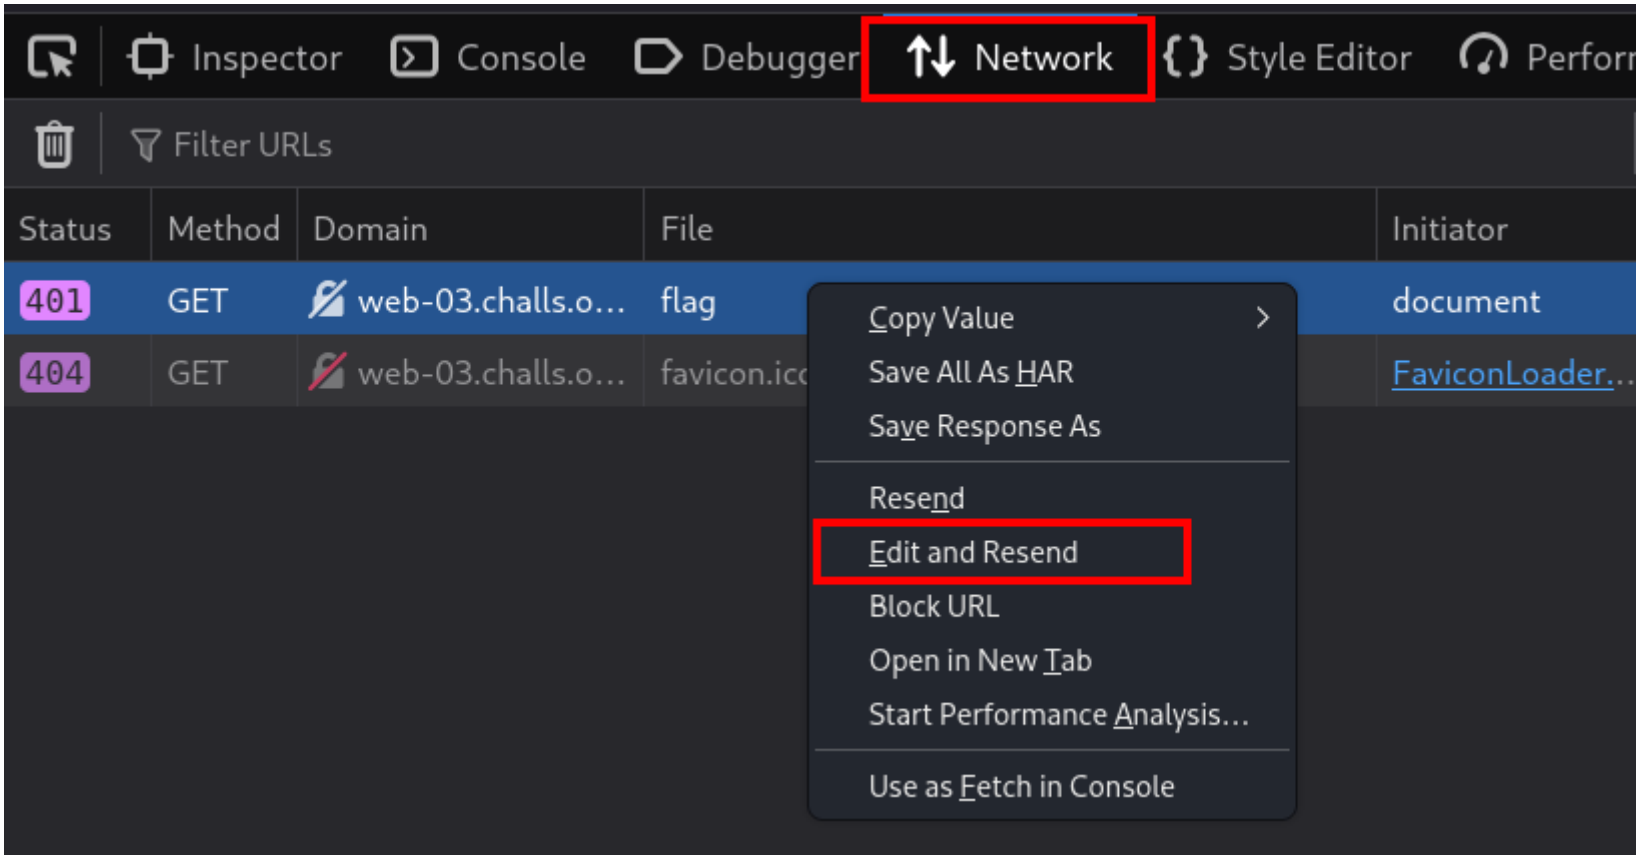

Then right-click the request and click on the Edit and Resend option

OLIcyber – Web 3
Solve Method 1: Web Browser

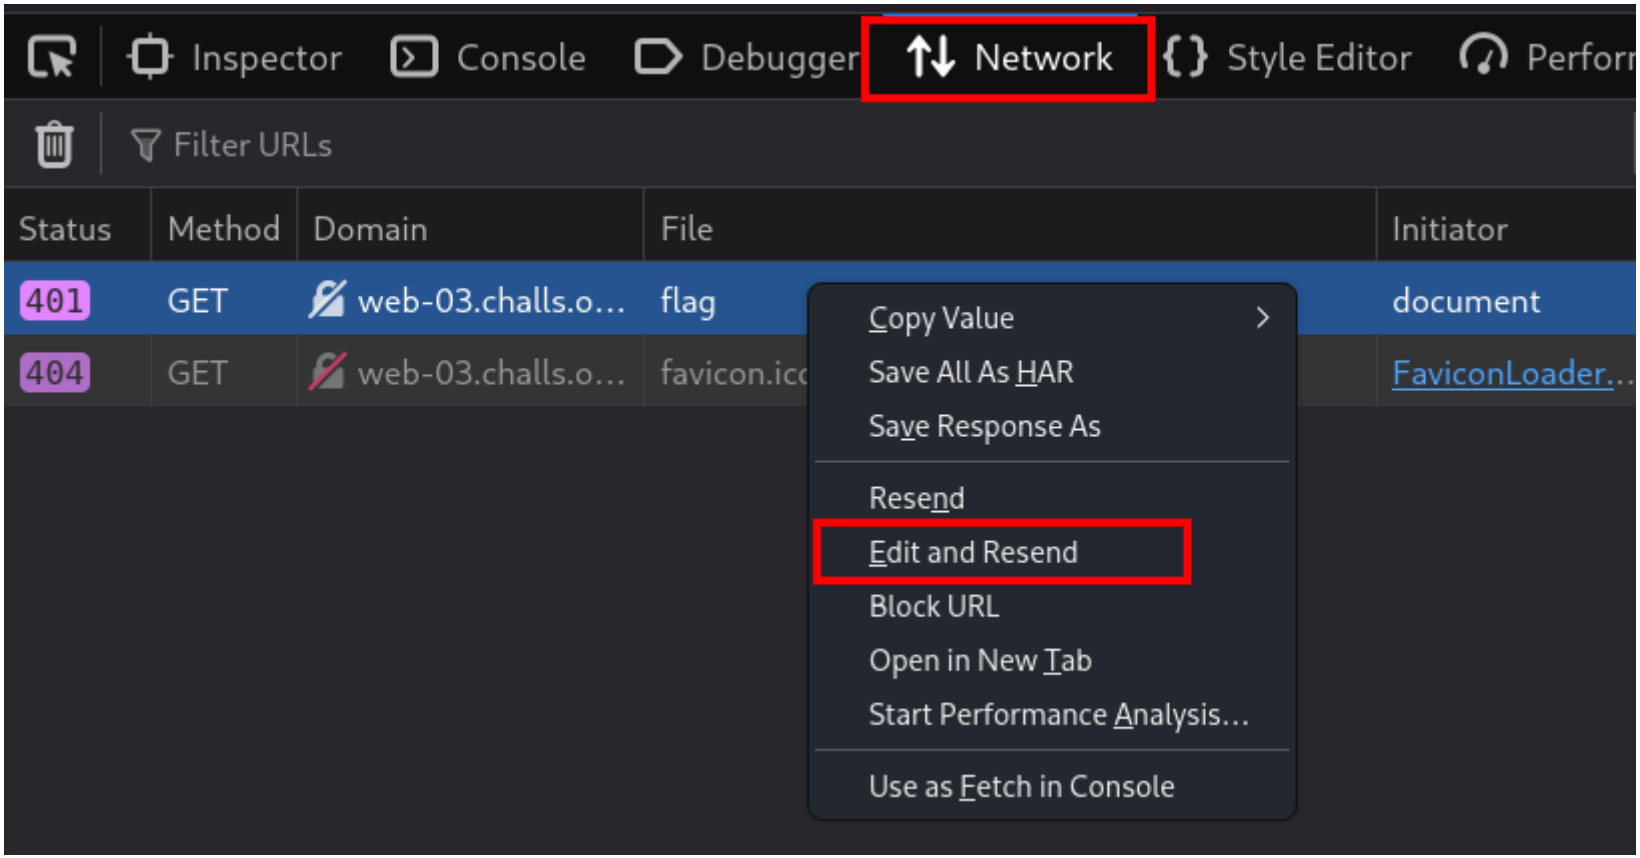

Then right-click the request and click on the Edit and Resend option

OLIcyber – Web 3
Solve Method 1: Web Browser

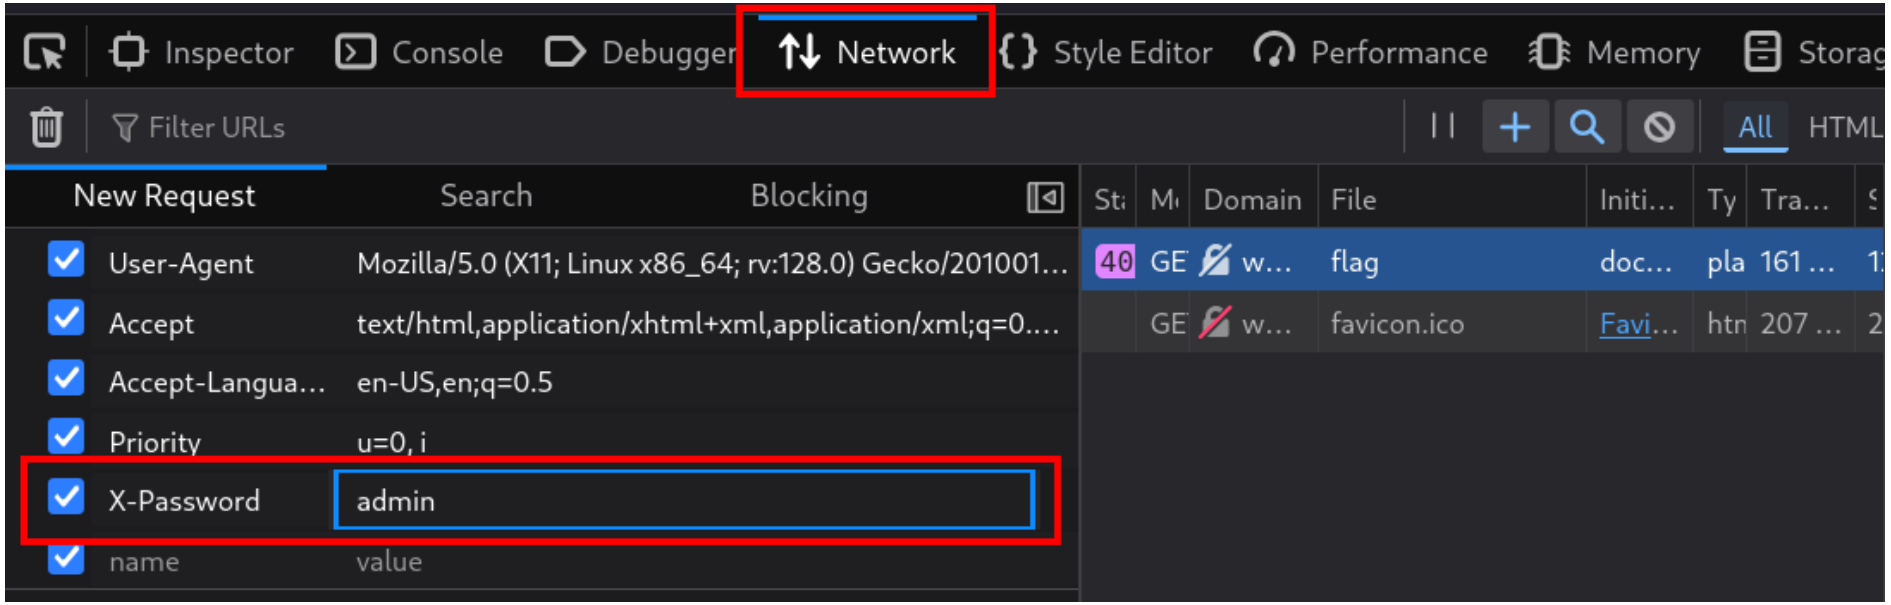

Then in the New Request tab, scroll down to the Headers section and create a new Header: **X-Password** with a value of **admin**

OLIcyber – Web 3
Solve Method 1: Web Browser

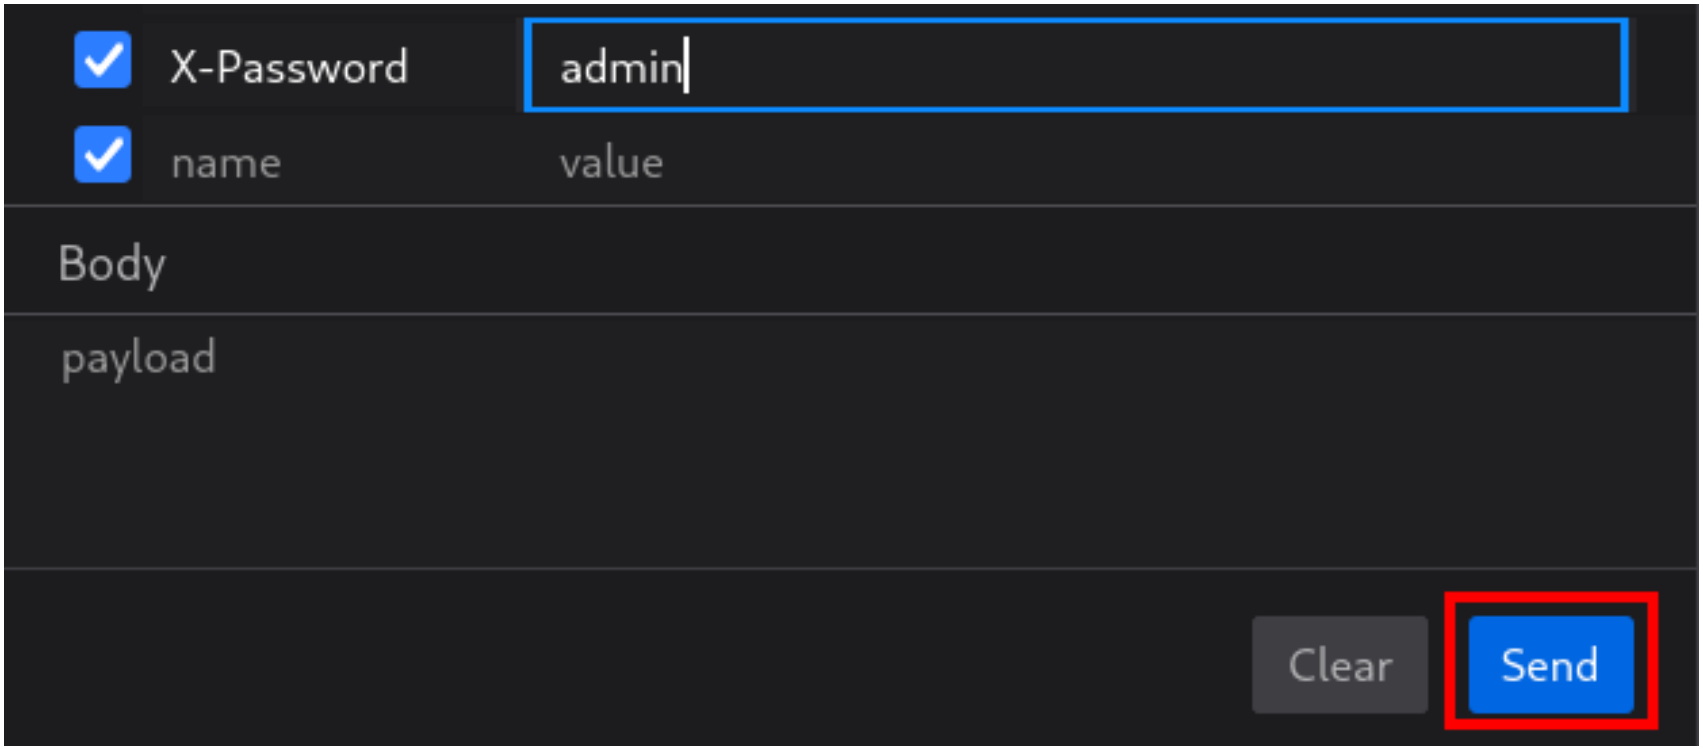

Then scroll down and click on the **Send** button

OLIcyber – Web 3
Solve Method 1: Web Browser

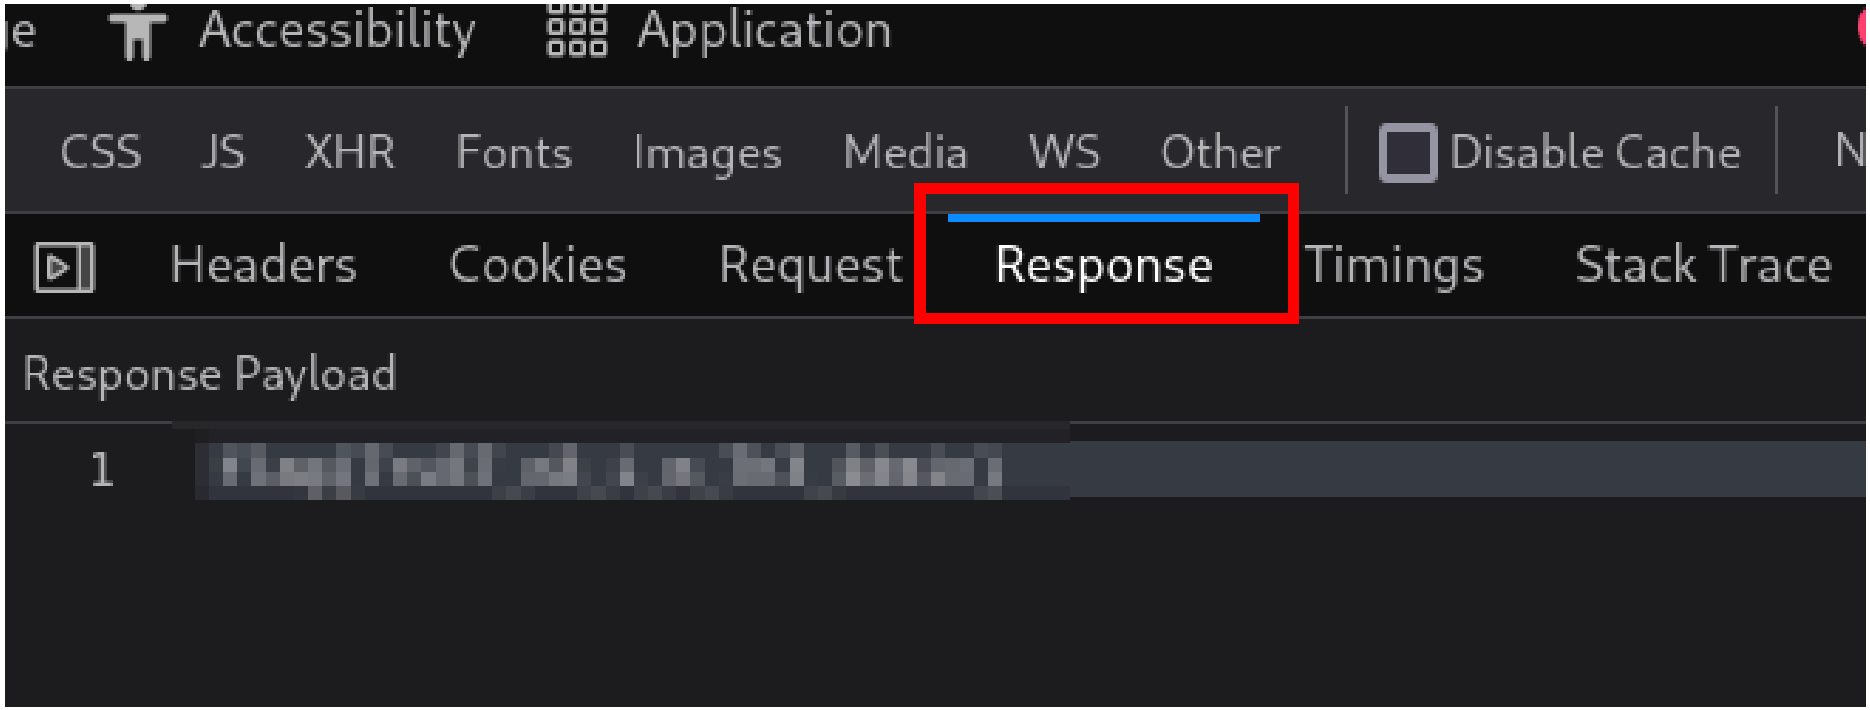

In the resulting window, click on the Response tab, and see the flag for the challenge

OLIcyber – Web 3
Solve Method 2: Curl

```
curl                        ⟵ the program itself
-v                          ⟵ return verbose output
-H "X-Password: admin"      ⟵ send an arbitrary header
```

To solve this challenge with Curl, we have to send the command using the -H parameter

OLIcyber – Web 3
Solve Method 3: Python

```
custom_headers = {'X-Password': 'admin'}

get_req = requests.get(URL, headers=custom_headers)
```

If we use the Python Requests module to send a GET request with an arbitrary header, we have to use the module's get() method with the **headers** parameter