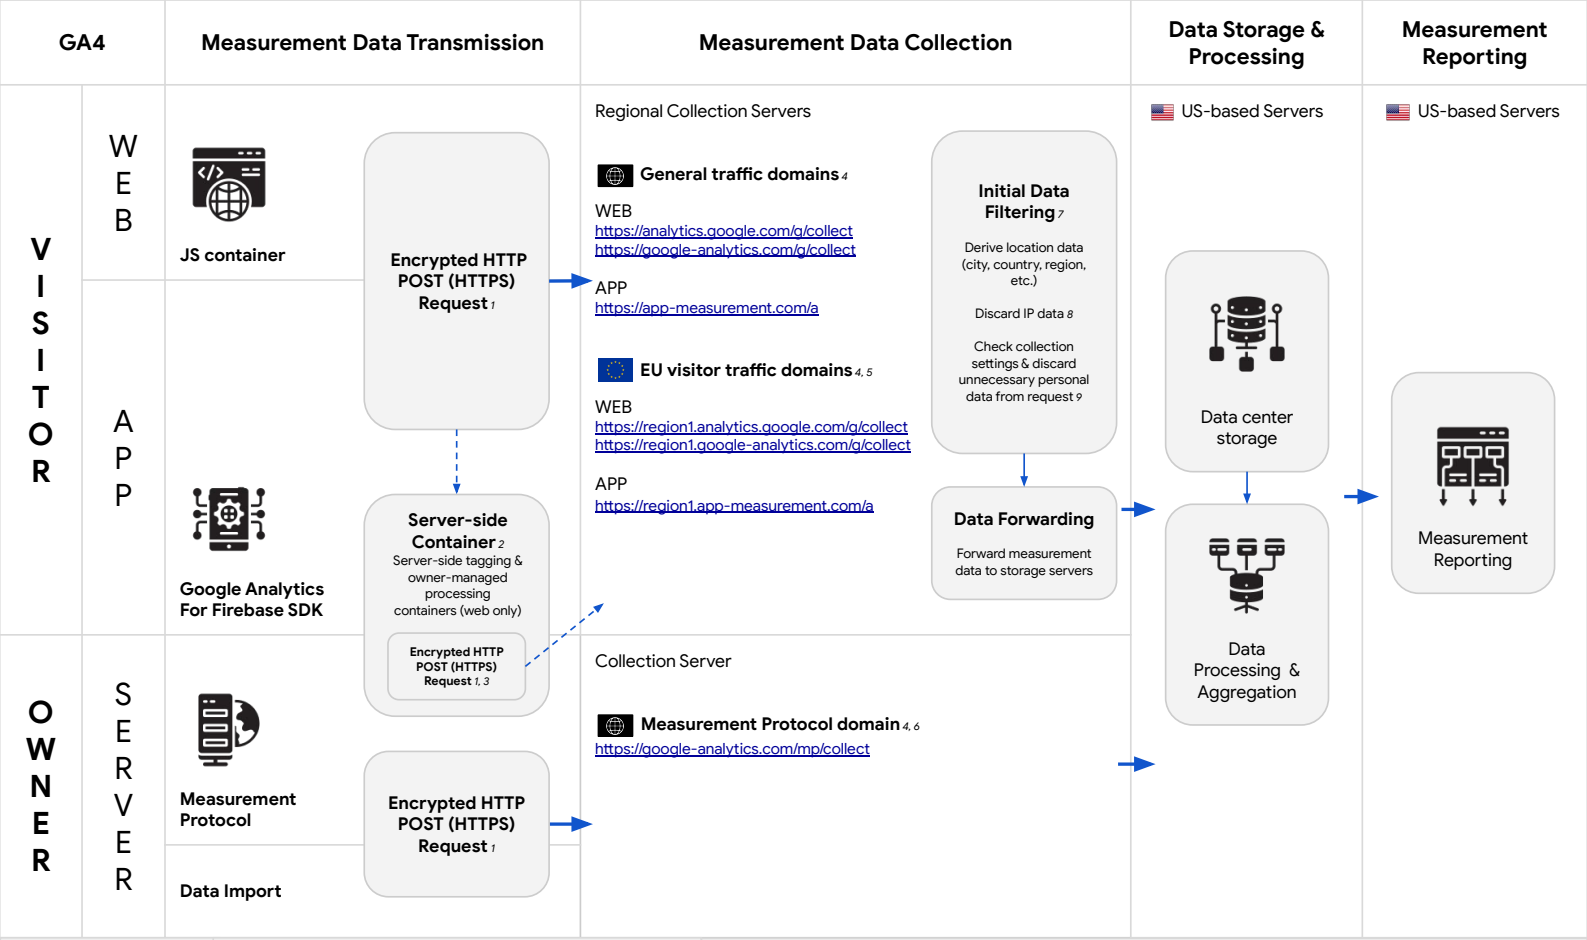


1. HTTPS request header
Request URL
IP Address
User Agent String
Language
Query string parameters

1. HTTPS request body
Cookies & Identifiers: device id (client_id, app_instance_id), IDFA, AdId, user_id (optional)
User properties (optional)
Events (e.g. views, clicks, purchases, etc.)
Event parameters: (e.g. timestamp, price, currency, etc.)

2. Data owners may use server-side tagging and owner-managed processing containers for initial web data collection.
3. All HTTPS requests from server-side tagging and MP (#6) to Analytics Collection are routed to general traffic domains.
4. Data collection is routed to the closest available server based on location.
5. Traffic from EU-based visitors (based on IP geo lookup) is routed to EU-based collection servers for data filtering.
6. MP allows server-to-server interactions, allowing the customer to remove unwanted browser metadata (GA4 MP).
7. Data filtering occurs in server memory and typically processes and forwards data to US servers within 15 minutes.
8. IP data is only used for geo-location and immediately discarded prior to forwarding to Analytics storage. For EU- based traffic, IP data is discarded from all Google logs and cannot be accessed or used for any additional use cases.
9. This includes regional data collection for advertising features or granular location & device data.