Linköping University | Institute for Analytical Sociology
Master's thesis, 30 ECTS | Computational Social Science
2026 | ISRN

Title
– Descriptive Subtitle

Titel på svenska
– Undertitel

Thomas Haase

Supervisor: Károly Takács
External supervisor: Philipp Lorenz-Spreen
Examiner: Examiner

Linköping University
SE–581 83 Linköping
+46 13 28 10 00, www.liu.se

Contents

2 Introduction . . . 1
- 2.1 Motivation & Relevance Statement [280w, 0.5p] . . . 1
- 2.2 Research Question [280w,0.5p] . . . 1
- 2.3 Summary of other Sections (Basically summary of Introduction Paragraphs) [550w - 1 page] . . . 1

3 Literature Review . . . 2
- 3.1 Introduction [100w, 0.2page] . . . 2
- 3.2 Theoretical Background (start broad) [650w, 1.2 pages] . . . 2
- 3.3 Relevant Theory (less broad) [680w, 1.3 pages] . . . 2
- 3.4 Case Study (detailed) [670w, 1.3 pages] . . . 2
- 3.5 Hypothesis (narrow down) [500w, 1page] . . . 2
- 3.6 Summary [100w, 0.2 page] . . . 2

4 Data and Methods . . . 3
- 4.1 Introduction [100w, 0.2p] . . . 3
- 4.2 Dataset Sampling & Description [264w, 0.5p] . . . 3
- 4.3 Operationalization & Measure [500w. 1p] . . . 3
- 4.4 Textanalysis (Discuss LLM, Prompt, Validation) [332w, 0.6p] . . . 4
- 4.5 Networkanalysis (Threads, Replynetwork, Egonetworks) [295w, 0.6p] . . . 6
- 4.6 OOPS I FORGOT THE SECTION WITH MY MODELS/Investigations WHILE WORDPLANNING . . . 6
- 4.7 Summary [100w, 0.2 p] . . . 8

5 Results . . . 9
- 5.1 Introduction [100w, 0.2p] . . . 9
- 5.2 Textanalysis: Result [510w, 1p] . . . 9
  - 5.2.1 Prompt Validation . . . 9
- 5.3 Network Analysis . . . 11
- 5.4 Network: Descriptives & Structure [469w, 0.9p] . . . 11
- 5.5 Network: Hierarchy Deepdive [386w, 0.7p] . . . 11
- 5.6 Network: Egonetworks [457w, 0.9p] . . . 11
- 5.7 H1: Model/Means [767w, 1.5p] . . . 11
- 5.8 Alter-Alter Mechanisms [531w, 1.0p] . . . 11
- 5.9 Summary [100w, 0.2 p] . . . 14

6 Discussion . . . 15
- 6.1 Introduction [100w, 0.2p] . . . 15
- 6.2 Summary of Results [347w, 0.7p] . . . 15
- 6.3 Interpretation (Relate Results to Literature Review) [387w, 0.7p] . . . 15
- 6.4 Implications (e.g. Significance of Findings, What side is supported, Gap filled) [372w, 0.7p] . . . 15
- 6.5 Limitations & Future Work [394w, 0.8p] . . . 15
- 6.6 Summary [100w, 0.2 p] . . . 15

7 Conclusion . . . 16

Appendix A: Additional Tables, Figures and Equations . . . 17

Symetry of F1 Score for swapping raters 17
Component Tables 17
Appendix C: Prompt 19
Appendix B: Code 20
Bibliography 21

List of Figures

Figure 1 Prompt Performance - Pairwise accuracy for all expert-expert and LLM-expert rater combinations across anti-elitism and people-centrism. 9
Figure 2 Prompt Performance - Pairwise F1 scores for all expert-expert and LLM-expert rater combinations across anti-elitism and people-centrism. 10
Figure 3 Title of the Figure 10
Figure 4 Title of the Figure 11
Figure 5 absdiff (Alter Similarity) 12
Figure 6 nodecov (Alter Activity) 13

List of Tables

Table 1 Component size distribution of the reply network 18

Abstract

insert abstract

1 Acknowledgements

1.1 Generative AI Statement

Find what ai use is allowed

1.2 Ethics Statement

what is probelmatic???

2 Introduction

2.1 Motivation & Relevance Statement [280w, 0.5p]

- https://publications.jrc.ec.europa.eu/repository/handle/JRC144603
  - decentralization of information is already happening

2.2 Research Question [280w,0.5p]

2.3 Summary of other Sections (Basically summary of Introduction Paragraphs) [550w - 1 page]

REFORMULATE AFTER WRITING RESULTS PART

Question: How does the usage of populist rhetoric by german Members of Parliament on Twitter affect the politicians engagement communities?

H1: German MPs who use populist rhetoric have more strongly interconnected alters in their reply ego networks than those who do not.

- linguistic construction of in/outgroup
- hyping the ingroup –> selfselection effect keeps only engaged users with knowledge of groups social facts that actively reply to each other (Oswald, Schulz, and Lorenz-Spreen 2025)

3 Literature Review

3.1 Introduction [100w, 0.2page]

3.2 Theoretical Background (start broad) [650w, 1.2 pages]

3.3 Relevant Theory (less broad) [680w, 1.3 pages]

3.4 Case Study (detailed) [670w, 1.3 pages]

3.5 Hypothesis (narrow down) [500w, 1page]

3.6 Summary [100w, 0.2 page]

4 Data and Methods

4.1 Introduction [100w, 0.2p]

4.2 Dataset Sampling & Description [264w, 0.5p]

The Dataset used in this study was kindly provided by Armin Pournaki from the Max Planck Institute for Mathematics in the Sciences, Leipzig. The dataset holds tweets and replies directed at German members of parliament aswell as their retweets and referenced tweets, collected over a one wekk from February 7 to February 14, 2022. Only the MPs tweets and their replies are analysed since the reply network best captures social interactions of engagementcommunities. Data were obtained via Twitter's streaming API using two parallel strategies. The follow stream tracked replies to MP-generated tweets, while the track stream captured tweets mentioning MP handles (e.g., "@username"), including direct and nested replies. Protected accounts were excluded. Both datasets were combined and deduplicated. From the raw data, reply-threads were constructed by linking tweets through directed reply chains. These interactions were then aggregated to a user-level reply network, weighted by the number of exchanges. Thus, the dataset enables an analysis of interaction patterns between politicians and their engagement communities on social media. To deliniate the set of politicians and add their name and party information, a list of parliamentary members of the 19th, 20th, and 21st German Bundestag is obtained from the Bundestags Webarchiv and added to the original dataset through their twitter-account links (Bundestag 2026). The complete dataset consists of 693 015 Tweets in the twitwi format (medialab 2026).

German political news from 7–14 February 2022 were dominated by the Omikron wave's peak and the escalating Russia-Ukraine crisis. As Russia massed troops for what would become Europe's largest military offensive since WWII, Chancellor Scholz met President Biden to discuss Germany's Nord Stream 2 dependency. Domestically, Scholz's coalition split over a general vaccine mandate, with FDP Justice Minister Buschmann deeming it constitutionally dubious and proposing mandatory physician consultations for unvaccinated adults as a softer alternative.

4.3 Operationalization & Measure [500w. 1p]

Current studies almost uniformly base their understanding of populism on Mudde (2004)'s definition of populism as [two homogeneous and antagonistic groups, 'the pure people' versus 'the corrupt elite', and which argues that politics should be an expression of the volonté générale (general will) of the people.]. While all operationalizations include a "pro-people" and "anti-elite" one of multiple third dimensions is often implemented aswell like the inclusion of anti-pluralist attitudes, the distinction

between leftwing and rightwing populism or agitating against horizontal outgroups like minorities (Aalberg et al. 2017; Castanho Silva et al. 2020; Meyer et al. 2025). Populist Attitudes are not only measured through surveys (Castanho Silva et al. 2020), but also through observational studies of political discourse on social media (Meyer et al. 2025) leveraging LLMs.

This study operationalizes the core dimensions of Mudde (2004)'s definition, People Attitude, Elitist Attitude, and Antagonism, by instructing a large language model through an annotation prompt (see Appendix). Each dimension is defined with explicit scoring anchors: People Attitude and Elitist Attitude are measured on bidirectional scales from –3 to +3, where positive values indicate support for and negative values indicate opposition to the respective group, while Antagonism is measured on a unidirectional scale from 0 (no divide) to 6 (existential threat), with labeled thresholds distinguishing dissatisfaction (1–2), active blame (3–4), and existential threat framing (5–6). The prompt leverages chain-of-thought style reasoning and few-shot examples to guide the models annotation behaviour. To guide the models reasoning letting it question itself throughout the process lead improved the results immensly compared to hard rule-based checks.

The prompt follows the structure from Liu et al. (2026). It begins with a role definition and a pre-analysis check if the text carries any content other than just a link or a user mention. It proceeds by defining "People Attitude", "Elite Attitude" and "Antagonism". The definition of "the people" is restricted to a broad ordinary majority and explicitly excludes named individuals, lists of specific persons, and narrow subgroups unless the text frames them as standing in for the general public. Similarly, elite criticism is only scored when the target is a generalized powerful class rather than a single individual or a specific policy disagreement. In the last major section the prompt invokes the chain-of-thought before assigning scores, the model must produce a holistic redescription of the post's rhetorical strategy, an actor-by-actor analysis that classifies each referenced person or group by scale (individual, institution, or generalized class) and dimension-specific explanations that articulate the reasoning behind each score. At each step, the model is asked to consider alternative readings and flag its confidence as LOW when a reasonable coder could disagree. Three few-shot examples are included to calibrate the model's decision boundaries: a strongly populist post with high people, elite, and antagonism scores, a non-political post that should receive all zeros, and an ambiguous post where institutional criticism could plausibly be read as either targeted policy dissatisfaction or broader anti-elite attitude. This example structure is designed to discourage binary classification tendencies and encourage the model to use the full range of each scale.

The prompt is included as a systemprompt and appended with the to be annotated tweet. The model outputs its reasoning and scores in a json format.

4.4 Textanalysis (Discuss LLM, Prompt, Validation) [332w, 0.6p]

Computationally methods driven text analysis is based on linguistic concepts. A corpus of documents is divided in tokens as semantically meaningful units of analysis which are often words. The simplest text classification techniques are usually wordfrequency based dictionary methods. Some of which already mechanistically take context of wordappearence into account (Ribeiro et al. 2016). While simple machine learning classifiers like naive bayes models are statistically more elaborate, deeplearning models are able to integrate interactions between tokens allowing for even better predictions. But deep learning architectures like convolutional neural networks trade variance for increased local bias through usage of filters (Sohil, Sohali, and Shabbir 2022). Transformer architectures implement modeling of long-range dependencies by implementing self attention on a micro level weighing the importance of every individual input token for other each individual input token (Cordonnier, Loukas, and Jaggi 2020). Qwen3-235B-A22B-Instruct-2507-FP8 is using more elaborate attention mechanisms like grouped query attention (Yang et al. 2025). The model also implements expert segmentation, is multilingual and has 8-bit floating weights (Yang et al. 2025).

Output quality of large language models is highly dependent on prompt design (Liu et al. 2026). Prompt engineering is conducted iteratively by drawing small random samples of tweets from the corpus and classifying it using an initial prompt. The resulting reasoning steps contained in the LLMs JSON output are then qualitatively assessed with regard to coherence and later label accuracy. Based on identified shortcomings, the prompt is systematically adjusted and the process is repeated. Early versions of the prompt contained were structured in the style described by Liu et al. (2026), later additional rule based checks were integrated, the coherence of the phrasing was adjusted and lastly the rulebased checks were changed to questions prompting the LLM to question its judgements and certainty. External validity is tested after improving the prompt qualitatively until reaching satisfying reasoning performance. The expert annotated training dataset of Bundestag for fine tuning the PopBERT populism classification transformer model is used (Erhard et al. 2025). The dataset contains 8795 sentences of Bundestag speeches with binary annotations of five experts on the people-centrism and anti-elite dimension (Erhard et al. 2025). After annotating validation dataset with the developed systemprompt and Qwen3-235B-A22B-Instruct-2507-FP8 accuracy

$$\text{Accuracy} = \frac{1}{n}\sum_{i=1}^{n} \mathbb{1}\left[\text{rater}_A^{(i)} = \text{rater}_B^{(i)}\right],$$

aswell as F scores

$$\text{Precision} = \frac{\text{both rated positive}}{\text{both rated positive} + \text{only predicted positive}}$$

$$\text{Recall} = \frac{\text{both rated positive}}{\text{both rated positive} + \text{only reference positive}}$$

$$F_1 = \frac{2 \cdot \text{Precision} \cdot \text{Recall}}{\text{Precision} + \text{Recall}}$$

for pairs of expert raters with each other and the LLM annotations are calculated. For validation the bidirectional rating scale of the LLM is collapsed to binary labels matching the direction of pro-people and anti-elite. While the F1 score is not symetric for swapping labels it is symetric for swapping raters (see Appendix).

4.5 Networkanalysis (Threads, Replynetwork, Egonetworks) [295w, 0.6p]

The reply threads are constructed by treating tweets as nodes that are linked through directed replies. A component in the constructed thread network is then a replythread with one rootnode that is only recieving links marking the direction of a reply. Some reply chains trace back to MP tweets posted before the collection period, so the root node has no row in the dataset. Matching the target tweets user information against the politician table recovers their authorship, recovering 2,631 of 89,561 threads (2.9%). Threads root tweet information like politician with e.g. party and followerinformation, are then stored within the reply tweets of the respective thread and aswell added to each tweet in the reply network.

The main research question requires a network of interactions plausibly representing an engagement community. A weighted user centric reply network with users as nodes and replies as directed links is constructed. The original tweet-based dataset holding politician and threadinformation served as the basis for construction with its `user_id` and `to_userid` variables. The resulting network is directed with edgeweights based on replycount. It holds 81 295 user-nodes connected through 239 502 reply-links distributed among 1865 components. A giant component holds (77 194) 94% of all nodes. 1207 users are contained in components of size 2, one original user, one replying user, as the threadsize holding the second most nodes. The second largest component held 41 (0.05%) users (see the table in appendix). The network analysis is based on the giant component to make computation more feasable leading to a loss of the network periphery without any actual structurally relevant threads.

Tweet-level populism dimensions (people scores, elitism scores, antagonism scores) are aggregated per user by computing weighted means across each user's tweets, then combined into a userlevel composite populism score. These user-level scores are added as vertex attributes to the reply network.

To definitly deliniate the dataset to replies from politicians tweets reply-edges not appearing underneath politicians threads are deleted and isolates are removed. Thereby removing rest-replythreads of e.g. referenced tweets.

4.6 OOPS I FORGOT THE SECTION WITH MY MODELS/ Investigations WHILE WORDPLANNING

A descriptive exploratory analysis describes first the results of the textanalysis and second the networkstructure. The textanalysis results are described for the entire

dataset containing also retweets and referenced tweets in order to capture the broader political discourse during the week. Detected populism dimensions are further explored by party additional to tweets textual content.

Following that the reply network structure is explored through a visualization using the Distributed Recursive Graph Layout and validated through closer inspection of degree and local clustering distributions (Martin, Brown, and Wylie 2007). The Distributed Recursive Graph Layout (DrL) lays out a graph by applying repulsion and attraction forces between nodes to prevent overlap and keeping connected nodes close. Beginning with randomness so nodes can move freely and avoid poor configurations, gradually reducing movement until positions stabilize. Once positioned, spatially close nodes are merged into representative summary nodes producing a coarser version of the graph. The cycle of coarsening and repositioning repeats until the graph is sufficiently small to lay out directly. Finally the process is reversed, expanding each simplified graph back one level at a time, using the prior layout as an initial arrangement.

The structure of politicians egonetworks is compared to answer the main question about local engagement communities. Mean alter degree is used as the primary measure of alter interconnectedness, capturing the average number of connections each alter maintains to other alters within the ego network. While density would be a more established measure in usual cases it is inversely related to network size, making comparisons across ego networks of different scales unreliable. As a robustness check, the fragmentation ratio is additionally tested since this measure relates the number of connected components to the overall network, providing a complementary perspective on whether alters form a cohesive neighborhood or fragment into isolated clusters.

- explain model variables
  - TODO: include mean thread size in model

```r
# ==== MODEL POPULISM ====

# === Baseline ===
m0 <- lm(mean_alter_degree ~ populism_binary,
         data = d_ego)
summary(m0)
check_model(m0)
ggsave("../images/5-modelcheck_m0.png",
       width = 11, height = 9, dpi = DPI)
# === Full ===
m1 <- lm(mean_alter_degree ~ populism_binary +
           ego_degree +
           user_followers +
           mean_thread_size,
          data = d_ego)
summary(m1)
check_model(m1)
ggsave("../images/5-modelcheck_m1.png",
       width = 11, height = 9, dpi = DPI)
```

```r
# ==== ROBUSTNESS CHECK ====
d_ego$fragmentation <- d_ego$component_count / d_ego$n_alters

r1 <- lm(mean_alter_degree ~ populism_binary +
           ego_degree +
           user_followers +
           mean_thread_size,
         data = d_ego)
summary(r1)
check_model(r1)
ggsave("../images/5-modelcheck_r1.png",
       width = 11, height = 9, dpi = DPI)
```

4.7 Summary [100w, 0.2 p]

- Hat armin den Datensatz schonmal irgendwo verwendet, sodass ich ihn zitieren könnte?

1. First write this data collection section, send to armin for refinement and clarification purposes.
2. write a refined proposal that focuses on politicians as egonets

==> look in data where politicians are in reply network. make sure to filter first ofr ONLY the trees coming from politicians

5 Results

5.1 Introduction [100w, 0.2p]

5.2 Textanalysis: Result [510w, 1p]

5.2.1 Prompt Validation

- Skewed dataset inflates accuracy
- F scores are not biased through large number of 0 populism scores
- F scores show that prompt is rating tweet on an expert level

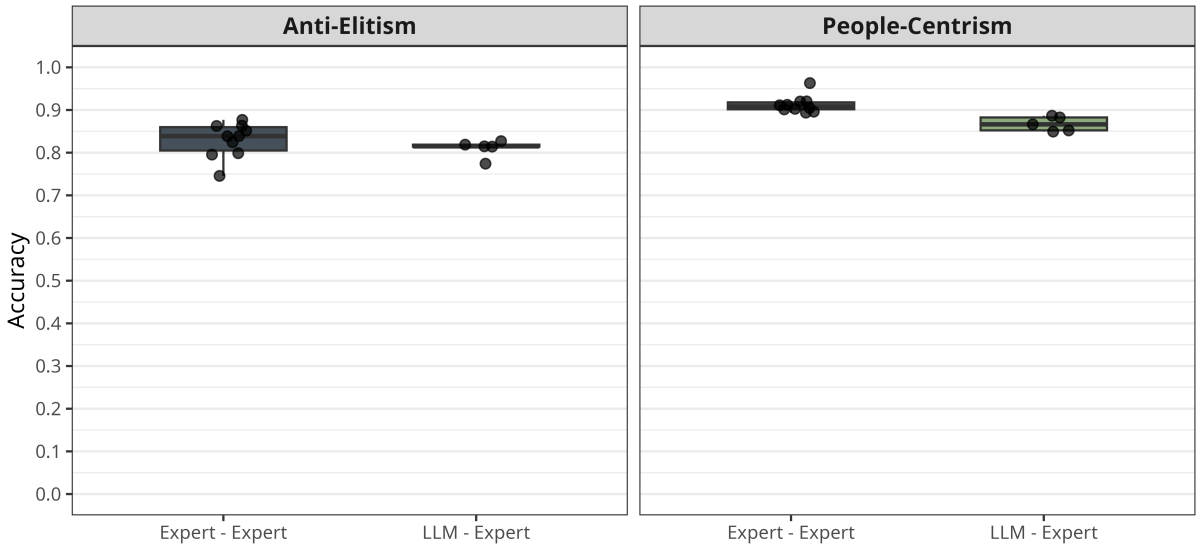

Figure 1: Prompt Performance - Pairwise accuracy for all expert-expert and LLM-expert rater combinations across anti-elitism and people-centrism.

Pairwise accuracy between binarized Qwen3-235B-A22B-Instruct-2507-FP8 ratings using the developed populism system prompt and five expert annotators from the PopBERT training corpus (Erhard et al. 2025). Each point represents one rater pair (expert-expert or LLM-expert). LLM ratings were collapsed from a 7-level Likert scale to binary scores (anti-elitism: score < 0; people-centrism: score > 0).

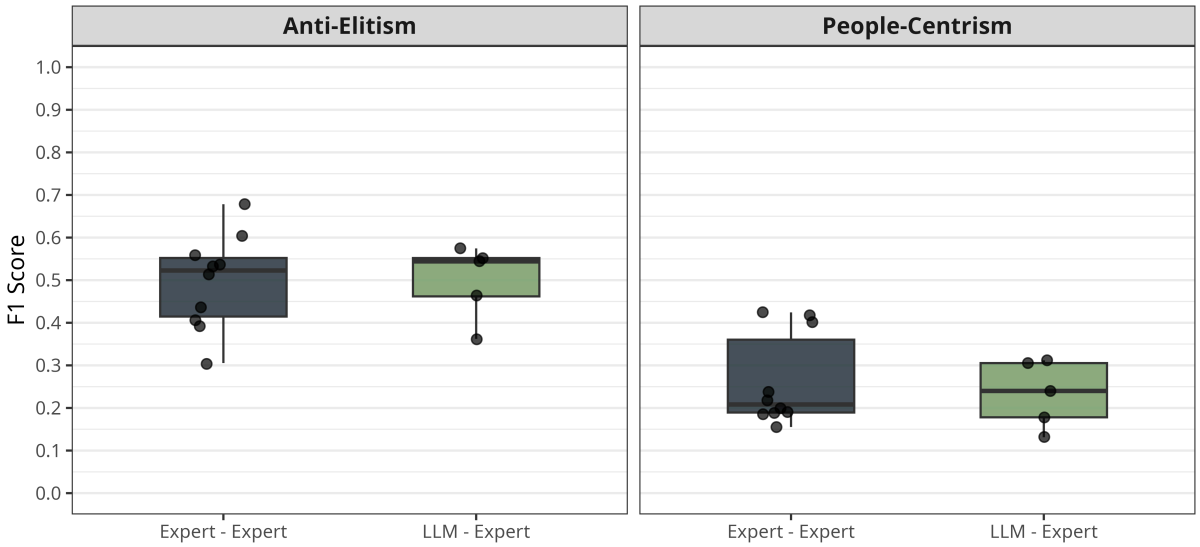

Figure 2: Prompt Performance - Pairwise F1 scores for all expert-expert and LLM-expert rater combinations across anti-elitism and people-centrism.

Pairwise F1 scores between binarized Qwen3-235B-A22B-Instruct-2507-FP8 ratings using the developed populism system prompt and five expert annotators from the PopBERT training corpus (Erhard et al. 2025). Each point represents one rater pair (expert-expert or LLM-expert). LLM ratings were collapsed from a 7-level Likert scale to binary scores (anti-elitism: score < 0; people-centrism: score > 0).

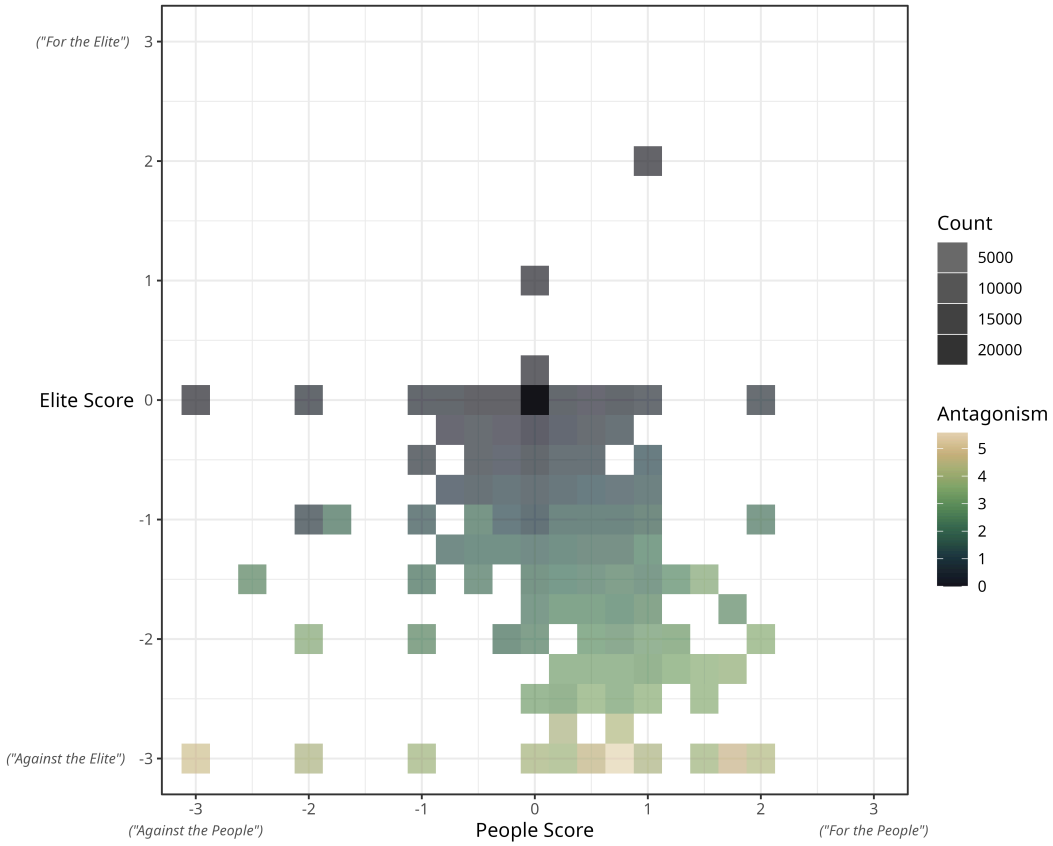

Figure 3: Title of the Figure

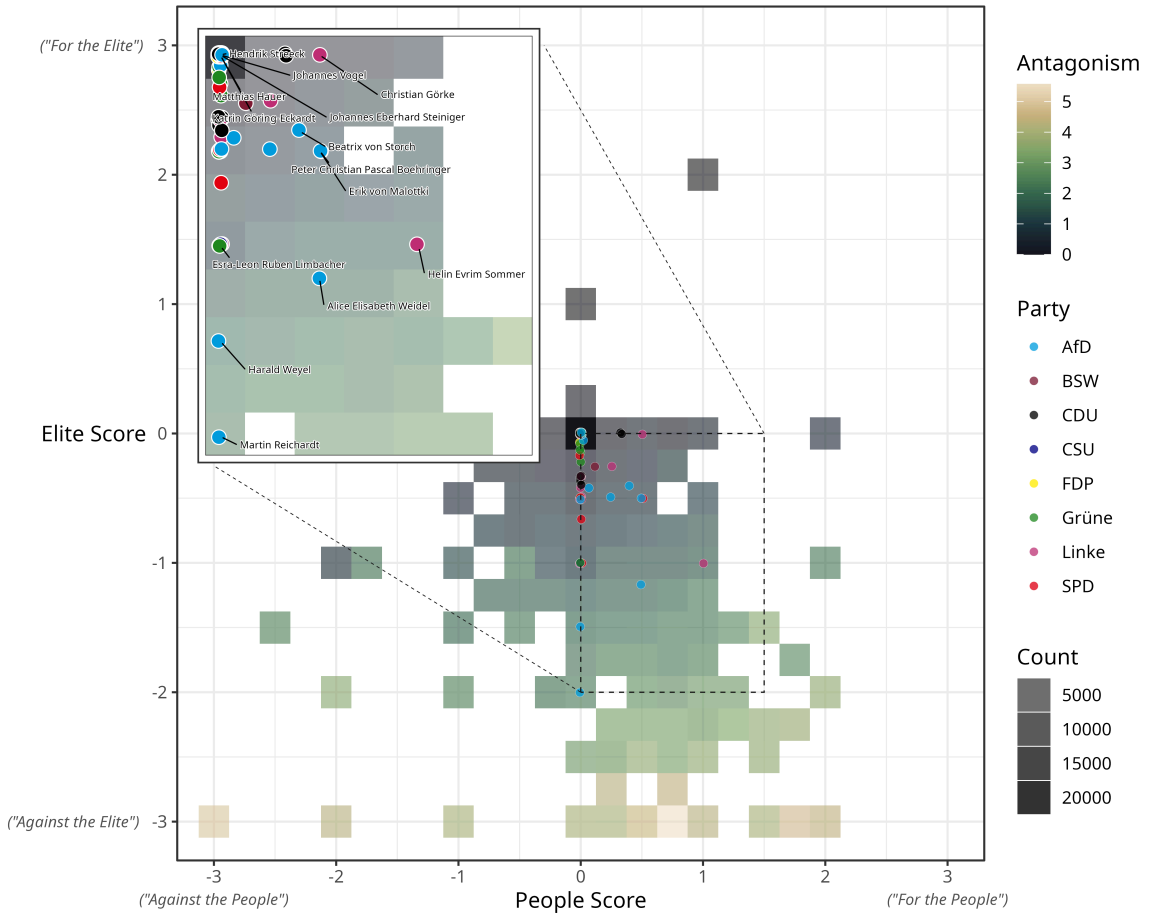

Figure 4: Title of the Figure

5.3 Network Analysis

5.4 Network: Descriptives & Structure [469w, 0.9p]

5.5 Network: Hierarchy Deepdive [386w, 0.7p]

5.6 Network: Egonetworks [457w, 0.9p]

5.7 H1: Model/Means [767w, 1.5p]

5.8 Alter-Alter Mechanisms [531w, 1.0p]

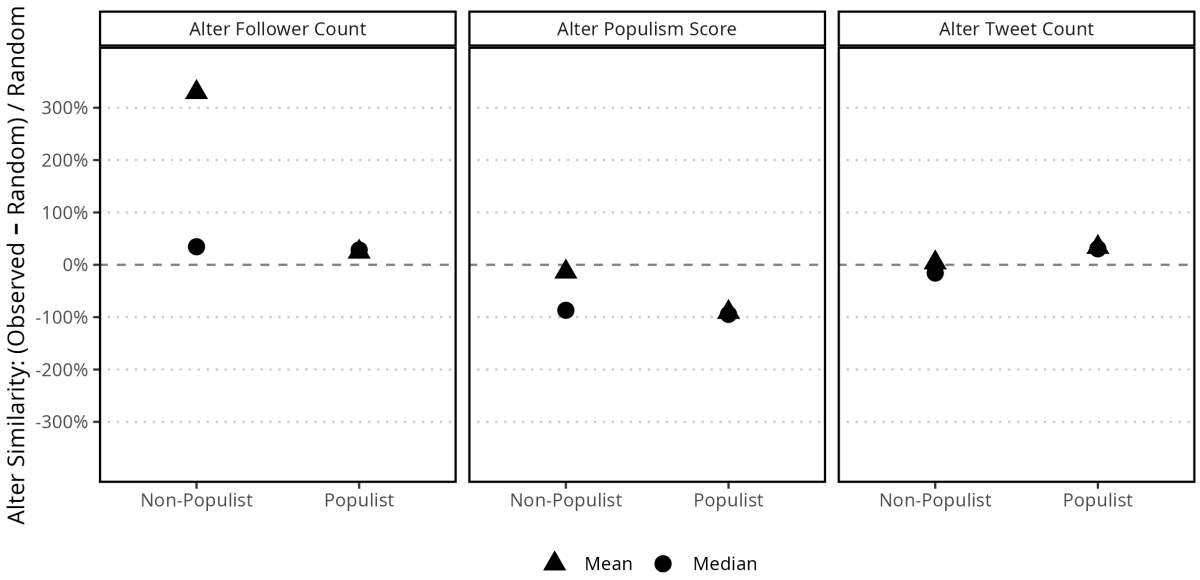

Figure 5: absdiff (Alter Similarity)

- What is shown
  - For each ego network, the mean absolute difference on a given attribute is computed once over all observed alter–alter ties and once over all possible alter–alter dyads. The ratio (observed − random) / random yields one value per ego network. The circle shows the median across all ego networks in each group, the triangle shows the mean.
- Alter Follower Count
  - Medians are slightly positive for both groups (35% non-populist, 25% populist).
  - Connected alters tend to be more different in follower count than random pairs — mild heterophily.
  - The non-populist mean explodes to 330% while the median stays low, indicating a heavily right-skewed distribution driven by a handful of ego networks where very high- and very low-follower alters disproportionately connect. The populist distribution is far more compact (mean ≈ median).
- Alter Populism Score
  - The strongest signal. Both medians sit near −90%, meaning connected alters hold nearly identical populism scores compared to what random pairing would produce.
  - This is strong, consistent populism homophily across both network types.
  - The non-populist mean is pulled upward to roughly −15%, again indicating right skew from a few outlier ego networks; the populist mean and median nearly overlap, suggesting a tight, well-behaved distribution.
- Alter Tweet Count
  - Medians hover near zero for non-populists (−10%) and slightly positive for populists (+30%).
  - There is no strong homophily or heterophily on tweet volume for non-populist ego networks, while populist ego networks show a mild tendency for connected alters to differ in tweet activity. Mean and median are close in both groups, so the distributions are relatively symmetric.

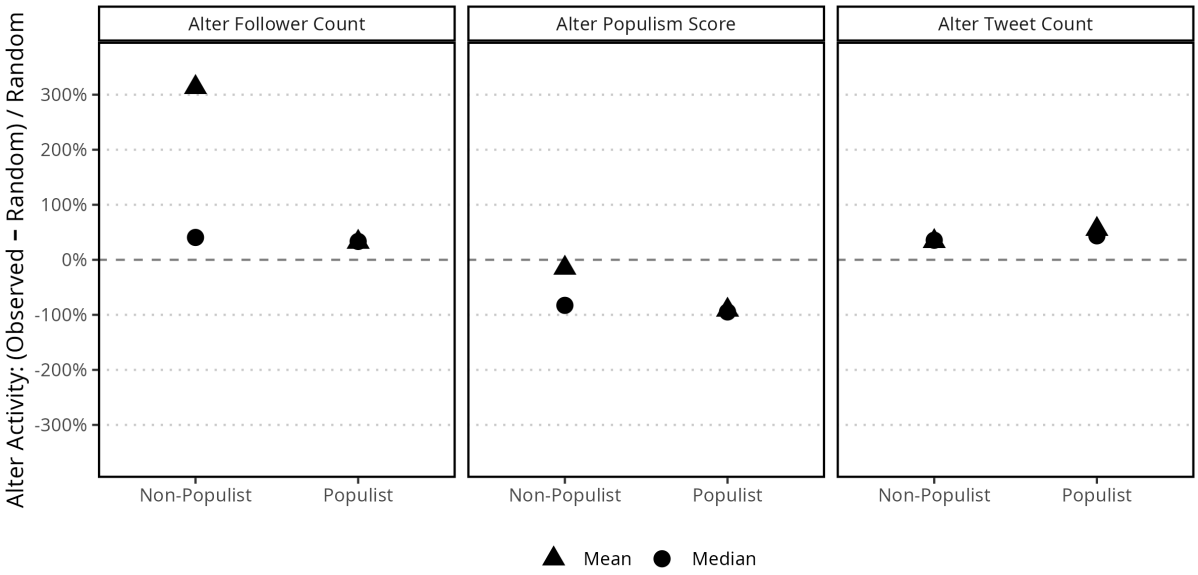

Figure 6: nodecov (Alter Activity)

- What is shown
  - Instead of the absolute difference, the sum of both alters' attribute values is computed per tie and per possible dyad. Positive deviation means ties preferentially form among alters with higher attribute values.
- Alter Follower Count
  - Both medians are positive (45% non-populist, 35% populist).
  - Alters with more followers connect to each other at higher-than-expected rates — a preferential attachment or popularity effect. The non-populist mean is again far above the median (315%), confirming the same small set of outlier ego networks seen in the absdiff plot.
- Alter Populism Score
  - Both medians are strongly negative (−80% to −90%), meaning ties form among alters with lower combined populism scores.
  - The more populist an alter pair is, the less likely they are to be connected. This mirrors the absdiff finding: connections cluster among ideologically similar, low-populism alters.
- Alter Tweet Count
  - Both groups are positive (medians 35% non-populist, 50% populist). High-volume tweeters connect more than expected.
  - The effect is somewhat stronger in populist ego networks. Mean and median are close in both groups, indicating stable distributions without extreme outliers.
- Summary
  - structure is the same across populist and non-populist ego networks!
    - strong populism homophily
    - mild follower heterophily
    - preferential connectivity among active and popular users

- degree difference
  - populist ego networks show slightly more tweet-driven heterophily and activity effects

  but the qualitative signatures are remarkably similar. The recurring mean–median divergence in the follower facet for non-populist networks traces to a small number of high-visibility ego networks.

5.9 Summary [100w, 0.2 p]

6 Discussion

6.1 Introduction [100w, 0.2p]

6.2 Summary of Results [347w, 0.7p]

6.3 Interpretation (Relate Results to Literature Review) [387w, 0.7p]

6.4 Implications (e.g. Significance of Findings, What side is supported, Gap filled) [372w, 0.7p]

6.5 Limitations & Future Work [394w, 0.8p]

6.6 Summary [100w, 0.2 p]

7 Conclusion

Appendix A: Additional Tables, Figures and Equations

Symetry of F1 Score for swapping raters

Given binary ratings $a_i, b_i \in \{0, 1\}$ from two raters, define:

$$\text{both_positive} = \sum_i a_i b_i$$

$$\text{only}_{b_{\text{positive}}} = \sum_i (1 - a_i) b_i$$

$$\text{only}_{a_{\text{positive}}} = \sum_i a_i (1 - b_i)$$

Treating A as ground truth:

$$\text{precision} = \frac{\text{both_positive}}{\text{both_positive} + \text{only}_{b_{\text{positive}}}}, \quad \text{recall} = \frac{\text{both_positive}}{\text{both_positive} + \text{only}_{a_{\text{positive}}}}$$

Swapping roles swaps $\text{only}_{a_{\text{positive}}} \leftrightarrow \text{only}_{b_{\text{positive}}}$, which swaps precision and recall. Since F_1 is their harmonic mean:

$F_1 = \frac{2 \cdot \text{ precision} \cdot \text{recall}}{\text{precision} + \text{recall}} = \frac{2 \cdot \text{ recall} \cdot \text{precision}}{\text{recall} + \text{precision}}$

Multiplication and addition are commutative, so F_1 is invariant under the swap. ■

For swapping labels (0,1) F Scores are not symetric.

Component Tables

Component Size	Number of Components	Total Nodes	% of Network
77194	1	77194	94.96%
41	1	41	0.05%
34	1	34	0.04%
31	1	31	0.04%
27	1	27	0.03%
23	1	23	0.03%
19	1	19	0.02%
16	1	16	0.02%
14	1	14	0.02%
11	3	33	0.04%
10	2	20	0.02%
9	4	36	0.04%
8	6	48	0.06%
7	7	49	0.06%
6	13	78	0.10%
5	24	120	0.15%
4	46	184	0.23%
3	185	555	0.68%
2	1207	2414	2.97%
1	359	359	0.44%

Table 1: Component size distribution of the reply network linking users through directed and weighted reply links. A giant component holds most user nodes and the size appearing the most is two.

Appendix C: Prompt

Appendix B: Code

Bibliography

Aalberg, Toril, Frank Esser, Carsten Reinemann, Jesper Strömbäck, and Claes H. de Vreese. 2017. *Populist Political Communication in Europe*. Routledge Research in Communication Studies. New York: Routledge.

Bundestag. 2026. "Deutscher Bundestag - Archiv."

Castanho Silva, Bruno, Sebastian Jungkunz, Marc Helbling, and Levente Littvay. 2020. "An Empirical Comparison of Seven Populist Attitudes Scales." *Political Research Quarterly* 73(2):409–24.. doi:10.1177/1065912919833176.

Cordonnier, Jean-Baptiste, Andreas Loukas, and Martin Jaggi. 2020. "On the Relationship between Self-Attention and Convolutional Layers." (arXiv:1911.03584).

Erhard, Lukas, Sara Hanke, Uwe Remer, Agnieszka Falenska, and Raphael Heiko Heiberger. 2025. "PopBERT. Detecting Populism and Its Host Ideologies in the German Bundestag." *Political Analysis* 33(1):1–17.. doi:10.1017/pan.2024.12.

Liu, Yao-Yang, Zhen Zheng, Feng Zhang, Jin-Cheng Feng, Yi-Yang Fu, Ji-Dong Zhai, Bing-Sheng He, Xiao Zhang, and Xiao-Yong Du. 2026. "A Comprehensive Taxonomy of Prompt Engineering Techniques for Large Language Models." *Frontiers of Computer Science* 20(3):2003601.. doi:10.1007/s11704-025-50058-z.

Martin, Shawn, W. Brown, and Brian Wylie. 2007. "Dr.L: Distributed Recursive (Graph) Layout."

medialab. 2026. "Medialab/twitwi."

Meyer, Hendrik, Julia Niemann-Lenz, Lasse Rodeck, and Matthias Revers. 2025. "Beyond Anti-Elitism and Out-Group Attacks: How Concerns Shape the AfD's Populist Representation on German TikTok during the 2024 European Elections." *Information, Communication & Society* 1–22.. doi:10.1080/1369118X.2025.2553016.

Mudde, Cas. 2004. "The Populist Zeitgeist." *Government and Opposition* 39(4):541–63.. doi:10.1111/j.1477-7053.2004.00135.x.

Oswald, Lisa, William Small Schulz, and Philipp Lorenz-Spreen. 2025. "A Collective Field Experiment Disentangling Participation in Online Political Discussions."

Ribeiro, Filipe N., Matheus Araújo, Pollyanna Gonçalves, Marcos André Gonçalves, and Fabrício Benevenuto. 2016. "SentiBench - a Benchmark Comparison of State-of-the-Practice Sentiment Analysis Methods." *EPJ Data Science* 5(1):23.. doi:10.1140/epjds/s13688-016-0085-1.

Sohil, Fariha, Muhammad Umair Sohali, and Javid Shabbir. 2022. "An Introduction to Statistical Learning with Applications in R: By Gareth James, Daniela Witten, Trevor Hastie, And Robert Tibshirani, New York, Springer Science and Business

Media, 2013, $41.98, eISBN: 978-1-4614-7137-7." *Statistical Theory and Related Fields* 6(1):87.. doi:10.1080/24754269.2021.1980261.

Yang, An, Anfeng Li, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Gao, Chengen Huang, Chenxu Lv, Chujie Zheng, Dayiheng Liu, Fan Zhou, Fei Huang, Feng Hu, Hao Ge, Haoran Wei, Huan Lin, Jialong Tang, Jian Yang, Jianhong Tu, Jianwei Zhang, Jianxin Yang, Jiaxi Yang, Jing Zhou, Jingren Zhou, Junyang Lin, Kai Dang, Keqin Bao, Kexin Yang, Le Yu, Lianghao Deng, Mei Li, Mingfeng Xue, Mingze Li, Pei Zhang, Peng Wang, Qin Zhu, Rui Men, Ruize Gao, Shixuan Liu, Shuang Luo, Tianhao Li, Tianyi Tang, Wenbiao Yin, Xingzhang Ren, Xinyu Wang, Xinyu Zhang, Xuancheng Ren, Yang Fan, Yang Su, Yichang Zhang, Yinger Zhang, Yu Wan, Yuqiong Liu, Zekun Wang, Zeyu Cui, Zhenru Zhang, Zhipeng Zhou, and Zihan Qiu. 2025. "Qwen3 Technical Report."