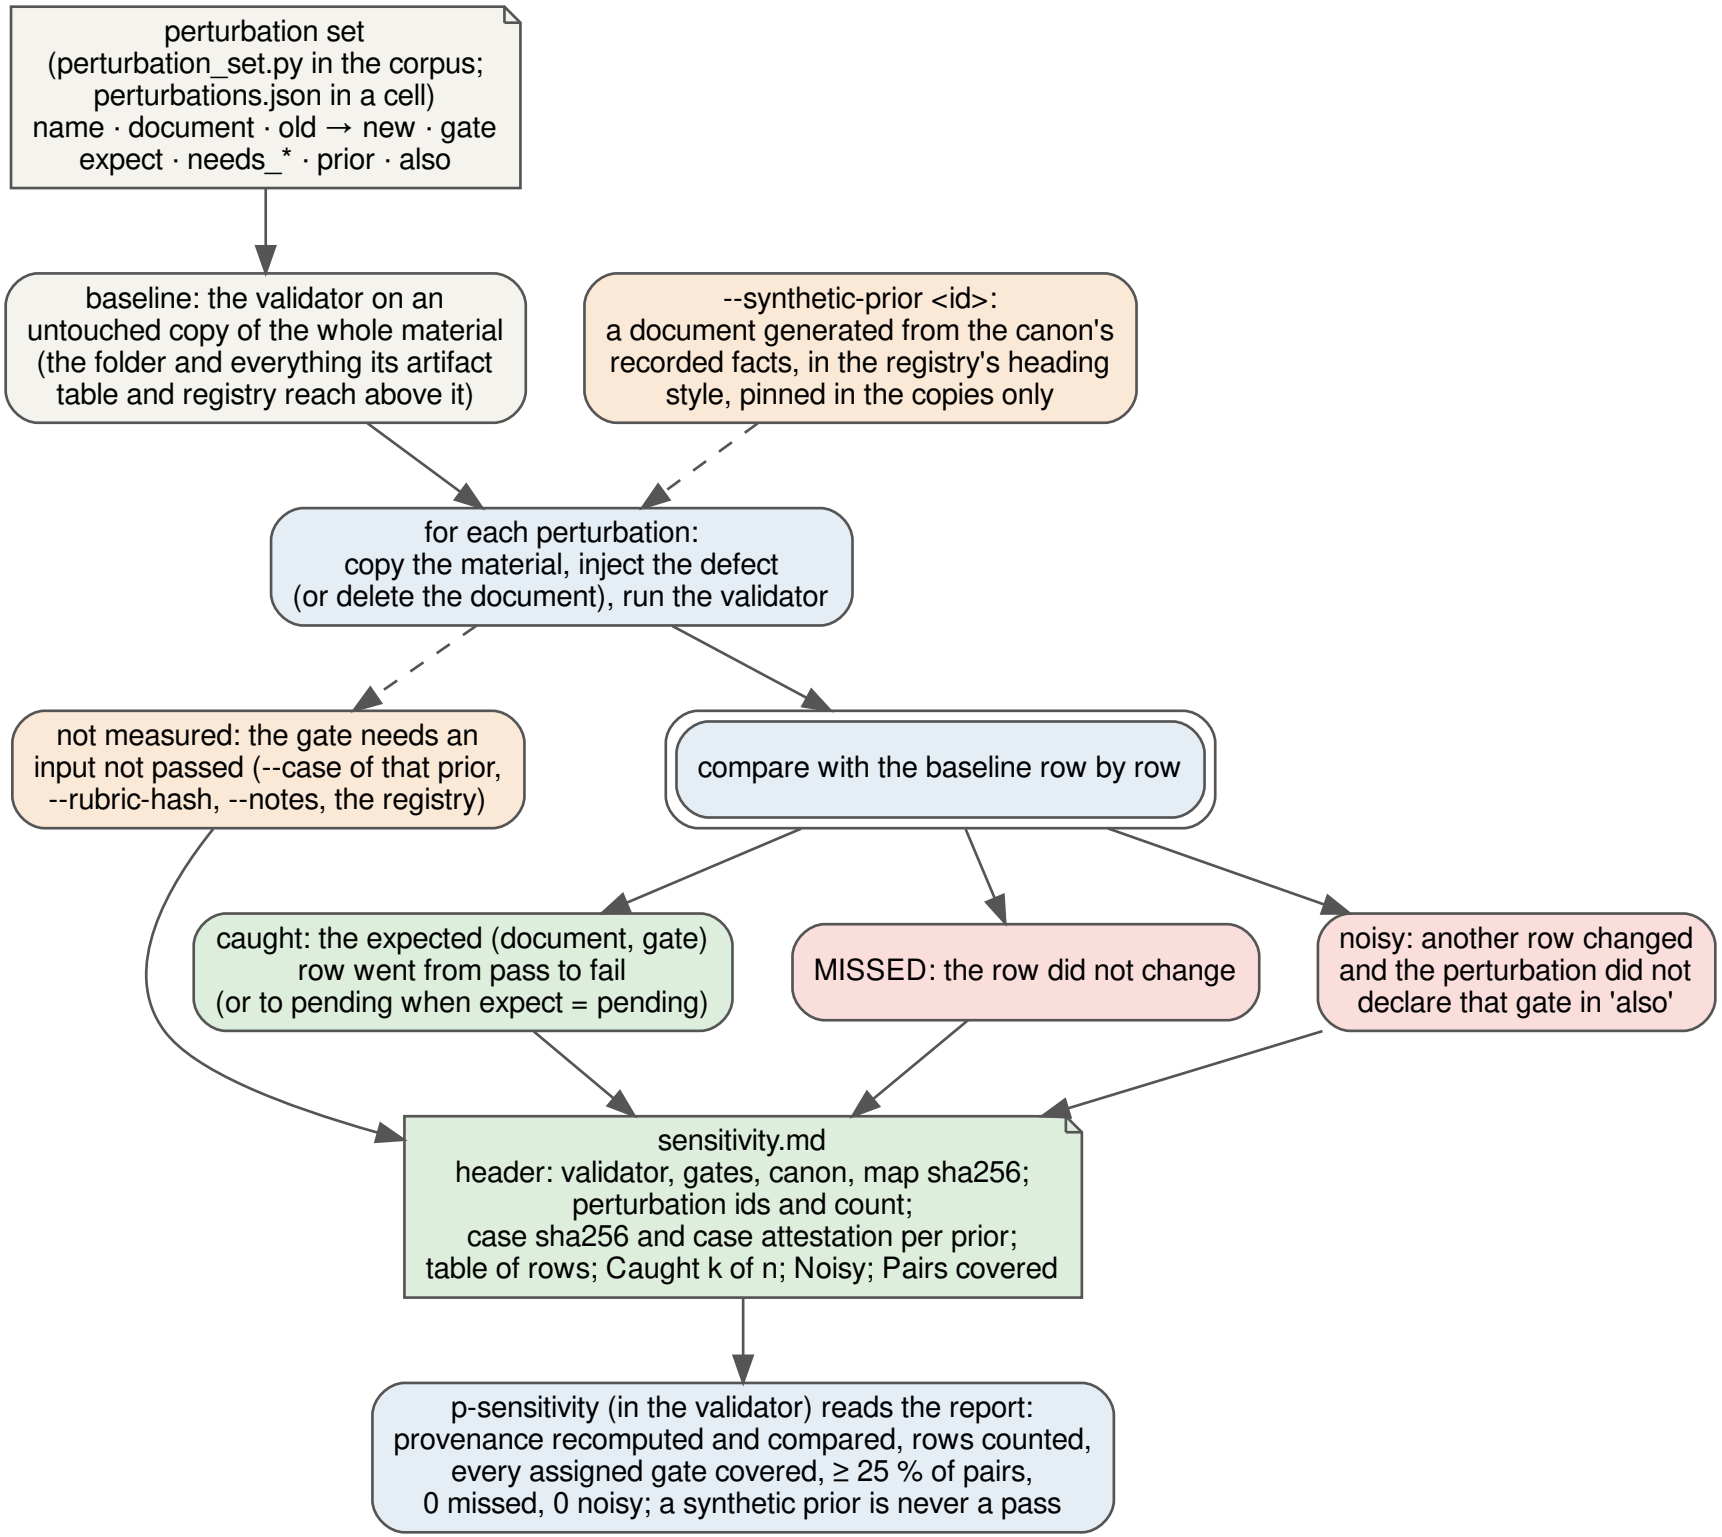
perturbation set
(perturbation_set.py in the corpus;
perturbations.json in a cell)
name · document · old → new · gate
expect · needs_* · prior · also
baseline: the validator on an
untouched copy of the whole material
(the folder and everything its artifact
table and registry reach above it)
--synthetic-prior <id>:
a document generated from the canon's
recorded facts, in the registry's heading
style, pinned in the copies only
for each perturbation:
copy the material, inject the defect
(or delete the document), run the validator
not measured: the gate needs an
input not passed (--case of that prior,
--rubric-hash, --notes, the registry)
compare with the baseline row by row
caught: the expected (document, gate)
row went from pass to fail
(or to pending when expect = pending)
MISSED: the row did not change
noisy: another row changed
and the perturbation did not
declare that gate in 'also'
sensitivity.md
header: validator, gates, canon, map sha256;
perturbation ids and count;
case sha256 and case attestation per prior;
table of rows; Caught k of n; Noisy; Pairs covered
p-sensitivity (in the validator) reads the report:
provenance recomputed and compared, rows counted,
every assigned gate covered, ≥ 25 % of pairs,
0 missed, 0 noisy; a synthetic prior is never a pass