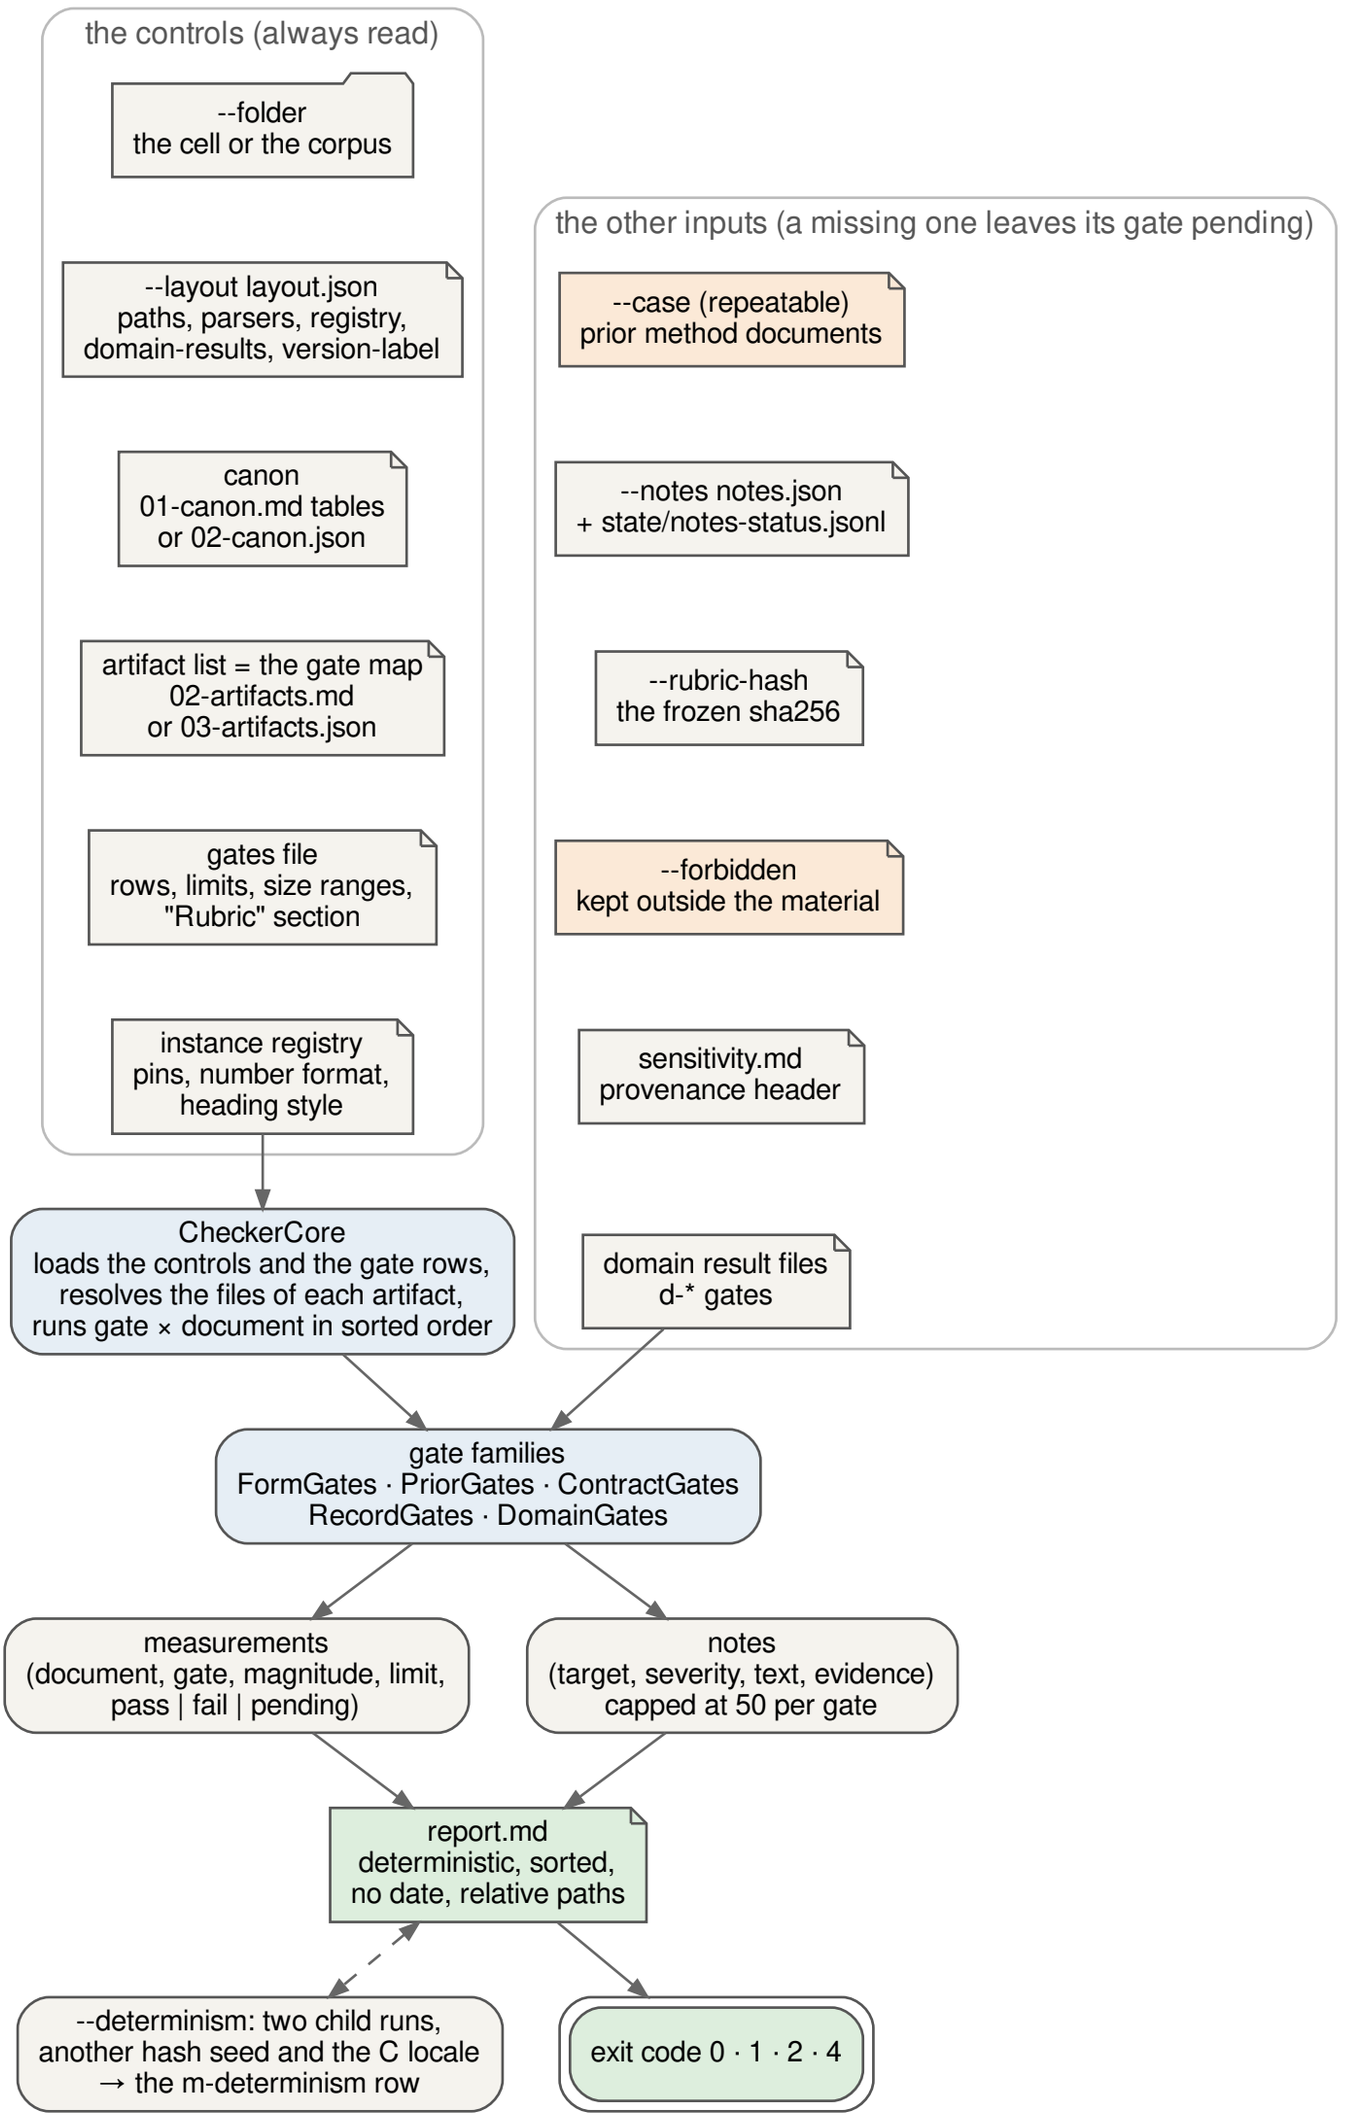
the controls (always read)
--folder
the cell or the corpus
--layout layout.json
paths, parsers, registry,
domain-results, version-label
canon
01-canon.md tables
or 02-canon.json
artifact list = the gate map
02-artifacts.md
or 03-artifacts.json
gates file
rows, limits, size ranges,
"Rubric" section
instance registry
pins, number format,
heading style
the other inputs (a missing one leaves its gate pending)
--case (repeatable)
prior method documents
--notes notes.json
+ state/notes-status.jsonl
--rubric-hash
the frozen sha256
--forbidden
kept outside the material
sensitivity.md
provenance header
domain result files
d-* gates
CheckerCore
loads the controls and the gate rows,
resolves the files of each artifact,
runs gate × document in sorted order
gate families
FormGates · PriorGates · ContractGates
RecordGates · DomainGates
measurements
(document, gate, magnitude, limit,
pass | fail | pending)
notes
(target, severity, text, evidence)
capped at 50 per gate
report.md
deterministic, sorted,
no date, relative paths
--determinism: two child runs,
another hash seed and the C locale
→ the m-determinism row
exit code 0 · 1 · 2 · 4