
CIFAR-10 | Full-batch gradient descent

5,000 training images | tanh 200-200 MLP | 20,000 updates

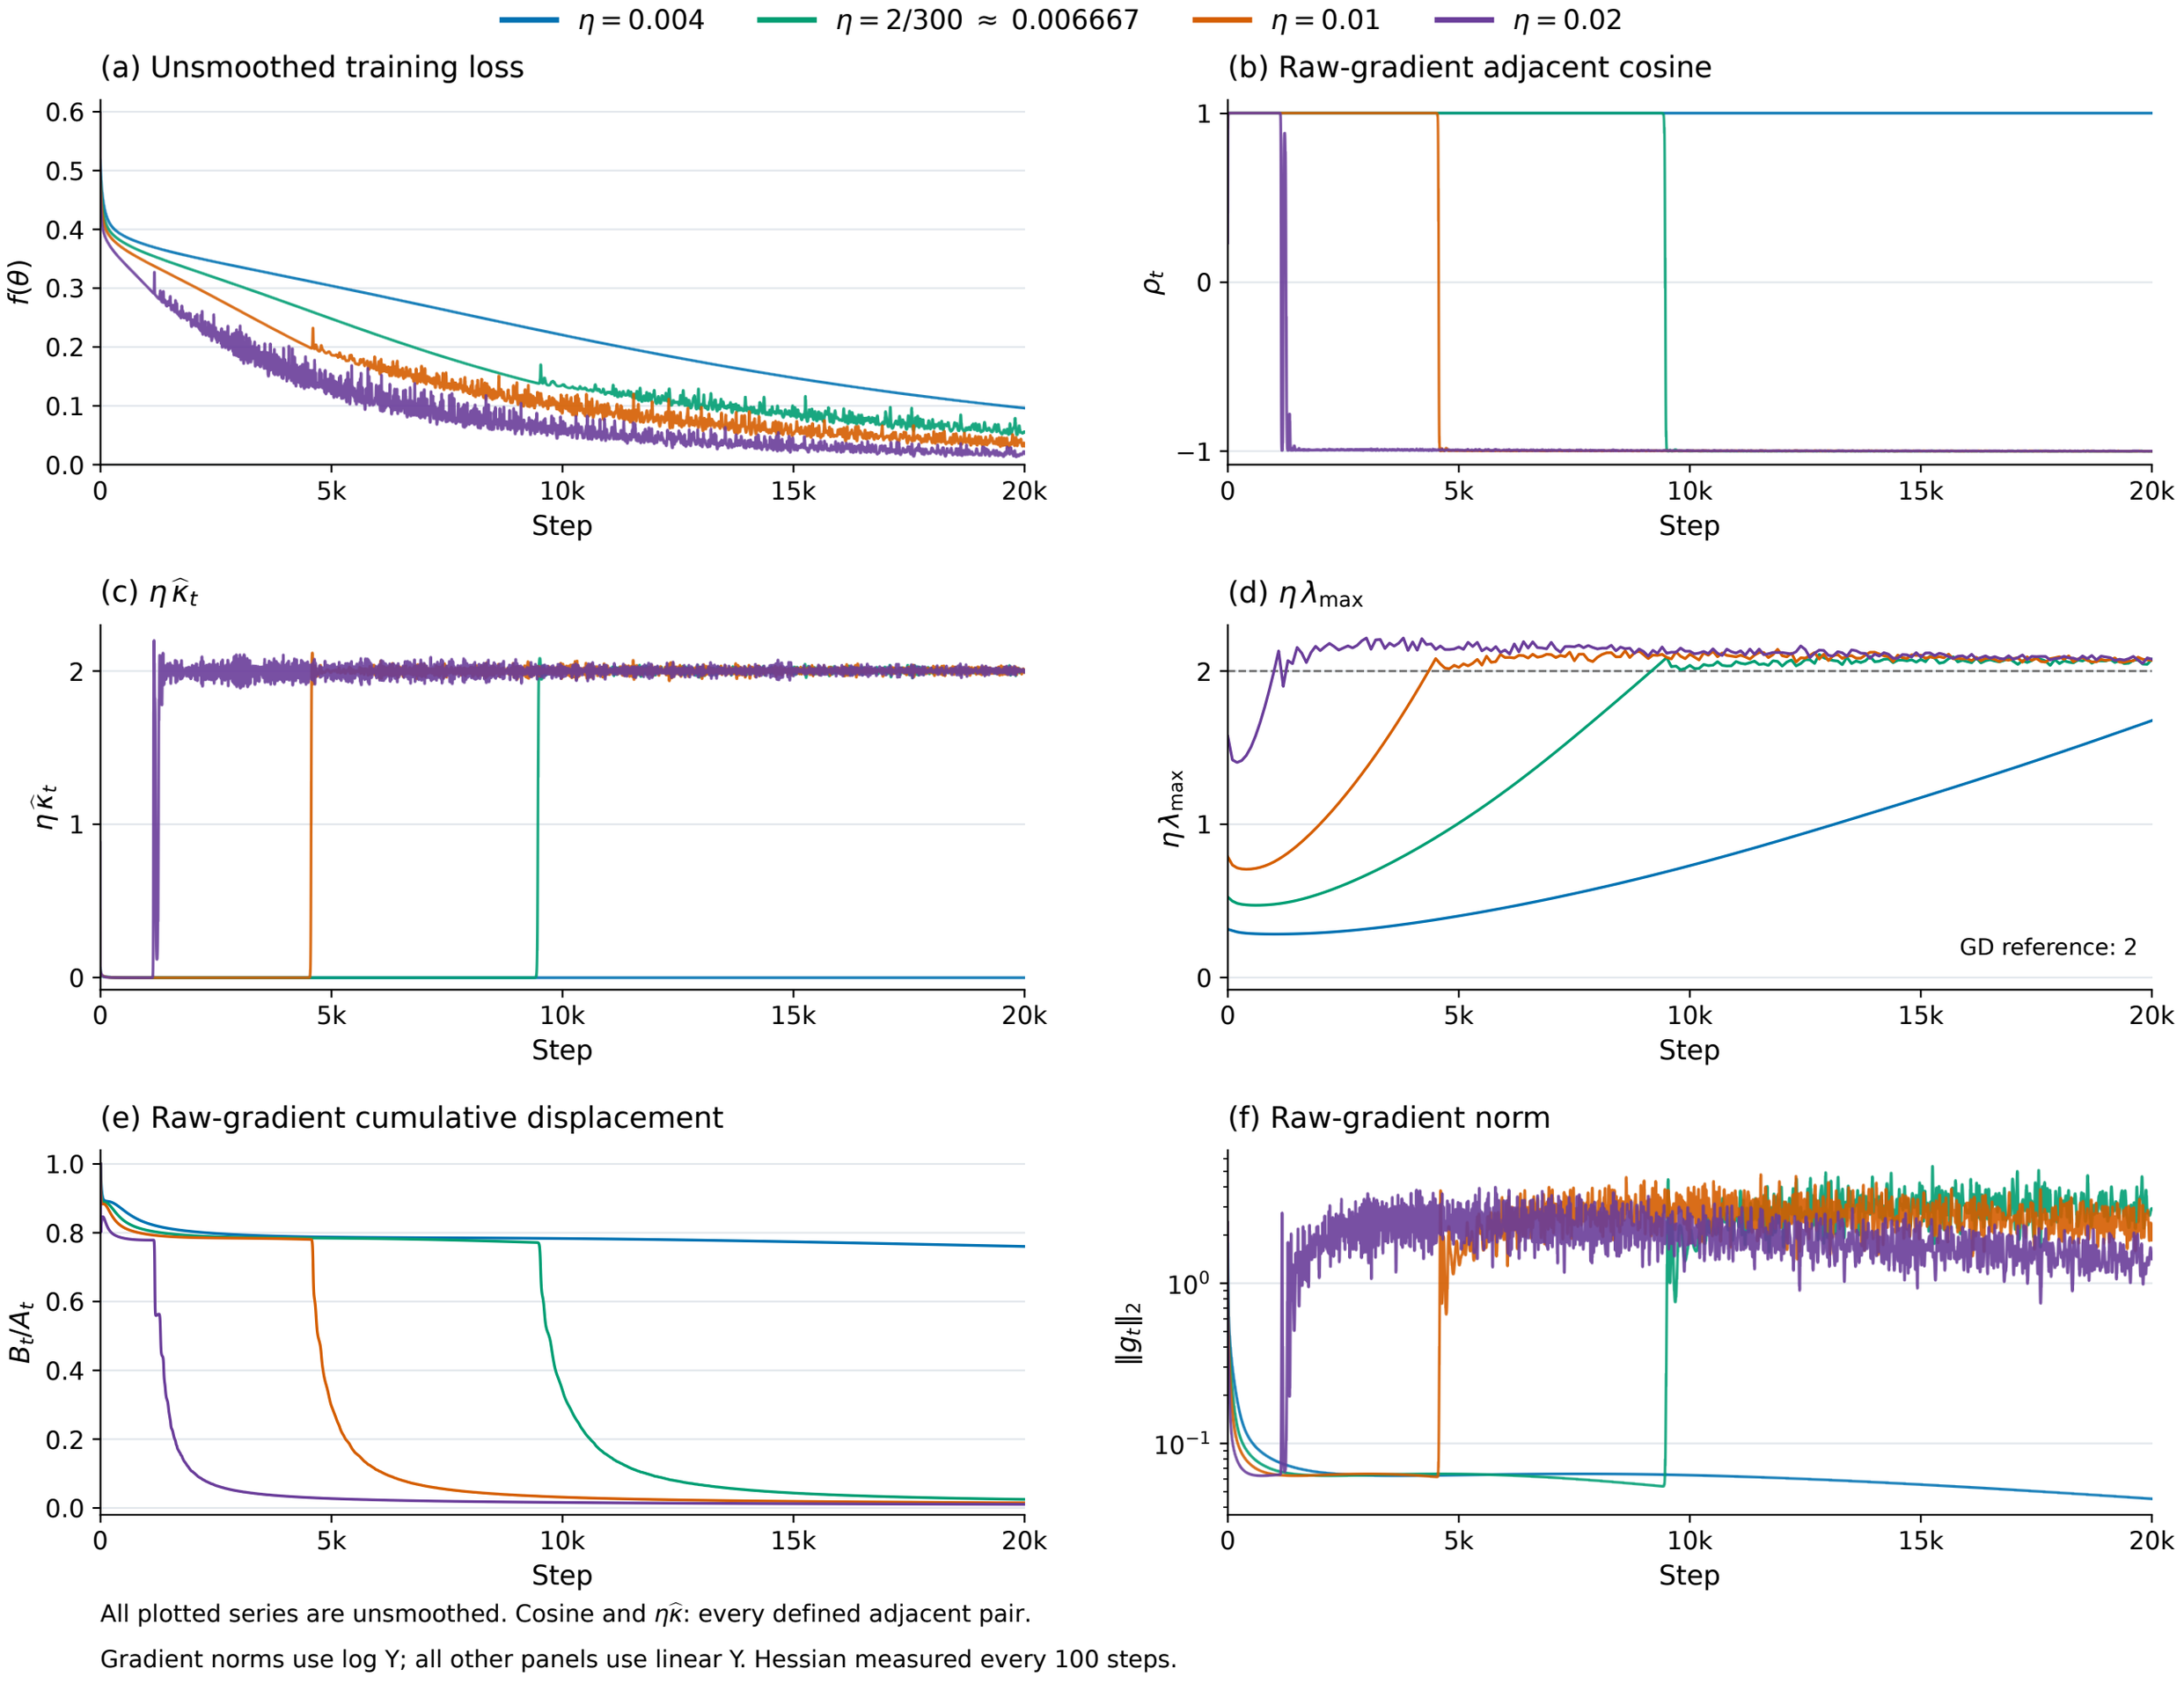

All plotted series are unsmoothed. Cosine and $\eta\widehat{\kappa}$: every defined adjacent pair.

Gradient norms use log Y; all other panels use linear Y. Hessian measured every 100 steps.