
MLP / CIFAR-10: selective entry updates


Thresholds fixed from eight preceding untreated updates; native gradients and Adam moments retained.

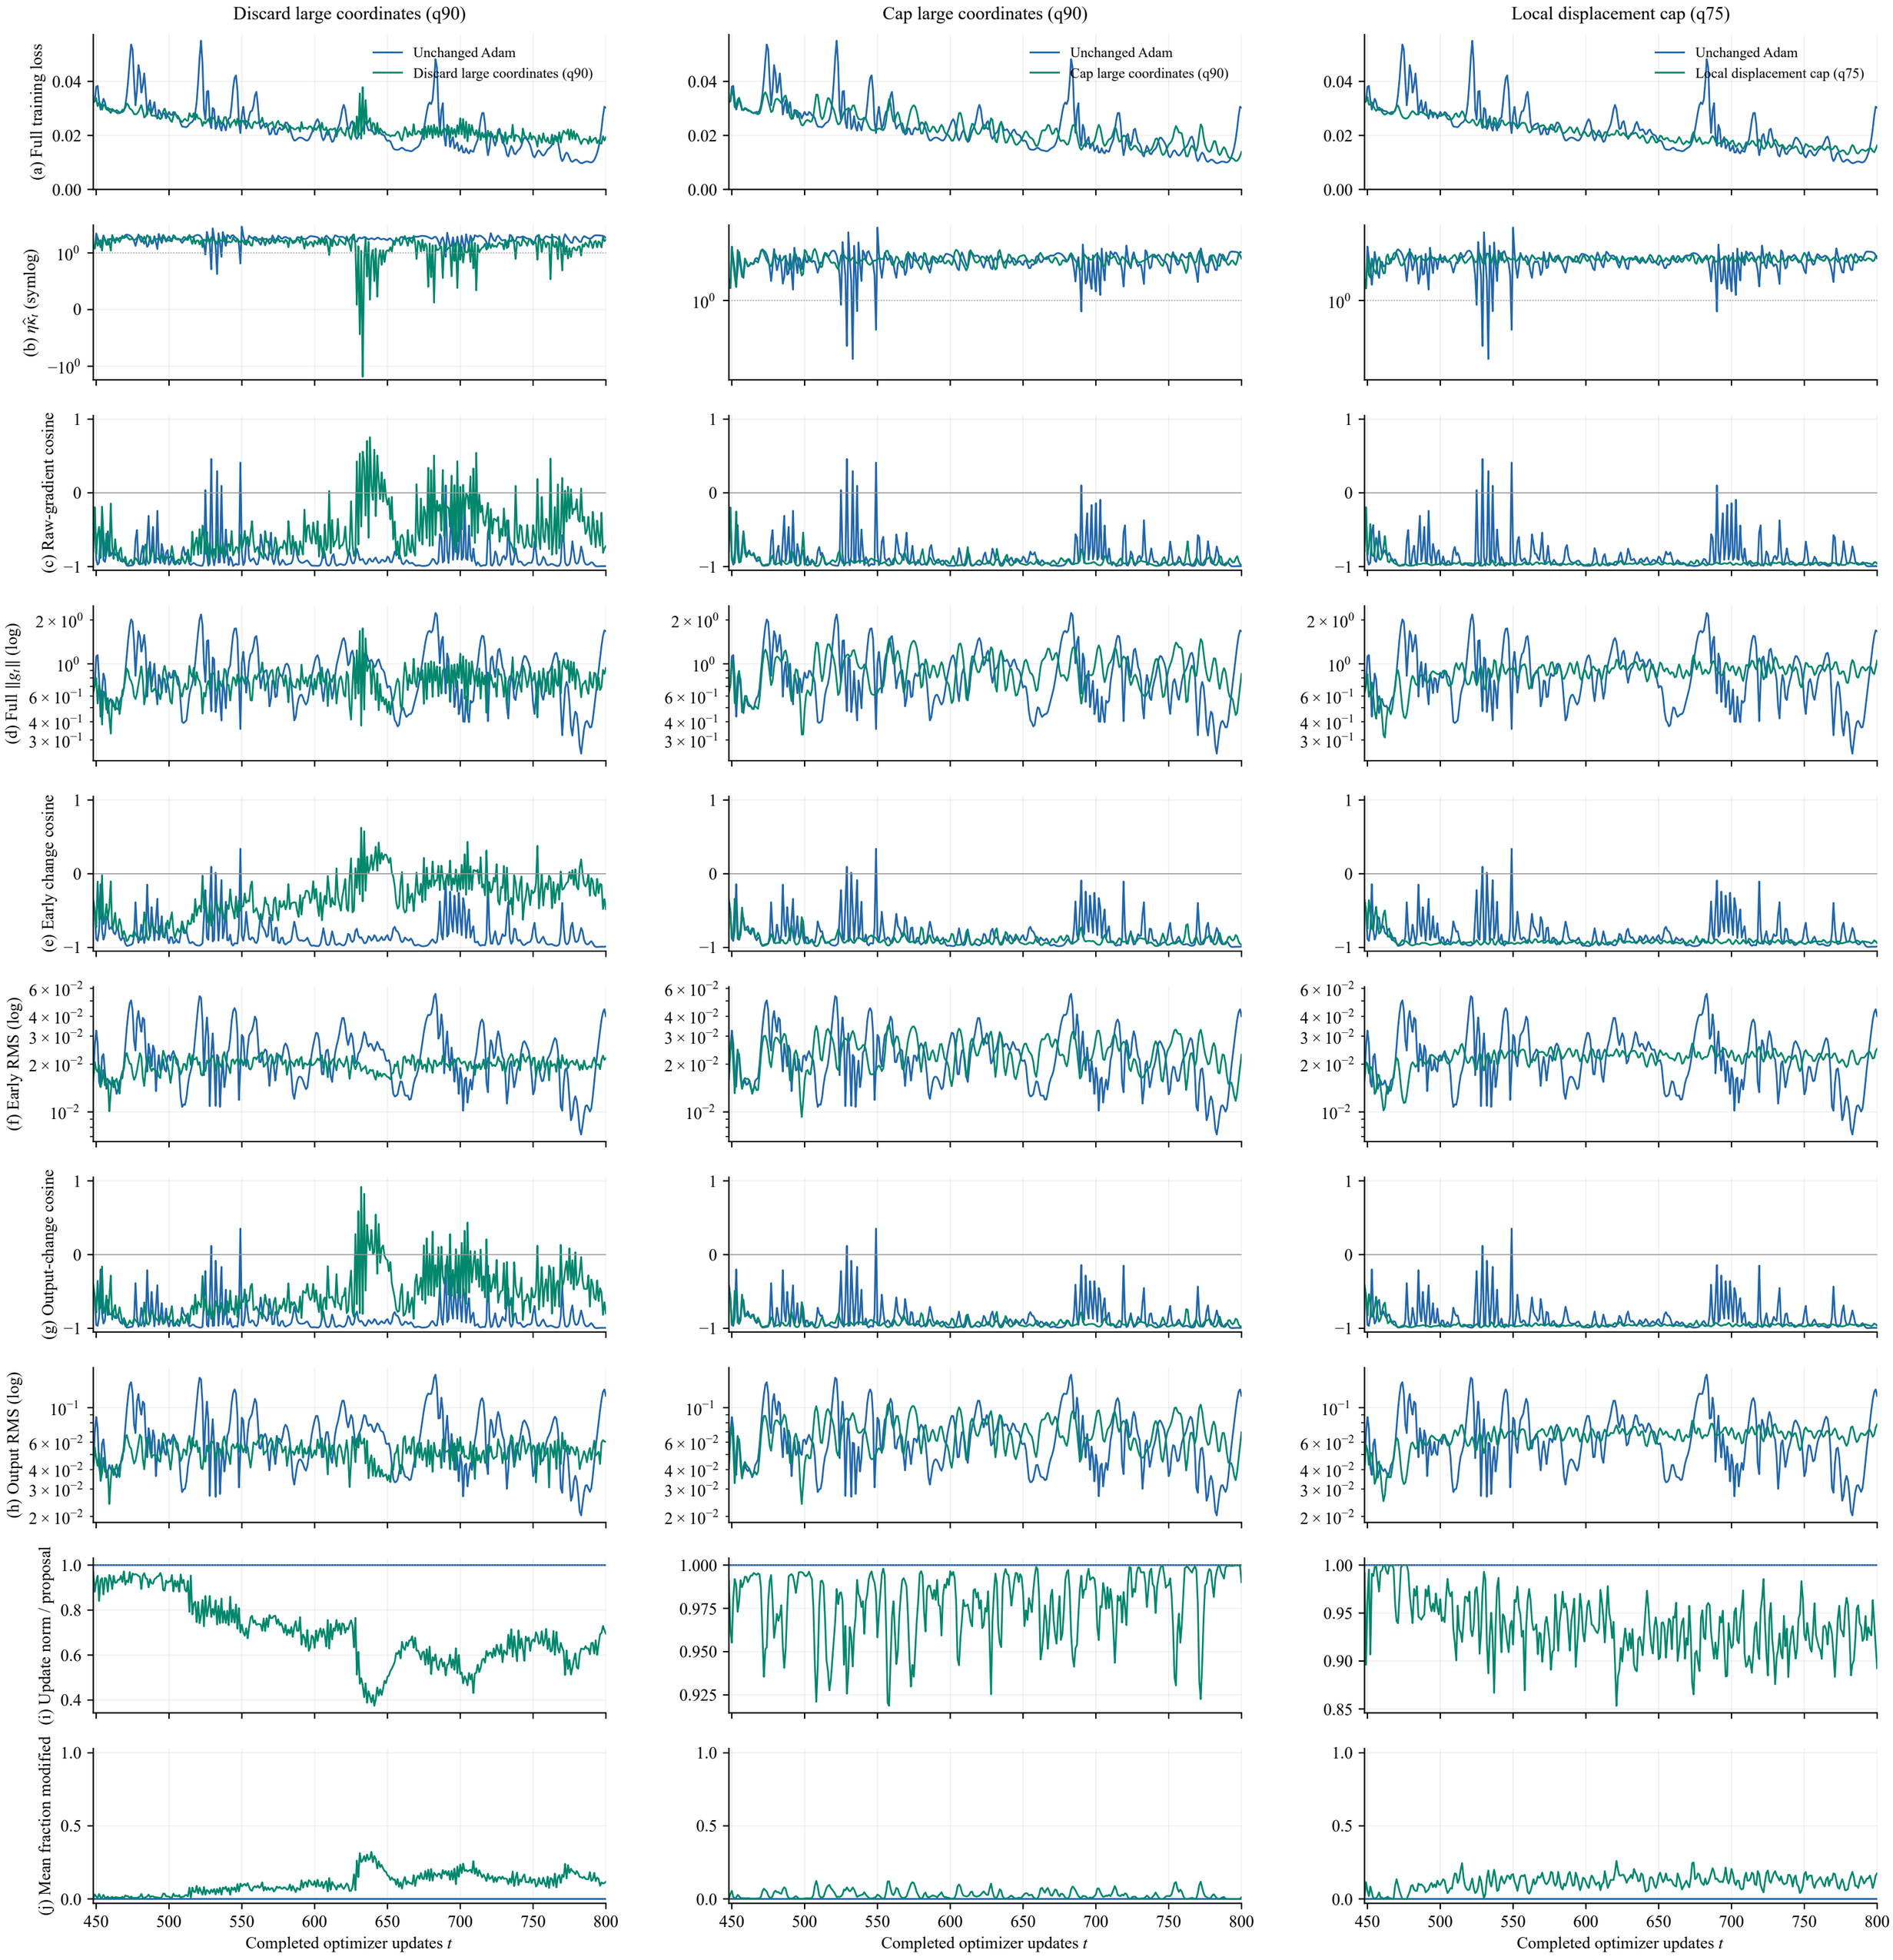

Full objectives; fixed diagnostic probes; outgoing representation changes; no smoothing. Each column uses its own unchanged baseline.
Early: MLP first tanh, ResNet conv1 output, Transformer first attention output. Loss and magnitude scales are independent by column.
The modified-fraction row averages targeted coordinate/neuron/block fractions; this is not a whole-model parameter fraction.
Undefined cosines and zero values on logarithmic axes appear as gaps.

ResNet-32 / CIFAR-10: selective entry updates


Thresholds fixed from eight preceding untreated updates; native gradients and Adam moments retained.

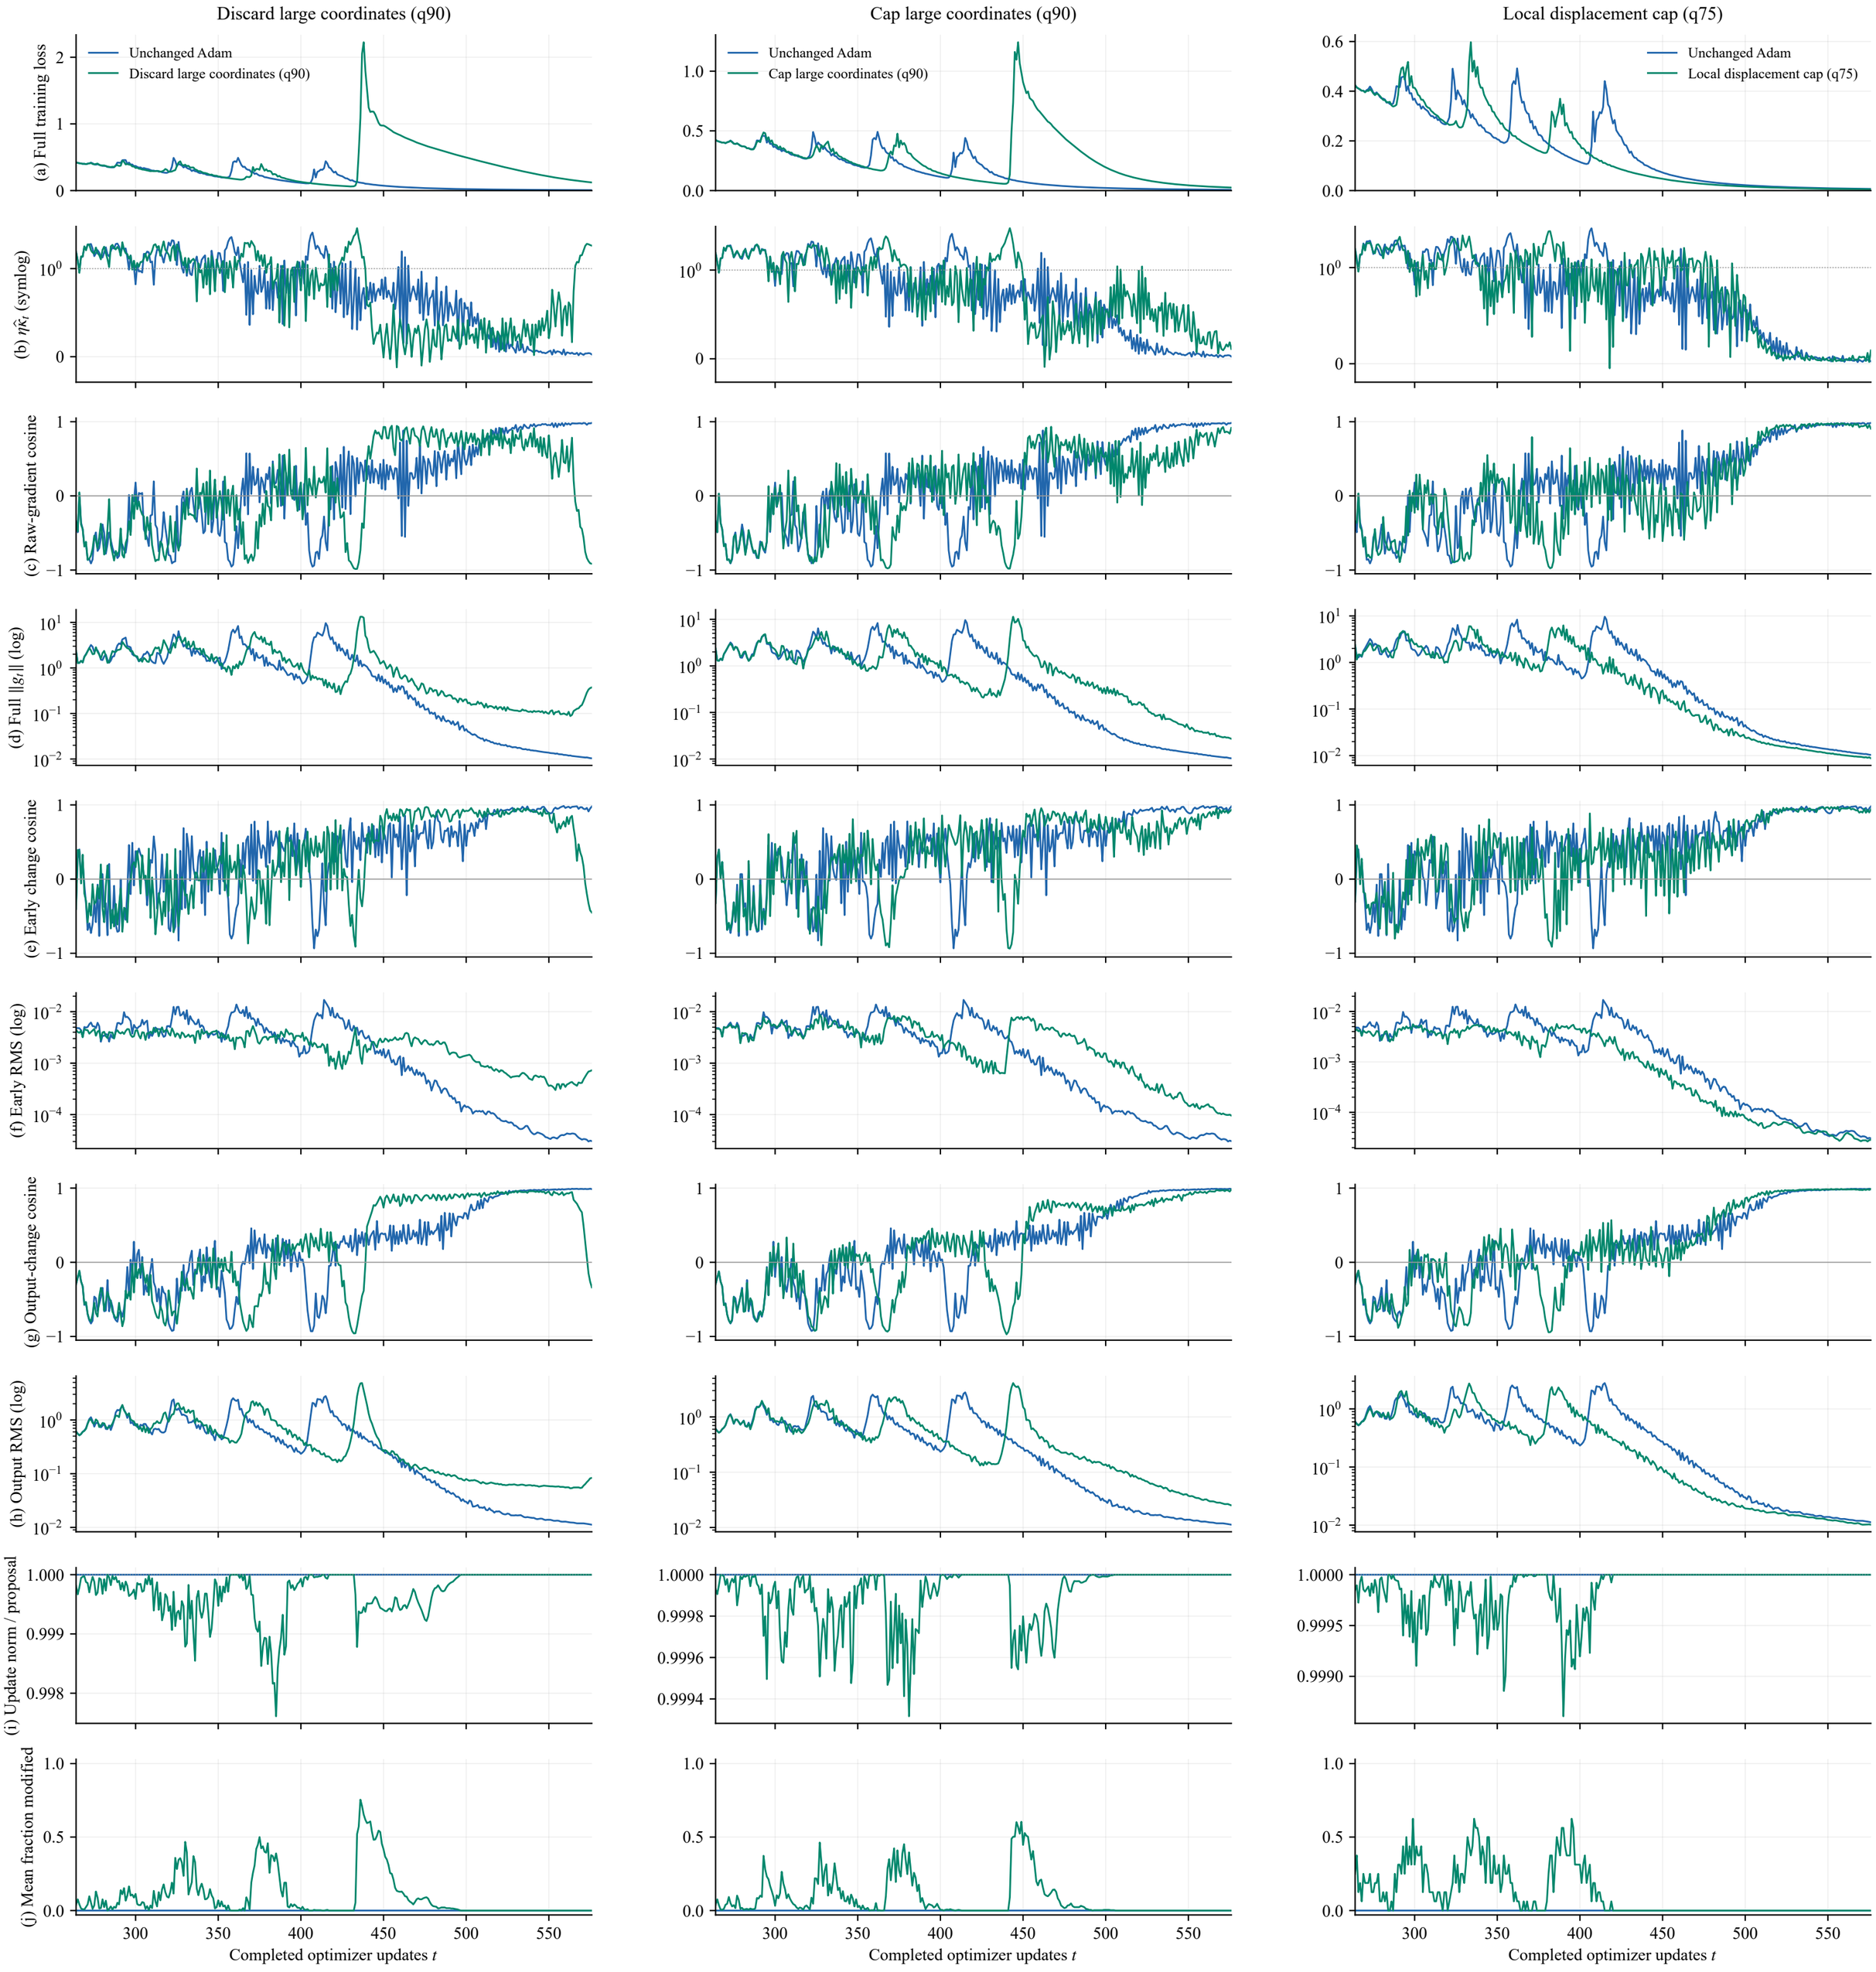

Full objectives; fixed diagnostic probes; outgoing representation changes; no smoothing. Each column uses its own unchanged baseline.
Early: MLP first tanh, ResNet conv1 output, Transformer first attention output. Loss and magnitude scales are independent by column.
The modified-fraction row averages targeted coordinate/neuron/block fractions; this is not a whole-model parameter fraction.
Undefined cosines and zero values on logarithmic axes appear as gaps.

Transformer / WikiText-2: selective entry updates

Thresholds fixed from eight preceding untreated updates; native gradients and Adam moments retained.

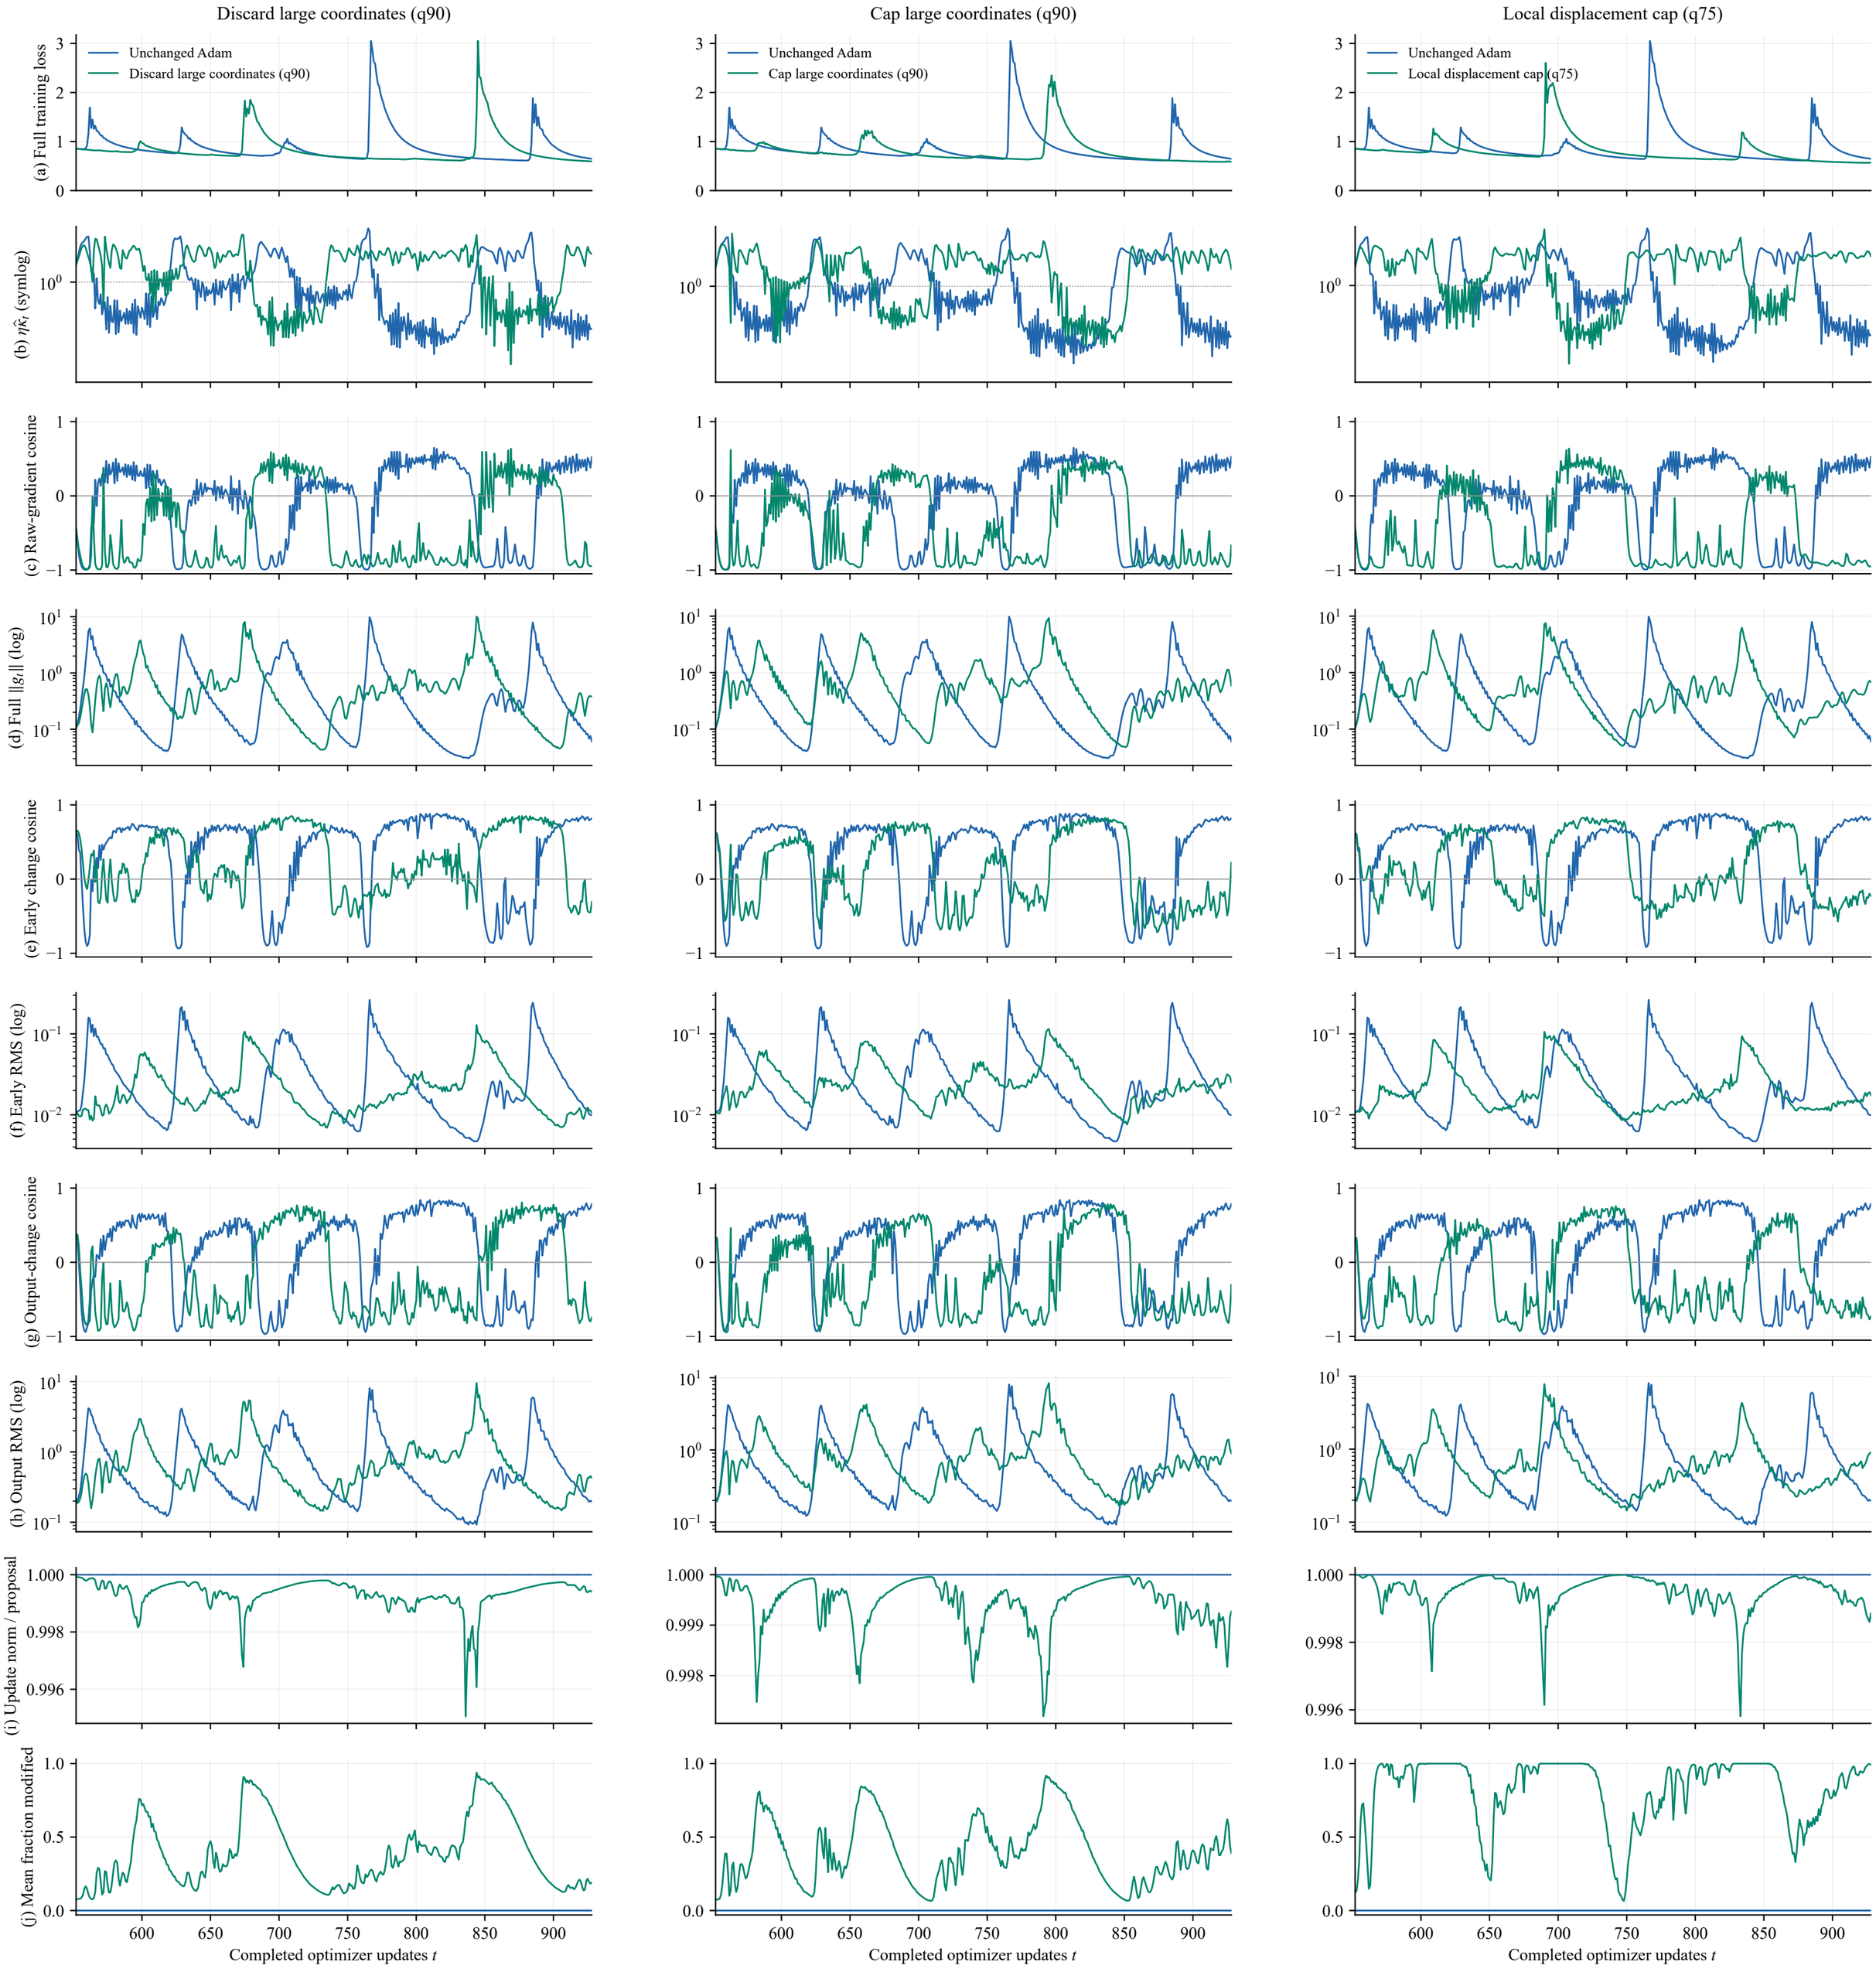

Full objectives; fixed diagnostic probes; outgoing representation changes; no smoothing. Each column uses its own unchanged baseline.
Early: MLP first tanh, ResNet conv1 output, Transformer first attention output. Loss and magnitude scales are independent by column.
The modified-fraction row averages targeted coordinate/neuron/block fractions; this is not a whole-model parameter fraction.
Undefined cosines and zero values on logarithmic axes appear as gaps.