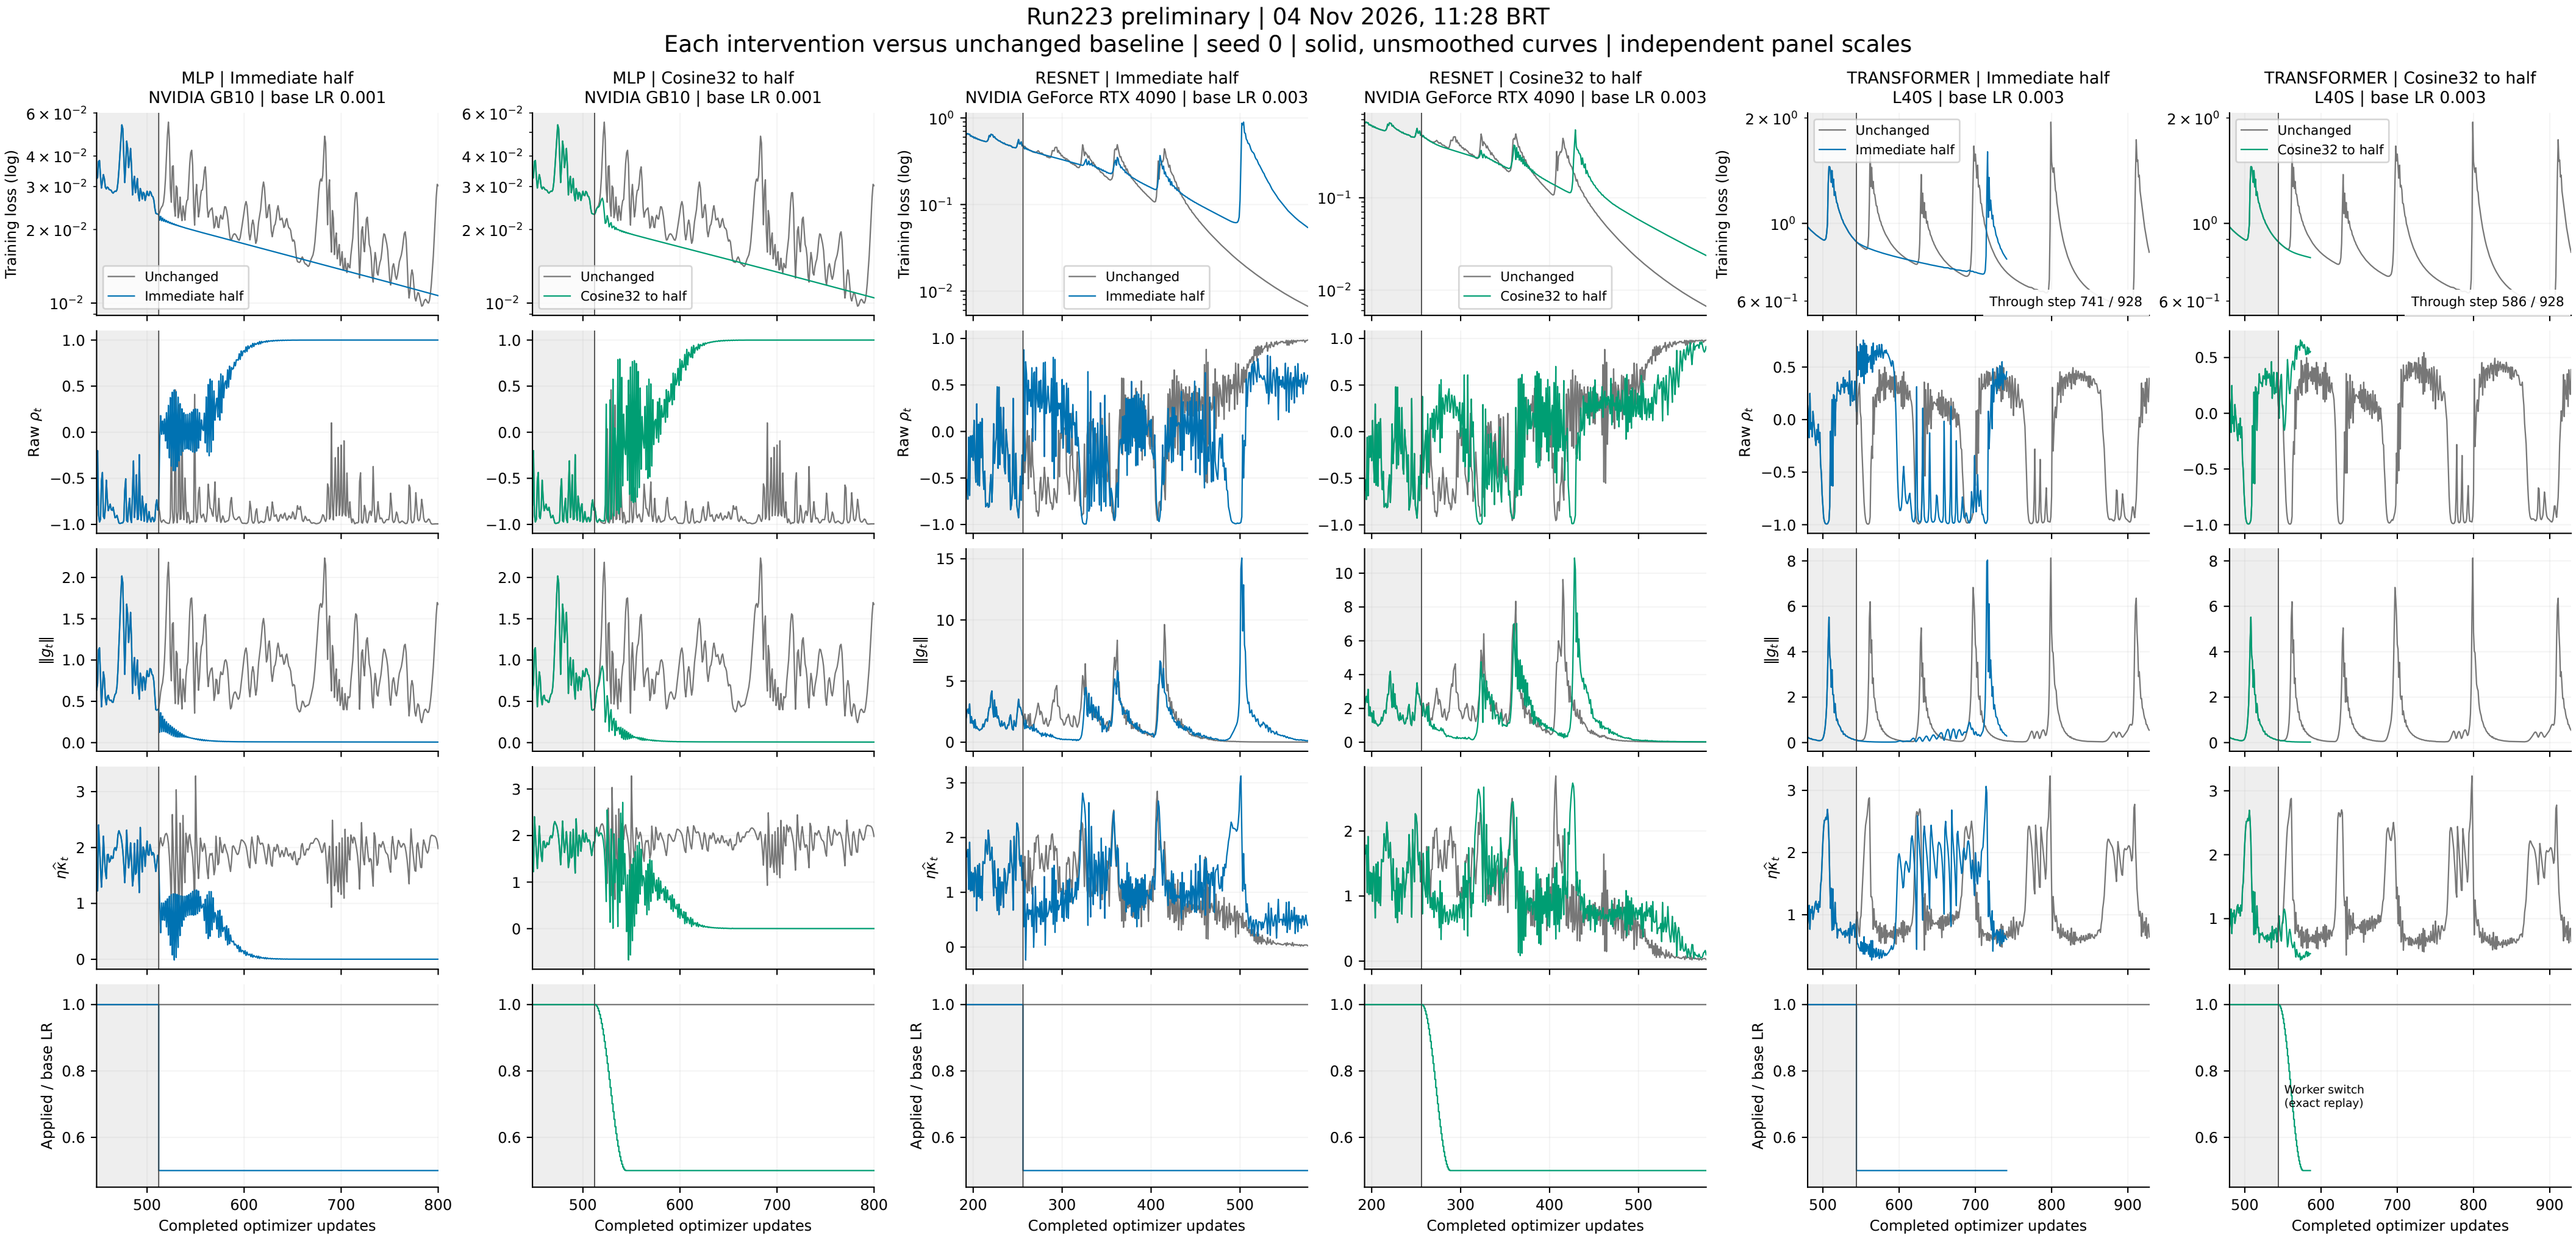

Run223 preliminary | 04 Nov 2026, 11:28 BRT
Each intervention versus unchanged baseline | seed 0 | solid, unsmoothed curves | independent panel scales
MLP | Immediate half
NVIDIA GB10 | base LR 0.001
MLP | Cosine32 to half
NVIDIA GB10 | base LR 0.001
RESNET | Immediate half
NVIDIA GeForce RTX 4090 | base LR 0.003
RESNET | Cosine32 to half
NVIDIA GeForce RTX 4090 | base LR 0.003
TRANSFORMER | Immediate half
L40S | base LR 0.003
TRANSFORMER | Cosine32 to half
L40S | base LR 0.003
Training loss (log)
Raw ρ_t
$\|g_t\|$
$\eta\hat{\kappa}_t$
Applied / base LR
Unchanged
Immediate half
Cosine32 to half
Through step 741 / 928
Through step 586 / 928
Worker switch
(exact replay)
Completed optimizer updates
Gray region: shared prefix. Vertical line: intervention fork. Transformer cosine switches L40S workers at the fork; exact gradient/two-update replay passed. Other curves stay on one worker.
MLP: 5,000 images; ResNet: 50,000 images; Transformer: 2,088,600 targets. No historical control reuse.