

Run031 | No momentum, decay 0.1


(a) Rosenbrock contours and all 10,000 steps

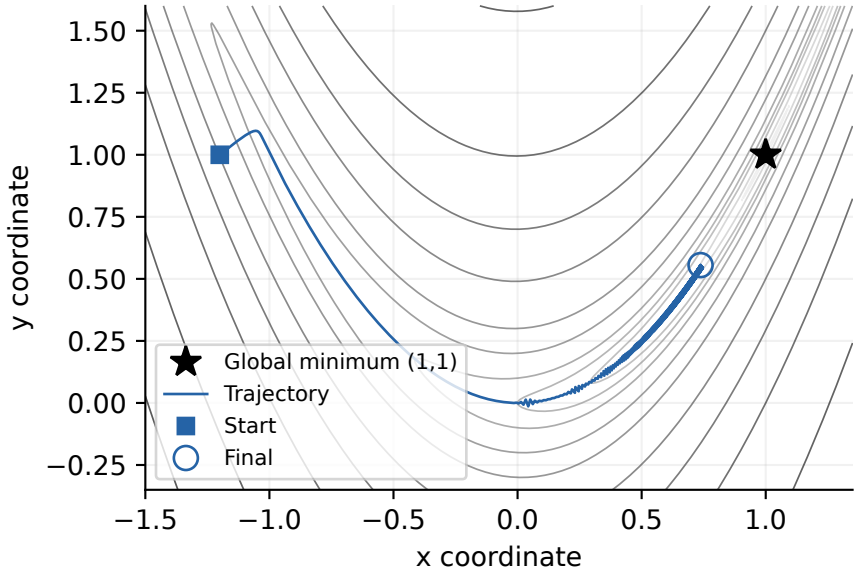


(b) Objective after update

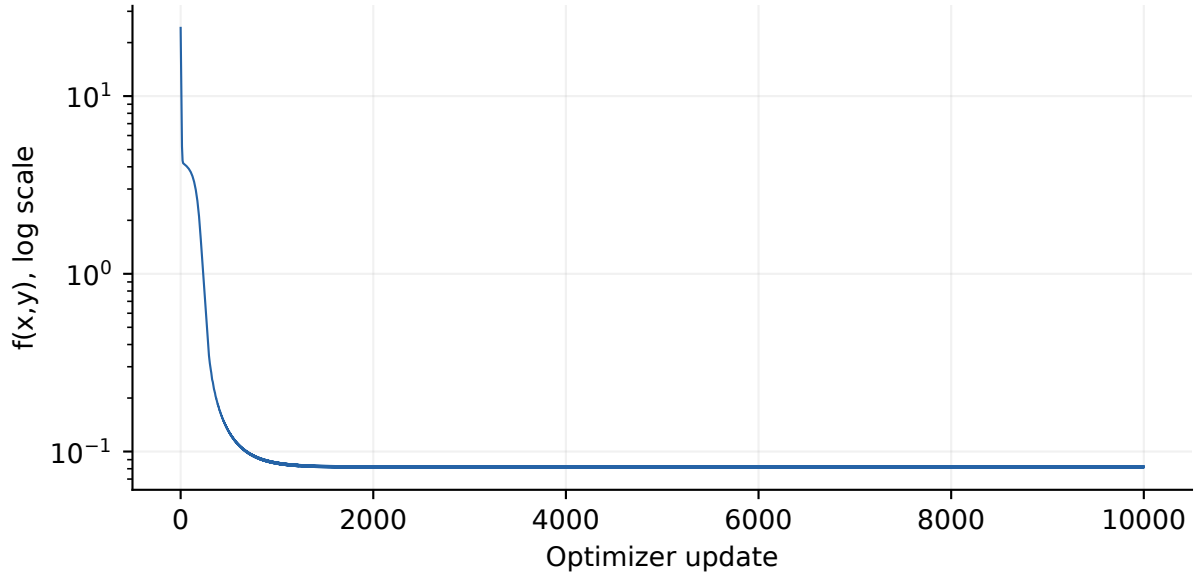


(c) Adjacent cosine: trailing 100-update mean

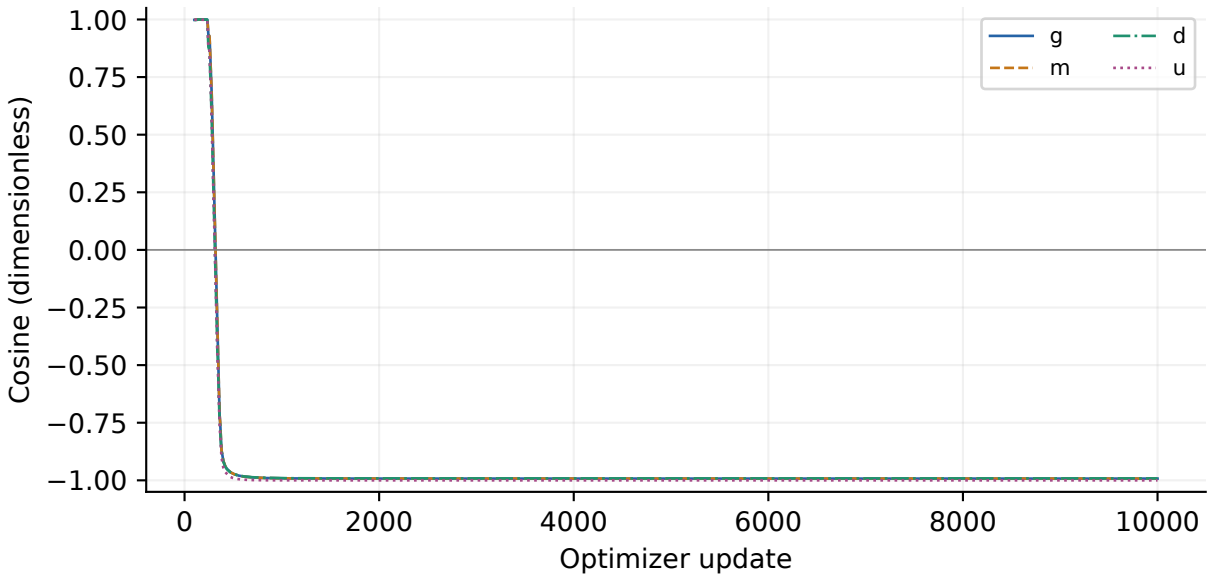


(d) Individual vector norms

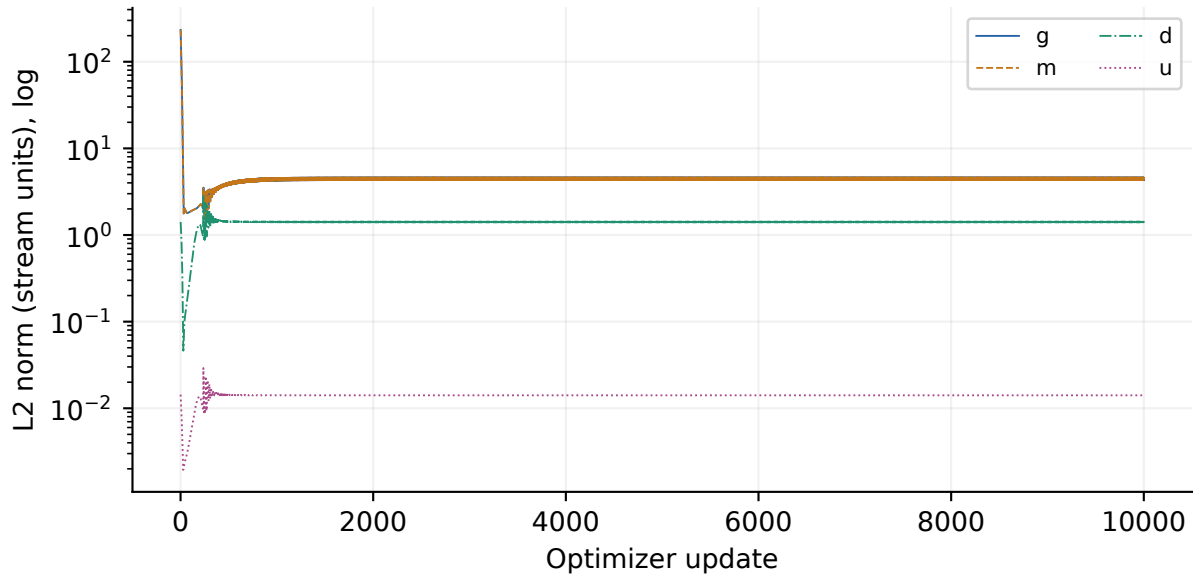

(e) A = sum of norms; B = norm of sum

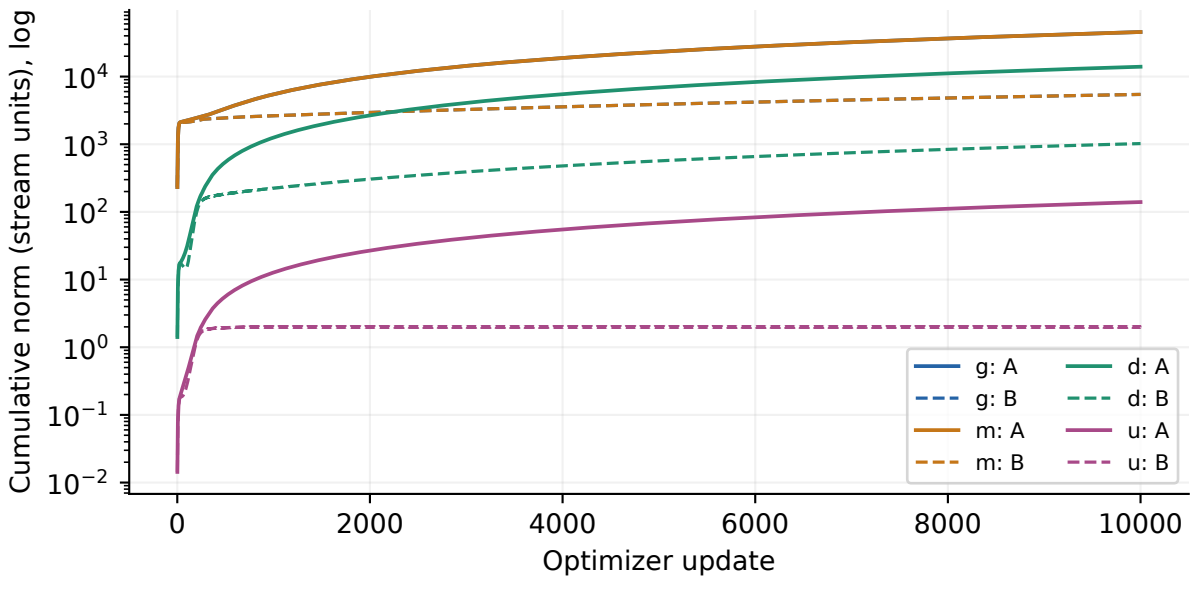

(f) Cumulative B/A

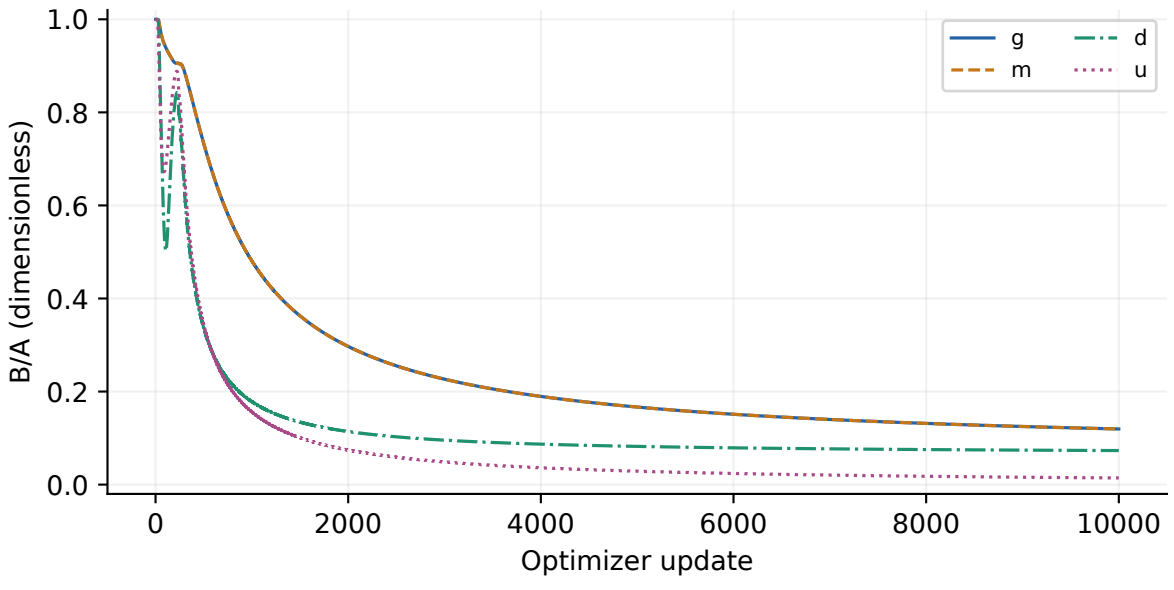

g: exact raw gradient; m: uncorrected first moment; d: adaptive direction without LR/decay; u: actual displacement.
Loss: positions 0-10,000; diagnostics: transitions 1-10,000. First cosine undefined; means require 100 valid pairs.
LR 0.01; beta2 0.95; float64; exact objective; one deterministic start; no uncertainty bars.