
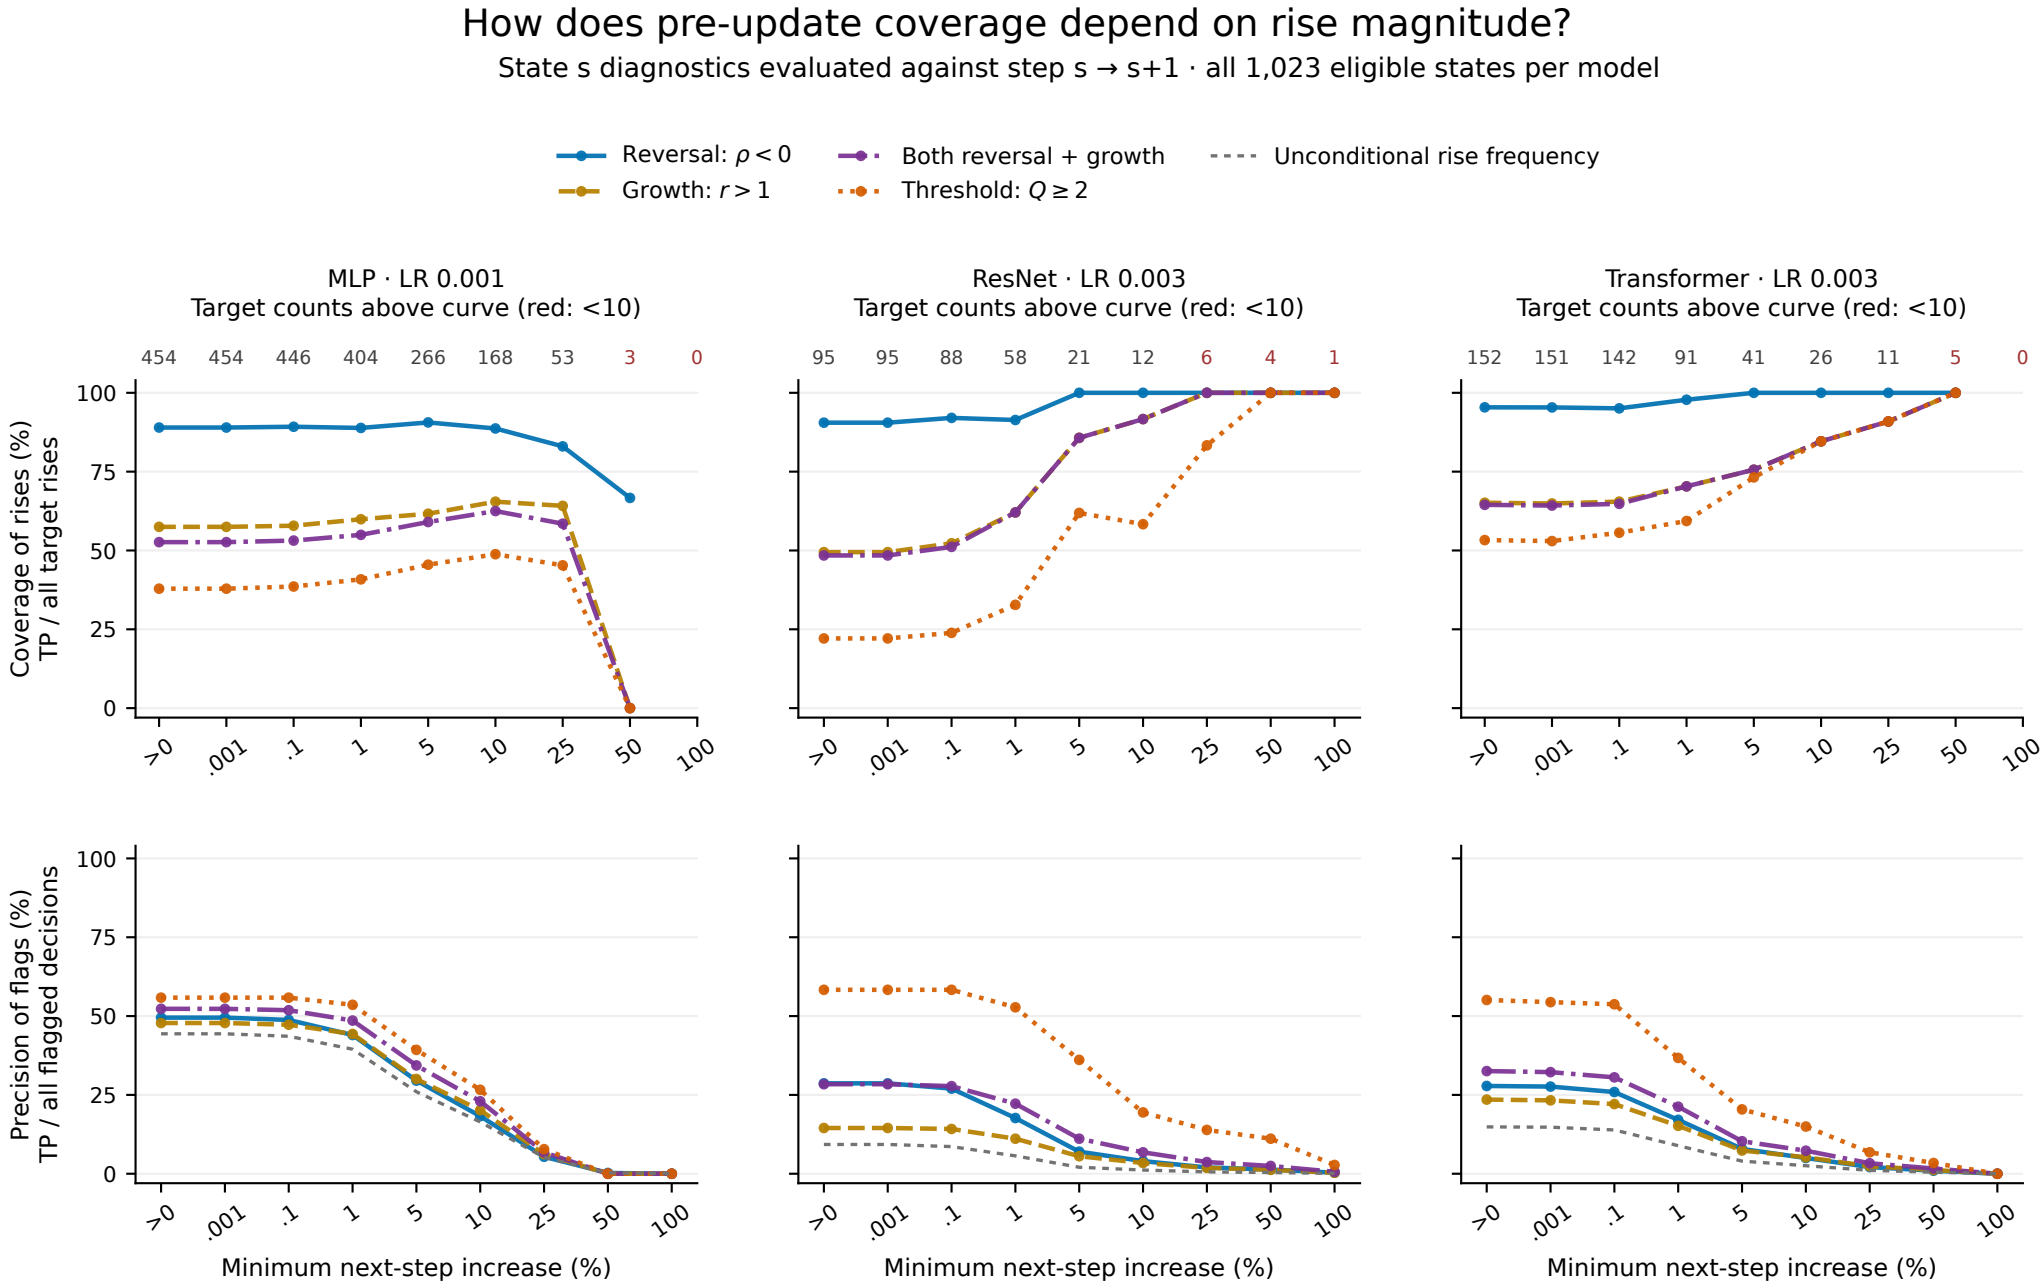



Strict >0 for any rise; other thresholds are minimum relative changes. Empty endpoints have no target rises.

One retained initialization per model; dependent updates. All nine model/LR arms are preserved in the data tables.

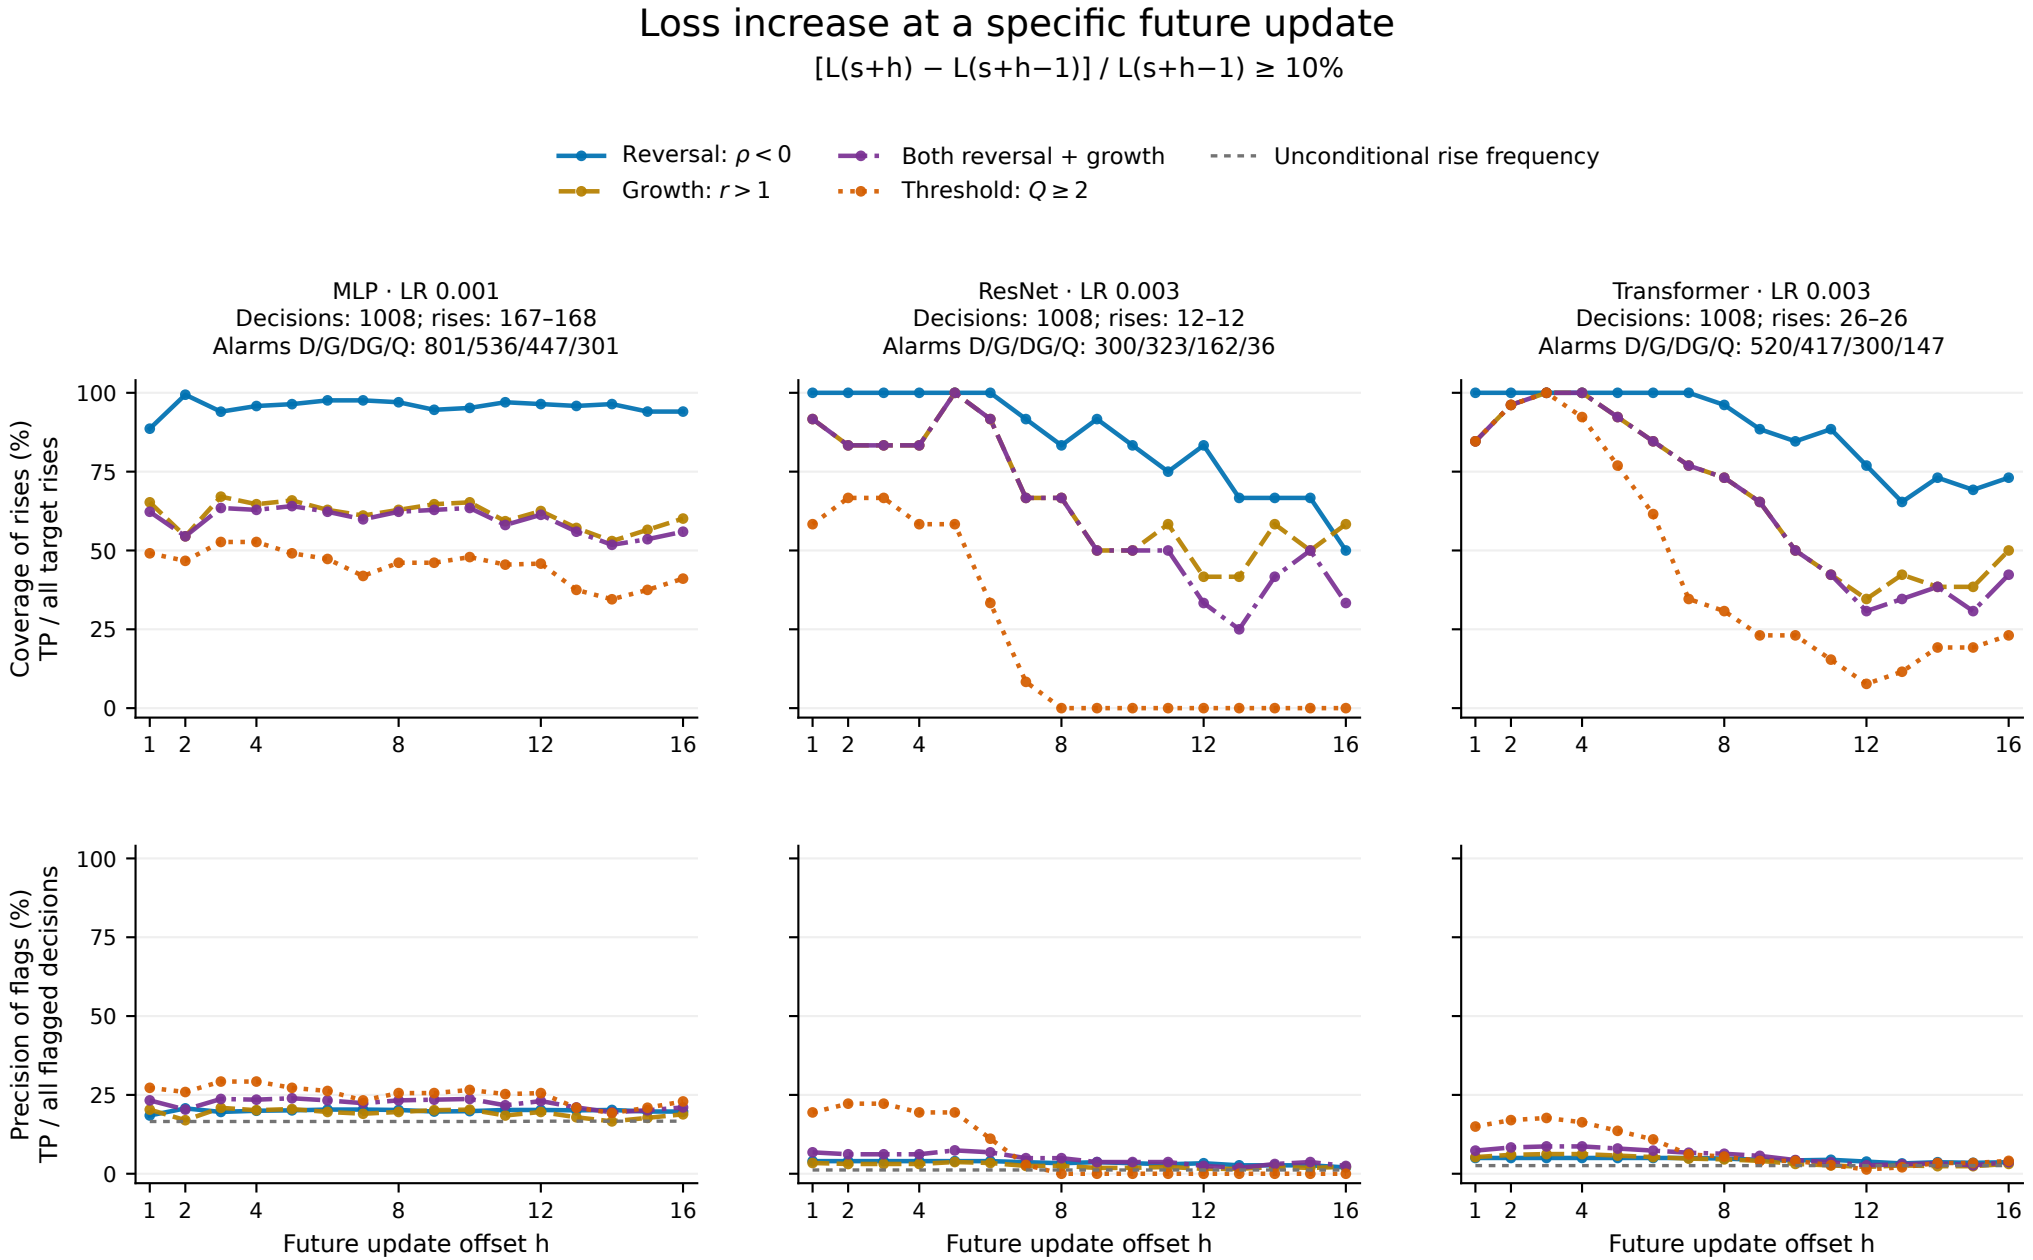


Same decision states s=1…1008 at every horizon; diagnostics fixed at s. Gray line: target frequency without a diagnostic.

Curves are exploratory; no horizon was chosen as a validated optimum. Window-target positives increase with horizon by construction.

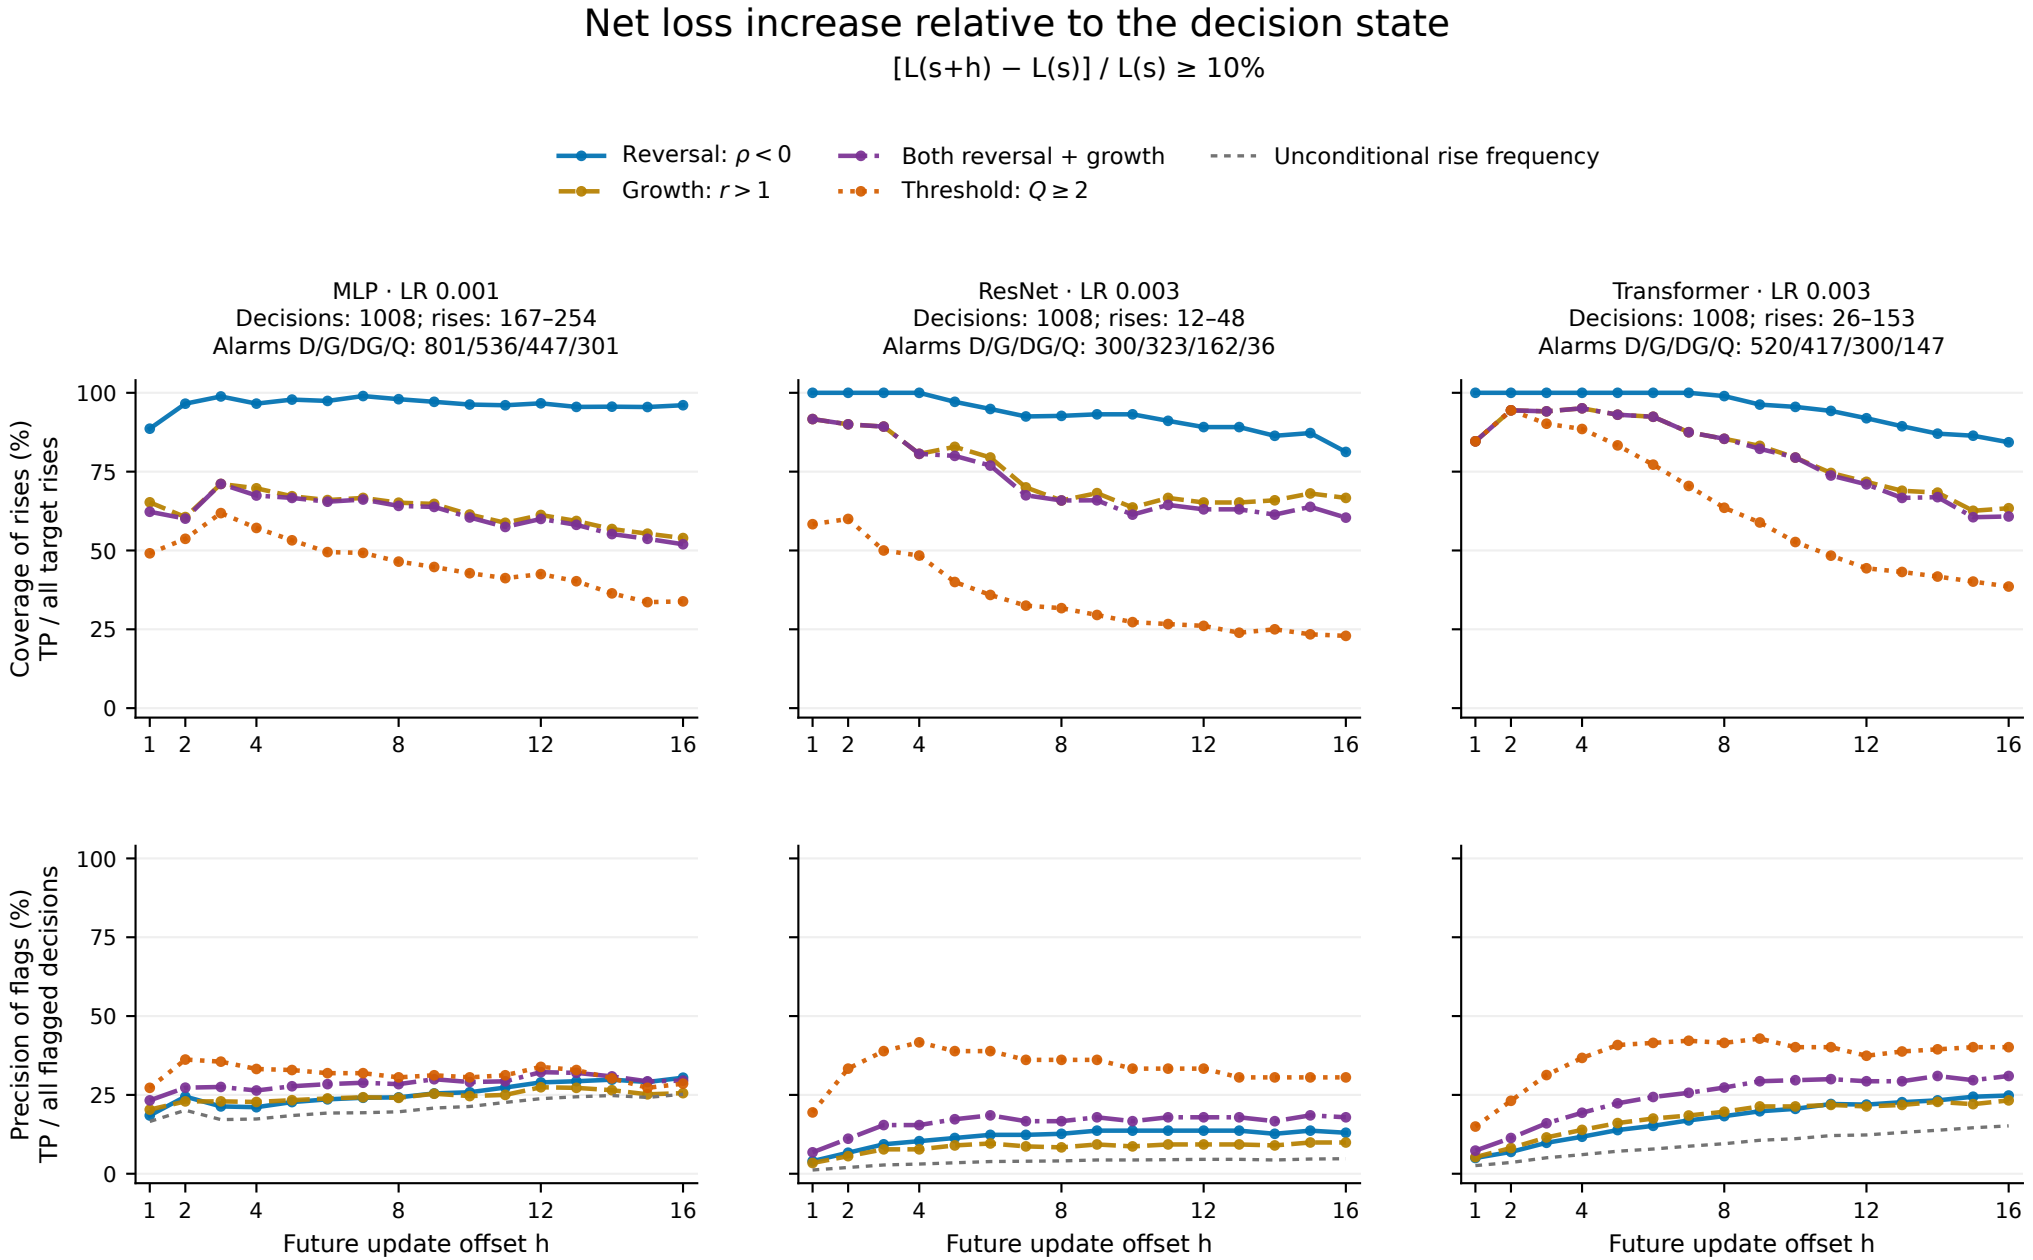


Same decision states s=1…1008 at every horizon; diagnostics fixed at s. Gray line: target frequency without a diagnostic.

Curves are exploratory; no horizon was chosen as a validated optimum. Window-target positives increase with horizon by construction.

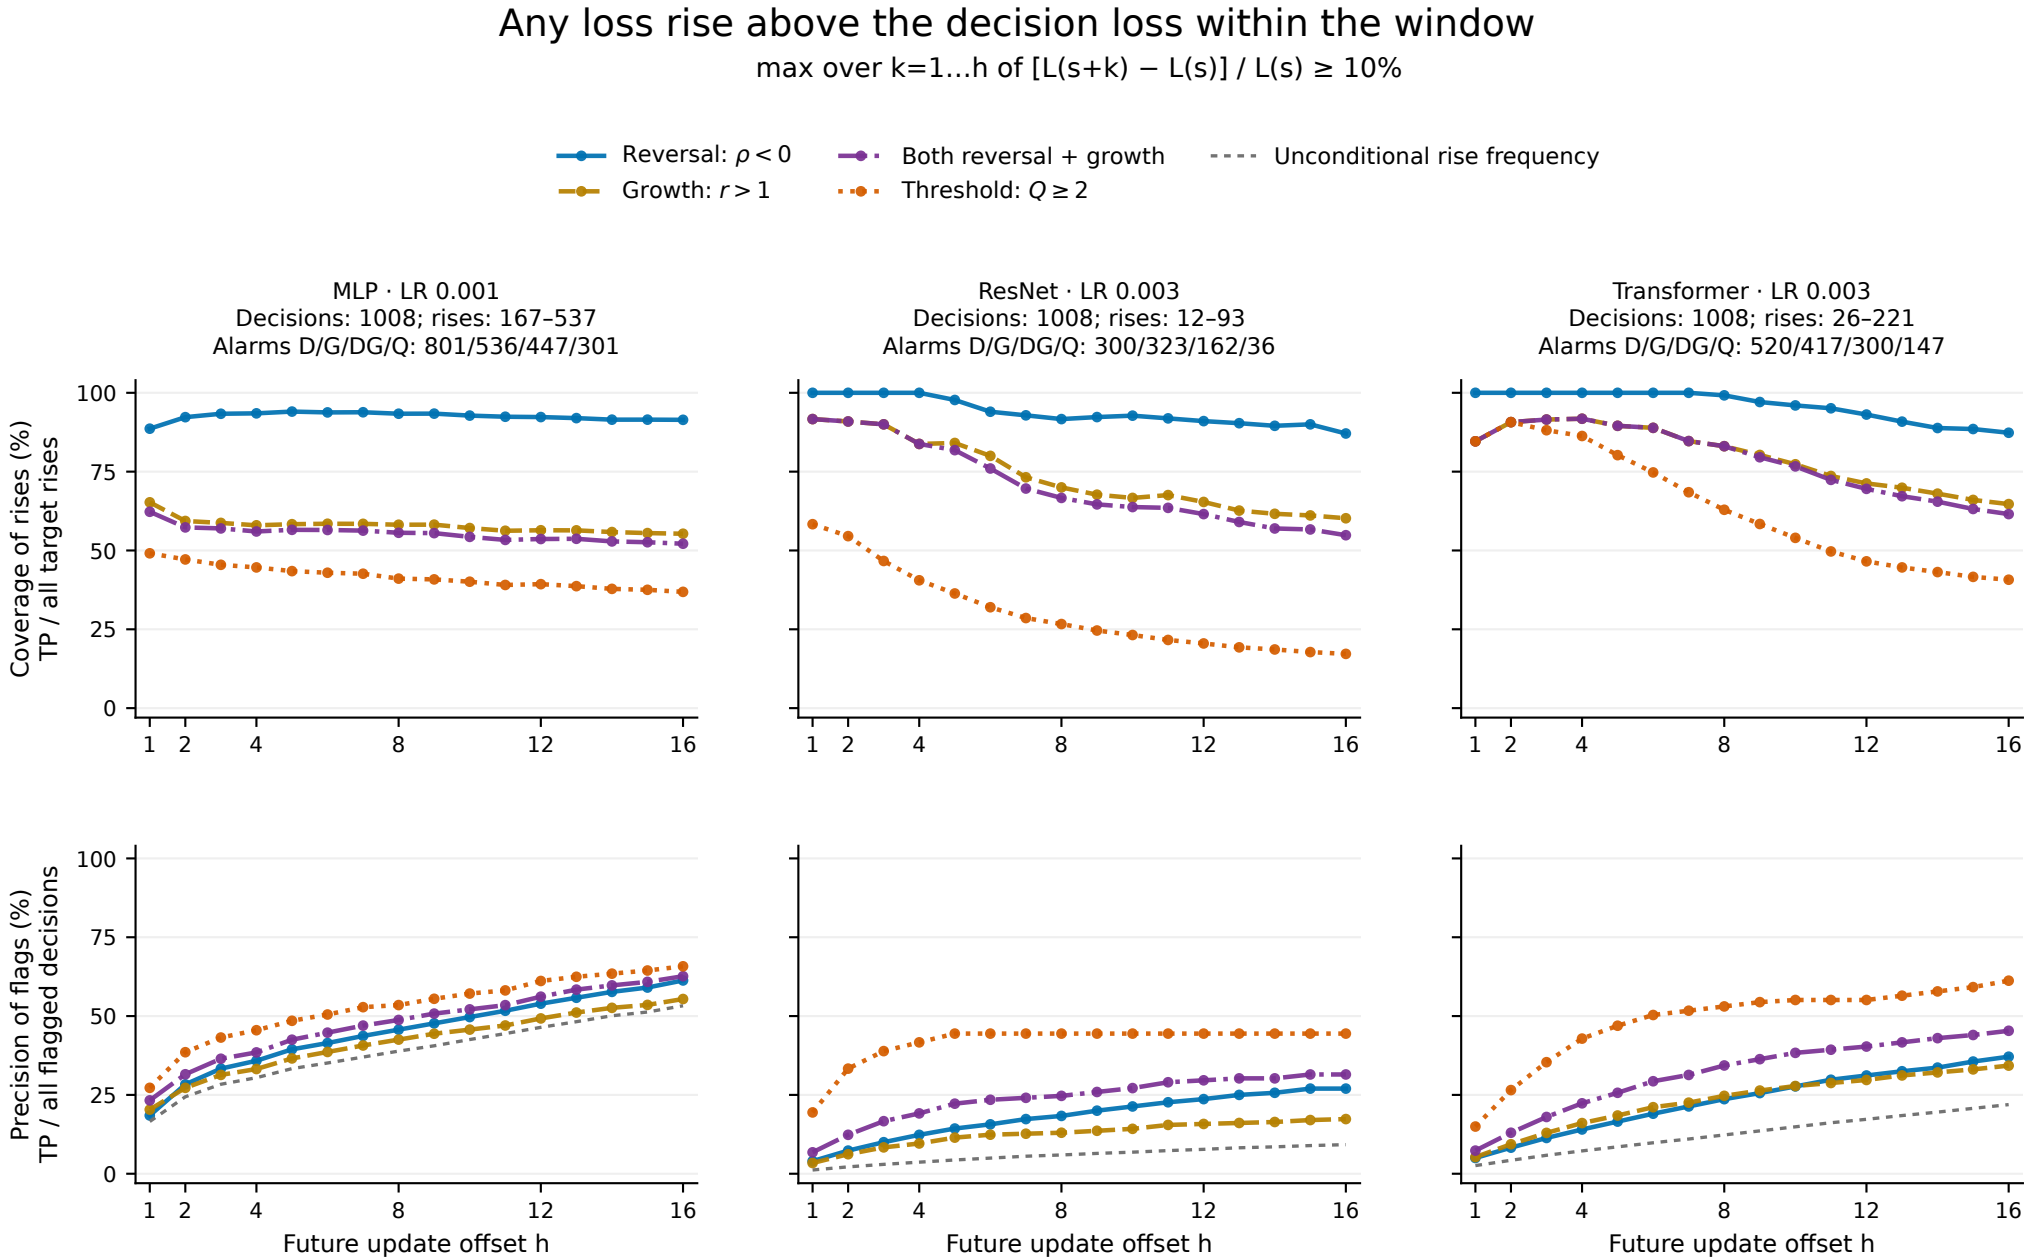

Same decision states s=1…1008 at every horizon; diagnostics fixed at s. Gray line: target frequency without a diagnostic.

Curves are exploratory; no horizon was chosen as a validated optimum. Window-target positives increase with horizon by construction.

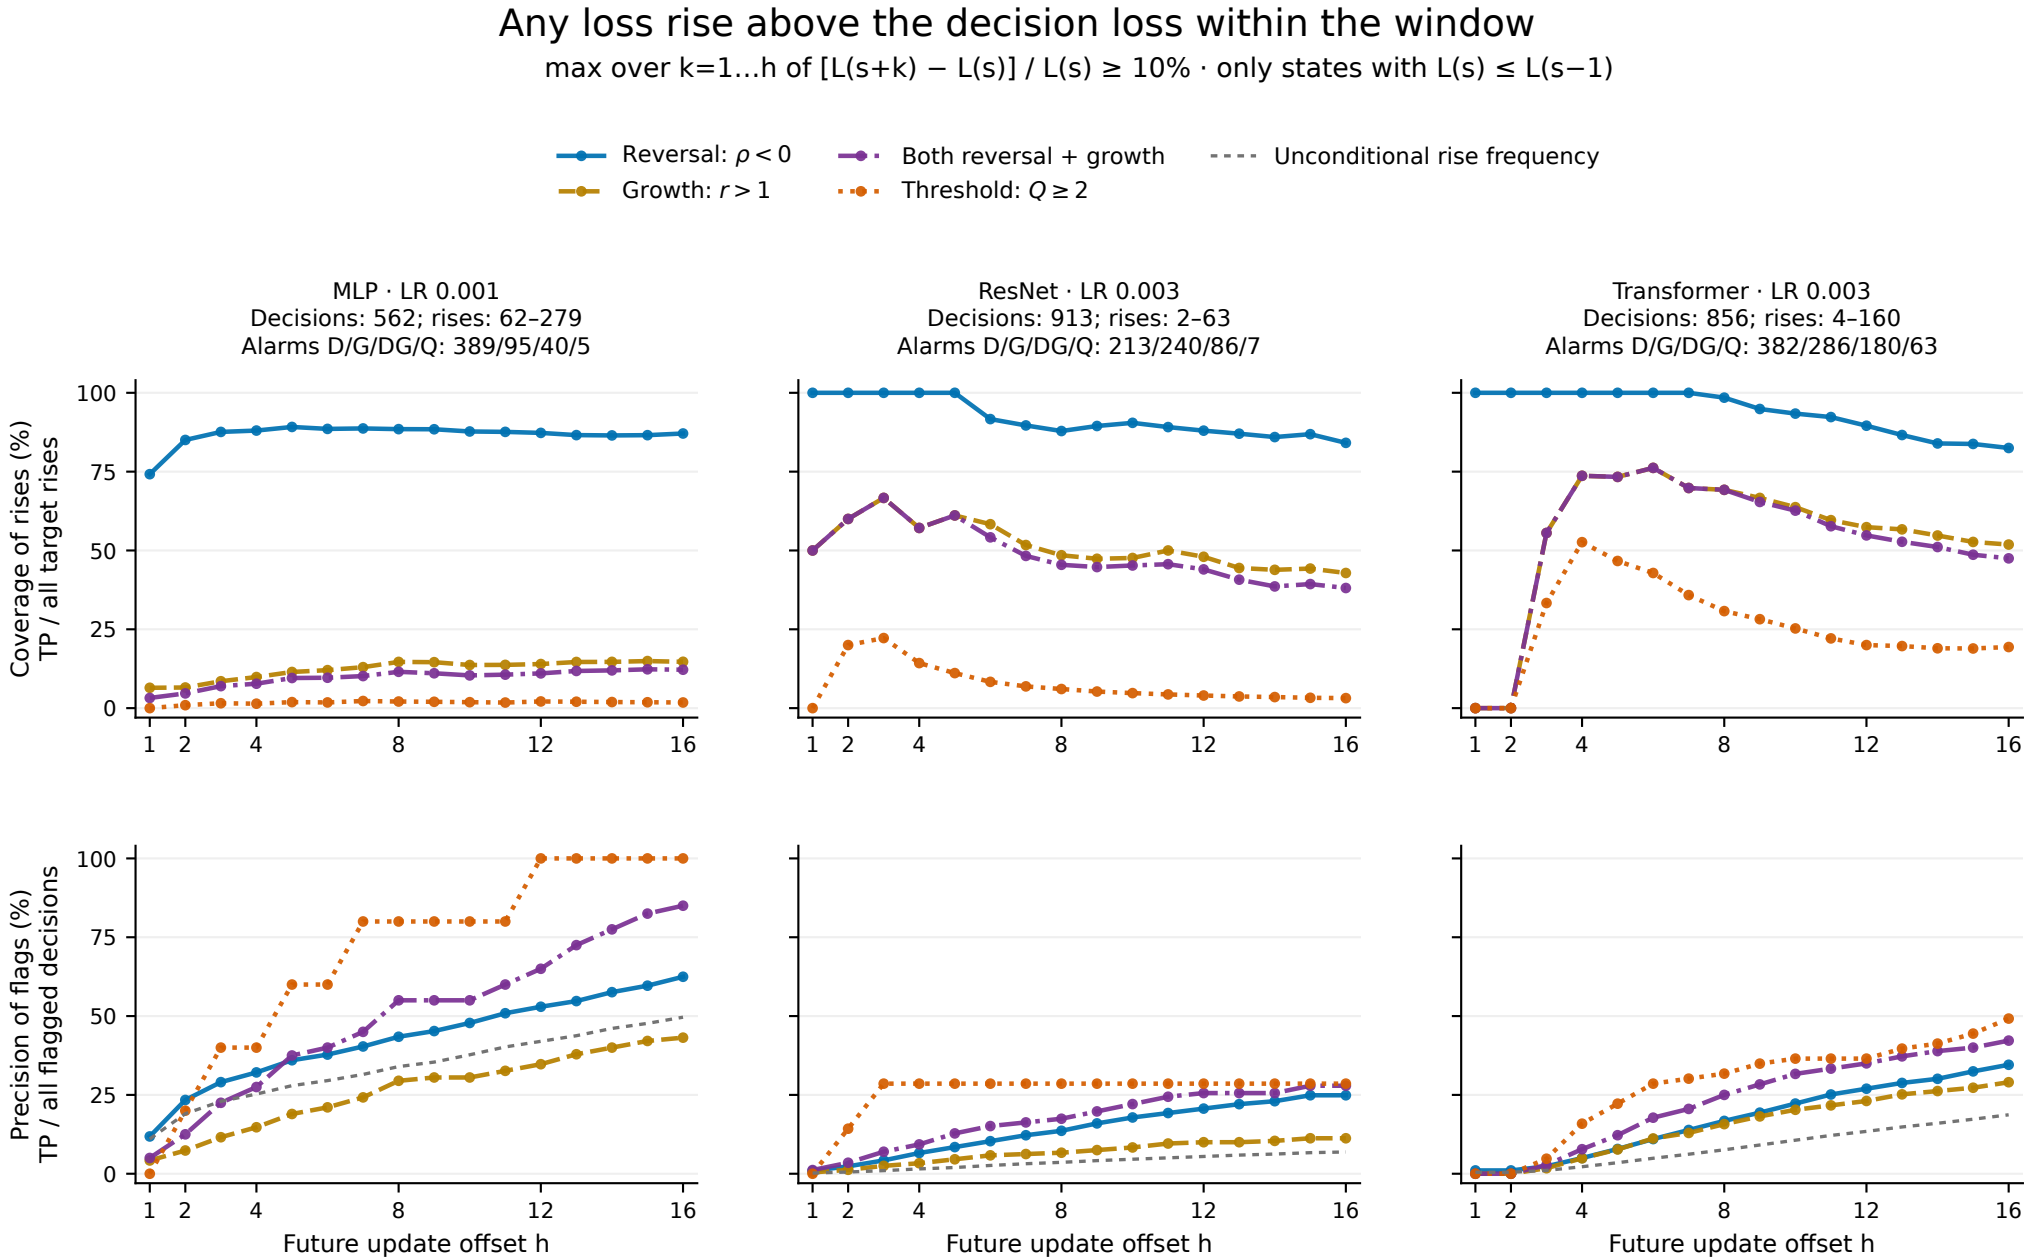


Same decision states s=1…1008 at every horizon; diagnostics fixed at s. Gray line: target frequency without a diagnostic.

Curves are exploratory; no horizon was chosen as a validated optimum. Window-target positives increase with horizon by construction.

Does retaining a warning cover later loss increases?

Next-step increase ≥10% · flag if the condition held at any of the last w states, including the current state

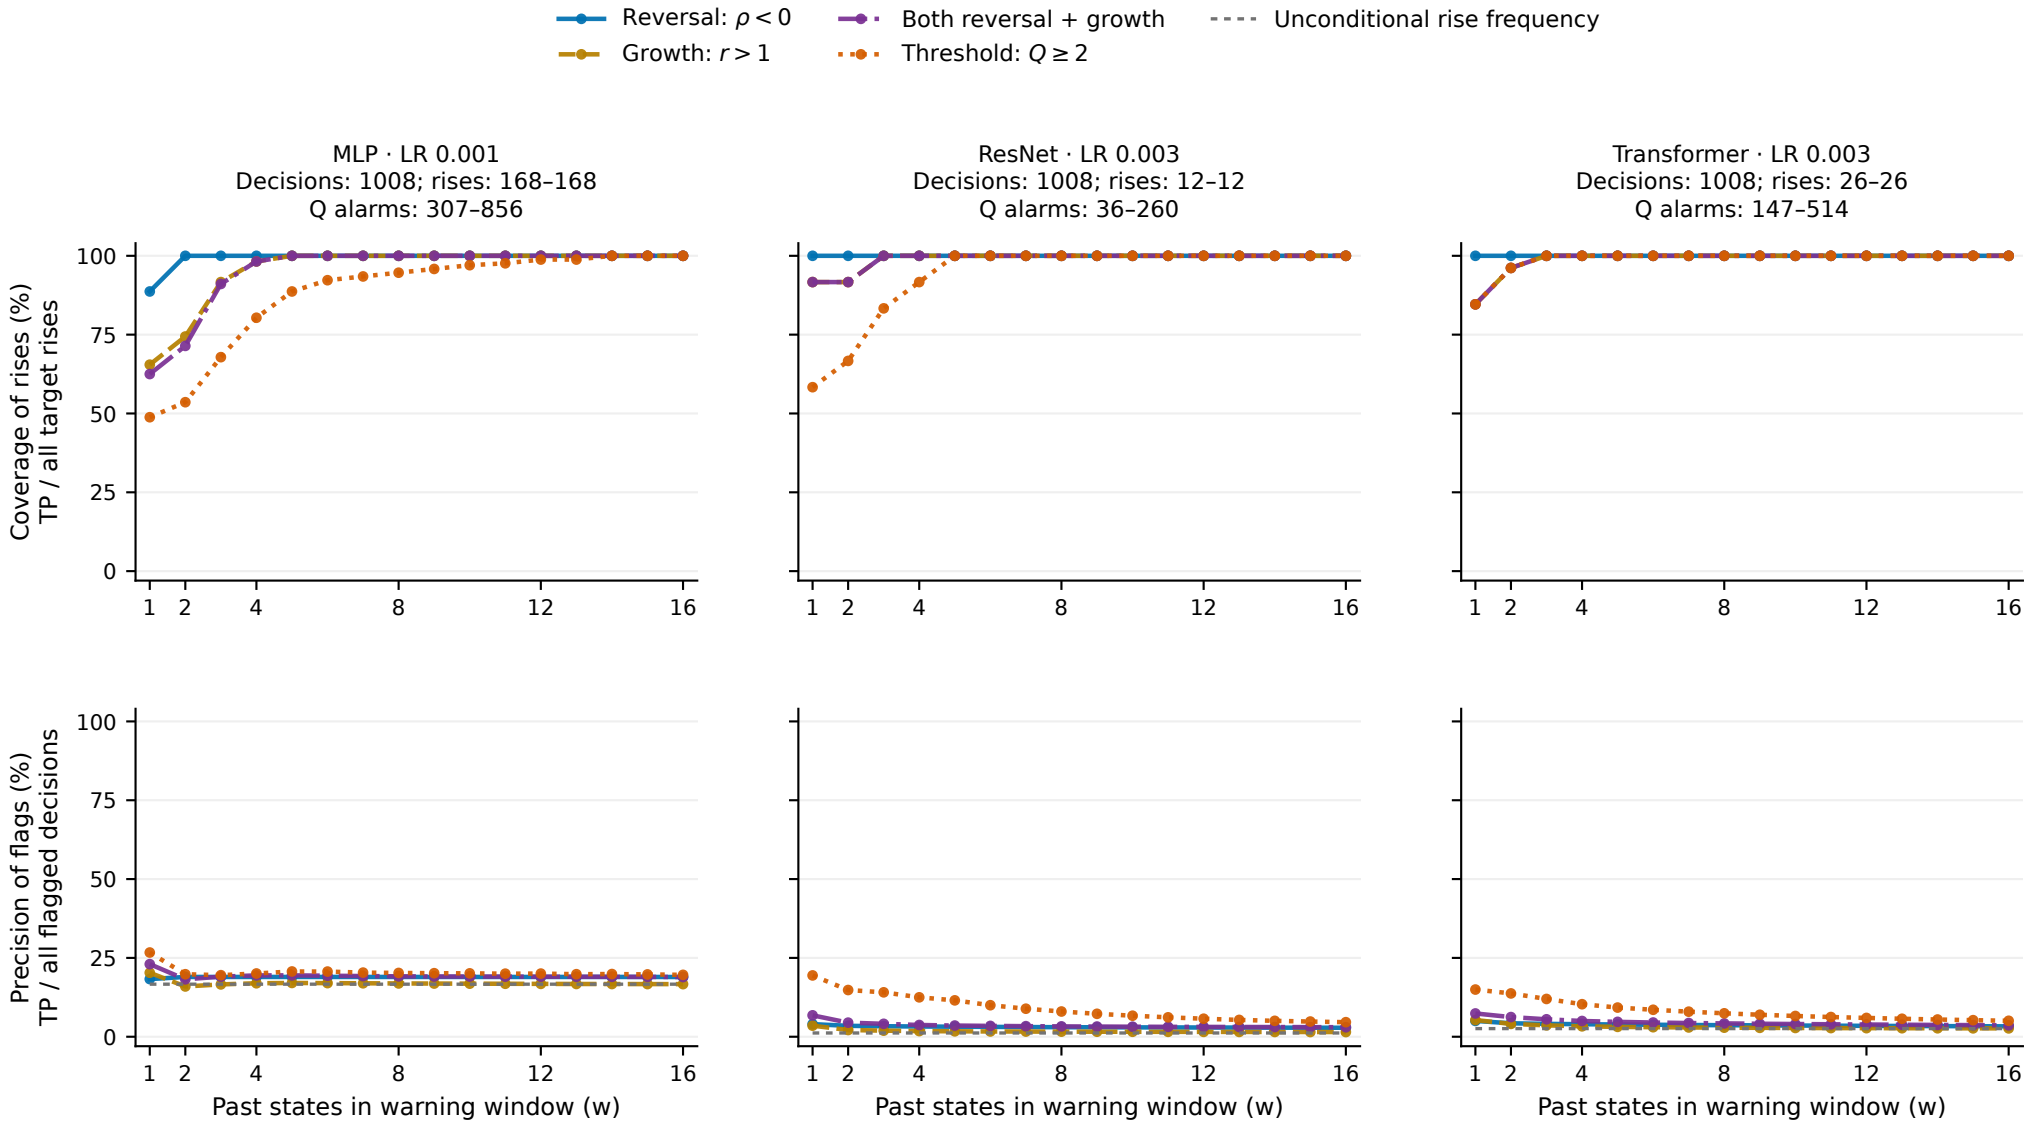

Each target update counted once; same states s=16…1023 at every width. Only past/current gradients enter the warning.

Longer memory raises coverage and flags more non-target steps. No winning width or universal operating threshold is claimed.