



At fixed R_{model} , implementation search changes both speed and validity

+ A0 ▲ A1-H ● A4-OL1 ◆ A7-OL1 ✕ failed gate


14M: Sakana-derived start → fused K001

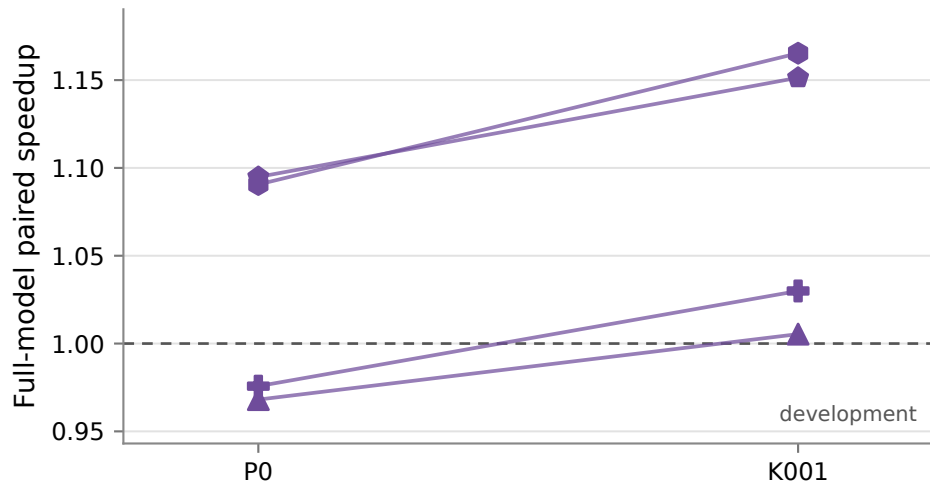


14M: fast invalid policy → robust K013

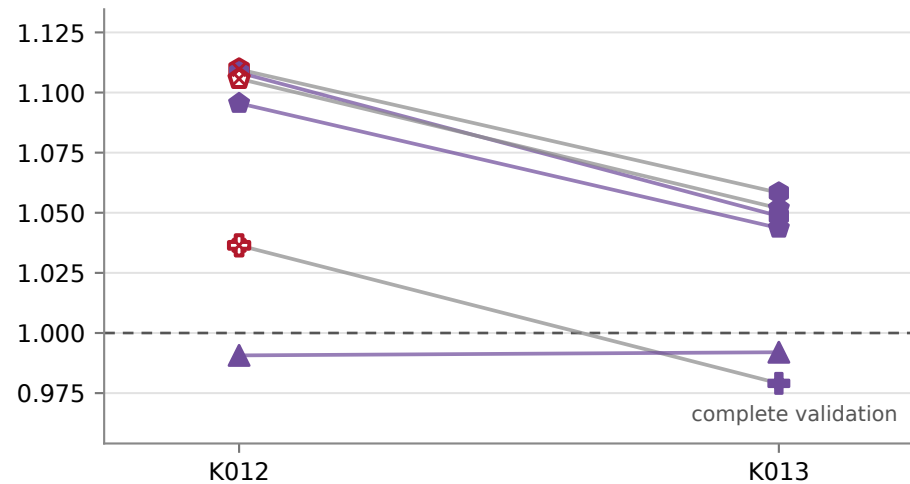

70M: generic K009 → topology-specific K016

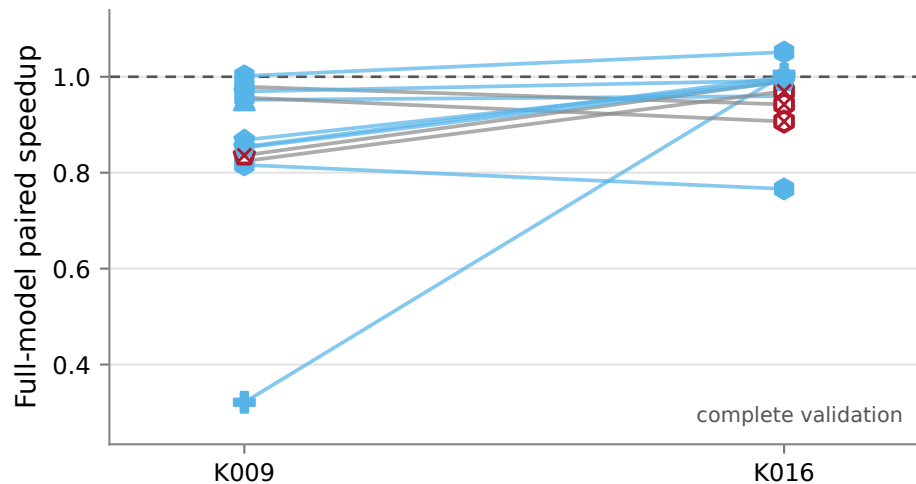

410M: early K004 → frozen K010

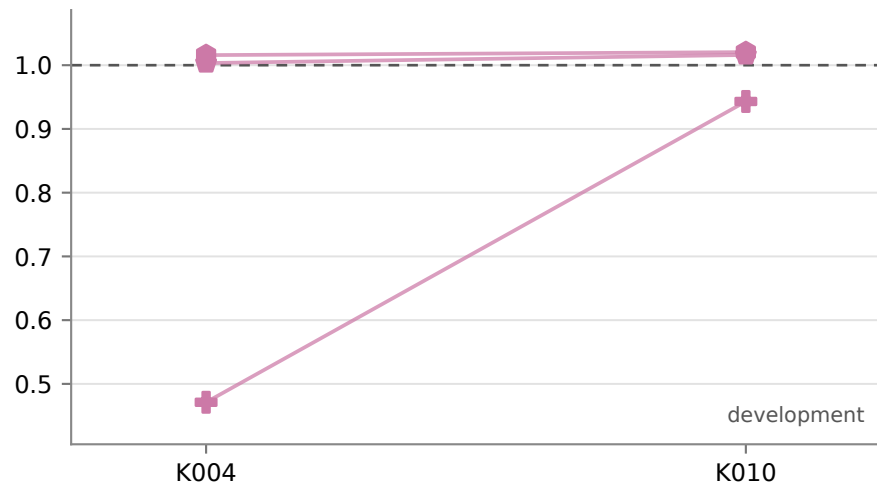

Lines join the same checkpoint, inputs and logical opportunity under two kernel policies. Ratios are each paired to the native eager path; cross-session transitions remain descriptive. Dense fallback is a valid deployment outcome, but not a sparse-kernel speedup.