

Formal Verification of Cyclic Lists

Thiago Henrique Mata

Independent Researcher

thiago.henrique.mata@gmail.com

<https://thiagomata.com/>

<https://github.com/thiagomata>

Abstract

In previous articles, we defined bounded Lists and Integrals of `BigInt` from scratch, relying only on core type constructs and recursion, with no prior knowledge of Scala’s collections required. From that, we proved and formally verified some properties related to them as size, append, concat, slice and sum. This article uses that as a foundation to define Cycles — unbounded List of Integers created from a bounded List, where the values of the Cycle are the values of the List in repetition using recursion. Then, we formally defined and verified key properties such as cycle equivalence between definitions, element access via modular indexing, and periodic invariance using the Stainless verification system. All properties are expressed and proved within a minimal framework using only elementary arithmetic, recursion, and pure Scala code. This work bridges mathematical foundations and executable verification, offering a self-contained, verifiable approach of modular arithmetic.

Licensed under the Creative Commons Attribution 4.0 International License (CC BY 4.0):

<https://creativecommons.org/licenses/by/4.0/>.

1 Introduction

Unbounded lists in cycles, are a fundamental concept in computer science and mathematics, often used to model repetitive structures or processes. They can be thought of as infinite lists that repeat a finite sequence of elements.

$$L = [x_0, x_1, x_2, \dots, x_{n-1}] \mid x_n \in \mathbb{S}, L \in \mathbb{L}$$
$$\text{Cycle}(L) = [x_0, x_1, x_2, \dots, x_{n-1}, x_0, x_1, \dots]$$

In this article, we present discrete definition of Cycle operations over finite integer lists, defined recursively and verified some of its properties using the Stainless system. Our approach follows a zero-prior-knowledge philosophy, building on a previously verified foundation for recursive list structure. The result is a verified, from-scratch implementation of cycle operations, suitable as a foundation for higher-level numeric reasoning over unbounded lists.

This article verifies:

- Cycle definitions: recursive, modulo, and memory — Section 3.
- Equivalence: recursive and modulo produce identical values at every position — Section 4.
- Element access: modular indexing, small-position direct lookup — Subsections 5.1–5.2.

- Periodic invariance: value unchanged by adding cycle-period multiples — Subsections 5.3–5.4.
- Mod propagation: remainder computed from base-cycle values — Subsection 5.5.
- Repeated-cycle invariance: repeating the base list preserves all lookups — Subsection 5.6.
- Cycle value positivity: all values ≥ 0 at every position — Subsection 5.7.
- Cycle rotation: rotates base list, shifts index — Subsection 5.8.
- Residue classification: all-zero, none-zero, and some-zero divisor classifications transfer from the base list to every cycle position — Subsections 5.10–5.12.

1.1 Related work

Finite rotation already has a substantial formal treatment in Lean’s Mathlib: it includes rotation reduced modulo list length, indexed rotation laws, and an equivalence relation identifying rotated lists [5]. These results give a close formal point of contact for the article’s base-list rotation and modular-indexing laws.

There is also broader work on cyclic datatypes as recursive programming structures. Hamana studies cyclic lists and related data modulo bisimulation, with a semantic account of their computation rules [1]. That setting is more general and different from the present periodic sequence generated by a finite integer list. Together, these sources place the Stainless development between finite-list rotation and general cyclic-data theory, while this article verifies the equivalence of its recursive and modulo presentations and the period, residue, and lookup properties of its concrete periodic model.

2 Preliminaries

We reuse several basic list operations and their verified properties from the companion articles *Using Formal Verification to Prove Properties of Lists Recursively Defined* [4] and *Formal Verification of Discrete Integration Properties from First Principles* [3].

These articles also defined and verified their properties using the same zero-prior-knowledge methodology, and are treated here as foundational primitives.

For any list L of numeric values $x_i \in \mathbb{S}$ where $\mathbb{S}$ is a set of all numeric values, $\mathbb{L}$ is the set of all lists, and n is the size of the list, we define:

$$L_e \in \mathbb{L}$$

$$L_e = []$$

$$\text{head} \in \mathbb{S}$$

$$\text{tail} \in \mathbb{L}$$

$$L_{\text{node}}(\text{head}, \text{tail}) \in \mathbb{L}_{\text{node}}$$

$$\mathbb{L} = \{L_e\} \cup \{L_{\text{node}}(\text{head}, \text{tail}) \mid \text{head} \in \mathbb{S}, \text{tail} \in \mathbb{L}\}$$

$$L = [x_0, x_1, \dots, x_{n-1}] \in \mathbb{S}^n$$

$$\begin{aligned}
\text{size}(L) &:= \begin{cases} 0 & \text{if } L = L_e \\ 1 + \text{size}(\text{tail}(L)) & \text{otherwise} \end{cases} \\
\text{sum}(L) &:= \begin{cases} 0 & \text{if } L = L_e \\ \text{head}(L) + \text{sum}(\text{tail}(L)) & \text{otherwise} \end{cases} \\
|L| > 0 \implies \text{last}(L) &:= \begin{cases} \text{head}(L) & \text{if } |L| = 1 \\ \text{last}(\text{tail}(L)) & \text{otherwise} \end{cases} \\
|L| > 0 \implies \text{slice}(L, f, t) &:= \begin{cases} [L_j] & \text{if } f = t \\ \text{slice}(L, f, t-1) ++ [L_t] & \text{if } f < t \end{cases} \\
&\quad \forall f, t \in \mathbb{N} \text{ where } 0 \leq f \leq t \\
A ++ B &:= \begin{cases} B & \text{if } A = L_e \\ L_{\text{node}}(\text{head}(A), \text{tail}(A) ++ B) & \text{otherwise} \end{cases} \\
&\quad \forall L, A, B \in \mathbb{L}
\end{aligned}$$

From these definitions, the authors [4] mathematically prove and formally verify the following properties of lists:


$$\begin{aligned}
&\forall L, A, B \in \mathbb{L}, \quad \forall v \in \mathbb{S}, \quad \forall i, f, t \in \mathbb{N} \\
&f > t, \quad 0 \leq i < |L| \\
&|L| > 0 \implies \text{tail}(L) = L[x_1, x_2, \dots, x_{n-1}] \quad [\text{Tail Identity}] \\
&|L| > 0 \implies L_0 = \text{head}(L) \quad [\text{Head Identity}] \\
&|L| > 0 \implies L_{|L|-1} = \text{last}(L) \quad [\text{Last Element Identity}] \\
&|L| - 1 > i > 0 \implies L_i = \text{tail}(L)_{i-1} \quad [\text{Access Tail Shift Left}] \\
&|L| - 2 > i > 1 \implies \text{tail}(L)_i = L_{i+1} \quad [\text{Access Tail Shift Right}] \\
&|L| = \text{size}(L) \quad [\text{Size Identity}] \\
&\sum L = \text{sum}(L) \quad [\text{Sum matches Summation}] \\
&\sum (v :: L) = v + \sum L \quad [\text{Left Append Preserves Sum}] \\
&\sum (A ++ B) = \sum A + \sum B \quad [\text{Sum over Concatenation}] \\
&\sum (A ++ B) = \sum (B ++ A) \quad [\text{Commutativity of Sum over Concatenation}] \\
&L[f \dots t] = L[f \dots (t-1)] ++ [L_t] \quad [\text{Slice Append Consistency}]
\end{aligned}$$

3 Cycle Definitions

Building on the definitions and properties of lists, we now define Cycles.

A Cycle is an unbounded list that repeats a finite sequence of elements from a bounded list. In this study, we restrict our universe of values $\mathbb{S}$ to be the set of non-negative integers, i.e., $\mathbb{S} = \mathbb{N}_0$.

- Recursive: values at i where $i < n$ come from the base list, otherwise recurse on $i - n$ — the definitional spec.
- Modulo: values come directly from the base list at position $i \bmod n$ — efficient access.
- Memory: wraps `ModCycle`, adds classification tracking via `checkMod(d)` — remembers which divisors produce all-zero, some-zero, or none-zero residue patterns.

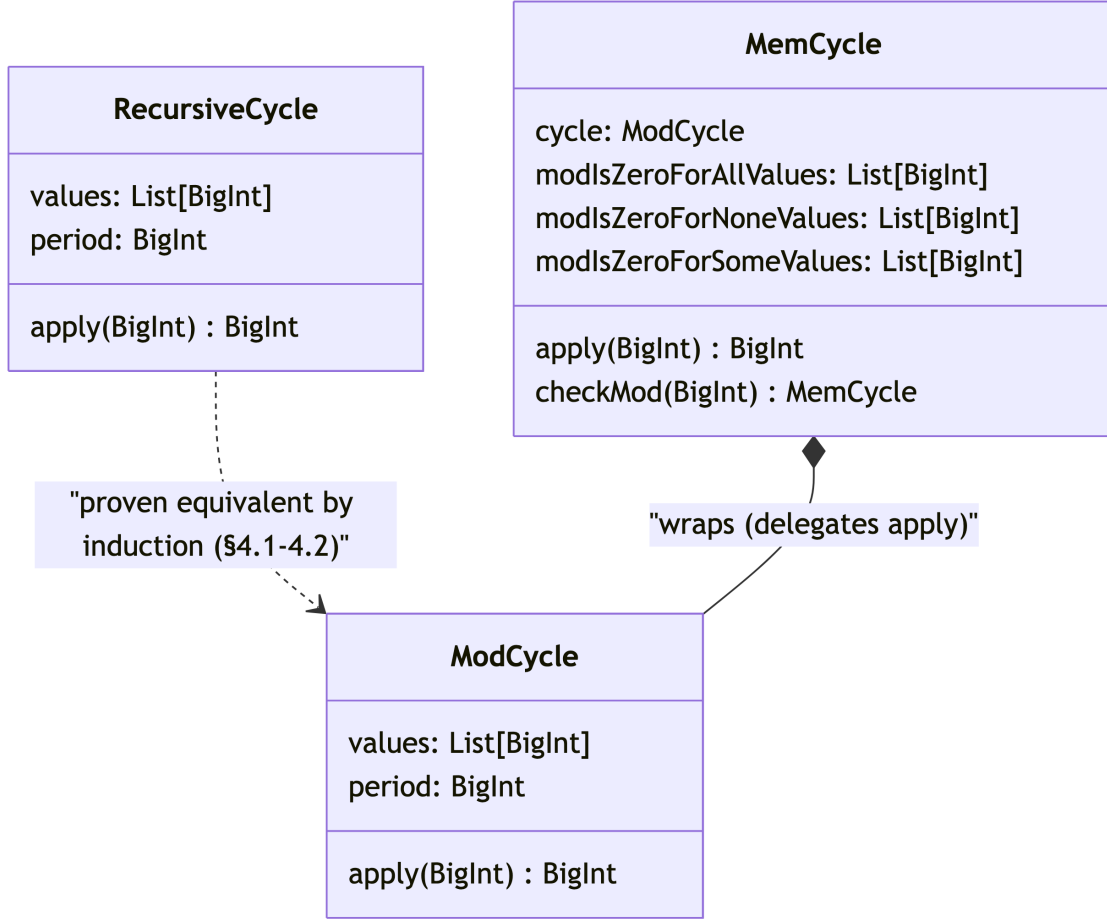

3.1 Recursive Cycle

$$\begin{aligned}
 &\forall L \in \mathbb{L}, \quad \forall v \in \mathbb{N}_0, \quad \forall i \in \mathbb{N}_0 \\
 &\quad L := [v_0, v_1, \dots, v_{n-1}] \in \mathbb{N}_0^n \\
 &\quad n = |L| \\
 &\text{RecCycle}_i := \begin{cases} L_i & \text{if } i < n \\ \text{RecCycle}_{i-n} & \text{if } i \geq n \end{cases}, \quad |L| > 0 \\
 &\quad \therefore \\
 &\text{RecCycle} = [v_0, v_1, \dots, v_{n-1}, v_0, v_1, \dots] \\
 &\text{Cycle}_i := \text{RecCycle}_i
 \end{aligned}$$

We take this recursive unrolling as the formal ground truth for the informal picture of “the infinite periodic sequence” used throughout this article: from here on, **Cycle** means **RecCycle**. That is a naming choice, not a theorem — the recursion peels off one copy of the base list per step, which is exactly what the periodic sequence means. What still needs proof is whether the modulo-based definition below computes the same values; that equivalence is proved in Section 4.

The recursive cycle is defined at [RecursiveCycle](#):

```
case class RecursiveCycle(values: List[BigInt]) {
  require(values.nonEmpty)
  require(CycleUtils.checkPositiveOrZero(values))

  def period: BigInt = values.size

  def apply(position: BigInt): BigInt = {
    decreases(position)
    require(position >= 0)

    if (position < period) {
      values(position)
    } else {
      apply(position - values.size)
    }
  }
}
```

3.2 Modulo Cycle

A Cycle can also be defined using modulo arithmetic, which is a common approach in computer science to handle cyclic structures.

$$\begin{aligned}
&\forall L \in \mathbb{L}, \quad \forall v \in \mathbb{N}_0, \quad \forall i \in \mathbb{N}_0 \\
&\quad L := [v_0, v_1, \dots, v_{n-1}] \in \mathbb{N}_0^n \\
&\quad n = |L| \\
&\quad \text{ModCycle}_i = L[i \bmod n], \quad |L| > 0 \\
&\quad \therefore \\
&\quad \text{ModCycle} = [v_0, v_1, \dots, v_{n-1}, v_0, v_1, \dots]
\end{aligned}$$

This unrolls informally to the same picture, but nothing so far shows that **ModCycle** and **RecCycle** — which Subsection 3.1 took as the meaning of **Cycle** — agree at every index. One recurses by repeated subtraction, the other computes a single remainder, and it is not obvious a priori that the two produce the same sequence. Section 4 proves they do, which is what lets **ModCycle** stand in for **Cycle** as well.

The modulo cycle is defined at [ModCycle](#):

```
case class ModCycle(values: List[BigInt]) {
  require(CycleUtils.checkPositiveOrZero(values))
  require(values.nonEmpty)

  def apply(position: BigInt): BigInt = {
    require(position >= 0)
    val index = Calc.mod(position, values.size)
  }
}
```

```

    assert(index >= 0)
    assert(index < values.size)
    values(index)
  }

  def period: BigInt = values.size

  def sum(): BigInt = ListUtils.sum(values)
}

```

3.3 Memory Cycle

The third representation, `MemCycle`, wraps a `ModCycle` and adds classification state: three lists tracking which divisors produce all-zero, some-zero, or none-zero residue patterns across the cycle's values.

Like `ModCycle`, positional lookup uses modular indexing; value access delegates directly to the wrapped `ModCycle`. Positional equivalence between the two is immediate by construction: `MemCycle.apply(position)` calls the wrapped `cycle(position)`, and `MemCycle(values)` constructs that wrapped cycle as `ModCycle(values)`.

$\text{MemCycle}(L)_i = \text{ModCycle}(L)_i$ [By `MemCycle.apply` delegating to its wrapped `ModCycle`]

The bounded bridge `CycleProperties::assertModCycleEqualsMemCycle` verifies the same lookup equality over one physical period for a `ModCycle` and a `MemCycle` sharing the same values and period.

`MemCycle(L)` returns the same values as `ModCycle(L)` by definition: it stores `ModCycle(L)` and delegates every lookup to it. Section 4 proves the remaining piece — that `RecursiveCycle(L)` and `ModCycle(L)` also agree at every position — after which the full three-way equality chain used throughout the article is assembled at the close of that section.

The cycle is immutable. Calling `checkMod(d)` returns a *new* `MemCycle` with `d` added to the appropriate classification list. The original is unchanged. Values are never modified; classification is metadata accumulated across calls.

```

case class MemCycle private (
  cycle: ModCycle,
  modIsZeroForAllValues: List[BIGInt] = List.empty,
  modIsZeroForNoneValues: List[BIGInt] = List.empty,
  modIsZeroForSomeValues: List[BIGInt] = List.empty,
) {
  def apply(position: BIGInt): BIGInt = cycle(position)
  def values: List[BIGInt] = cycle.values
  def period: BIGInt = cycle.period
  def checkMod(dividend: BIGInt): MemCycle = { /* returns new MemCycle */
  }
}

```

The memory cycle is defined at `MemCycle`. Classification lemmas are verified in `CycleCheckMod`.

4 Cycle Equivalence

Subsection 3.1 defines `Cycle` to mean `RecCycle` — a naming choice, not a claim. This section proves the claim that actually needs proving: that `ModCycle`, defined independently by a single modulo operation rather than by recursive unrolling, computes exactly the same values as `RecCycle` at every position. This equivalence is what the rest of the article leans on whenever it moves between the two representations, and it is not immediate from the two definitions side by side. We prove it by induction on the position i .

- Base case ($i < n$): both definitions consult the base list directly at the same position.
- Inductive step ($i \geq n$): the recursive definition reduces to $i - n$, wrapping to the same modulo position.

$$\begin{aligned}
& \forall L \in \mathbb{L}, \quad \forall v \in \mathbb{N}_0, \quad \forall i \in \mathbb{N}_0 \\
& \quad L := [v_0, v_1, \dots, v_{n-1}] \in \mathbb{N}_0^n \\
& \quad n = |L| \\
& \text{ModCycle}_i = L[i \bmod n], \quad |L| > 0 \\
& \text{RecCycle}_i = \begin{cases} L_i & \text{if } i < n \\ \text{RecCycle}_{i-n} & \text{if } i \geq n \end{cases}, \quad |L| > 0
\end{aligned}$$

4.1 Base Case ($i < n$)

When the position is within the first cycle, both definitions return the list element directly.

$$\begin{aligned}
i < n & \implies i \bmod n = i && [\text{Trivial Mod For Small Dividend}] \\
\text{ModCycle}_i &= L_{(i \bmod n)} && [\text{ModCycle Definition}] \\
&= L_i && [\text{Since } i < n, i \bmod n = i] \\
\text{RecCycle}_i &= L_i && [\text{Since } i < n, \text{ by RecCycle Definition}] \\
&\vdots \\
i < n & \implies \text{ModCycle}_i = \text{RecCycle}_i \quad \blacksquare \quad [\text{Q.E.D.}]
\end{aligned}$$

The lemma [Trivial Mod for Small Dividend](#) was proved and verified in the article [Division and Modulo from Recursive Normalization](#) [2].

This property is verified in `RecursiveCycleMatchesModCycle::assertCycleAndRecursiveCycleMathForSmallValues`. The full Scala verification code is in Appendix A.1.

4.2 Inductive Step ($i \geq n$)

For positions beyond the first cycle, both definitions reduce the position by the cycle period and rely on the inductive hypothesis.

$$\begin{aligned}
& \text{ModCycle}_{(i-n)} = \text{RecCycle}_{(i-n)} && [\text{By Induction Hypothesis}] \\
i \geq n \implies i \bmod n = (i-n) \bmod n && [\text{Quotient Invariance Under Linear Shift}] \\
& \text{ModCycle}_i = L_{(i \bmod n)} && [\text{ModCycle Definition}] \\
& = L_{((i-n) \bmod n)} && [\text{Since } i \geq n, i \bmod n = (i-n) \bmod n] \\
& = \text{ModCycle}_{(i-n)} && [\text{By Definition}] \\
& = \text{RecCycle}_{(i-n)} && [\text{By Substitution}] \\
& \text{RecCycle}_i = \text{RecCycle}_{(i-n)} && [\text{By RecCycle Definition}] \\
& = \text{ModCycle}_i && [\text{By Substitution}] \\
& \therefore \\
i \geq n \implies \text{ModCycle}_i = \text{RecCycle}_i && \blacksquare \quad [\text{Q.E.D.}]
\end{aligned}$$

The lemma [Quotient Invariance Under Linear Shift](#) was proved and verified in [Division and Modulo from Recursive Normalization](#) [2].

This property is verified in [RecursiveCycleMatchesModCycle::assertCycleAndRecursiveCycleMathForAnyValues](#). The full Scala verification code is in Appendix A.2.

With both pieces now established — `RecCycle` and `ModCycle` equal by this section, `MemCycle` and `ModCycle` equal by delegation (Subsection 3.3) — the three representations agree at every position:

$$\begin{aligned}
& \text{RecCycle}(L)_i = \text{ModCycle}(L)_i && [\text{Subsections 4.1–4.2}] \\
& = \text{MemCycle}(L)_i && [\text{Subsection 3.3}] \\
\therefore \quad \text{RecCycle}(L)_i = \text{ModCycle}(L)_i = \text{MemCycle}(L)_i && [\text{Three-Way Equality}]
\end{aligned}$$

5 Cycle Properties

In this section, we prove and verify the main properties of Cycles. Each property is stated mathematically, then shown to hold via a corresponding verified lemma in Scala using the Stainless system.

- Element access: `cycle(key) == cycle.values(mod(key, period))` — Subsection 5.1.
- Small-value direct lookup: `key < period  $\Rightarrow$  cycle(key) == cycle.values(key)` — Subsection 5.2.
- Periodicity: `cycle(key) = cycle(key + period * m)` for any number of loops — Subsection 5.3.
- Multi-loop consistency: value at `key` is independent of which multiple of the period is added — Subsection 5.4.
- Mod propagation: remainder modulo `d` at any position equals remainder at the base position — Subsection 5.5.
- Repeated-cycle invariance: repeating the base list preserves all lookups — Subsection 5.6.

- Value positivity: non-negative base values guarantee non-negative cycle values — Subsection 5.7.
- Rotation: rotating the base list shifts the cycle index by the same amount — Subsection 5.8.
- MemCycle-level restatements: the key access and modulo properties are also verified directly for the memory-backed representation — Subsection 5.9.
- Residue classification transfer: all-zero, none-zero, and some-zero divisor classifications on the base list hold at every cycle position — Subsections 5.10–5.12.

Throughout this section, L is the finite backing list, n is the period, and $Cycle$ is the unbounded periodic stream it defines — formally, **Cycle** means **RecCycle** (Subsection 3.1), proved in Section 4 to equal **ModCycle** at every position:

$$\begin{aligned} \forall L \in \mathbb{L}, \quad \forall v \in \mathbb{N}_0, \quad \forall i \in \mathbb{N}_0 \\ L := [v_0, v_1, \dots, v_{n-1}] \in \mathbb{N}_0^n, \quad |L| > 0 \\ \text{Cycle} := [v_0, v_1, \dots, v_{n-1}, v_0, v_1, \dots] \\ n := |L| \end{aligned}$$

5.1 Cycle Element Access

The value of any element in a cycle equals the value of the underlying list at the position modulo the cycle period.

$$\text{Cycle}_i = L[i \bmod n]$$

Proof.

$$\begin{aligned} \text{Cycle}_i &= \text{RecCycle}_i \quad [\text{Subsection 3.1 Definition}] \\ &= \text{ModCycle}_i \quad [\text{Section 4 Cycle Equivalence}] \\ &= L[i \bmod n] \quad [\text{ModCycle Definition}] \\ \therefore \text{Cycle}_i &= L[i \bmod n] \quad \blacksquare [\text{Q.E.D.}] \end{aligned}$$

The Cycle Equivalence property was proved and verified in Section 4.

This property is verified in `CycleProperties::findValueInCycle`. The full Scala verification code is in Appendix A.3.

5.2 Small Value in Cycle

For positions smaller than the cycle period, the cycle value equals the list value at that position directly.

$$i < n \implies \text{Cycle}_i = L_i$$

Proof.

$$\begin{aligned} \text{Cycle}_i &= \text{RecCycle}_i \quad [\text{Subsection 3.1 Definition}] \\ i < n \implies \text{RecCycle}_i &= L_i \quad [\text{RecCycle Definition}] \end{aligned}$$

$$\therefore i < n \implies \text{Cycle}_i = L_i \quad \blacksquare \text{ [Q.E.D.]}$$

This step only needs the `Cycle := RecCycle` naming from Subsection 3.1; the `ModCycle` side of the equivalence proved in Section 4 is not required here.

This property is verified in `CycleProperties::smallValueInCycle`. The full Scala verification code is in Appendix A.4.

5.3 Value Match After Many Loops

Cycle values remain invariant when adding any multiple of the cycle period to the access key.

$$\text{Cycle}_{(i+n \cdot m)} = L[i \bmod n]$$

Proof.

$$\begin{aligned} \text{Cycle}_{(i+n \cdot m)} &= \text{RecCycle}_{(i+n \cdot m)} && \text{[Subsection 3.1 Definition]} \\ &= \text{ModCycle}_{(i+n \cdot m)} && \text{[Section 4 Cycle Equivalence]} \\ &= L[(i + n \cdot m) \bmod n] && \text{[ModCycle Definition]} \\ &= L[i \bmod n] && \text{[Quotient Invariance Under Linear Shift by Multiplier]} \end{aligned}$$

$$\therefore \text{Cycle}_{(i+n \cdot m)} = L[i \bmod n] \quad \blacksquare \text{ [Q.E.D.]}$$

The lemma [Quotient Invariance Under Linear Shift](#) and its multiplier variant were proved and verified in [Division and Modulo from Recursive Normalization](#) [2].

This property is verified in `CycleProperties::valueMatchAfterManyLoops`. The full Scala verification code is in Appendix A.5.

5.4 Two Multiples of Cycle Size

Shifting the same key by two different multiples of the cycle period produces the same cycle value either way.

$$\text{Cycle}_{(i+n \cdot m_1)} = \text{Cycle}_{(i+n \cdot m_2)}$$

Proof. By Subsection 5.3, applied at both m_1 and m_2 :

$$\begin{aligned} \text{Cycle}_{(i+n \cdot m_1)} &= L[i \bmod n] && \text{[Subsection 5.3, Value Match After Many Loops]} \\ \text{Cycle}_{(i+n \cdot m_2)} &= L[i \bmod n] && \text{[Subsection 5.3, Value Match After Many Loops]} \end{aligned}$$

$$\therefore \text{Cycle}_{(i+n \cdot m_1)} = \text{Cycle}_{(i+n \cdot m_2)} = L[i \bmod n] \quad \blacksquare \text{ [Q.E.D.]}$$

This property is verified in `CycleProperties::valueMatchAfterManyLoopsInBoth`. The full Scala verification code is in Appendix A.6.

5.5 Propagate Modulo from Value to Cycle

The modulo operation applied to a cycle value can be equivalently applied to the underlying list value at the modular index. Since the previous sections prove that the cycle representations agree at every position, we can use the modulo cycle definition directly: cycle lookup first reduces the position to $i \bmod n$, and taking a remainder by any positive divisor d preserves that same base-position reduction.

$$\text{Cycle}_i \bmod d = L_{i \bmod n} \bmod d$$

Proof.

$$\begin{aligned} \text{Cycle}_i &= \text{RecCycle}_i && [\text{Subsection 3.1 Definition}] \\ &= \text{ModCycle}_i && [\text{Section 4 Cycle Equivalence}] \\ &= L_{i \bmod n} && [\text{ModCycle Definition}] \\ \therefore \text{Cycle}_i \bmod d &= L_{i \bmod n} \bmod d && \blacksquare [\text{Q.E.D.}] \end{aligned}$$

This property is verified in `CycleProperties::propagateModFromValueToCycle`. The related idempotence restatement, `cycle(position) == cycle(position mod period)`, is verified in `CycleProperties::assertCycleOfPosEqualsCycleOfModPos`. The full Scala verification code is in Appendix A.7.

5.6 Repeated-Cycle Invariance

When a cycle's base list is repeated t times to form a longer physical period, the values read at every position remain identical. The repeated cycle is structurally a concatenation of t copies of the original list; the extra length is invisible at any index because modular indexing composes correctly across the nested periods. Repetition uses the same t -fold notation as *Integral Cycle*, Subsection 6.1's $L^{(x)}$ (list repeated x times), defined the same way by unfolding one copy at a time:

$$\begin{aligned} V^{(t)} &:= \begin{cases} L_e & \text{if } t = 0, \\ V \mathbin{++} V^{(t-1)} & \text{otherwise.} \end{cases} \\ C &\text{ --- original MemCycle, } V = \text{values}(C), \quad n = |V| \\ C^{(t)} &\text{ --- repeated cycle, } \text{values}(C^{(t)}) = V^{(t)} \quad \text{with } t > 0 \\ \text{period} &= t \cdot n \end{aligned}$$

Proof.

$$\begin{aligned} C^{(t)}(\text{pos}) &= V^{(t)}(\text{mod}(\text{pos}, \text{period})) && [\text{MemCycle access via modular index}] \\ &= V(\text{mod}(\text{mod}(\text{pos}, t \cdot n), n)) && [\text{Repeated list access pattern}] \\ &= V(\text{mod}(\text{pos}, n)) && [\text{ModOperations::modByPositiveMultipleThenBase}] \\ &= C(\text{pos}) && [\text{Original cycle access}] \\ &\blacksquare && [\text{Q.E.D.}] \end{aligned}$$

The proof separates construction from lookup. Callers must build a valid `MemCycle` from the repeated values; this lemma only says that once such a cycle exists, the larger physical period does not change any lookup.

```

def assertRepeatedValuesCycleMatches(
  cycle: MemCycle,
  repeatedCycle: MemCycle,
  times: BigInt,
  position: BigInt
): Boolean = {
  require(times > BigInt(0))
  require(position >= BigInt(0))
  require(cycle.period > BigInt(0))
  require(repeatedCycle.values ==
    ListRepeatProperties.repeat(cycle.values, times))
  // ... inductive proof via mod composition ...
  repeatedCycle(position) == cycle(position)
}.holds

```

This property is verified in `MemCycleProperties::assertRepeatedValuesCycleMatches`. The complete Scala derivation is included in Appendix A.8.

5.7 Cycle Value Positivity

When every value in the base list is non-negative, every position in the cycle returns a non-negative value. This guarantees that cycle lookups never produce negative numbers, which is essential for integral and gap reasoning.

$$(\forall x \in L, x \geq 0) \wedge |L| > 0 \implies \text{Cycle}_{\text{pos}} \geq 0$$

Proof. By Subsection 5.1, $\text{Cycle}_{\text{pos}} = L[\text{pos} \bmod n]$, and $\text{pos} \bmod n$ is a valid index into L (in $[0, n)$). So $\text{Cycle}_{\text{pos}}$ is one of the values of L —and every value of L is non-negative by hypothesis, so $\text{Cycle}_{\text{pos}} \geq 0$.

$$\therefore (\forall x \in L, x \geq 0) \wedge |L| > 0 \implies \text{Cycle}_{\text{pos}} \geq 0 \quad \blacksquare \text{ [Q.E.D.]}$$

This property is verified in `CycleProperties::cycleValuePositiveOrZero`, which reduces to the list-level helper `CycleUtils::checkPositiveOrZeroAtIndex`—indexing into a non-negative list at a valid position yields a non-negative value. The full Scala verification code is in Appendix A.9.

The same argument gives the verified strict lower-bound form: if every base value is greater than x , then every cycle value is greater than x .

$$(\forall y \in L, y > x) \wedge |L| > 0 \implies \text{Cycle}_{\text{pos}} > x.$$

Proof. The modular index selects a value of L , which is greater than x by hypothesis:

$$\begin{aligned}
\text{Cycle}_{\text{pos}} &= L[\text{pos} \bmod n] && \text{[Subsection 5.1]} \\
L[\text{pos} \bmod n] &> x && \text{[Base-list lower bound]} \\
\therefore \text{Cycle}_{\text{pos}} &> x. && \blacksquare \text{ [Q.E.D.]}
\end{aligned}$$

This strengthening is verified for `RecursiveCycle`, the article’s `Cycle` representation, in `RecursiveCycle::cycleValueBiggerThan`.

5.8 Cycle Rotation

Rotating a cycle's base list by k positions and then accessing index i gives the same value as accessing the original cycle at index $i + k$. This connects cycle structure directly to the list rotation concept from chapter 3. Rotation is defined by re-indexing the base list from offset k :

$$\begin{aligned}\text{rotateAt}(L, k) &:= [L[(k + j) \bmod n] \mid 0 \leq j < n] \\ \text{rotateAt}(\text{Cycle}, k)_i &:= \text{rotateAt}(L, k)[i \bmod n] \\ \text{rotateAt}(\text{Cycle}, k)_i &= \text{Cycle}_{i+k} \quad \text{for } k \geq 0, i \geq 0\end{aligned}$$

Proof.

$$\begin{aligned}\text{rotateAt}(\text{Cycle}, k)_i &= \text{rotateAt}(L, k)[i \bmod n] && [\text{By Definition}] \\ &= L[(k + (i \bmod n)) \bmod n] && [\text{By Definition, since } i \bmod n \text{ lies in } [0, n)] \\ &= L[(k + i) \bmod n] && [\text{Modulo Idempotence + Distributivity over Addition}] \\ &= \text{Cycle}_{i+k} && [\text{Subsection 5.1 Cycle Element Access}] \\ \therefore \text{rotateAt}(\text{Cycle}, k)_i &= \text{Cycle}_{i+k} \quad \text{for } k \geq 0, i \geq 0 \quad \blacksquare [\text{Q.E.D.}]\end{aligned}$$

The third step composes [Modulo Idempotence](#) and [Distributivity over Addition](#), both proved and verified in [Division and Modulo from Recursive Normalization](#) [2]: $\text{mod}(k + \text{mod}(i, n), n) = \text{mod}(k + i, n)$ follows because both sides reduce to $\text{mod}(\text{mod}(k, n) + \text{mod}(i, n), n)$.

This property is verified in [CycleProperties::rotateAtValue](#). The full Scala verification code is in Appendix A.10.

5.9 MemCycle-Level Restatement

Sections 5.1–5.5 state element access, small-value lookup, periodic invariance, multi-loop consistency, and mod propagation for `ModCycle`. Since $\text{MemCycle}(L)_i = \text{ModCycle}(L)_i$ at every position (Subsection 3.3, assembled at the close of Section 4), all five results carry over to `MemCycle` by direct substitution—mathematically, this section adds no content beyond Subsections 5.1–5.5. `MemCycle` is nonetheless the representation actually used elsewhere in the codebase (it is the one that carries residue-classification metadata), and Stainless has no way to transfer a lemma proved for one concrete type to a different wrapper type that merely happens to agree with it pointwise: each result below is re-proved against `MemCycle`, and its proof body mirrors the corresponding `ModCycle` lemma line for line rather than deriving anything new:

$$\begin{aligned}\text{Cycle}_{\text{key}} &= L[\text{key} \bmod n] && [\text{Element Access}] \\ \text{key} < n &\implies \text{Cycle}_{\text{key}} = L[\text{key}] && [\text{Small Value Lookup}] \\ \text{Cycle}_{\text{key}} &= \text{Cycle}_{\text{key}+n \cdot m} && [\text{Periodic Invariance}] \\ \text{Cycle}_{\text{key}+n \cdot m_1} &= \text{Cycle}_{\text{key}+n \cdot m_2} && [\text{Multi-Loop Consistency}] \\ \text{Cycle}_{\text{key}} \bmod d &= L[\text{key} \bmod n] \bmod d && [\text{Mod Propagation}]\end{aligned}$$

These are verified in [MemCycleProperties::findValueInCycle](#),
[MemCycleProperties::smallValueInCycle](#),
[MemCycleProperties::valueMatchAfterManyLoops](#),

`MemCycleProperties::valueMatchAfterManyLoopsInBoth`, and
`MemCycleProperties::propagateModFromValueToCycle`.

The mod-idempotence identity from Subsection 5.5’s proof (that Cycle_i equals $\text{Cycle}_{(i \bmod n) \bmod n}$) has its own `MemCycle` restatement in

`MemCycleProperties::assertCycleOfPosEqualsCycleOfModPos`.

`MemCycle` also classifies each divisor by how its residues behave across the base list.

`MemCycle.checkMod(d)` (Subsection 3.3) counts how many values of L are $\equiv 0 \bmod d$, via `countModZero`—one pass over the list, adding 1 wherever the value is $\equiv 0 \bmod d$:

$$\text{countModZero}(L, d) := \begin{cases} 0 & \text{if } L = L_e, \\ 1 + \text{countModZero}(\text{tail}(L), d) & \text{if } \text{head}(L) \bmod d = 0, \\ \text{countModZero}(\text{tail}(L), d) & \text{otherwise.} \end{cases}$$

`checkMod(d)` then buckets d as all-zero, none-zero, or some-zero based on that count—each bucket defined and proved below to transfer from the base list to every position of the infinite `Cycle`, using the same move as Subsection 5.7: a cycle value is always *some* value of L (Subsection 5.1), so any property that holds of every value of L holds of every cycle position too. `CycleCheckMod.scala`’s ten lemmas separately verify that the classification itself is mutually exclusive, exhaustive, and persists correctly across independent `checkMod` calls—bookkeeping properties of the classification lists, not further claims about cycle values, so they are not restated here.

5.10 All-Zero Residue Transfers to the Cycle

`checkMod(d)` classifies d as all-zero when every value of L is $\equiv 0 \bmod d$ —i.e. `countModZero(L, d)` counts all n of them:

$$\text{allZero}(d) :\Leftrightarrow \text{countModZero}(L, d) = n \quad [\text{MemCycle.allModValuesAreZero}]$$

$$\text{allZero}(d) \implies \forall k, \text{Cycle}_k \bmod d = 0$$

Proof.

$$\begin{aligned} \text{allZero}(d) &\implies \forall x \in L, x \bmod d = 0 && [\text{Definition of countModZero}] \\ \text{Cycle}_k &= L[k \bmod n] && [\text{Subsection 5.1 Cycle Element Access}] \\ \implies \text{Cycle}_k \bmod d &= 0 && [L[k \bmod n] \text{ is a value of } L] \end{aligned}$$

$$\therefore \text{allZero}(d) \implies \forall k, \text{Cycle}_k \bmod d = 0 \quad \blacksquare [\text{Q.E.D.}]$$

`allZero` is `MemCycle.allModValuesAreZero`, defined and set by `checkMod` in `MemCycle`. `Stainless` verifies the base-list count directly; the transfer to an arbitrary cycle position k shown above is this article’s corollary of that count together with Subsection 5.1, not a separate `Stainless` lemma.

5.11 None-Zero Residue Transfers to the Cycle

The symmetric case: `checkMod(d)` classifies d as none-zero when no value of L is $\equiv 0 \bmod d$ —`countModZero(L, d)` counts none of them:

$$\text{noneZero}(d) :\Leftrightarrow \text{countModZero}(L, d) = 0 \quad [\text{MemCycle.noModValuesAreZero}]$$

$$\text{noneZero}(d) \implies \forall k, \text{Cycle}_k \bmod d \neq 0$$

Proof.

$$\begin{aligned} \text{noneZero}(d) &\implies \forall x \in L, x \bmod d \neq 0 && [\text{Definition of countModZero}] \\ \text{Cycle}_k &= L[k \bmod n] && [\text{Subsection 5.1 Cycle Element Access}] \\ \implies \text{Cycle}_k \bmod d &\neq 0 && [L[k \bmod n] \text{ is a value of } L] \end{aligned}$$

$$\therefore \text{noneZero}(d) \implies \forall k, \text{Cycle}_k \bmod d \neq 0 \quad \blacksquare [\text{Q.E.D.}]$$

`noneZero` is `MemCycle.noModValuesAreZero`, defined and set by `checkMod` in `MemCycle`. As in Subsection 5.10, Stainless verifies the base-list count; the transfer to arbitrary `k` is this article’s corollary of Subsection 5.1.

5.12 Some-Zero Residue Transfers to the Cycle

`checkMod(d)` classifies `d` as some-zero when some, but not all, values of `L` are $\equiv 0 \bmod d$ —`countModZero(L, d)` counts strictly between 0 and `n` of them:

$$\text{someZero}(d) :\Leftrightarrow 0 < \text{countModZero}(L, d) < n \quad [\text{MemCycle.someModValuesAreZero}]$$

Unlike Subsections 5.10–5.11, `someZero` is not a claim about *every* position—it needs witnesses on both sides, so the transfer argument has to name two concrete cycle positions rather than substitute into a universal.

$$\begin{aligned} \text{someZero}(d) &\implies \exists k_0, k_1, \quad \text{Cycle}_{k_0} \bmod d = 0 \wedge \\ &\quad \text{Cycle}_{k_1} \bmod d \neq 0 \end{aligned}$$

Proof. By definition, `someZero(d)` means $0 < \text{countModZero}(L, d) < n$: at least one value of `L` is $\equiv 0 \bmod d$, and at least one is not. Let $j_0, j_1 \in [0, n)$ be indices of one such value on each side, so $L_{j_0} \bmod d = 0$ and $L_{j_1} \bmod d \neq 0$.

$$\begin{aligned} j_0, j_1 < n &\implies \text{Cycle}_{j_0} = L_{j_0} \wedge \text{Cycle}_{j_1} = L_{j_1} && [\text{Subsection 5.2 Small Value in Cycle}] \\ &\implies \text{Cycle}_{j_0} \bmod d = 0 \wedge \text{Cycle}_{j_1} \bmod d \neq 0 && [\text{Substitution}] \end{aligned}$$

$$\begin{aligned} \therefore \text{someZero}(d) &\implies \exists k_0, k_1, \quad \text{Cycle}_{k_0} \bmod d = 0 \wedge \text{Cycle}_{k_1} \bmod d \neq 0 \\ &\quad (k_0 := j_0, k_1 := j_1) \quad \blacksquare [\text{Q.E.D.}] \end{aligned}$$

`someZero` is `MemCycle.someModValuesAreZero`, defined and set by `checkMod` in `MemCycle`. As above, Stainless verifies the base-list count; the witness positions k_0, k_1 are this article’s corollary of Subsection 5.2, not a separate Stainless lemma.

6 Conclusion

This article presented the definitions and properties of Cycles, a fundamental concept that enables representation of repeating sequences of values. We defined Cycles using two approaches—a recursive definition and a modulo-based definition—and proved their equivalence for all positions. We further established eleven properties: element access via modular indexing, direct access for small positions, invariance under addition of cycle-period multiples, consistency across distinct multiples, modulo propagation from values to cycle access, repeated-cycle invariance, value positivity, rotation invariance, and the all-zero, none-zero, and some-zero transfers of `MemCycle`’s divisor-residue classification from the base list to cycle positions.

$$\begin{aligned} \forall L \in \mathbb{L}, \quad \forall v \in \mathbb{N}_0, \quad \forall i, m_1, m_2 \in \mathbb{N}_0 \\ L := [v_0, v_1, \dots, v_{n-1}] \in \mathbb{N}_0^n, \quad |L| > 0 \\ \text{Cycle} := [v_0, v_1, \dots, v_{n-1}, v_0, v_1, \dots] \\ n = |L| \end{aligned}$$

$$\text{RecCycle}_i = \text{ModCycle}_i = \text{MemCycle}_i \quad [\text{Three-Way Equivalence}]$$

$$\text{Cycle}_i = L[i \bmod n] \quad [\text{Cycle Element Access}]$$

$$\text{key} < n \implies \text{Cycle}_{\text{key}} = L_{\text{key}} \quad [\text{Small Value Direct Lookup}]$$

$$\text{Cycle}_i \bmod d = \text{Cycle}_{(i \bmod n)} \bmod d \quad [\text{Mod Propagation}]$$

$$\text{Cycle}_{(i+n \cdot m)} = L[i \bmod n] \quad [\text{Value Match After Many Loops}]$$

$$\text{Cycle}_{(i+n \cdot m_1)} = \text{Cycle}_{(i+n \cdot m_2)} \quad [\text{Two Multiples}]$$

$$\text{Cycle}_{\text{pos}}^{(t)} = \text{Cycle}_{\text{pos}} \quad \forall t > 0 \quad [\text{Repeated-Cycle Invariance}]$$

$$(\forall x \in L, x \geq 0) \implies \text{Cycle}_{\text{pos}} \geq 0 \quad [\text{Cycle Value Positivity}]$$

$$(\forall y \in L, y > x) \implies \text{Cycle}_{\text{pos}} > x \quad [\text{Cycle Value Greater Than}]$$

$$\text{rotateAt}(\text{Cycle}, k)_i = \text{Cycle}_{i+k} \quad [\text{Rotation Invariance}]$$

$$\text{allZero}(d) \implies \forall k, \text{Cycle}_k \bmod d = 0 \quad [\text{All-Zero Residue Transfer}]$$

$$\text{noneZero}(d) \implies \forall k, \text{Cycle}_k \bmod d \neq 0 \quad [\text{None-Zero Residue Transfer}]$$

$$\begin{aligned} \text{someZero}(d) \implies \exists k_0, k_1, \text{Cycle}_{k_0} \bmod d = 0 \wedge \\ \text{Cycle}_{k_1} \bmod d \neq 0 \quad [\text{Some-Zero Residue Transfer}] \end{aligned}$$

The reusable equivalence, access, periodicity, modulo, repetition, positivity, and rotation properties were formally verified using Scala Stainless. The residue-classification counts are likewise verified on the base list; the all-zero, none-zero, and some-zero transfers stated here are the mathematical corollaries proved in Subsections 5.10–5.12. The full Stainless verification code is in Appendix A.

7 Future Work

Future work may include exploring more complex properties of Cycles, such as their behavior under operations including concatenation and filtering, and their applications in algorithms and data structures. Additionally, we can investigate discrete integration of Cycles, similar to the work done for lists [4] and integrals [3].

References

- [1] M. Hamana. Cyclic Datatypes modulo Bisimulation based on Second-Order Algebraic Theories. *Logical Methods in Computer Science*, 13(4:8), 2017.
- [2] T. H. Mata. Division and Modulo from Recursive Normalization. <https://github.com/thiagomata/prime-numbers/blob/cycle-article-v1.0.0/articles/chapter2/modulo.md>, 2026.
- [3] T. H. Mata. Formal Verification of Discrete Integration Properties from First Principles. <https://github.com/thiagomata/prime-numbers/blob/cycle-article-v1.0.0/articles/chapter4/integral.md>, 2026.
- [4] T. H. Mata. Using Formal Verification to Prove Properties of Lists Recursively Defined. <https://github.com/thiagomata/prime-numbers/blob/cycle-article-v1.0.0/articles/chapter3/list.md>, 2026.
- [5] The Lean Community. Mathlib: List Rotation. https://leanprover-community.github.io/mathlib4_docs/Mathlib/Data/List/Rotate.html.

A Scala Verification Code

A.1 Cycle Equivalence — Base Case

Source: [RecursiveCycleMatchesModCycle::](#)
[assertCycleAndRecursiveCycleMathForSmallValues](#)

```
def assertCycleAndRecursiveCycleMathForSmallValues(  
  cycle: ModCycle,  
  position: BigInt  
): Boolean = {  
  val list = cycle.values  
  
  require(position >= 0)  
  require(position < list.size)  
  
  val recursiveCycle = RecursiveCycle(list)  
  assert(position >= 0)  
  assert(position < list.size)  
  assert(list.size == cycle.period)  
  assert(list.size == recursiveCycle.period)  
  assert(ModSmallDividend.modSmallDividend(position, list.size))  
  assert(Calc.mod(position, list.size) == position)  
  cycle(position) == recursiveCycle(position)  
}.holds
```

A.2 Cycle Equivalence — Inductive Step

Source: [RecursiveCycleMatchesModCycle::](#)
[assertCycleAndRecursiveCycleMathForAnyValues](#)

```

def assertCycleAndRecursiveCycleMathForAnyValues(
  cycle: ModCycle,
  position: BigInt
): Boolean = {
  decreases(position)
  val list = cycle.values

  require(position >= 0)
  require(list.size > 0)

  val recCycle = RecursiveCycle(list)

  if (position < list.size) {
    // base case
    assertCycleAndRecursiveCycleMathForSmallValues(cycle, position)
  } else {
    // inductive step
    assertCycleAndRecursiveCycleMathForAnyValues(cycle, position -
list.size)
    assert(cycle(position - list.size) == recCycle(position -
list.size))
    assert(ModSum.checkValueShift(position, list.size))
    assert(Calc.mod(position, list.size) == Calc.mod(position -
list.size, list.size))
    assert(cycle(position) == cycle(position - list.size))
    assert(recCycle(position) == recCycle(position - list.size))
  }
  cycle(position) == recCycle(position)
}.holds

```

A.3 Cycle Element Access — findValueInCycle

Source: [CycleProperties::findValueInCycle](#)

```

def findValueInCycle(cycle: ModCycle, key: BigInt): Boolean = {
  require(key >= 0)
  require(cycle.period > 0)
  cycle(key) == cycle.values(Calc.mod(key, cycle.period))
}.holds

```

A.4 Small Value in Cycle — smallValueInCycle

Source: [CycleProperties::smallValueInCycle](#)

```

def smallValueInCycle(cycle: ModCycle, key: BigInt): Boolean = {
  require(key >= 0)
  require(key < cycle.period)
  require(cycle.period > 0)
  cycle(key) == cycle.values(key)
}.holds

```

A.5 Value Match After Many Loops — valueMatchAfterManyLoops

Source: [CycleProperties::valueMatchAfterManyLoops](#)

```
def valueMatchAfterManyLoops(cycle: ModCycle, key: BigInt, m: BigInt):
  Boolean = {
    require(key >= 0)
    require(cycle.period > 0)
    require(m >= 0)
    AdditionAndMultiplication.ATimesBSameMod(key, cycle.period, m)
    cycle(key) == cycle(key + cycle.period * m)
  }.holds
```

A.6 Two Multiples of Cycle Size — valueMatchAfterManyLoopsInBoth

Source: [CycleProperties::valueMatchAfterManyLoopsInBoth](#)

```
def valueMatchAfterManyLoopsInBoth(cycle: ModCycle, key: BigInt, m1:
  BigInt, m2: BigInt): Boolean = {
  require(key >= 0)
  require(cycle.period > 0)
  require(m1 >= 0)
  require(m2 >= 0)
  AdditionAndMultiplication.ATimesBSameMod(key, cycle.period, m1)
  AdditionAndMultiplication.ATimesBSameMod(key, cycle.period, m2)
  assert(cycle(key) == cycle(key + cycle.period * m1))
  assert(cycle(key) == cycle(key + cycle.period * m2))
  AdditionAndMultiplication.APlusMultipleTimesBSameMod(key,
  cycle.period, m1)
  AdditionAndMultiplication.APlusMultipleTimesBSameMod(key,
  cycle.period, m2)
  assert(Calc.mod(key, cycle.period) == Calc.mod(key + cycle.period *
  m1, cycle.period))
  assert(Calc.mod(key, cycle.period) == Calc.mod(key + cycle.period *
  m2, cycle.period))
  assert(cycle(key + cycle.period * m1) == cycle(key))
  assert(cycle(key + cycle.period * m2) == cycle(key))
  assert(cycle(key + cycle.period * m2) ==
  cycle(Calc.mod(key, cycle.period)))
  assert(cycle(key + cycle.period * m1) == cycle(key + cycle.period *
  m2))
}.holds
```

A.7 Propagate Modulo — propagateModFromValueToCycle / assertCycleOfPosEqualsCycleOfModPos

Source: [CycleProperties::propagateModFromValueToCycle](#) and [CycleProperties::assertCycleOfPosEqualsCycleOfModPos](#)

```
def propagateModFromValueToCycle(cycle: ModCycle, dividend: BigInt,
  key: BigInt): Boolean = {
  require(key >= 0)
  require(dividend > 0)
```

```

    require(cycle.period > 0)
    val modKeySize = Calc.mod(key, cycle.period)
    Calc.mod(cycle(key),dividend) ==
    Calc.mod(cycle.values(modKeySize),dividend)
  }.holds

def assertCycleOfPosEqualsCycleOfModPos(cycle: ModCycle, position:
  BigInt): Boolean = {
  require(position >= 0)
  require(cycle.period > 0)

  val period = cycle.period

  assert(cycle(position) == cycle.apply(position))
  assert(cycle(position) == cycle.values(Calc.mod(position, period)))

  assert(ModIdempotence.modIdempotence(position, period))
  assert(Calc.mod(Calc.mod(position, period),period) ==
    Calc.mod(position, period))
  assert(cycle(position) == cycle(Calc.mod(position, period)))
}.holds

```

A.8 Repeated-Cycle Invariance — `assertRepeatedValuesCycleMatches`

Source: [MemCycleProperties::assertRepeatedValuesCycleMatches](#)

```

def assertRepeatedValuesCycleMatches(
  cycle: MemCycle,
  repeatedCycle: MemCycle,
  times: BigInt,
  position: BigInt
): Boolean = {
  require(times > BigInt(0))
  require(position >= BigInt(0))
  require(cycle.period > BigInt(0))
  require(repeatedCycle.values ==
    ListRepeatProperties.repeat(cycle.values, times))
  val values = cycle.values
  val repeatedIndex = Calc.mod(position, values.size * times)
  val originalIndex = Calc.mod(position, values.size)
  assert(ListRepeatProperties.assertRepeatSize(values, times))
  assert(repeatedCycle.period == values.size * times)
  assert(findValueInCycle(repeatedCycle, position))
  assert(repeatedCycle(position) == repeatedCycle.values(repeatedIndex))
  assert(ListRepeatProperties.assertRepeatedIndex(values, times,
    repeatedIndex))
  assert(repeatedCycle.values(repeatedIndex) ==
    values(Calc.mod(repeatedIndex, values.size)))
  assert(ModOperations.modByPositiveMultipleThenBase(position,
    values.size, times))
  assert(Calc.mod(repeatedIndex, values.size) == originalIndex)
  assert(repeatedCycle.values(repeatedIndex) == values(originalIndex))
  assert(findValueInCycle(cycle, position))
  assert(cycle(position) == values(originalIndex))
}

```

```
    repeatedCycle(position) == cycle(position)
  }.holds
```

A.9 Cycle Value Positivity — cycleValuePositiveOrZero

Source: [CycleProperties::cycleValuePositiveOrZero](#)

```
def cycleValuePositiveOrZero(cycle: ModCycle, pos: BigInt): Boolean = {
  require(pos >= 0)
  require(cycle.period > 0)
  findValueInCycle(cycle, pos)
  val idx = Calc.mod(pos, cycle.period)
  assert(idx >= 0)
  assert(idx < cycle.period)
  CycleUtils.checkPositiveOrZeroAtIndex(cycle.values, idx)
  cycle(pos) >= 0
}.holds
```

A.10 Cycle Rotation — rotateAtValue

Source: [CycleProperties::rotateAtValue](#)

```
def rotateAtValue(cycle: ModCycle, k: BigInt, i: BigInt): Boolean = {
  require(k >= 0)
  require(i >= 0)
  require(cycle.period > 0)

  val size = cycle.period
  val rotatedCycle = cycle.rotateAt(k)

  findValueInCycle(rotatedCycle, i)
  val modI = Calc.mod(i, size)
  assert(rotatedCycle(i) == rotatedCycle.values(modI))

  CycleUtils.collectRotatedValueAt(cycle.values, k, size, modI)
  assert(rotatedCycle.values(modI) == cycle.values(Calc.mod(k + modI,
    size)))

  ModIdempotence.modIdempotence(i, size)
  ModOperations.modAdd(k, size, Calc.mod(i, size))
  ModOperations.modAdd(k, size, i)
  assert(Calc.mod(k + modI, size) == Calc.mod(k + i, size))

  findValueInCycle(cycle, k + i)
  assert(cycle(k + i) == cycle.values(Calc.mod(k + i, size)))

  rotatedCycle(i) == cycle(k + i)
}.holds
```

B Stainless Verification Log Output

All formally verified results in this article were checked with Stainless 0.9.8.8, compiling with its standard Scala 3.3.3 front end, by running `just verify-ch 4`. The run reported 2,995 valid, 0 invalid, and 0 unknown verification conditions. The full chapter-scoped verification log is preserved with the source at the immutable release tag `cycle-article-v1.0.0` and is available at [logs/verify-ch-4-v1-chapter4-_.log](#).