

Swagger Documentation

DashboardDownloadthiagosucupira/microAPISwagger UISpringfox Reference Doc

localhost:8080/swagger-ui.html#/courier45resource

swaggerdefault (/v2/api-docs)Explore

Courrier API
API REST for fetching, updating and deleting Couriers
Created by Thiago Sucupira
Contact the developer
Apache License Version 2.0

courier-resource : Courier Resource
Show/Hide | List Operations | Expand Operations

POST/courierInserts a courier in the in-memory database

GET/courier/fetchAllActiveCouriersReturns a list of all ACTIVE couriers in the in-memory database

GET/courier/fetchAllCouriersReturns a list of all the couriers in the in-memory database

DELETE/courier/{id}Deletes a courier in the in-memory database

GET/courier/{id}Returns a single courier by their ID

PUT/courier/{id}Updates a courier in the in-memory database

[BASE URL: / , API VERSION: 0.1]

DashboardDownloadthiagosucupira/microAPISwagger UISpringfox Reference Doc

localhost:8080/swagger-ui.html#/courier45resource/fetchAllCouriersUsingGET

swaggerdefault (/v2/api-docs)Explore

Courrier API
API REST for fetching, updating and deleting Couriers
Created by Thiago Sucupira
Contact the developer
Apache License Version 2.0

courier-resource : Courier Resource
Show/Hide | List Operations | Expand Operations

POST/courierInserts a courier in the in-memory database

GET/courier/fetchAllActiveCouriersReturns a list of all ACTIVE couriers in the in-memory database

GET/courier/fetchAllCouriersReturns a list of all the couriers in the in-memory database

Response Class (Status 200)
OK

Model Example Value

```
{
  "active": true,
  "delivers": 0,
  "email": "string",
  "fullName": "string",
  "id": 0
}
```


Response Content Type (application/json)

Response Messages


HTTP Status Code	Reason	Response Model	Headers
401	Unauthorized		
403	Forbidden		
404	Not Found		

Try it out

JUnit

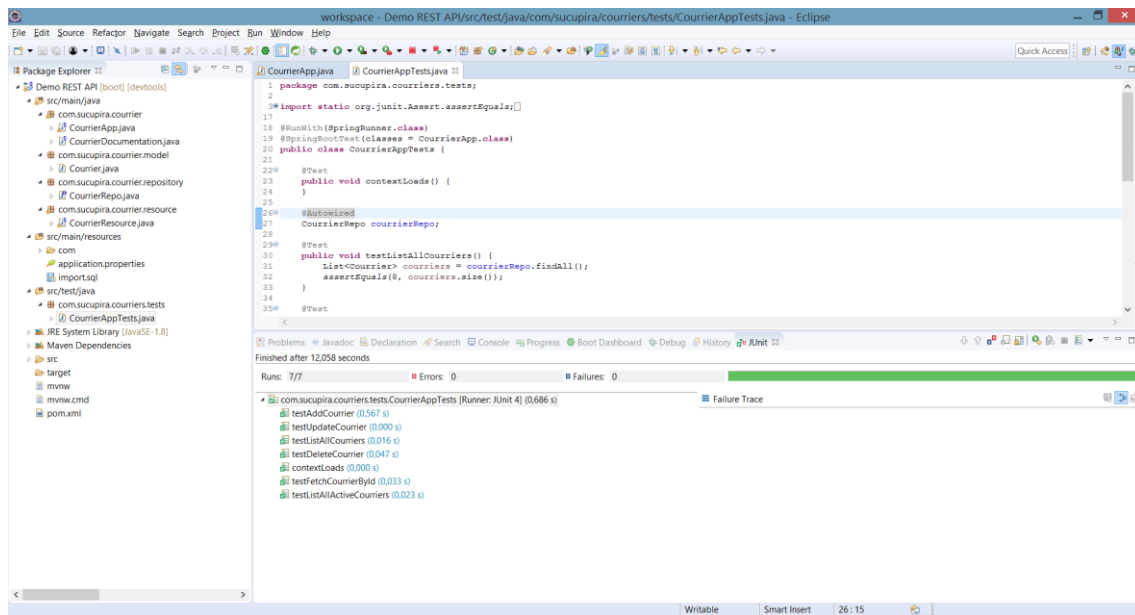

API Demo on Postman

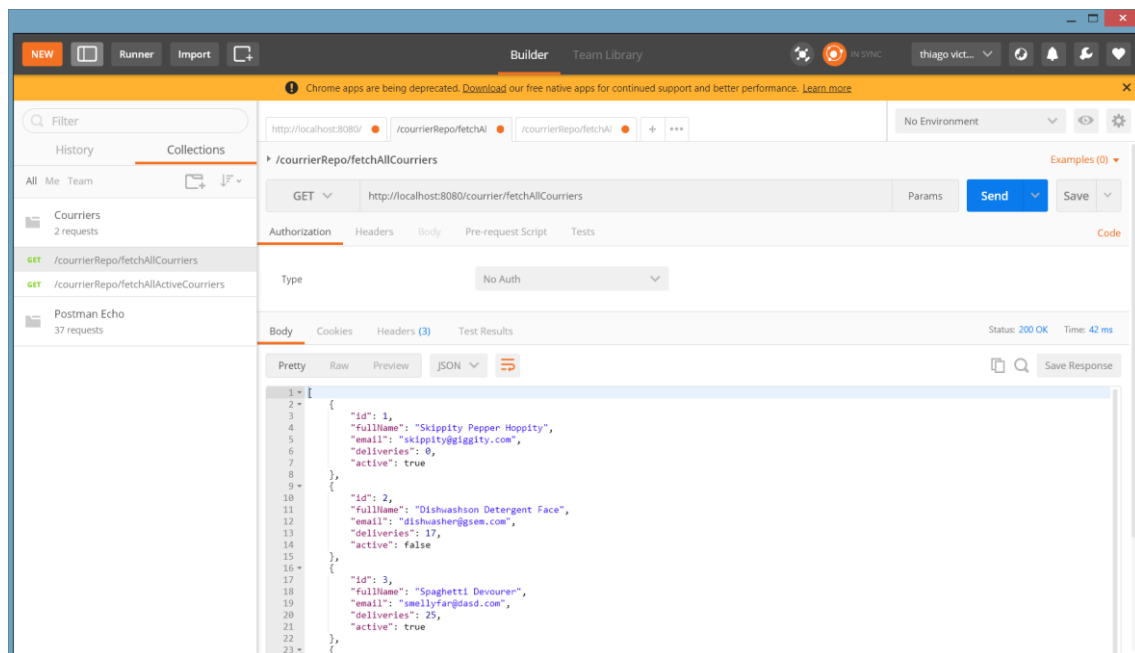

SOAP API's WSDL and schema

