Overview

	Passed	Failed	Known	Undefined	Total	%Passed
Features	2	1	0	0	3	66.67
Scenarios	4	1	0	0	5	80.00
Steps	25	1	0	4	30	83.33

Overall Duration: 0h 01m 24s

Table of Contents

1.	Login to loyal page	. 1
	1. Test login	
	2. Test login	
	3. Test login	
2.	Regiter Client	. 2
	1. Create new parent	. 2
3.	Create appoinment for the Created parent	. 5
	1. Createing a Appoinment	


Detailed Results Report

ssed: 3 Failed: 0	Undefined: 0	Duration: 25.41s	
Scenario Outline: Test login	1		
Passed: 2	Failed: 0	Indefined: 0	Duration:
Before			7.68s
Given I fill the "test123"	and "pass123" in the field	s to logged into the application	8.12s
Element option Element username Name TEX password Name TEX	T		
And I should click the "	Login" button to login to th	e ''Loyal page''	1.31s
Element option .account_btn csssele	ctor		
After			0.01s
Back to Table of Contents			
Scenario Outline: Test login	1		
Passed: 2	Failed: 0	Indefined: 0	Duration:
Before			0.00s
Given I fill the "e25med to logged into the applications and the supplier to logged into the applications are supplied to logge the supplier to logge the		.com" and "pass1234" in the fields	2.93s
Element option Elemusername Name TEX	<u> </u>		

	password Na	ame TEXT							
	And I should cl	lick the "Lo	gin'' but	tton to login to	the "Loyal page	e''		1	.38s
	Element	option							
	.accountb	tn cssselecto	or						
Aft	ter							0).01s
Bac	ck to Table of Cont	<u>tents</u>							
Sce	enario Outline:	Test login							
Pas	sed: 2	Fa	iled: 0		Undefined: 0			Ι	Ouration: 3
Bef	fore							0	0.00s
	Given I fill the to logged into t			2@eight25med	ia.com" and "T	est1234"	in the fi	elds 2	.66s
	Element op username Na password Na	ame TEXT							
	And I should cl	lick the ''Lo	gin'' but	tton to login to	the "Loyal page	e''		1	.30s
	Element	option otn cssselecto							
Aft	ter							0	0.01s
Bac	k to Table of Cont	<u>tents</u>							
eatu	re: Regiter Clie	nt							
assed:		Failed: 1		Undefined: 0					
				TUnaetinea: v		Duration:	41.96s		
Sce	enario: Create r	new parent		Underinea: 0		Duration:	41.96s		
	enario: Create i sed: 10	new parent	Failed: 1	Undermed: 0	Undefined: 4	Duration:	41.96s	I	Ouration: 4
Pas		new parent	Failed: 1	Undermed: 0	Undefined: 4	Duration:	41.96s		Ouration: 4
Pas	sed: 10 fore					Duration:	41.96s	0	0.00s
Pas	sed: 10 fore Given I Should	see the Loy	al login	page loaded su	ıcessfullyy	Duration:	41.96s	1	
Pas	sed: 10 fore	l see the Loy lick on ''Reg tion	al login	page loaded su	ıcessfullyy	Duration:	41.96s	1	0.00s .22s
Pas	sed: 10 fore Given I Should And I should cl Element opt	l see the Loy lick on "Reg tion selector	val login gister cli	page loaded su	icessfullyy left side menu	Duration:	41.96s	0 1 6	0.00s .22s
Pas	fore Given I Should And I should cl Element opt Inr-user css	l see the Loy lick on "Reg tion selector redirect to t	val login gister cli he Regis	page loaded su ent'' button on	left side menu	Duration:	41.96s	0 1 6	.22s .48s
Pas	fore Given I Should cl And I should cl Element opt Inr-user css Then I should 1 And I fill the '' Element	l see the Loy lick on "Reg tion selector redirect to t Find parent	val login gister cli he Regis	page loaded su ent'' button on ster Client page s to create a ne	left side menu e successfullyy w Parent			0 1 6	
Pas	fore Given I Should Cl And I should cl Element opt Inr-user css Then I should I And I fill the "I Element //*[contains("))]	l see the Loy lick on "Reg tion seelector redirect to t Find parent (concat(""	val login gister cli he Regis t'' details	page loaded suent" button on ster Client page to create a ne	left side menu e successfullyy w Parent " ", "form-cont	rol", "	value Henrry	1 6 2 0 option xpath	
Pas	Given I Should classed: 10 Given I Should classed: 20 Element optople. Inr-user css Then I should it And I fill the '' Element //*[contains("'))] Then I should s	l see the Loy lick on "Reg tion selector redirect to t Find parent (concat(""	yal login gister cli he Regis '' details , @class y enable	page loaded suent" button on ster Client page s to create a ne , " "), concat(e successfullyy W Parent "", "form-cont	rol", "	value Henrry	1 6 2 0 option xpath	
Pas	Given I Should classed: 10 Given I Should classed: 20 Element optople. Inr-user css Then I should it And I fill the '' Element //*[contains("'))] Then I should s	l see the Loy lick on "Reg tion selector redirect to t Find parent (concat(""	yal login gister cli he Regis '' details , @class y enable	page loaded suent" button on ster Client page s to create a ne , " "), concat(left side menu e successfullyy w Parent " ", "form-cont	rol", "	value Henrry	2 0 option xpath	
Pas	Given I Should And I should cl Element opt Inr-user css Then I should I And I fill the "I Element //*[contains(""))] Then I should s And I click on t Element opt	l see the Loy lick on "Reg tion selector redirect to t Find parent (concat("" see the newl the "Add no	yal login gister cli he Regis '' details , @class y enable	page loaded suent" button on ster Client page s to create a ne , " "), concat(e successfullyy W Parent "", "form-cont	rol", "	value Henrry	2 0 option xpath	0.00s 0.22s 0.48s 0.10s 0.65s Element Textbox
Pas	Given I Should And I should cl Element opt Inr-user css Then I should I And I fill the "I Element //*[contains(""))] Then I should s And I click on t Element opt Increase css	l see the Loy lick on "Reg tion selector redirect to t Find parent (concat("" see the newl the "Add ne	val login gister cli he Regis t'' details , @class y enable ew Parer	page loaded suent" button on ster Client page s to create a ne , " "), concat(ed "No parent ant" button to a	e successfullyy W Parent "", "form-cont	rol'', ''	value Henrry eft hand	option xpath side 0	0.00s 0.22s 0.48s 0.10s 0.65s Element Textbox
Pas	Given I Should And I should cl Element opt Inr-user css Then I should I And I fill the "I Element //*[contains(""))] Then I should s And I click on t Element opt Increase css	l see the Loy lick on "Reg tion seelector redirect to t Find parent (concat(" " see the newl the "Add not cion selector r new paren	val login gister clic he Regis t'' details , @class y enable ew Parer	page loaded suent" button on ster Client page s to create a ne sto create a ne	e successfullyy W Parent " ", "form-cont record found?" I	rol'', ''	value Henrry eft hand	0	0.00s 0.22s 0.48s 0.65s Element Textbox 0.00s 0.41s
Pas	Given I Should And I should cl Element opt Inr-user css Then I should I And I fill the "I Element //*[contains(""))] Then I should s And I click on t Element opt Inter in the contains opt Inter in the	l see the Loy lick on "Reg tion seelector redirect to t Find parent (concat(" " see the newl the "Add not cion selector r new paren	yal login gister cli he Regis " details , @class y enable ew Parer	page loaded suent" button on ster Client page s to create a ne sto create a ne	e successfullyy W Parent " ", "form-cont record found?" I	rol'', ''	value Henrry eft hand	0	2.20s 48s 10s 65s Element Textbox 00s 41s
Pas	Given I Should And I should cl Element opt Inr-user css Then I should I And I fill the "I Element //*[contains(""))] Then I should s And I click on t Element opt Inches action csss Then "Register And I should se Element	see the Loy lick on "Reg tion selector redirect to t Find parent (concat("" see the newl the "Add ne tion selector r new paren ee the excel	he Regist" details , @class y enable ew Parer t" Tab s data "Re	page loaded suent" button on ster Client page s to create a ne ," "), concat(ed "No parent ent" button to a legister Client"	e successfullyy W Parent " ", "form-cont record found?" I	rol'', ''	value Henrry eft hand	0	.22s .48s .10s .65s Element Textbox .00s .41s
Pas	Given I Should And I should cl Element opt Inr-user css Then I should I And I fill the "I Element //*[contains(""))] Then I should s And I click on t Element opt Inches action csss Then "Register And I should se Element	see the Loy lick on "Reg tion selector redirect to t Find parent (concat("" see the newl the "Add notion selector r new paren ee the excel value	yal login gister cli he Regis t" details , @class y enable ew Parer t" Tab s data "Re option name	page loaded suent" button on ster Client page to create a new parent in the control of the contr	e successfullyy W Parent " ", "form-cont record found?" I	rol'', ''	value Henrry eft hand	0	2.20s 48s 10s 65s Element Textbox 00s 41s

An	nd I click on the "Add New		create a p	et to the	parent		6.41s
	Element	option					
	.add-new-top-panel-button	ncsssele	ctor				
٩n	nd I should see the "Registe	er New P	Pet'' tab af	ter clicki	ing the button		2.07s
۱	nd I fill the "Register New I	Pet" deta	ails from e	xcel data	a ''RegisterCli	e nt' '	11.66s
	Element		value	option	ElementType		
	name		Pet Name	_	Textbox		
	species				dropdown		
	gender		Gender		dropdown		
	0	11.117					
	//div[@class='Select-place	noider j	Herryu	xpath	Textbox		
locomillo	g.openqa.selenium.Timeoucated by By.xpath: //div[@cILLISECONDS interval) org.openqa.selenium.supporg.openqa.selenium.supporg.openqa.selenium.supporg.openqa.selenium.Secom.cucumber.common.Secom.cucumber.common.Secom.cucumber.definition.acc.acc.acc.acc.acc.acc.acc.acc.acc.ac	class='Se ort.ui.W ort.ui.Flu etElemer etElemer ommonS dmin.Re ew Pet'' ium.NoS blacehold ions/no_s System i 64', os.ve ort.ui.Ex hrow(Op ort.ui.Ex	elect-place ebDriverV uentWait.ints.waitElents.setElents.Exce egisterClie details from suchEleme ler'] For d such_eleme info: host: ersion: '10. expectedComptional.jav expectedComptional.jav	Vait.timountil(FlucementVishentByXldataCricent.i_fill_mexcel ontExceptocument dent.html "THILIMO", java. a:290) nditions.	eoutExceptione entWait.java: sibleByXpath(spath(SetElemoteriaOf(Commethe_details_from the_details_from this end in the sible info: version: '1.8.0 lambda\$findE	cond(s) with 500 (WebDriverWait.j., 232) SetElements.java:22 ents.java:117) nonSteps.java:763) om_excel_data(Re Client''(B_Registe ocate an element urror, please visit: ersion: '3.4.0', revisip: '169.254.93.13 _202' Driver info: element\$0(ExpectedCondition	ava:80) 228) gisterC rClient sing By sion: 1', os.n driver. dCondi
at at at at	org.openqa.selenium.suppo org.openqa.selenium.suppo org.openqa.selenium.suppo org.openqa.selenium.suppo com.cucumber.common.Se	ort.ui.Ex ort.ui.Ex ort.ui.Ex ort.ui.Fl	xpectedCox xpectedCox xpectedCox uentWait.	nditions. nditions? nditions? until(Flu	access\$000(Ex \$7.apply(Expections) \$7.apply(Expections) entWait.java:	pected Conditions, cted Conditions.jav cted Conditions.jav 209)	java:44 (a:206) (a:202)
at at	com.cucumber.common.Secom.cucumber.common.Cocom.cucumber.definition.ava:396)	ommon§	Steps.Exce	ldataCri	teriaOf(Comn	onSteps.java:763)	
at at at at	sun.reflect.NativeMethodAsun.reflect.NativeMethodAsun.reflect.DelegatingMethjava.lang.reflect.Method.ircucumber.runtime.Utils\$1cucumber.runtime.Timeou	Accessor lod Acces nvoke (Maccell)	Impl.invol ssorImpl.i ethod.java ls.java:40)	ke(Nativo nvoke(D n:498)	eMethodAcces	■ •	ıva:43)

```
at cucumber.runtime.java.JavaStepDefinition.execute(JavaStepDefinition.java:38)
at cucumber,runtime.StepDefinitionMatch,runStep(StepDefinitionMatch,java:37)
at cucumber.runtime.ExtendedRuntime.runStep(ExtendedRuntime.java:316)
at cucumber.runtime.model.StepContainer.runStep(StepContainer.java:44)
at cucumber.runtime.model.StepContainer.runSteps(StepContainer.java:39)
at cucumber.runtime.model.CucumberScenario.run(CucumberScenario.java:44)
at com.github.mkolisnyk.cucumber.runner.ExtendedExecutionUnitRunner.run
(ExtendedExecutionUnitRunner.java:32)
at com.github.mkolisnyk.cucumber.runner.ExtendedFeatureRunner.runChild
(ExtendedFeatureRunner.java:99)
at com.github.mkolisnyk.cucumber.runner.ExtendedFeatureRunner.runChild
(ExtendedFeatureRunner.java:24)
at org.junit.runners.ParentRunner$3.run(ParentRunner.java:290)
at org.junit.runners.ParentRunner$1.schedule(ParentRunner.java:71)
at org.junit.runners.ParentRunner.runChildren(ParentRunner.java;288)
at org.junit.runners.ParentRunner.access$000(ParentRunner.java:58)
at org.junit.runners.ParentRunner$2.evaluate(ParentRunner.java:268)
at org.junit.runners.ParentRunner.run(ParentRunner.java:363)
at cucumber.runtime.junit.FeatureRunner.run(FeatureRunner.java:70)
at com.github.mkolisnyk.cucumber.runner.ExtendedCucumber.runChild(ExtendedCucumber.jav
108)
at com.github.mkolisnyk.cucumber.runner.ExtendedCucumber.runChild(ExtendedCucumber.jav
at org.junit.runners.ParentRunner$3.run(ParentRunner.java:290)
at org.junit.runners.ParentRunner$1.schedule(ParentRunner.java:71)
at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:288)
at org.junit.runners.ParentRunner.access$000(ParentRunner.java:58)
at org.junit.runners.ParentRunner$2.evaluate(ParentRunner.java:268)
at org.junit.runners.ParentRunner.run(ParentRunner.java:363)
at com.github.mkolisnyk.cucumber.runner.ExtendedCucumber.run(ExtendedCucumber.java:148
at com.cucumber.common.ExtraExtendedCucumber.run(ExtraExtendedCucumber.java:37)
at org.junit.runner.JUnitCore.run(JUnitCore.java:137)
at org.junit.runner.JUnitCore.run(JUnitCore.java:115)
at org.testng.junit.JUnit4TestRunner.start(JUnit4TestRunner.java:81)
at org.testng.junit.JUnit4TestRunner.run(JUnit4TestRunner.java:69)
at org.testng.TestRunner$1.run(TestRunner.java:697)
at org.testng.TestRunner.runJUnitWorkers(TestRunner.java:1004)
at org.testng.TestRunner.privateRunJUnit(TestRunner.java:728)
at org.testng.TestRunner.run(TestRunner.java:629)
at org.testng.SuiteRunner.runTest(SuiteRunner.java:366)
at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:361)
at org.testng.SuiteRunner.privateRun(SuiteRunner.java:319)
at org.testng.SuiteRunner.run(SuiteRunner.java:268)
at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52)
at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:86)
at org.testng.TestNG.runSuitesSequentially(TestNG.java:1244)
at org.testng.TestNG.runSuitesLocally(TestNG.java:1169)
at org.testng.TestNG.run(TestNG.java:1064)
at org.apache.maven.surefire.testng.TestNGExecutor.run(TestNGExecutor.java:135)
at org.apache.maven.surefire.testng.TestNGDirectoryTestSuite.executeSingleClass
(TestNGDirectoryTestSuite.java:112)
at org.apache.maven.surefire.testng.TestNGDirectoryTestSuite.execute(TestNGDirectoryTestSuite
```

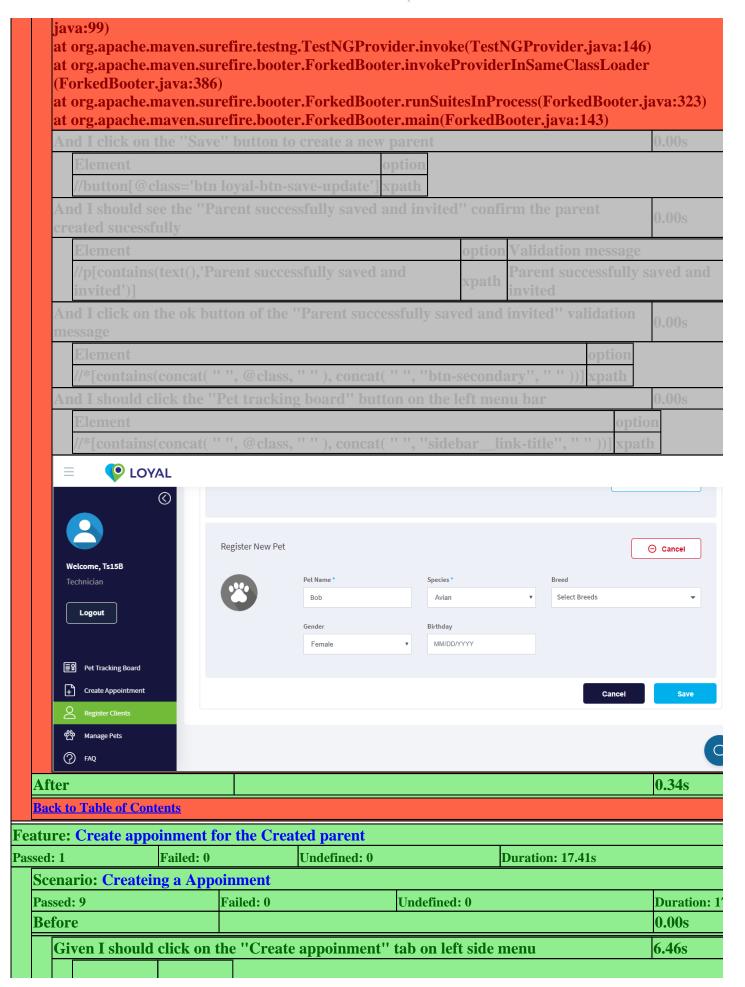

Element option							
.lnr-file-add cssselecto	r						
Then I should redirect to	the Create appoin	ment page su	ccessfullyy			2.16s	
And I fill the "RegisterC	ient" details to cre	ate a new Ap	poinment			1.04s	
Element		value			option	Eleme	
//*[contains(concat(" concat(" ", "form-con-		e25media com	atest+668@eig	ht25media.	xpath	Textb	
Then I should see the sea	rch results coming	for the given	Key word			0.67s	
email e25mediatest+60	8@eight25media.c	com					
And I click on the search appoinment	ed key word to get	the values of	the parent to	create a ne	W	0.26s	
Element option email e25mediatest	+668@eight25med	ia.com					
Then I should see the nev	vly enabled "Select	A Pet" secti	onn			2.23s	
Locator //h3[contains(text(),'So		name A Pet					
And I click on the pet in	. –					1.30s	
Element option .checkmark cssselector							
Then I should see the nev	vly enabled Appoin	tment "Crea	te New Appoi	ntment'' se	ction	2.22s	
Locator		Topi	c name				
//h3[contains(text(),'Create New Appointment')] Create New Appointment							
And I should fill the appo	inment date on the	e create appo	inment tab			1.07s	
Element			ElementType				
//input[@placeholder=	-'MM/DD/YYYY']	_	textbox				
ter						0.01s	
ck to Table of Contents							