

DataClases

destrocturing

dataclass Client(val firstName:String, val lastName:String)














































































































































































First name: James; Last name: Halliday

james.component1()

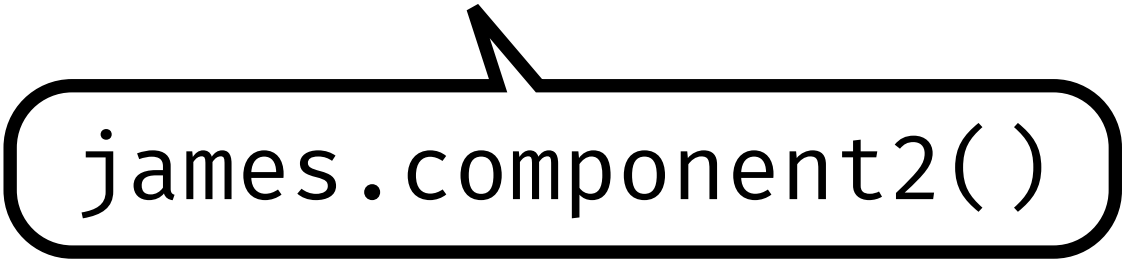

james.component2()

3

5

val james = ClieDt("James", "Haliday")

`val` (`first`, `last`) `=` `james`


```
println("First name: $first; Last name: $last")
```

Data Classes

destructuring

```
data class Client(val firstName: String, val lastName: String)
```

```
val james = Client("James", "Halliday")
```

james.component1()

```
val (first, last) = james
```

james.component2()

```
println("First name: $first; Last name: $last")
```

First name: James; Last name: Halliday

Data Classes

copy

```
data class Client(val firstName: String, val lastName: String)
```