

Frontend code

```
App/apply-leave/page.tsx;  
'use client';
```

```
import React, { useState } from 'react';
```

```
import Sidebar from '../components/Sidebar';
```

```
import TopBar from '../components/TopBar';
```

```
import LeaveTabs from '../components/LeaveTabs';
```

```
import LeaveBalanceCards from '../components/LeaveBalanceCards';
```

```
import ApplyLeaveForm from '../components/ApplyLeaveForm';
```

```
export default function ApplyLeavePage() {
```

```
  // mock balance data
```

```
  const [balances] = useState({
```

```
    Annual: 8,
```

```
    Casual: 2,
```

```
    Sick: 5,
```

```
  });
```

```
  return (
```

```
    <div className="min-h-screen bg-gray-50">
```

```
      {/* fixed sidebar and header live outside the flow; main content gets offsets */}
```

```
      <Sidebar />
```

```
      <TopBar />
```

```

    <div className="ml-64 pt-16">
      <main className="px-10 py-8 min-h-[calc(100vh-4rem)] overflow-auto">
        <LeaveTabs active="request" />
        <LeaveBalanceCards balances={balances} />

        <ApplyLeaveForm balances={balances} />
      </main>
    </div>
  </div>
);
}

```

App/approval/page.tsx;

'use client';

```

import React from 'react';
import Sidebar from '../components/Sidebar';
import TopBar from '../components/TopBar';
import LeaveTabs from '../components/LeaveTabs';

```

```

export default function ApprovalPage() {
  return (
    <div className="min-h-screen bg-gray-50">
      <Sidebar />

```

```
<TopBar />
```

```
<div className="ml-64 pt-16">
```

```
<main className="px-10 min-h-[calc(100vh-4rem)] overflow-auto">
```

```
<LeaveTabs active="approval" />
```

```
<h1 className="text-2xl font-semibold mb-4">Approval Panel</h1>
```

```
<p>Managers can review and approve pending leave requests here.</p>
```

```
</main>
```

```
</div>
```

```
</div>
```

```
);
```

```
}
```

```
App/components/ApplyLeaveForm.tsx;
```

```
"use client";
```

```
import React, { useState, useEffect } from 'react';
```

```
interface Props {
```

```
  balances: Record<string, number>;
```

```
}
```

```
const ApplyLeaveForm: React.FC<Props> = ({ balances }) => {
```

```
  const [type, setType] = useState('Annual');
```

```
  const [fromDate, setFromDate] = useState("");
```

```
  const [toDate, setToDate] = useState("");
```

```

const [days, setDays] = useState(0);
const [reason, setReason] = useState("");
const [attachment, setAttachment] = useState<File | null>(null);
const [errors, setErrors] = useState<string[]>([]);
const [success, setSuccess] = useState(false);

const todayStr = new Date().toISOString().split('T')[0];

useEffect(() => {
  if (fromDate && toDate) {
    const from = new Date(fromDate);
    const to = new Date(toDate);
    const diff = Math.ceil((to.getTime() - from.getTime()) / (1000 * 60 * 60 * 24)) + 1;
    setDays(diff > 0 ? diff : 0);
  } else {
    setDays(0);
  }
}, [fromDate, toDate]);

const validate = () => {
  const errs: string[] = [];
  if (!type) errs.push('Leave type is required');
  if (!fromDate) errs.push('From date is required');
  if (!toDate) errs.push('To date is required');
  if (fromDate && toDate && new Date(toDate) < new Date(fromDate))
    errs.push('To date cannot be earlier than From date');

```

```
if (!reason) errs.push('Reason is required');  
setErrors(errs);  
return errs.length === 0;  
};
```

```
const handleSubmit = (e: React.FormEvent) => {  
  e.preventDefault();  
  if (!validate()) return;
```

```
  // In a real app you would send the data to the server here  
  console.log({ type, fromDate, toDate, days, reason, attachment });
```

```
  // show success message and clear form
```

```
  setSuccess(true);  
  setType('Annual');  
  setFromDate('');  
  setToDate('');  
  setDays(0);  
  setReason('');  
  setAttachment(null);  
  setErrors([]);
```

```
  // hide message after 3 seconds
```

```
  setTimeout(() => setSuccess(false), 3000);  
};
```

```

return (
  <form onSubmit={handleSubmit} className="bg-white rounded-xl shadow-sm p-6 mt-6">
    {success && (
      <div className="bg-green-50 text-green-700 p-2 rounded mb-4">
        Leave Request Submitted Successfully
      </div>
    )}
    {errors.length > 0 && (
      <div className="bg-red-50 text-red-700 p-2 rounded mb-4">
        <ul className="list-disc list-inside">
          {errors.map((e, i) => (
            <li key={i}>{e}</li>
          ))}
        </ul>
      </div>
    )}

    <div className="mb-4">
      <label className="block text-sm text-gray-600 mb-1">Leave type</label>
      <select
        value={type}
        onChange={(e) => setType(e.target.value)}
        className={`w-full border rounded-lg px-3 py-2 bg-white transition-colors duration-200 cursor-pointer ${type ? 'text-[#6C6C70]' : 'text-gray-400'}`}
      >
        <option>Annual</option>

```

```
<option>Casual</option>
<option>Medical Leave</option>
</select>
</div>
```

```
<div className="grid grid-cols-1 sm:grid-cols-2 gap-4 mb-4">
  <div>
    <label className="block text-sm text-gray-600 mb-1">From</label>
    <input
      type="date"
      value={fromDate}
      min={todayStr}
      onChange={(e) => setFromDate(e.target.value)}
      className={`w-full border rounded-lg px-3 py-2 bg-white transition-colors duration-
200 ${fromDate ? 'text-[#6C6C70]' : 'text-gray-400'} `}
    />
  </div>
  <div>
    <label className="block text-sm text-gray-600 mb-1">To</label>
    <input
      type="date"
      value={toDate}
      min={fromDate || todayStr}
      onChange={(e) => setToDate(e.target.value)}
      className={`w-full border rounded-lg px-3 py-2 bg-white transition-colors duration-
200 ${toDate ? 'text-[#6C6C70]' : 'text-gray-400'} `}
    />
  </div>
</div>
```

```
</div>
```

```
</div>
```

```
<div className="mb-4">
```

```
<label className="block text-sm text-gray-600 mb-1">Total Leave Days</label>
```

```
<input
```

```
  type="number"
```

```
  value={days}
```

```
  readOnly
```

```
  className={`w-full border rounded-lg px-3 py-2 transition-colors duration-200
    ${days > 0 ? 'bg-[#FFF3E6] text-[#6C6C70]' : 'bg-[#FFF3E6]'} `}
```

```
  />
```

```
</div>
```

```
<div className="mb-4">
```

```
<label className="block text-sm text-gray-600 mb-1">Reason for leave</label>
```

```
<textarea
```

```
  value={reason}
```

```
  onChange={(e) => setReason(e.target.value)}
```

```
  rows={4}
```

```
  className={`w-full border rounded-lg px-3 py-2 bg-white transition-colors duration-200
    ${reason ? 'text-[#6C6C70]' : 'text-gray-400'} `}
```

```
  />
```

```
</div>
```

```
<div className="mb-4">
```

```
<label className="block text-sm text-gray-600 mb-1">Attachment (optional)</label>
```

```
<div className="mt-1 flex justify-center items-center px-6 pt-5 pb-6 border-2 border-dashed border-gray-300 rounded-xl">
```

```
<div className="flex flex-col items-center space-y-2">
```

```
{/* inline upload icon component */}
```

```
<div className="text-gray-400">
```

```
<svg
```

```
  className="h-12 w-12"
```

```
  viewBox="0 0 24 24"
```

```
  fill="none"
```

```
  stroke="currentColor"
```

```
  strokeWidth={2}
```

```
  strokeLinecap="round"
```

```
  strokeLinejoin="round"
```

```
  xmlns="http://www.w3.org/2000/svg"
```

```
>
```

```
<path d="M21 15v4a2 2 0 0 1-2 2H5a2 2 0 0 1-2-2v-4" />
```

```
<polyline points="7 10 12 5 17 10" />
```

```
<line x1="12" y1="5" x2="12" y2="19" />
```

```
</svg>
```

```
</div>
```

```
<div className="flex text-sm text-gray-600">
```

```
<label
```

```
  htmlFor="file-upload"
```

```
  className="relative cursor-pointer rounded-md bg-white font-medium text-orange-600 hover:text-orange-500"
```

```
>
```

```
<span>Click to upload</span>
```

```
<input
  id="file-upload"
  name="attachment"
  type="file"
  className="sr-only"
  onChange={(e) => setAttachment(e.target.files ? e.target.files[0] : null)}
/>
</label>
<p className="pl-1">or drag and drop</p>
</div>
<p className="text-xs text-gray-500">PDF, JPG up to 5MB</p>
</div>
</div>
</div>
```

```
<div className="flex justify-end space-x-4">
  <button
    type="button"
    className="px-4 py-2 rounded-lg border border-gray-300 text-gray-700 hover:bg-gray-
100 transition-colors duration-200"
  >
    Cancel Request
  </button>
  <button
    type="submit"
    className="px-4 py-2 rounded-lg bg-orange-500 text-white hover:bg-orange-600
transition-colors duration-200"
```

```

    >
    Submit Request
  </button>
</div>
</form>
);
};

export default ApplyLeaveForm;

App/component/BalanceCard.tsx;
import React from 'react';

interface BalanceCardProps {
  type: string;
  remaining: number;
  total: number;
  colorClass?: string; // tailwind background color
}


const BalanceCard: React.FC<BalanceCardProps> = ({ type, remaining, total, colorClass =
'bg-[#FFF3E6] border-[#F5C28B]' }) => {
  return (
    <div className={`rounded-xl p-5 shadow-sm border ${colorClass} flex flex-col`>
      <span className="text-sm text-gray-600 mb-1">{type}</span>
      <span className="text-2xl font-bold text-gray-800">

```

```
    {remaining} / {total}  
  </span>  
</div>  
);  
};
```

```
export default BalanceCard;
```

```
App/component/image.png;
```

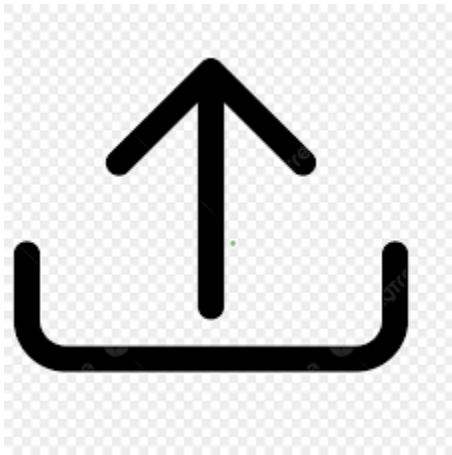

```
App/component/LeaveBalanceCard.tsx;
```

```
import React from 'react';
```

```
interface Props {  
  balances: Record<string, number>;  
}
```

```
export default function LeaveBalanceCards({ balances }: Props) {  
  return (  

```

```

<div className="grid grid-cols-2 gap-6 mb-6">
  {Object.entries(balances)
    // don't display sick leave on this page
    .filter(([type]) => type.toLowerCase() !== 'sick')
    .map(([type, amount]) => (
      <div
        key={type}
        className="bg-[#FFF3E6] border border-[#F5C28B] rounded-xl p-5"
      >
        <p className="text-sm text-gray-600 mb-1">
          {type} Leaves
        </p>
        <h2 className="text-2xl font-bold text-gray-800">
          {amount} days
        </h2>
      </div>
    ))}
</div>

);
}

```

App/component/LeaveForm.tsx;

"use client";

import { useState } from "react";

```
export default function LeaveForm() {  
  
  const [leaveType, setLeaveType] = useState("");  
  const [fromDate, setFromDate] = useState("");  
  const [toDate, setToDate] = useState("");  
  const [reason, setReason] = useState("");  
  
  const handleSubmit = () => {  
  
    const data = {  
  
      leaveType,  
  
      fromDate,  
  
      toDate,  
  
      reason,  
  
    };  
  
    console.log("Leave Request:", data);  
  
  };  
  
  return (  
  
    <div className="bg-white p-6 rounded-lg shadow space-y-4">  
  
      {/* Leave Type */}  
  
      <div>  
  
        <label className="block text-sm mb-1">Leave Type</label>  
  
        <select  
  
          value={leaveType}  
  
          onChange={(e) => setLeaveType(e.target.value)}  
  
          className="w-full border p-2 rounded"
```

```
>  
  
  <option value="">Select Type</option>  
  <option value="annual">Annual</option>  
  <option value="casual">Casual</option>  
  
</select>  
  
</div>
```

```
{/* Date Range */}  
  
<div className="grid grid-cols-2 gap-4">  
  <div>  
    <label className="block text-sm mb-1">From</label>  
  
    <input  
      type="date"  
      value={fromDate}  
      onChange={(e) => setFromDate(e.target.value)}  
      className="w-full border p-2 rounded"  
    />  
  </div>
```

```
<div>  
  <label className="block text-sm mb-1">To</label>  
  
  <input  
    type="date"  
    value={toDate}  
    onChange={(e) => setToDate(e.target.value)}  
    className="w-full border p-2 rounded"
```

```

    />

</div>

</div>

{/* Reason */}

<div>

  <label className="block text-sm mb-1">Reason</label>

  <textarea

    value={reason}

    onChange={(e) => setReason(e.target.value)}

    className="w-full border p-2 rounded"

    rows={4}

  />

</div>

{/* Buttons */}

<div className="flex justify-end gap-3">

  <button className="px-4 py-2 border rounded">

    Cancel

  </button>

  <button

    onClick={handleSubmit}

    className="px-4 py-2 bg-orange-500 text-white rounded"

  >

    Submit Request

```

```
        </button>
      </div>
    </div>
  );
}
```

App/component/LeaveTable.tsx

```
import React from 'react';
```

```
export interface LeaveRecord {
  id: number;
  type: string;
  from: string; // yyyy-mm-dd
  to: string;
  days: number;
  status: 'Pending' | 'Approved' | 'Rejected';
}
```

```
interface LeaveTableProps {
  records: LeaveRecord[];
}
```

```
const statusColor = (status: string) => {
  switch (status) {
    case 'Pending':
```

```
    return 'bg-yellow-100 text-yellow-800';
  case 'Approved':
    return 'bg-green-100 text-green-800';
  case 'Rejected':
    return 'bg-red-100 text-red-800';
  default:
    return '';
  }
};
```

```
const LeaveTable: React.FC<LeaveTableProps> = ({ records }) => {
  return (
    <div className="overflow-x-auto">
      <table className="w-full table-auto border-collapse">
        <thead>
          <tr className="bg-gray-100">
            <th className="px-4 py-2 text-left text-xs font-medium text-gray-800">Type</th>
            <th className="px-4 py-2 text-left text-xs font-medium text-gray-800">From</th>
            <th className="px-4 py-2 text-left text-xs font-medium text-gray-800">To</th>
            <th className="px-4 py-2 text-left text-xs font-medium text-gray-800">Days</th>
            <th className="px-4 py-2 text-left text-xs font-medium text-gray-800">Status</th>
          </tr>
        </thead>
        <tbody>
          {records.map((r) => (
            <tr key={r.id} className="border-b">
```

```

        <td className="px-4 py-2 text-sm text-gray-800">{r.type}</td>
        <td className="px-4 py-2 text-sm text-gray-800">{r.from}</td>
        <td className="px-4 py-2 text-sm text-gray-800">{r.to}</td>
        <td className="px-4 py-2 text-sm text-gray-800">{r.days}</td>
        <td className="px-4 py-2 text-sm">
            <span className={` inline-block px-2 py-1 rounded-full text-xs font-semibold
${statusColor(r.status)} `}>{r.status}</span>
        </td>
    </tr>
    )}}
</tbody>
</table>
</div>
);
};

```

```
export default LeaveTable;
```

```
app/components/LeaveTabs.tsx;
```

```
"use client";
```

```
import { useRouter } from "next/navigation";
```

```
interface Props {
```

```
    active: "request" | "history" | "approval" | "reports";
  }
```

```
export default function LeaveTabs({ active }: Props) {
  const router = useRouter();

  return (
    <div className="flex gap-6 border-b pb-2">
      <button
        onClick={() => router.push("/apply-leave")}
        className={`pb-2 font-medium text-sm ${
          active === "request"
            ? "text-orange-500 border-b-2 border-orange-500"
            : "text-gray-500"
        }`}
      >
        Request Leave
      </button>

      <button
        onClick={() => router.push("/leave-history")}
        className={`pb-2 font-medium text-sm ${
          active === "history"
            ? "text-orange-500 border-b-2 border-orange-500"
            : "text-gray-500"
        }`}
      >
```

>

Leave History

</button>

<button

onClick={() => router.push("/approval")}

className={`pb-2 font-medium text-sm \${

active === "approval"

? "text-orange-500 border-b-2 border-orange-500"

: "text-gray-500"

}`}

>

Approval Panel

</button>

<button

onClick={() => router.push("/reports")}

className={`pb-2 font-medium text-sm \${

active === "reports"

? "text-orange-500 border-b-2 border-orange-500"

: "text-gray-500"

}`}

>

Get Reports

</button>

</div>

```
);  
}
```

App/components/Logo.tsx;

```
import React from 'react';
```

```
interface LogoProps {  
  withText?: boolean;  
}
```

```
const Logo: React.FC<LogoProps> = ({ withText = true }) => {  
  return (  
    <div className="flex items-center space-x-3">  
      <div className="w-10 h-10 rounded-lg bg-orange-400 flex items-center justify-center  
flex-shrink-0">  
        <svg viewBox="0 0 48 48" className="w-6 h-6" xmlns="http://www.w3.org/2000/svg"  
aria-hidden>  
          <rect width="48" height="48" rx="8" fill="#fb923c" />  
          <text x="50%" y="55%" textAnchor="middle" dominantBaseline="middle"  
fontWeight={800} fontSize={16} fill="#fff">HR</text>  
        </svg>  
      </div>  
      {withText && (  
        <div className="leading-tight">  
          <div className="text-lg font-semibold text-gray-900">HRMS</div>
```

```

    <div className="text-xs text-gray-500">Management System</div>

  </div>

  )}

</div>

);

};

export default Logo;

app/components/Navbar.tsx;

import React from "react";

import { Bell, MessageSquare, User } from "lucide-react";

export default function Navbar() {
  return (
    <div className="h-16 bg-white border-b flex items-center justify-between px-12">

      <input
        type="text"
        placeholder="Search"
        className="bg-gray-100 px-4 py-2 rounded-lg w-96 outline-none text-sm"
      />

      <div className="flex items-center gap-6 text-gray-600">

        <Bell size={20} />

        <MessageSquare size={20} />

```

```
        <User size={20} />

      </div>

    </div>

  );
}
```

```
App/components/Sidebar.tsx;

"use client";
```

```
import Link from "next/link";
import { usePathname } from "next/navigation";
import {
  LayoutGrid,
  Shield,
  UserPlus,
  CalendarDays,
  FileText,
  Settings,
} from "lucide-react";
```

```
const navItems = [
  { name: "Dashboard", href: "/", icon: LayoutGrid },
  { name: "Employee Management", href: "/employees", icon: Shield },
  { name: "Recruitment", href: "/recruitment", icon: UserPlus },
  { name: "Leave", href: "/apply-leave", icon: CalendarDays },
```

```
{ name: "Document", href: "/document", icon: FileText },  
{ name: "Settings", href: "/settings", icon: Settings },  
];
```

```
export default function Sidebar() {
```

```
  const pathname = usePathname() || "/";
```

```
  return (
```

```
    <aside className="fixed top-0 left-0 bottom-0 w-64 bg-[#F3F4F6] border-r border-gray-  
200 z-50">
```

```
      {/* Logo section */}
```

```
      <div className="px-6 pt-8 pb-6">
```

```
        <div className="flex items-center gap-3">
```

```
          <div className="w-14 h-14 rounded-2xl bg-orange-500 flex items-center justify-  
center text-white font-bold">
```

```
            HR
```

```
          </div>
```

```
        <div className="leading-tight">
```

```
          <div className="text-lg font-semibold text-gray-900">HRMS</div>
```

```
          <div className="text-xs text-gray-500">Management System</div>
```

```
        </div>
```

```
      </div>
```

```
    </div>
```

```
    {/* MAIN MENU title */}
```

```
    <div className="px-6 text-xs font-semibold text-gray-400 mb-3">
```

MAIN MENU

</div>

```
{/* Navigation */}
```

```
<nav className="px-4 space-y-2">
```

```
{navItems.map((item) => {
```

```
  const Icon = item.icon;
```

```
  const isActive =
```

```
    pathname === item.href || pathname.startsWith(item.href + "/");
```

```
  return (
```

```
    <Link
```

```
      key={item.name}
```

```
      href={item.href}
```

```
      className={`flex items-center gap-3 px-3 py-2 rounded-lg text-sm transition ${
```

```
        isActive ? "text-orange-500" : "text-gray-600 hover:bg-white/70"
```

```
      }`
```

```
    >
```

```
      <Icon
```

```
        size={20}
```

```
        className={isActive ? "text-orange-500" : "text-gray-500"}
```

```
      />
```

```
      <span className={isActive ? "font-medium" : ""}>{item.name}</span>
```

```
    </Link>
```

```
  );
```

```
}}
```

```
</nav>
```

```
{/* Footer */}
```

```
<div className="absolute bottom-4 left-0 w-full px-6 text-xs text-gray-400">
```

```
  © 2026 HRSM
```

```
</div>
```

```
</aside>
```

```
);
```

```
}
```

```
App/components/Topbar.tsx;
```

```
"use client";
```

```
import { Search, Bell, MessageSquare, User } from "lucide-react";
```

```
export default function TopBar() {
```

```
  return (
```

```
    <header className="fixed top-0 left-0 right-0 z-40 h-16 border-b border-gray-200">
```

```
      <div className="h-full flex items-center">
```

```
        {/* ✅ left area same as sidebar */}
```

```
        <div className="w-64 h-full bg-[#F3F4F6] border-r border-gray-200" />
```

```
        {/* ✅ right area white */}
```

```
        <div className="flex-1 h-full bg-white flex items-center justify-between px-10">
```

```
          <div className="flex items-center bg-gray-100 px-5 py-2 rounded-full w-[320px]">
```

```
            <Search size={18} className="text-gray-400 mr-3" />
```

```
<input
  type="text"
  placeholder="Search"
  className="bg-transparent outline-none w-full text-sm text-gray-600 placeholder-
gray-400"
/>
</div>
```

```
<div className="flex items-center gap-6 text-gray-600">
  <Bell size={20} className="cursor-pointer hover:text-black" />
  <MessageSquare size={20} className="cursor-pointer hover:text-black" />
  <User size={20} className="cursor-pointer hover:text-black" />
</div>
</div>
</div>
</header>
);
}
```

App/component/UploadIcon.tsx;

```
import React from 'react';
```

```
interface Props {
  className?: string;
```

```
}
```

```
const UploadIcon: React.FC<Props> = ({ className = 'h-12 w-12 text-gray-400' }) => (
```

```
<svg
```

```
  className={className}
```

```
  viewBox="0 0 24 24"
```

```
  fill="none"
```

```
  stroke="currentColor"
```

```
  strokeWidth={2}
```

```
  strokeLinecap="round"
```

```
  strokeLinejoin="round"
```

```
  xmlns="http://www.w3.org/2000/svg"
```

```
>
```

```
  <path d="M21 15v4a2 2 0 0 1-2 2H5a2 2 0 0 1-2-2v-4" />
```

```
  <polyline points="7 10 12 5 17 10" />
```

```
  <line x1="12" y1="5" x2="12" y2="19" />
```

```
</svg>
```

```
);
```

```
export default UploadIcon;
```

```
app/document/page.tsx;
```

```
'use client';
```

```
import React from 'react';
```

```
import Sidebar from '../components/Sidebar';
```

```
import TopBar from '../components/TopBar';

export default function DocumentsPage() {
  return (
    <div className="min-h-screen bg-gray-50">
      <Sidebar />
      <TopBar />

      <div className="ml-64 pt-16">
        <main className="px-10 py-8 min-h-[calc(100vh-4rem)] overflow-auto">
          <h1 className="text-2xl font-semibold mb-4">Documents</h1>
          <p>Upload and manage HR-related documents here.</p>
        </main>
      </div>
    </div>
  );
}
```

App/employees/page.tsx;

'use client';

```
import React from 'react';
import Sidebar from '../components/Sidebar';
import TopBar from '../components/TopBar';

export default function EmployeesPage() {
```

```

return (
  <div className="min-h-screen bg-gray-50">
    <Sidebar />
    <TopBar />

    <div className="ml-64 pt-16">
      <main className="px-10 py-8 min-h-[calc(100vh-4rem)] overflow-auto">
        <h1 className="text-2xl font-semibold mb-4">Employee Management</h1>
        <p>Here you'll be able to view and manage employee records.</p>
      </main>
    </div>
  </div>
);
}

```

App/leave-history/page.tsx;

'use client';

```

import React from 'react';
import Sidebar from '../components/Sidebar';
import TopBar from '../components/TopBar';

export default function EmployeesPage() {
  return (
    <div className="min-h-screen bg-gray-50">
      <Sidebar />

```

```
<TopBar />
```

```
<div className="ml-64 pt-16">
```

```
  <main className="px-10 py-8 min-h-[calc(100vh-4rem)] overflow-auto">
```

```
    <h1 className="text-2xl font-semibold mb-4">Employee Management</h1>
```

```
    <p>Here you'll be able to view and manage employee records.</p>
```

```
  </main>
```

```
</div>
```

```
</div>
```

```
);
```

```
}
```

```
App/recruitment/page.tsx;
```

```
'use client';
```

```
import React from 'react';
```

```
import Sidebar from '../components/Sidebar';
```

```
import TopBar from '../components/TopBar';
```

```
export default function RecruitmentPage() {
```

```
  return (
```

```
    <div className="min-h-screen bg-gray-50">
```

```
      <Sidebar />
```

```
      <TopBar />
```

```
    <div className="ml-64 pt-16">
```

```

    <main className="px-10 py-8 min-h-[calc(100vh-4rem)] overflow-auto">
      <h1 className="text-2xl font-semibold mb-4">Recruitment</h1>
      <p>This page will manage job postings and applications.</p>
    </main>
  </div>
</div>
);
}

```

```
App/reports/page.tsx;
```

```
'use client';
```

```

import React from 'react';
import Sidebar from '../components/Sidebar';
import TopBar from '../components/TopBar';
import LeaveTabs from '../components/LeaveTabs';

```

```

export default function ReportsPage() {
  return (
    <div className="min-h-screen bg-gray-50">
      <Sidebar />
      <TopBar />

      <div className="ml-64 pt-16">
        <main className="px-10 py-8 min-h-[calc(100vh-4rem)] overflow-auto">
          <LeaveTabs active="reports" />

```

```
    <h1 className="text-2xl font-semibold mb-4">Reports</h1>

    <p>Generate and view leave reports from here.</p>

  </main>

</div>

</div>

);
}
```

App/setting/page.tsx;

'use client';

import React from 'react';

import Sidebar from '../components/Sidebar';

import TopBar from '../components/TopBar';

export default *function* SettingsPage() {

return (

<div className="min-h-screen bg-gray-50">

<Sidebar />

<TopBar />

<div className="ml-64 pt-16">

<main className="px-10 py-8 min-h-[calc(100vh-4rem)] overflow-auto">

<h1 className="text-2xl font-semibold mb-4">Settings</h1>

```
    <p>Adjust application preferences and account settings.</p>
  </main>
</div>
</div>
);
}
```

App/globals.css;

```
@import "tailwindcss";
```

```
:root {
  --background: #ffffff;
  --foreground: #171717;
}
```

```
@theme inline {
  --color-background: var(--background);
  --color-foreground: var(--foreground);
  --font-sans: var(--font-geist-sans);
  --font-mono: var(--font-geist-mono);
}
```

```
@media (prefers-color-scheme: dark) {
  :root {
    --background: #0a0a0a;
```

```
--foreground: #ededed;

}

}
```

```
body {

  background: var(--background);

  color: var(--foreground);

  font-family: Arial, Helvetica, sans-serif;

}
```

```
App/layout.tsx;

import type { Metadata } from "next";

import { Geist, Geist_Mono } from "next/font/google";

import "./globals.css";
```

```
const geistSans = Geist({

  variable: "--font-geist-sans",

  subsets: ["latin"],

});
```

```
const geistMono = Geist_Mono({

  variable: "--font-geist-mono",

  subsets: ["latin"],

});
```

```
export const metadata: Metadata = {
```

```
title: "Create Next App",
description: "Generated by create next app",
};
```

```
export default function RootLayout({
  children,
}: Readonly<{
  children: React.ReactNode;
}>){
  return (
    <html lang="en">
      <body
        className={` ${geistSans.variable} ${geistMono.variable} antialiased` }
      >
        {/* layout header removed to avoid duplicate top bars; page components render TopBar
instead */}
        {children}
      </body>
    </html>
  );
}
```

App/page.tsx;

```
import Link from 'next/link';
```

```
export default function Home() {
```

```
return (
  <div className="min-h-screen bg-gray-50 flex items-center justify-center">
    <div className="max-w-2xl w-full p-8">
      <div className="bg-white border border-gray-100 rounded-lg shadow-sm p-8 text-center">
        <h1 className="text-2xl font-semibold mb-2">Welcome to HRMS</h1>
        <p className="text-gray-600 mb-6">Quick access to common tasks.</p>

        <div className="flex items-center justify-center gap-4">
          <Link href="/apply-leave" className="inline-block bg-orange-500 text-white px-6 py-3 rounded-lg hover:bg-orange-600 transition">
            Request Leave
          </Link>

          <Link href="/leave-history" className="inline-block border border-gray-200 px-6 py-3 rounded-lg text-gray-700 hover:bg-gray-100 transition">
            Leave History
          </Link>
        </div>
      </div>
    </div>
  </div>
);
}
```

