	Button b2 = new Button ("Button 2");
	Button b3 = new Hutton ("Button 3");
	frame.add(b1);
	frame.add(b2);
	frame.add(b3);
	frame . setLayout (new FlowLayout());
	frame.setLayot(new CridLayout(2, 2));
	frame.setSize(300, 200);
	frame.setVisible(true);
	}
	}
	a. Grid Layout
	b. Border Layout
	c. Flow Layout
	d. Card Layout	

6.	**In functional programming, which of the following is an example of a higher-order function?** a. A function that returns the square of a number b. A function that adds two numbers c. A function that takes another function as an argument or returns a function d. A function that uses global variables to modify input data	

7.	**Find the output**
	def multi_func(fun_name, arg1, arg2):
	return fun_name(fun_name(arg1, arg2),20)
	def sum(x,y):
	return x+y
	print(multi_func(sum,10,20))	

8.	**To create parallel programming in Python which of the of the following header file to be imported** a. multithread b. multiprocessing c. threadprocessing d. parallelprocessing	
9.	**To create a socket, we must use socket.socket() function available in the Python socket module** a. socket.socket() b. socket().thread c. socket.port() d.TCP.UDP.scoket()	
10.	**Which of the following methods is used to send data over a TCP socket in Python?** a. socket.sendto() b. socket.send() c. socket.write() d. socket.transmit()	

SRM Institute of Science and Technology **SET-B**
College of Engineering and Technology
School of Computing

DEPARTMENT OF COMPUTATIONAL INTELLIGENCE
SRM Nagar, Kattankulathur – 603203, Chengalpattu District, Tamilnadu
Academic Year: 2024-2025 (ODD)

Test: QUIZ - II **Date: /10/2024**
Course Code & Title:21CSE203P - Advanced Programming Practices **Duration: 1hr**
Year & Sem: II year & III Sem **Max. Marks: 10**

Name of Student	Sanskriti Tiwari
Register ID	RA2311003010123

S.No	Question	Answer
1.	**Which of the following statements about Java Threads is correct?** a. Java threads don't allow parts of a program to be executed in parallel b. Java is a single-threaded language c. Java's garbage collector runs as a high priority thread d. Ready, running and sleeping are three states that a thread can be in during its life cycle	(d)


2.	**What will be the output of the following Java code?**
	Class multithreaded_programming
	{
	public static void main (String [] args[])
	{
	Thread t = thread.currentThread ();
	System.out.println (t);
	}
	}
	a. thread [5, main]
	b. thread [main, 5]
	c. thread [main, 0]
	d. Thread [main, 5, main]
		(d)


3.	**What is the primary role of the DriverManager class in JDBC?** a. To manage database transactions b. To load the driver class c. To close the database connection d. To retrieve metadata from the database	(c)
4.	**Which of the following is a top-level container in Swing?** a. JPanel b. JLabel c. JFrame d. JButton	
5.	**What is the layout manager used in the Java code given below?** import java.awt.*; public class LayoutExample extends Frame (public static void main(String[] args){ LayoutExample frame = new LayoutExample(); Button bl = new Button ("Button 1");	

ii)	Darshan wants to maintain a mini catalog of his friend's name. He started off by identifying five close friends. He needs to sort them chronological order to add in the mini catalog. Help Darshan to devise the mini catalog using the structured programming paradigm.	8	L3	1	4, PSO2	2.2.4
17 a i)	Signify the importance of accessibility in Java.	4	L1	2	1	1.4.1
ii)	Marc needs to calculate the area for different shapes of circle, triangle, rectangle, square. He has been instructed to use hierarchy form of classes to execute the computation. Adapt the suitable feature and help Marc in estimating the area of different shapes using Java.	8	L3	2	4, PSO2	2.2.4
	Or					
b i)	Describe the built-in packages in Java.	4	L2	2	1	1.4.1
	Allen needs to compute arithmetic operations. He has been instructed to define the task as a bundle module. Help Allen in devising the computation using Java. Hint – User-defined package.	8	L3	2	4, PSO2	2.2.4

***Program Indicators are available separately for Computer Science and Engineering in AICTE examination reforms policy.**

Course Outcome (CO) and Bloom's level (BL) Coverage in Questions

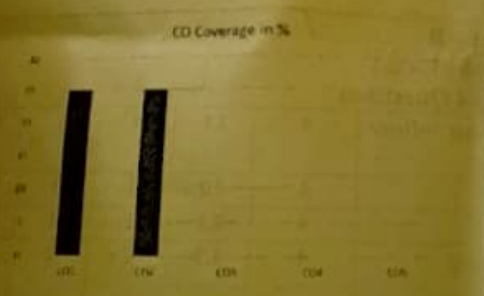

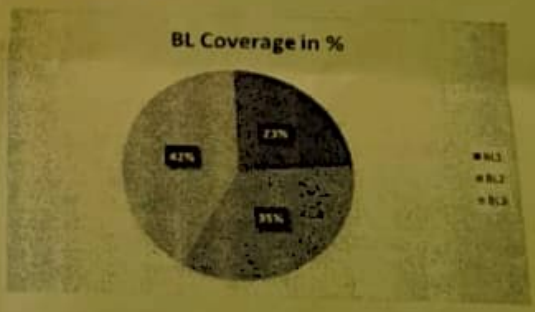

Approved by the Audit Professor/Course Coordinator

D. The code will fail to compile.

7. What is the output of the following code involving integer division?

```
int a = 5;
int b = 2;
int result = a / b;
System.out.println(result);
```

A. The output will be 2.5.
B. The output will be 2.
C. The output will be 3.
D. The code will fail to compile.

8. What will be the result of the following for loop that contains an off-

```
for (int i = 0; i < 5; i++) {
    System.out.println(i);
}
```

A. The loop will print numbers from 0 to 4.
B. The loop will print numbers from 0 to 5.
C. The loop will print numbers from 1 to 5.
D. The code will fail to compile.

9. What is the output of a switch statement when no break is used betw

```
int day = 2;
switch (day) {
    case 1:
        System.out.println("Monday");
    case 2:
        System.out.println("Tuesday");
    case 3:
        System.out.println("Wednesday");
        break;
    default:
        System.out.println("Invalid day");
}
```

A. The output will be Tuesday only.
B. The output will be Monday, Tuesday, and Wednesday.
C. The output will be Tuesday and Wednesday.
D. The code will fail to compile.

10. What will be the result if an array is declared but not initialized?

```
int[] arr;
arr[0] = 10;
```

A. The code will compile successfully.
B. The code will throw a NullPointerException at runtime.
C. The code will throw a compile-time error.
D. The code will run but produce no output.

lo	Question	Answer

1.	double num = 3.9999;
	int result = (int) num;
	System.out.println(result);
	Why is the result not what you expected, and how can you preserve the value correctly?	

2.	public class Test {
	int x = 10;
	void show() {
	int x = 5;
	System.out.println(x);
	}
	}
	// In the main method
	Test test = new Test();
	test.show();
	Why is the output different than expected, and how can you access the class variable instead of the local variable?	

3.	public class Example {
	public void display() {
	static int count = 0;
	System.out.println(count);
	}
	}
	Why does the compiler reject the code, and how can you fix it?	

4.	public class Test {
	void print() {
	System.out.println("Hello");
	}
	}
	// In the main method
	Test obj = null;
	obj.print();
	A. The program will print "Hello".
	B. The program will compile but throw a NullPointerExcepti
	C. The program will compile with a warning but will run suc
	D. The program will not compile due to a syntax error.	

5.
```
public class MyClass {
    MyClass(int value) {
        // Constructor logic
    }
}
// In the main method
MyClass obj = new MyClass(); // Error here
```
A. The code will compile successfully.
B. The code will compile with a warning.
C. The code will fail to compile because a default constructor is missing.
D. The code will run but throw an exception.

6. What will be the result of the following code?
```
double value = 8.75;
int result = (int) value;
System.out.println(result);
```
A. The result will be 8.75.
B. The result will be 8.
C. The result will be 9.
D. The code will fail to compile.

7. What is the output of the following code involving integer division?
```
int a = 5;
int b = 2;
int result = a / b;
System.out.println(result);
```
A. The output will be 2.5.
B. The output will be 2.
C. The output will be 3.
D. The code will fail to compile.

8. What will be the result of the following for loop that contains an off-by
```
for (int i = 0; i < 5; i++) {
    System.out.println(i);
}
```
A. The loop will print numbers from 0 to 4.
B. The loop will print numbers from 0 to 5.
C. The loop will print numbers from 1 to 5.
D. The code will fail to compile.

9. What is the output of a switch statement when no break is used betw
```
int day = 2;
switch (day) {
    case 1:
        System.out.println("Monday");
    case 2:
        System.out.println("Tuesday");
    case 3:
        System.out.println("Wednesday");
        break;
    default:
        System.out.println("Invalid day");
}
```