


Nguyễn Phú Thọ


CNPM2 – 1150080158

LAB02_MVC


Tạo project

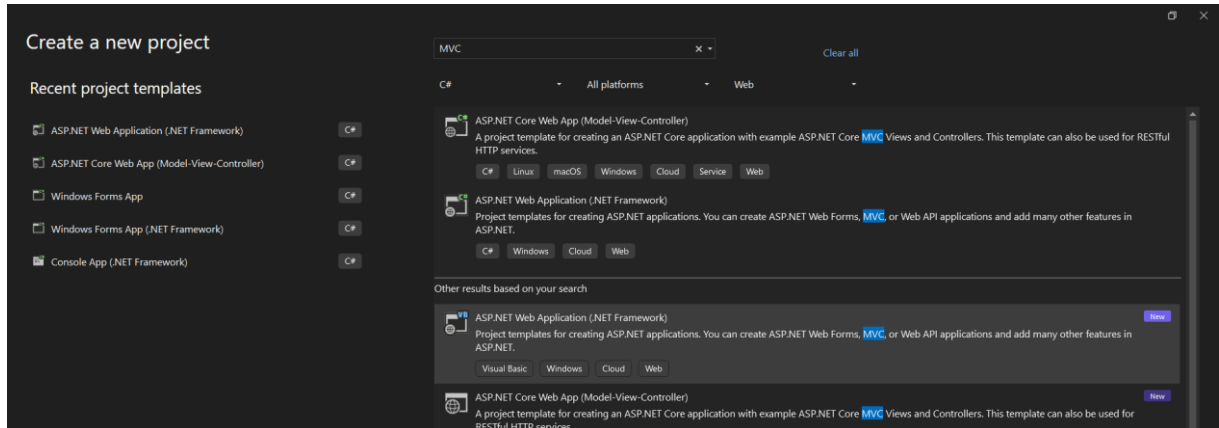


Khởi tạo project

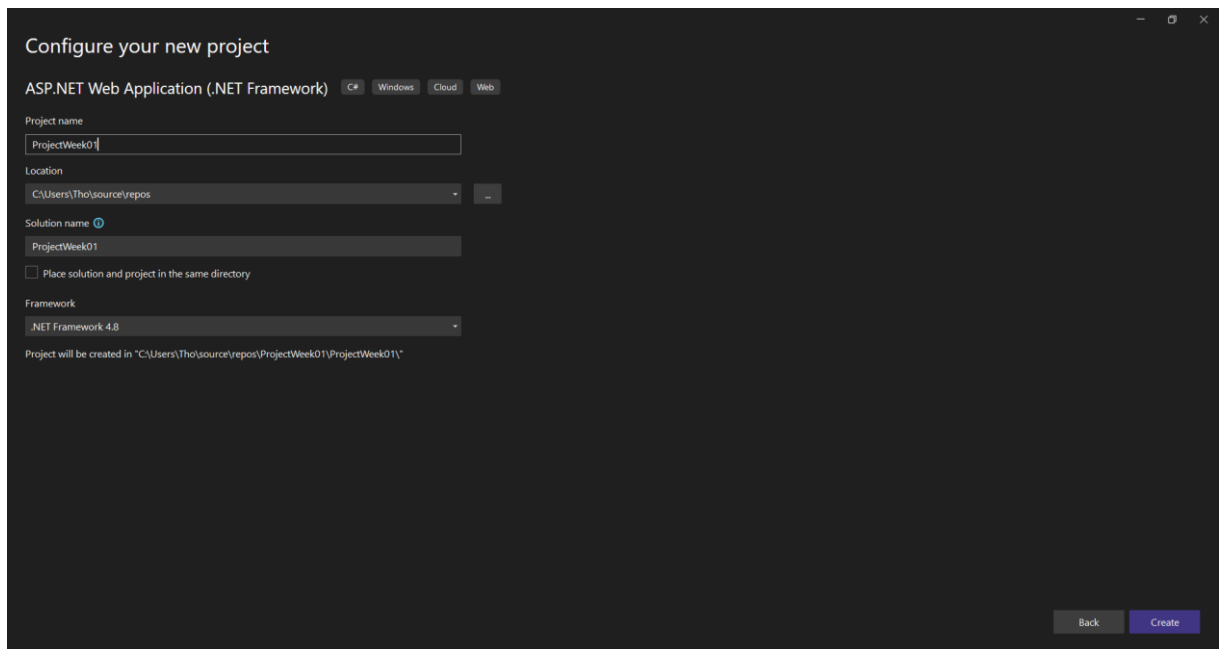

Sau khi tạo

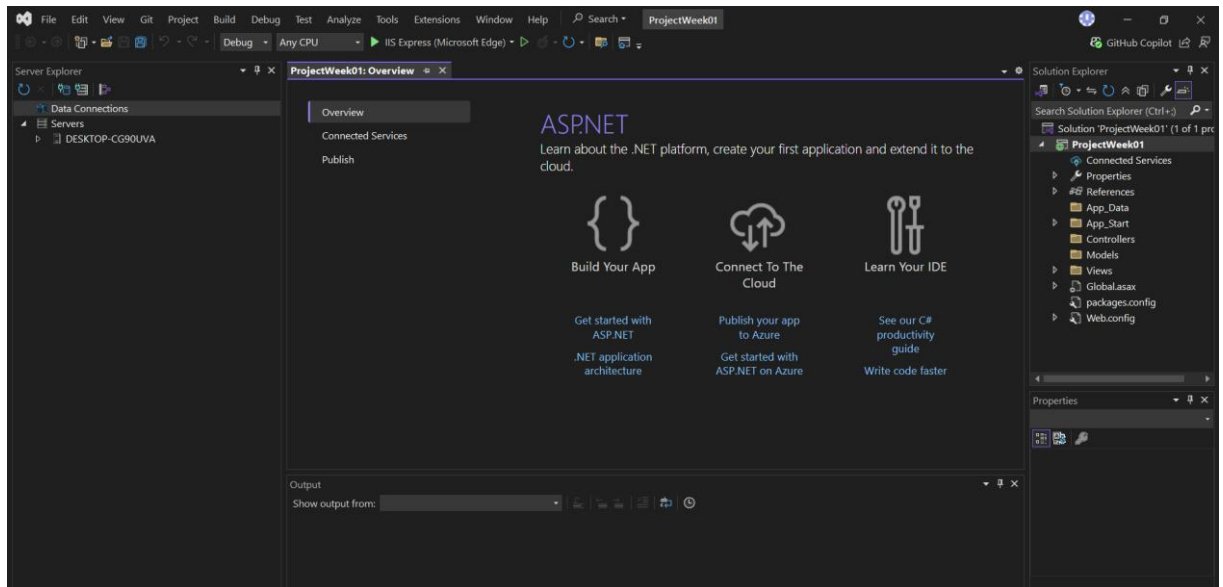

Add controller

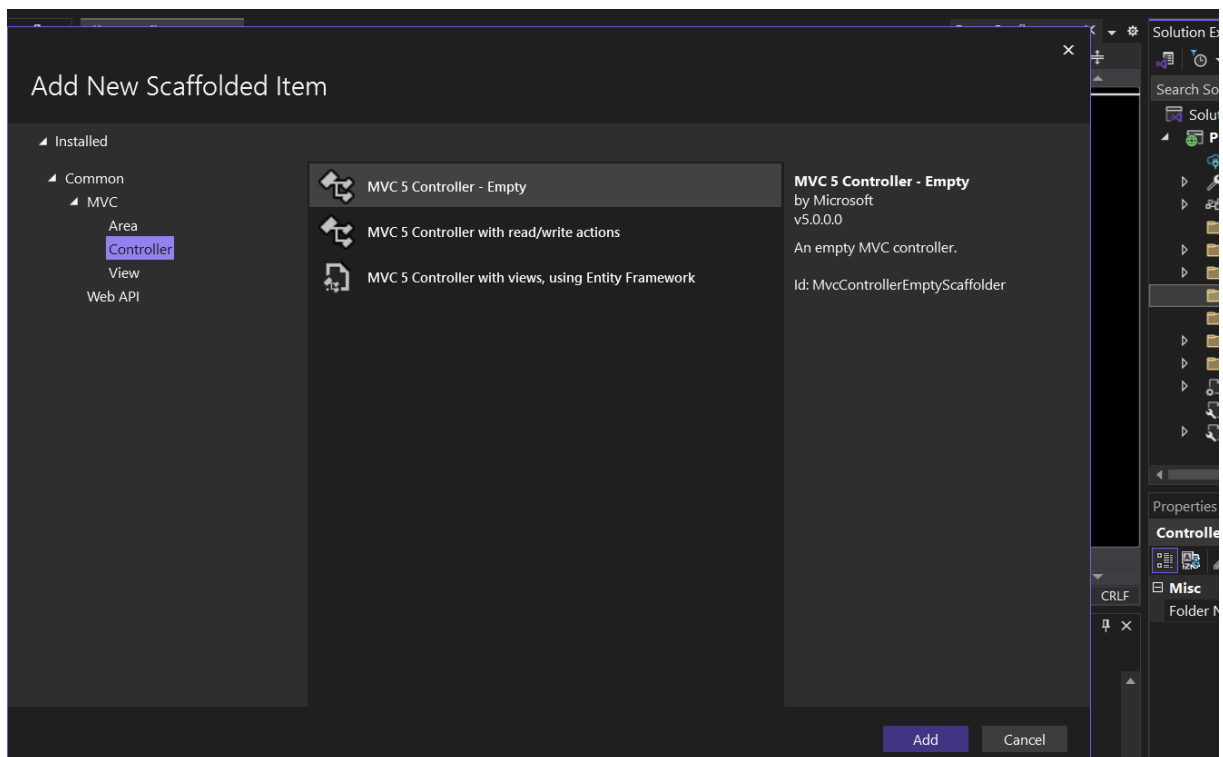



Tạo homeController

```
HomeController.cs  FilterConfig.cs  RouteConfig.cs
ProjectWeek1
ProjectWeek1.Controllers.HomeController  Index()
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.Mvc;

namespace ProjectWeek1.Controllers
{
    0 references
    public class HomeController : Controller
    {
        // GET: Home
        0 references
        public ActionResult Index()
        {
            return View();
        }
    }
}
```

Add View cho controller

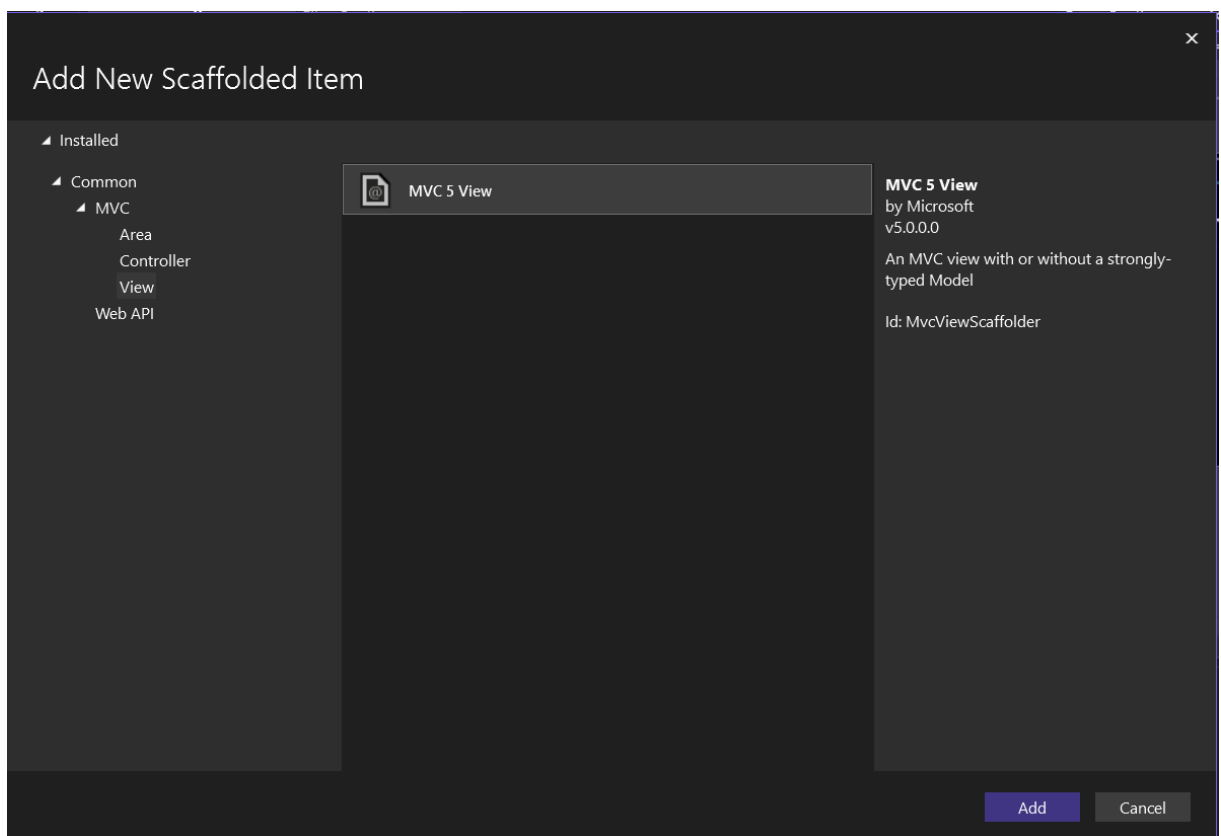

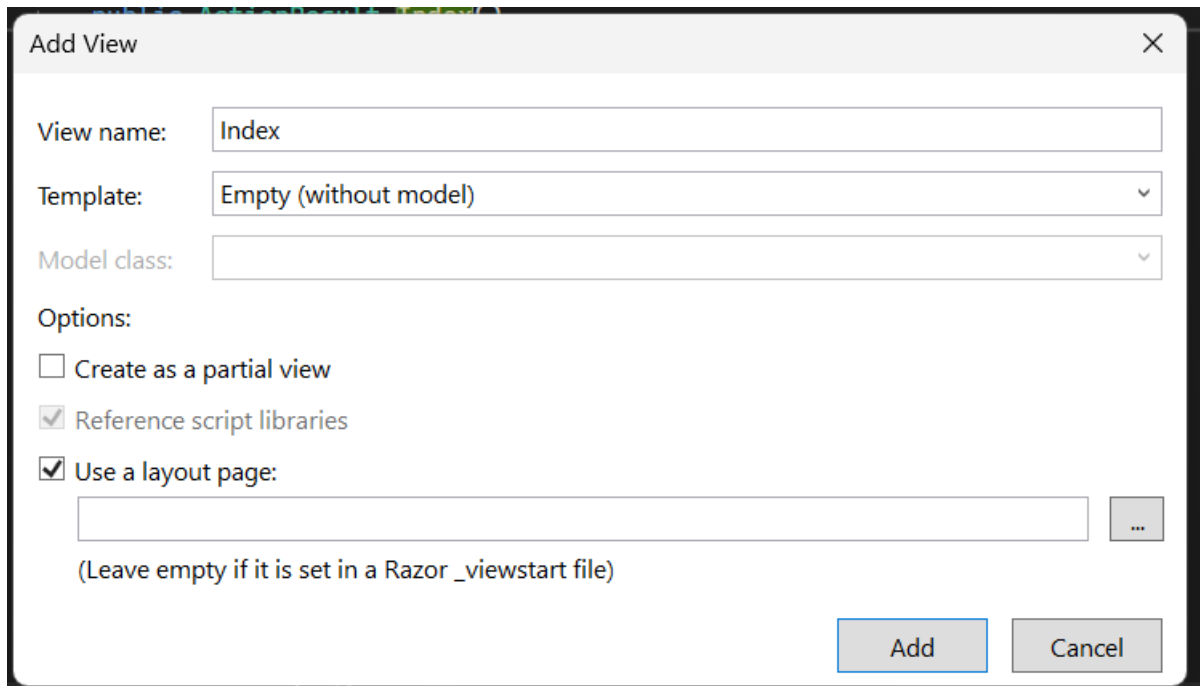


The 'Add View' dialog box is shown with the following settings:

- View name: Index
- Template: Empty (without model)
- Model class: (empty)
- Options:
 - ☐ Create as a partial view
 - ☒ Reference script libraries
 - ☒ Use a layout page:
 - (Leave empty if it is set in a Razor _viewstart file)

Buttons: Add, Cancel


Khi add view xong sẽ hiện ra view này

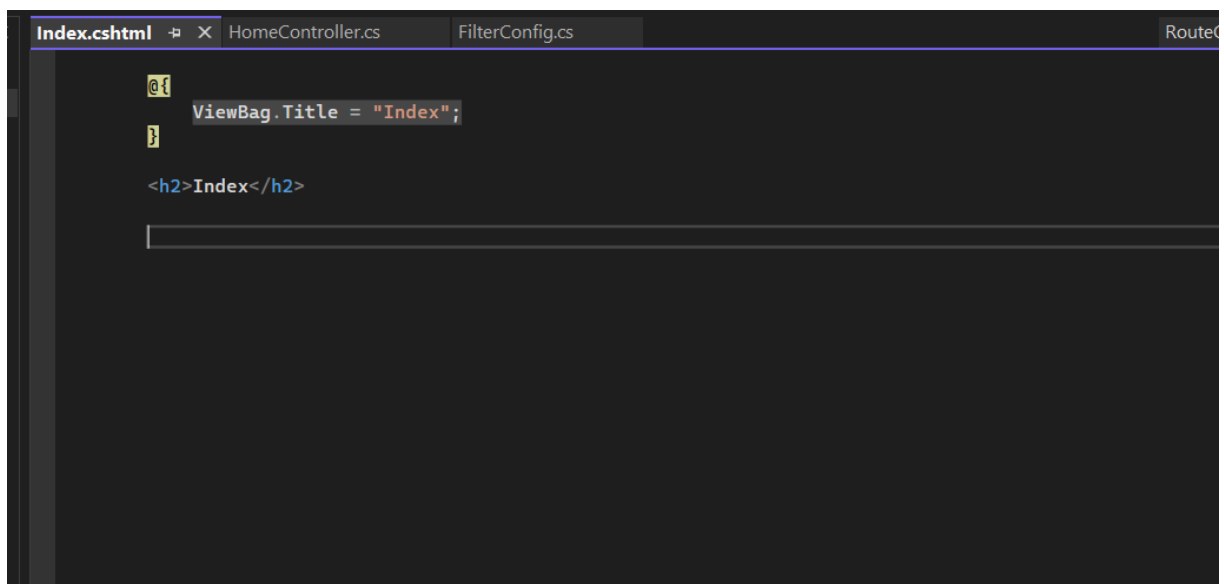


```
@{
    ViewBag.Title = "Index";
}

<h2>Index</h2>
```

Sau khi chạy thử project ban đầu

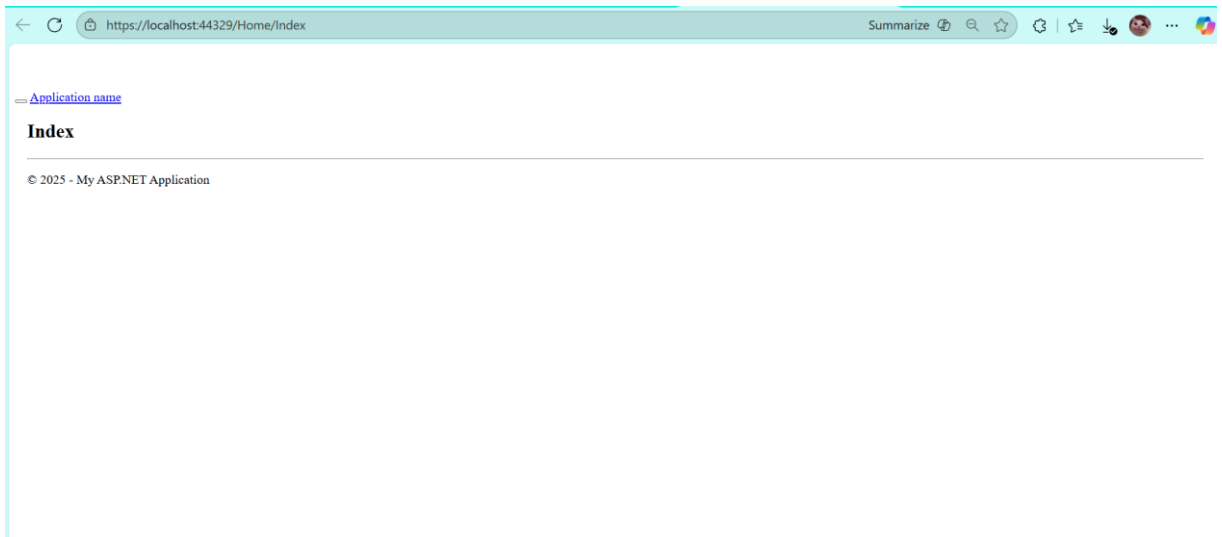


Thêm ảnh MVC.jpg

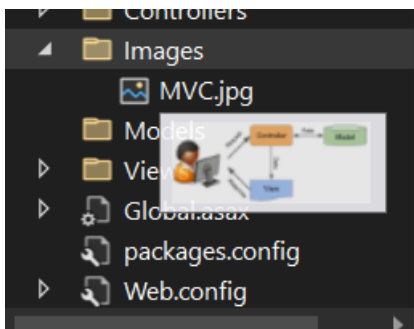

Chạy lên

Tiếp theo copy các thư mục vào ADMIN

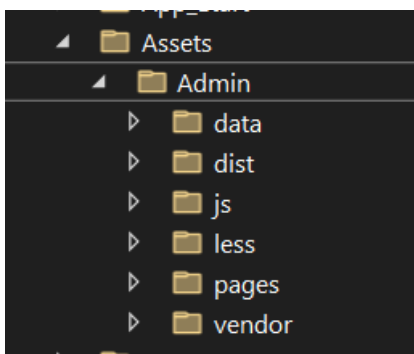




Sau khi thay index.cshtml bằng

```
@{  
    Layout = "~/Views/Shared/_Layout.cshtml";  
    ViewBag.Title = "Dashboard";  
}
```

```
@Html.Partial("DashboardContent")
```

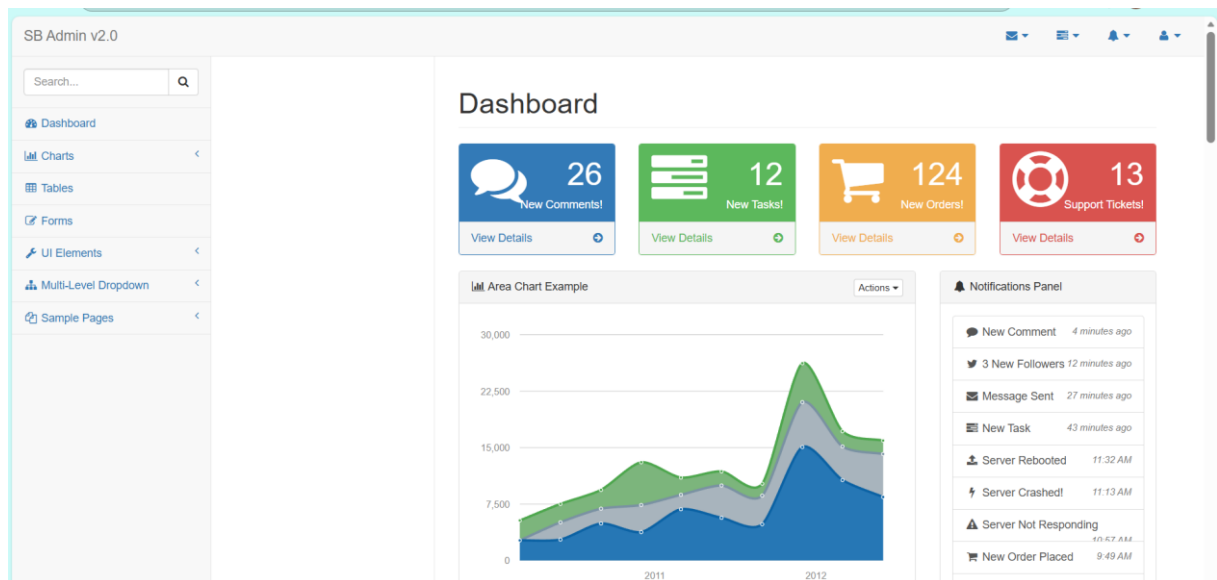


Tạo TableController:

```
TableContent.cshtml | Index.cshtml | TableController.cs | DashboardContent.cshtml
ProjectWeek01 | ProjectWeek01.Controllers.TableController | Index()

using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.Mvc;

namespace ProjectWeek01.Controllers
{
    0 references
    public class TableController : Controller
    {
        // GET: Table
        0 references
        public ActionResult Index()
        {
            return View();
        }
    }
}
```


Trong TableController tạo view index

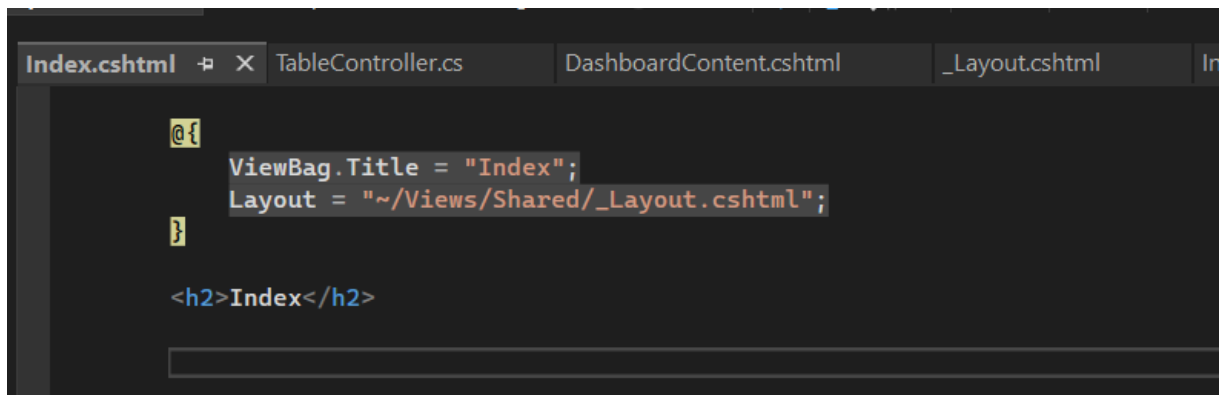

```
@{
    ViewBag.Title = "Index";
    Layout = "~/Views/Shared/_Layout.cshtml";
}

<h2>Index</h2>
```

Tạo Partial View cho phần nội dung Table:

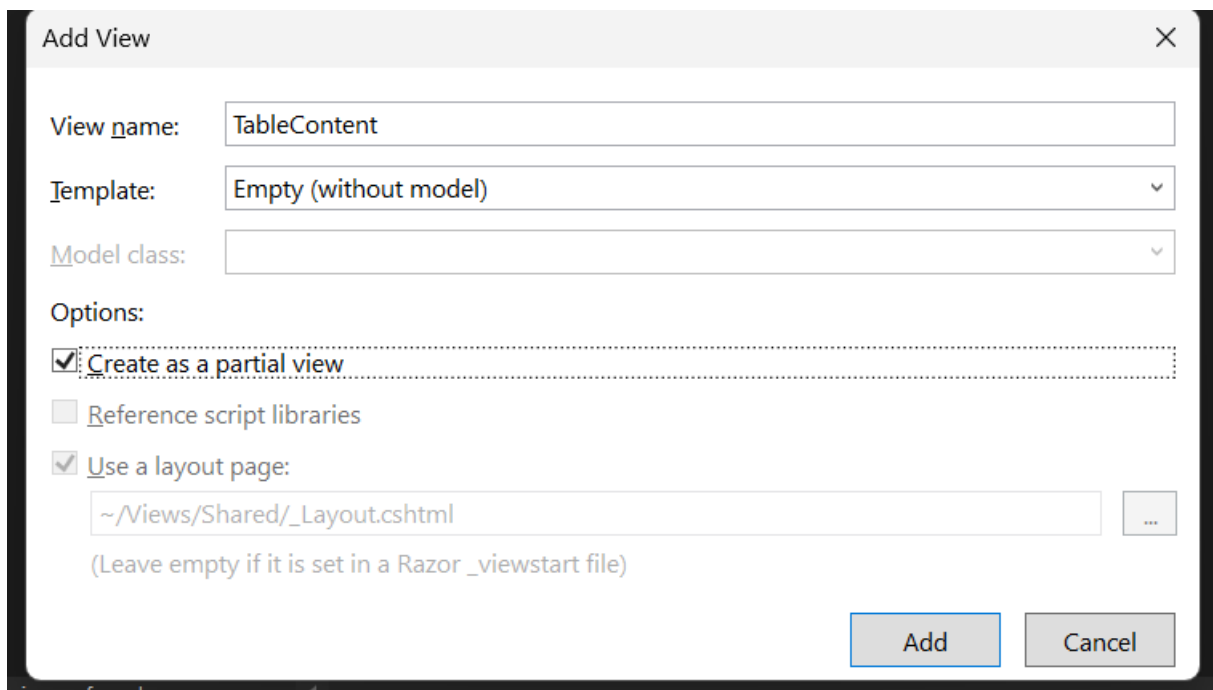

Add View

View name: TableContent

Template: Empty (without model)

Model class:


Options:

- ☒ Create as a partial view
- ☐ Reference script libraries
- ☒ Use a layout page: ~/Views/Shared/_Layout.cshtml

(Leave empty if it is set in a Razor _viewstart file)

Add Cancel

Gắn TableContent vào Views/Table/Index.cshtml:

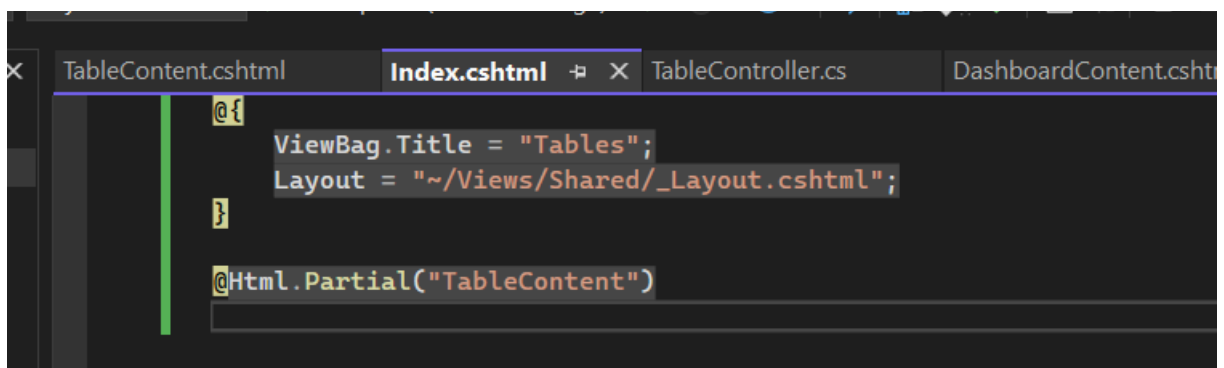

```
@{
    ViewBag.Title = "Tables";
    Layout = "~/Views/Shared/_Layout.cshtml";
}

@Html.Partial("TableContent")
```


Sửa menu “Tables” trong _Layout.cshtml

```

    <!-- /.nav-second-level -->
  </li>
  <li>
    <a href="@Url.Action("Index", "Table")">
      <i class="fa fa-table fa-fw"></i> Tables
    </a>
  </li>

```

Kết quả khi chạy

SB Admin v2.0

Search...

Dashboard

Charts

Tables

Forms

UI Elements

Multi-Level Dropdown

Sample Pages

Tables

DataTables Advanced Tables

| Rendering engine | Browser | Platform(s) | Engine version | CSS grade |
|------------------|---------------------------|------------------|----------------|-----------|
| Trident | Internet Explorer 4.0 | Win 95+ | 4 | X |
| Trident | Internet Explorer 5.0 | Win 95+ | 5 | C |
| Trident | Internet Explorer 5.5 | Win 95+ | 5.5 | A |
| Trident | Internet Explorer 6 | Win 98+ | 6 | A |
| Trident | Internet Explorer 7 | Win XP SP2+ | 7 | A |
| Trident | AOL browser (AOL desktop) | Win XP | 6 | A |
| Gecko | Firefox 1.0 | Win 98+ / OSX.2+ | 1.7 | A |
| Gecko | Firefox 1.5 | Win 98+ / OSX.2+ | 1.8 | A |
| Gecko | Firefox 2.0 | Win 98+ / OSX.2+ | 1.8 | A |
| Gecko | Firefox 3.0 | Win 2k+ / OSX.3+ | 1.9 | A |
| Gecko | Camino 1.0 | OSX.2+ | 1.8 | A |
| Gecko | Camino 1.5 | OSX.3+ | 1.8 | A |