

Procédure d'installation OCS Inventory sur Debian 13

Thomas MERLEN

31 Mars 2026

1 Mettre à jour votre système

Avant de pouvoir installer Ocs Inventory, on met à jour les dépôts et on installe les dernières versions des paquets disponibles.

```
sudo apt update && sudo apt upgrade -y
```

2 Installer les dépendances


On installe les dépendances nécessaires, notamment le serveur web, la base de données et les modules requis pour OCS Inventory.

```
sudo apt install mariadb-server apache2  
libapache2-mod-perl2 make gcc php php-mysql  
php-gd php-xml php-mbstring php-curl  
libxml-simple-perl libdbi-perl libdbd-mysql  
-perl libapache-dbi-perl libnet-ip-perl  
libarchive-zip-perl libmojolicious-perl  
libswitch-perl libplack-perl -y
```

3 Configurer la base de données

On se connecte à MariaDB en tant qu'utilisateur root pour configurer la base de données.

```
sudo mysql -u root -p
```

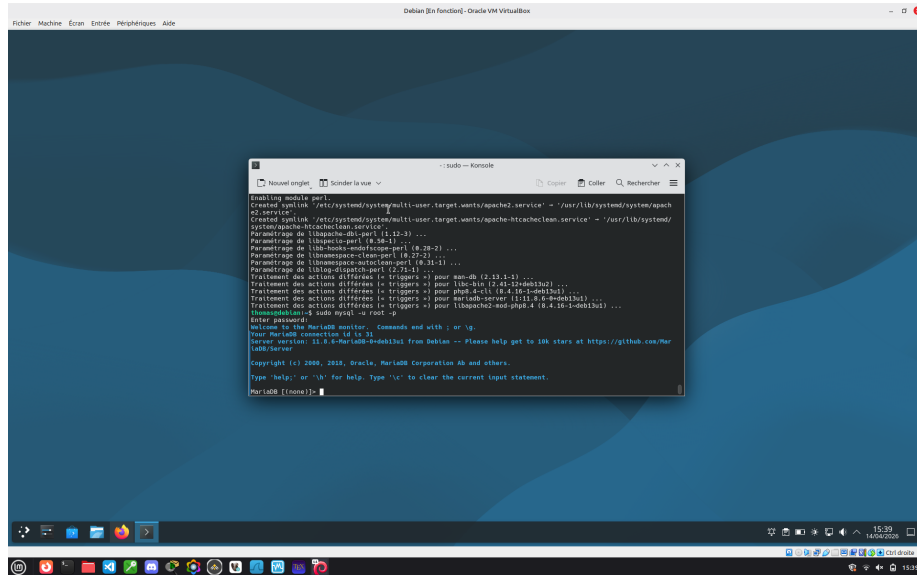

Vous êtes maintenant dans le mode configuration de votre BDD. Voici les commandes à rentrer :

On crée la base de données qui sera utilisée par OCS Inventory.

```
create database ocsdatabase;
```

On crée un utilisateur dédié à la base de données pour OCS Inventory.


```
create user 'ocs-user'@'localhost' identified  
by 'ocs-mdp';
```

On attribue tous les droits à l'utilisateur sur la base de données OCS Inventory.

```
grant all privileges on ocsdatabase.* to 'ocs-  
user'@'localhost':
```

```
flush privileges;
```

```
exit;
```

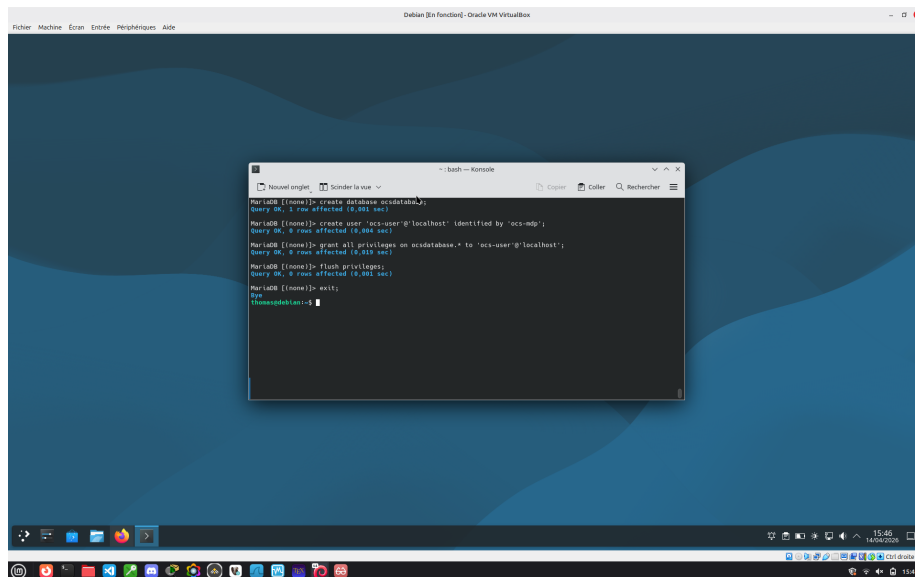

4 Installer OCS Inventory

Mettez vous dans votre répertoire personnel afin de récupérer les fichiers

Téléchargement du paquet OCS Inventory.

```
wget https://github.com/PassAndSecure/  
OCS_inventory/releases/download/  
OCSNG_UNIX_SERVER-2.12.1/OCSNG_UNIX_SERVER  
-2.12.1.tar.gz
```


Extraire l'archive télécharger

```
tar -xvzf OCSNG_UNIX_SERVER-2.12.1.tar.gz
```



```
-----
Welcome to OCS Inventory NG Management server setup !
-----
Trying to determine which OS or Linux distribution you use
| Checking for Apache web server binaries |
-----
CAUTION: If upgrading Communication server from OCS Inventory NG 1.6 RC2 and
previous, please remove any Apache configuration for Communication Server!
Do you wish to continue ([y/n])?
Assuming Communication server 1.6 RC2 or previous is not installed
on this computer.
|
Starting OCS Inventory NG Management server setup from folder /home/thomas/Bureau/OCSNG_UNIX_SERVER-2.12.1
Starting log in file /home/thomas/Bureau/OCSNG_UNIX_SERVER-2.12.1/ocs_server_setup.log
-----
| Checking for database server properties... |
-----
Your MySQL client seems to be part of MySQL version for for.
./mysql.sh 1801 [ illegal number: for
./mysql.sh 1801 [ illegal number: for
Your computer does not seem to be compliant with MySQL 4.1 or higher.
Do you wish to continue ([y/n])?
Ensure your database server is running MySQL 4.1 or higher !
Ensure also this computer is able to connect to your MySQL server !
Which host is running database server [localhost] ?
OK, database server is running on host localhost [-]
On which port is running database server [3306] ?
OK, database server is running on port 3306 [-]
-----
| Checking for Apache web server daemon... |
-----
Where is Apache daemon binary [/usr/sbin/apache2ctl] ?
OK, using Apache daemon /usr/sbin/apache2ctl [-]
-----
| Checking for Apache main configuration file... |
-----
Where is Apache main configuration file [/etc/apache2/apache2.conf] ?
OK, using Apache main configuration file /etc/apache2/apache2.conf [-]
-----
| Checking for Apache user account... |
-----
```

```
-----
| Checking for Apache user account... |
-----
Which user account is running Apache web server [www-data] ?
OK, Apache is running under user account www-data [-]
-----
| Checking for Apache group... |
-----
Which user group is running Apache web server [www-data] ?
OK, Apache is running under users group www-data [-]
-----
| Checking for Apache Include configuration directory... |
-----
Setup found Apache Include configuration directory in
/etc/apache2/conf-available.
Setup will put OCS Inventory NG Apache configuration in this directory.
Where is Apache Include configuration directory [/etc/apache2/conf-available] ?
OK, Apache Include configuration directory /etc/apache2/conf-available found [-]
-----
| Checking for PERL Interpreter... |
-----
Found PERL interpreter at /usr/bin/perl [-]
Where is perl interpreter binary [/usr/bin/perl] ?
OK, using PERL interpreter /usr/bin/perl [-]
-----
Do you wish to setup Communication server on this computer ([y/n])?
|
| Checking for Make utility... |
-----
OK, Make utility found at /usr/bin/make [-]
-----
| Checking for Apache mod_perl version... |
-----
Checking for Apache mod_perl version 1.99.22 or higher
Found that mod_perl version 1.99.22 or higher is available.
OK, Apache is using mod_perl version 1.99.22 or higher [-]
-----
| Checking for Communication server log directory... |
-----
Communication server can create detailed logs. This log can be enabled
```

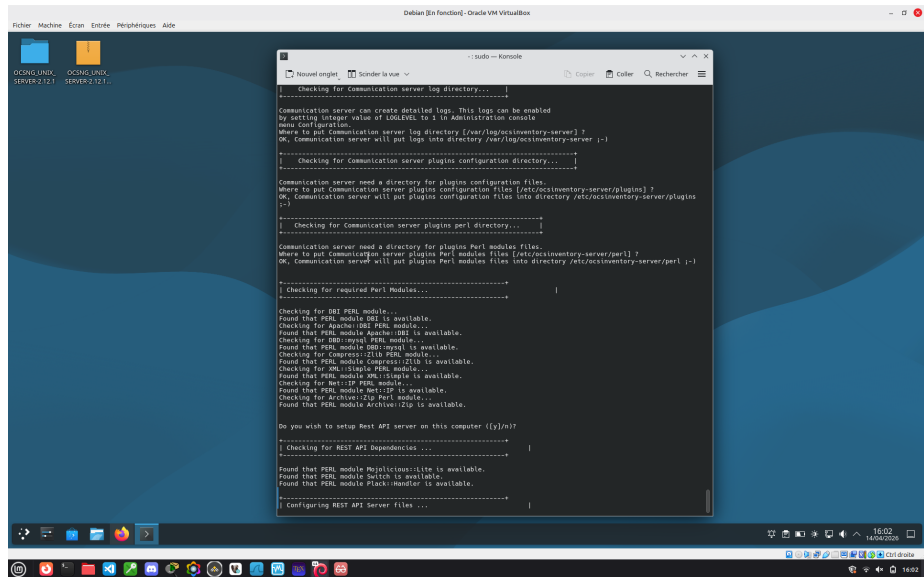

```
Checking for Communication server log directory...
Communication server can create detailed logs. This log can be enabled
by setting integer value of LOGLEVEL to 1 in Administration console
Have Configuration.
Where to put Communication server log directory [/usr/local/ocsinventory-server] ?
OK, Communication server will put logs into directory /usr/local/ocsinventory-server ;-)


Checking for Communication server plugins configuration directory...
Communication server need a directory for plugins configuration files.
Where to put Communication server plugins configuration files [/usr/local/ocsinventory-server/plugins] ?
OK, Communication server will put plugins configuration files into directory /usr/local/ocsinventory-server/plugins
;-)

Checking for Communication server plugins perl directory...
Communication server need a directory for plugins Perl module files.
Where to put Communication server plugins Perl module files [/usr/local/ocsinventory-server/perl] ?
OK, Communication server will put plugins Perl modules files into directory /usr/local/ocsinventory-server/perl
;-)

Checking for required Perl Modules...
Checking for DBI Perl module...
Found that PERL module DBI is available.
Checking for Apache::DBI Perl module...
Found that PERL module Apache::DBI is available.
Checking for DBD::mysql Perl module...
Found that PERL module DBD::mysql is available.
Checking for CGI::Simple Perl module...
Found that PERL module CGI::Simple is available.
Checking for HTML::Template Perl module...
Found that PERL module HTML::Template is available.
Checking for Net::IP Perl module...
Found that PERL module Net::IP is available.
Checking for Archive::Zip Perl module...
Found that PERL module Archive::Zip is available.

Do you wish to setup Rest API server on this computer (y/n)?
Checking for REST API Dependencies ...
Found that PERL module Mojolicious::Lite is available.
Found that PERL module Set::IntSpan is available.
Found that PERL module Plack::Handler is available.

Configuring REST API Server files ...
```

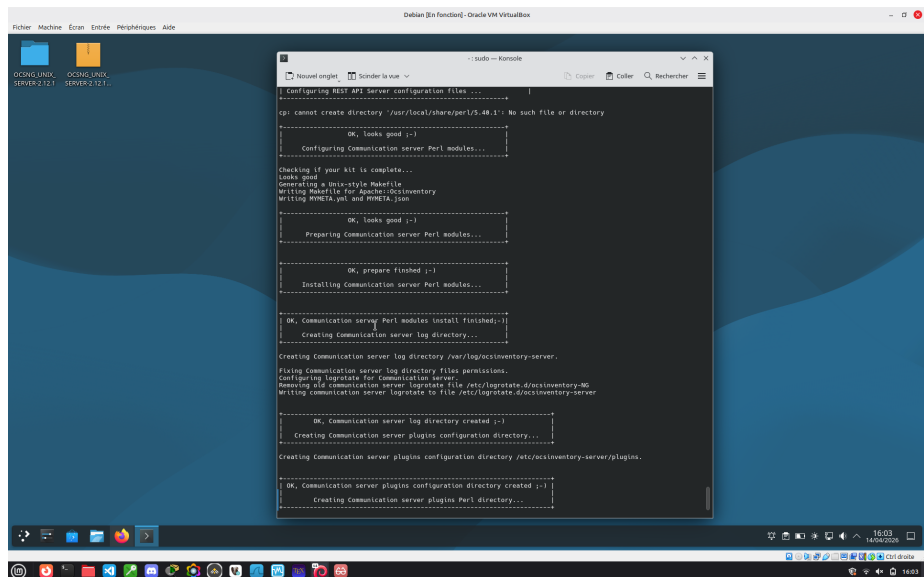

```
Configuring REST API Server configuration files ...
cp: cannot create directory '/usr/local/share/perl/5.48.1': No such file or directory
OK, looks good ;-)
Configuring Communication server Perl modules...
Checking if your kit is complete...
Looks good
Generating a Unix-style Makefile
Writing Makefile for Apache::ocsinventory
Writing pmc/Makefile.PL and pmc/Makefile.PL

Preparing Communication server Perl modules...
OK, prepare finished ;-)
Installing Communication server Perl modules...
OK, Communication server Perl modules install finished;-)
Creating Communication server log directory...
Creating Communication server log directory /usr/local/ocsinventory-server.
Fixing Communication server log directory files permissions.
Configuring logrotate for Communication server
Removing old Communication server logrotate file /etc/logrotate.d/ocsinventory-MS
Writing Communication server logrotate to file /etc/logrotate.d/ocsinventory-server

OK, Communication server log directory created ;-)
Creating Communication server plugins configuration directory...
Creating Communication server plugins configuration directory /usr/local/ocsinventory-server/plugins.
OK, Communication server plugins configuration directory created ;-)
Creating Communication server plugins Perl directory...
```

```
Debian [in function]: Oracle VM VirtualBox

Fichier Machine Ecran Entree Peripheriques Aide

OCSNG_UNIX_SERVER-2.12.1 OCSNG_UNIX_SERVER-2.12.1...

: sudo - Konsole

Creating Communication server plugins configuration directory /etc/ocsinventory-server/plugins.

OK, Communication server plugins configuration directory created -:-)
Creating Communication server plugins Perl directory...
Creating Communication server plugins Perl directory /etc/ocsinventory-server/perl.

OK, Communication server plugins Perl directory created -:-)
Now configuring Apache web server...

To ensure Apache loads mod_perl before OCS Inventory NG Communication Server,
Setup can name Communication Server Apache configuration file
/etc/ocsinventory-server.conf instead of /etc/httpd.conf
Do you allow Setup renaming Communication Server Apache configuration file
to /etc/ocsinventory-server.conf (y/n)?
OK, using /etc/ocsinventory-server.conf as Communication Server Apache configuration file
Renaming old communication server configuration to file /etc/apache2/conf-available/ocsinventory.conf
Writing communication server configuration to file /etc/apache2/conf-available/z-ocsinventory-server.conf

OK, Communication server setup successfully finished -:-)
Please, review /etc/apache2/conf-available/z-ocsinventory-server.conf
to ensure all is good. Then restart Apache daemon.

Do you wish to setup Administration Server (Web Administration Console)
on this computer (y/n)?
Checking for Administration Server directories...
CAUTION: Setup now install files in accordance with filesystem Hierarchy
Standard. So, no file is installed under Apache root document directory
(Refer to Apache configuration Files to locate it).
If you're upgrading from OCS Inventory NG Server 1.01 and previous, YOU
MUST Remove (or move) directories 'ocsreports' and 'download' from Apache
root document directory.
If you choose to move directory, YOU MUST MOVE 'download' directory to
Administration Server webstatics directory (by default:
/var/lib/ocsinventory-reports), especially if you use Deployment feature.
Do you wish to continue (y/n)?
Assuming directory 'ocsreports' and 'download' removed from
Apache root document directory.
Where to copy Administration Server static files for PHP Web Console
(/var/lib/ocsinventory-reports) ?

16:03 16/03/2024
```

```
Debian [in function]: Oracle VM VirtualBox

Fichier Machine Ecran Entree Peripheriques Aide

OCSNG_UNIX_SERVER-2.12.1 OCSNG_UNIX_SERVER-2.12.1...

: bash - Konsole

Checking for required Perl Modules...

Checking for DBI PERL module...
Found that PERL module DBI is available.
Checking for DBD::mysql PERL module...
Found that PERL module DBD::mysql is available.
Checking for DBD::SQLite PERL module...
Found that PERL module DBD::SQLite is available.
Checking for Net::IP PERL module...
Found that PERL module Net::IP is available.

Installing files for Administration server...

Creating PHP directory /var/share/ocsinventory-reports/ocsreports.
Copying PHP files to /var/share/ocsinventory-reports/ocsreports.
Fixing permissions on directory /var/share/ocsinventory-reports/ocsreports.
Creating database configuration file /var/share/ocsinventory-reports/ocsreports/dbconfig.inc.php.
Fixing permissions on directory /var/lib/ocsinventory-reports/zip.
Creating IPDISCOVER directory /var/lib/ocsinventory-reports/zip.
Fixing permissions on directory /var/lib/ocsinventory-reports/zip.
Creating some web directory /var/lib/ocsinventory-reports/home.
Fixing permissions on directory /var/lib/ocsinventory-reports/home.
Creating Administration server log file directory /var/lib/ocsinventory-reports/log.
Fixing permissions on directory /var/lib/ocsinventory-reports/log.
Creating Administration server temporary file directory /var/lib/ocsinventory-reports/tmp.dir.
Fixing permissions on directory /var/lib/ocsinventory-reports/tmp.dir.
Creating Administration server scripts log files directory /var/lib/ocsinventory-reports/scripts.
Fixing permissions on directory /var/lib/ocsinventory-reports/scripts.
Configuring IPDISCOVER Perl script.
Installing IPDISCOVER Perl script.
Fixing permissions on IPDISCOVER Perl script.
Writing Administration server configuration to file /etc/apache2/conf-available/ocsinventory-reports.conf

OK, Administration server installation finished -:-)
Please, review /etc/apache2/conf-available/ocsinventory-reports.conf
to ensure all is good and restart Apache daemon.
Then, point your browser to http://server/ocsreports
to configure database server and create/update schema.

Setup has created a log file /home/thomas/Bureau/OCSNG_UNIX_SERVER-2.12.1/ocs_server_setup.log. Please, save t
his file.
If you encounter error while running OCS Inventory NG Management server,
we can ask you to show us its content !

DON'T FORGET TO RESTART APACHE DAEMON !
Enjoy OCS Inventory NG :-))
thomas@babel:~$ cd /home/thomas/OCSNG_UNIX_SERVER-2.12.1$
```

Redémarrer Apache 2

```
sudo systemctl restart apache2
```

```
sudo a2enconf ocsinventory-reports
```

```
sudo systemctl reload apache2
```


```
sudo chown -R www-data:www-data /usr/share/  
ocsinventory-reports
```

```
sudo chmod -R 755 /usr/share/ocsinventory-  
reports
```

```
sudo chown -R www-data:www-data /var/lib/  
ocsinventory-reports
```

```
sudo chmod -R 755 /var/lib/ocsinventory-  
reports
```

```
sudo systemctl restart apache2
```

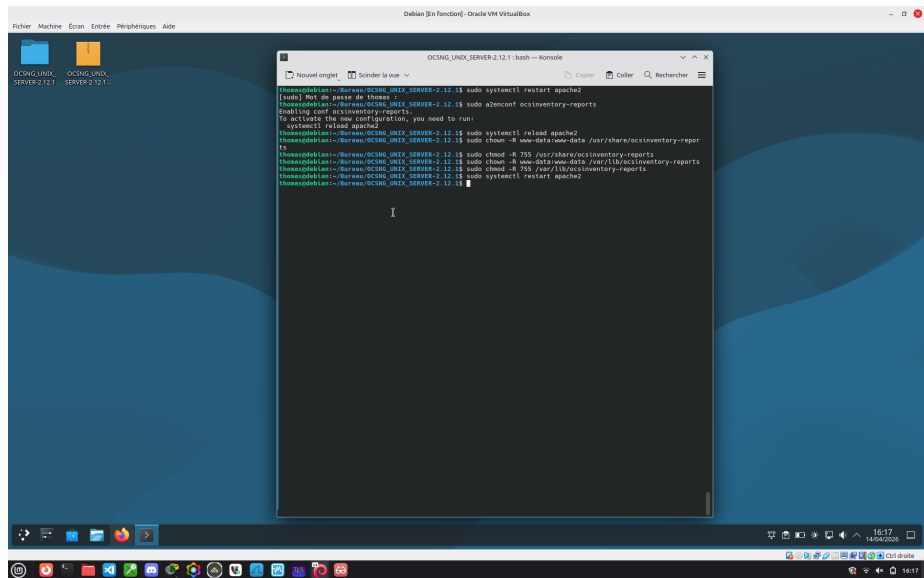Nous avons besoin de modifier certaines valeurs :

```
sudo nano /etc/php/8.4/apache2/php.ini
```

Voici les valeurs à modifier :


```
post_max_size = 30M
```

```
upload_max_filesize = 30M
```



```
sudo nano /etc/apache2/conf-available/z-  
ocsinventory-server.conf
```

```
PerlSetEnv OCS_DB_NAME ocsdatabase
```

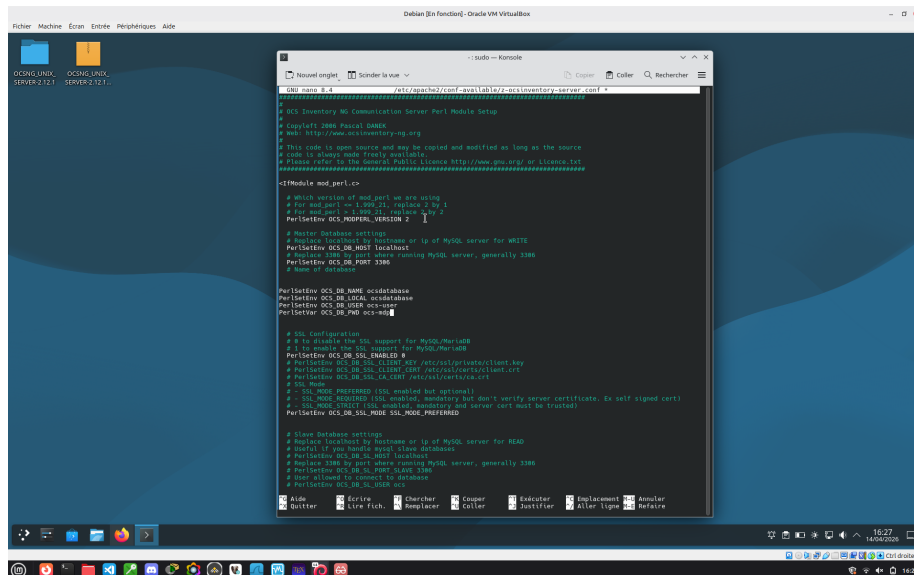


Autre fichier à modifier

```
sudo nano /usr/share/ocsinventory-reports/  
ocsreports/dbconfig.inc.php
```

Ajouter cette configuration dans le fichier :

```
define("DB_NAME", "ocsdatabase");  
define("SERVER_READ", "localhost");  
define("SERVER_WRITE", "localhost");  
define("SERVER_PORT", "3306");  
define("COMPTE_BASE", "ocs-user");  
define("PSWD_BASE", "ocs-mdp");  
define("ENABLE_SSL", "");  
define("SSL_MODE", "");  
define("SSL_KEY", "");  
define("SSL_CERT", "");  
define("CA_CERT", "");
```

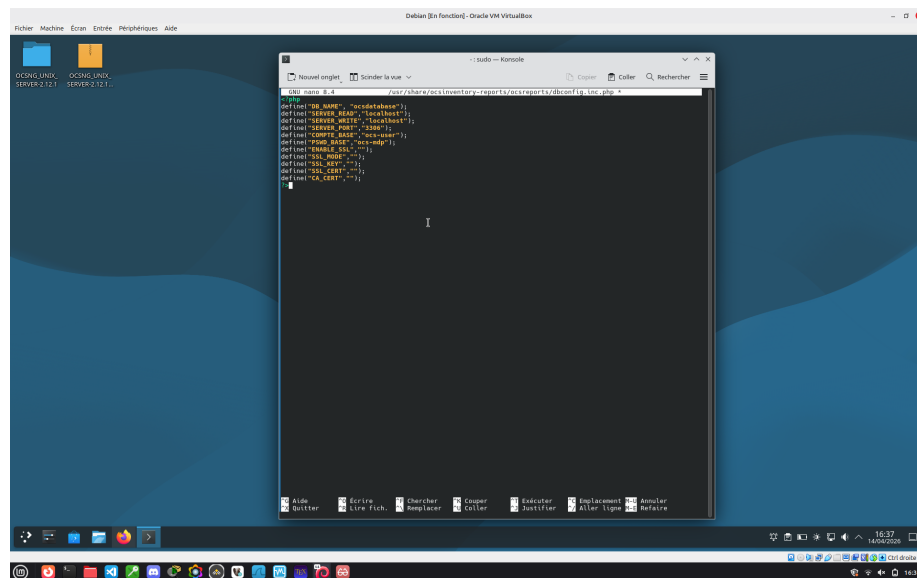


Redémarrer votre apache 2 pour la dernière fois

```
sudo systemctl restart apache2
```


6 Configuration sur le site web

Rendez vous sur le site <http://localhost/ocsreports>

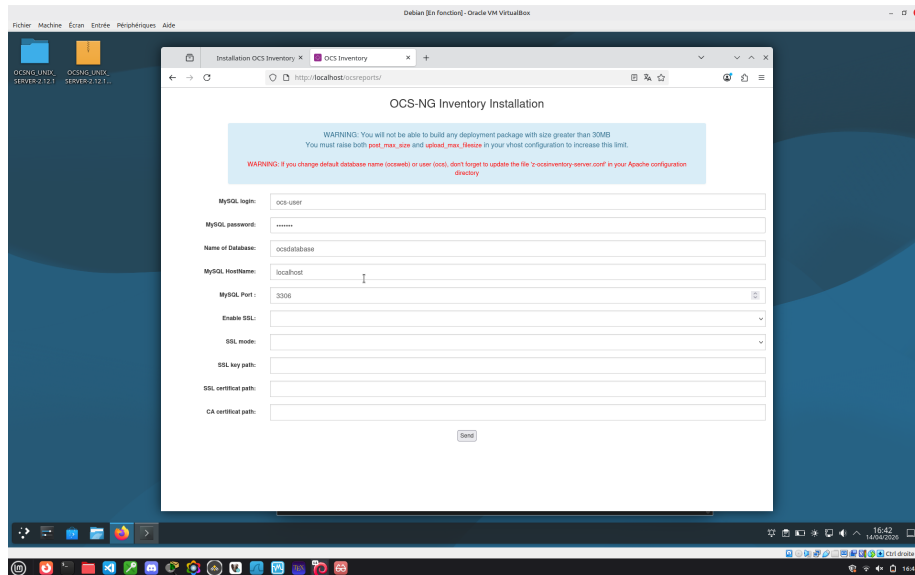


Le formulaire est correct appuyer sur "Send"

Une fois l'installation terminer "Perform the update" si une mise à jour est disponible puis cliquer sur "Click here to enter OCS-NG GUI"

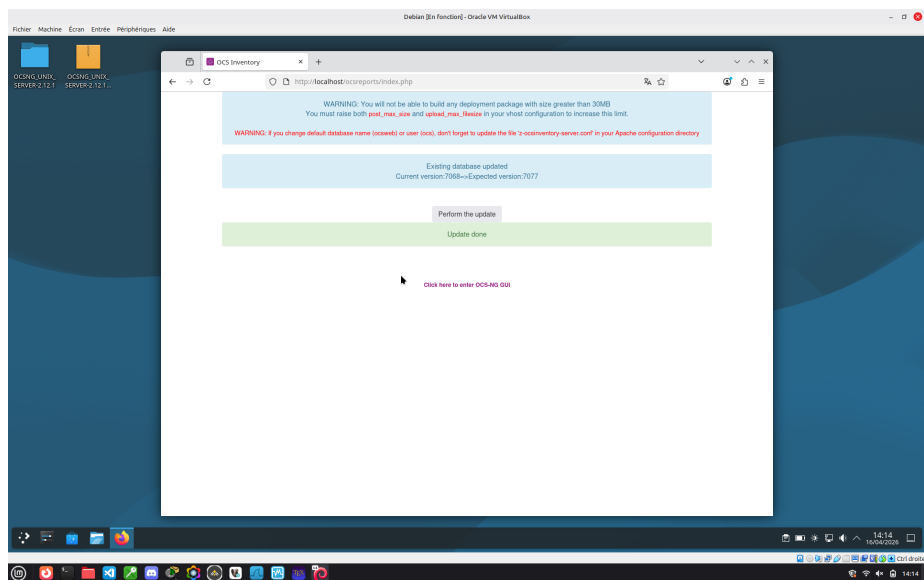

Vous voilà maintenant sur Ocs Inventory, le login et mot de passe sont "admin"

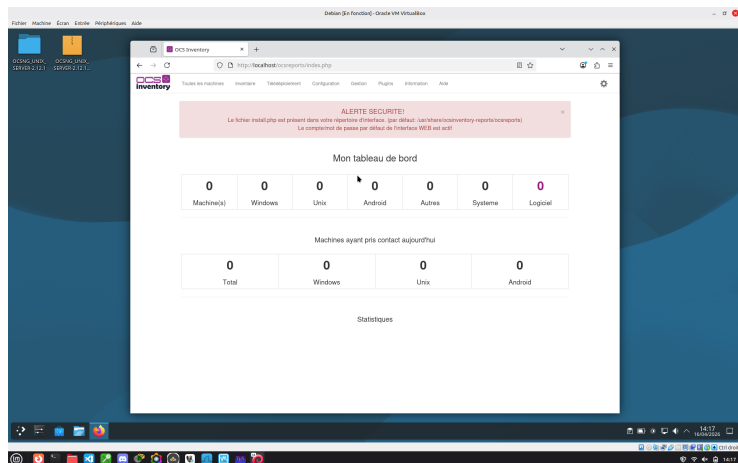

```
sudo rm /usr/share/ocsinventory-reports/
      ocsreports/install.php
```


1 Insérer les données dans la BDD

```
sudo mysql
```

```
use ocsdatabase;
```

```
source /home/thomas/Bureau/ocsweb_0916.sql;
```

```
exit;
```



7 Sources

Cette procédure résulte de plusieurs sources :

OCS Inventory Documentation

Pass And Secure

8 Conclusion

Cette installation m'a permis de développer des compétences en administration système sous Debian, notamment l'installation de services web, la configuration d'une base de données MariaDB, la gestion des dépendances et le déploiement d'une application web comme OCS Inventory. Cela m'a aussi permis de mieux comprendre l'interaction entre les différents composants d'un système d'information. Grâce à l'importation des données, j'ai pu vérifier le bon fonctionnement de l'application et explorer l'interface web avec des informations déjà enregistrées.

J'ai seulement rencontré des difficultés concernant l'agent UNIX que je n'ai pas réussi à installer.

1 Concernant l'agent OCS Inventory

Télécharger l'agent sur son système.

```
wget https://github.com/OCSInventory-NG/
      UnixAgent/archive/refs/tags/v2.10.4.tar.gz
```

Extraire l'archive :

```
tar -xvf v2.10.4.tar.gz
```

Pour lancer l'installation tapez les commandes :

```
perl Makefile.PL
```

```
make
```

```
sudo make install
```


Et c'est là que je rencontre des problèmes avec la configuration de l'agent

