

Annotation of Semantic Triples and Perspectives from User Responses in Context

(Annotation Guidelines)*

Thomas Bellucci
M Artificial Intelligence
t.bellucci@student.vu.nl

Version 1.0

March 2022

Contents

1	Task	2
2	Definitions	2
3	Data and annotation	4
3.1	Data	4
3.2	Annotation procedure	4
4	Guidelines	6
4.1	Triple annotation	6
4.2	Perspective annotation	7
4.2.1	Additional notes	8
5	Examples	8
5.1	Example 1	8
5.2	Example 2	9
5.3	Example 3	9
5.4	Example 4	10

*In partial fulfillment of the requirements for the degree of M Artificial Intelligence at the Vrije Universiteit, Amsterdam

1 Task

In the context of dialogue systems, the task of Knowledge Extraction (KE) is to derive from user input spans of information in a structured, machine-readable form to allow the acquisition of new world knowledge and establish a personal common ground of shared knowledge with the user [3]. For example, given the user utterance

(1) *"I went on holiday to Milan last year."*

a KE system could extract the information $\langle user, went\ to, Milan \rangle$ and from it decide to continue the conversation by, e.g. asking *"Where is Milan located?"*.¹

To represent the information expressed in an utterance, semantic triples of the form $\langle subject, predicate, object \rangle$ are commonly used; these triples describe two entities (the *subject* and *object*) and a relationship between them (the *predicate*). The task of the knowledge extraction system is to identify these triples from the user's utterances in the dialogue.

One difficulty with knowledge extraction in a conversational setting (as opposed to non-conversational text) is that user input must often be interpreted relative to linguistic context in order to be understood. For example, utterances such as

(2) *"Milan"* or (3) *"No, believe it was London."*

are uninterpretable without considering the context in which they were spoken (e.g. *"Where did you go on holiday?"*). Moreover, as can be seen from example (3), multiple bits of information are often presented within the same utterance and speakers often express a particular *perspective* on the information, e.g. denying the information or signalling a level of (un)certainly.

To accelerate the development of knowledge extraction systems for dialogue capable of capturing information from user input with respect to *linguistic context*, we will develop a dataset of short dialogues annotated with ground-truth triples and perspective annotations.² In this document, I will describe the dataset and present guidelines for its annotation.

2 Definitions

In this section, I will informally present to notions of **triple** and **perspective**, which will be used to represent the assertions made by the user.

¹In Leolani, responses are evoked by so-called *thoughts*; reflections on the state of the brain of the robot after receiving new information.

²To our knowledge, no such dataset has to date been made available for English.

Triples of the form $\langle \textit{subject}, \textit{predicate}, \textit{object} \rangle$ are used to represent a single, elementary claim made by a user. The *predicate* represents a relationship between two terms or entities, its so-called *arguments*. For example,

(4) "*Mike wants to go to space*"

presents a claim which we can express as the triple $\langle \textit{Mike}, \textit{wants to go to}, \textit{space} \rangle$. Most important is that, a triple contains information on a *single* claim made by the user. For example, from (5) we infer four triples (each their own claim);

(5) A.1: "*I am Katana, a nursing student at ODU*"
 B.1: "*Hi Katana. Do you have children?*"
 A.2: "*No, just a pet horse.*"

$\langle \textit{I}, \textit{am}, \textit{Katana} \rangle$
 $\langle \textit{I}, \textit{am}, \textit{a nursing student at ODU} \rangle$
 $\langle \textit{you}, \textit{do have}, \textit{children} \rangle$ (negated)
 $\langle \textit{you}, \textit{do have}, \textit{a pet horse} \rangle$

Note the elliptical construction of "*just a pet horse*". The triple representing this information requires a predicate and subject, "*you*" and "*have*", which it must inherit from the context (in this case question) in order to be a complete triple.

Moreover, note that all triples in (5) are positive, even though $\langle \textit{you}, \textit{have}, \textit{children} \rangle$ is denied by the user in the story. To model negation, we will use **perspectives**. As shown by (6), a user may express a perspective on the information presented to signal whether a claim is (believed to be) true or not, or to indicate uncertainty;

(6) "*I think Mike does not want to go to space*"

In order to capture negation and uncertainty, we will use a perspective of the form $\langle \textit{polarity}, \textit{certainty} \rangle$, which like triples, mark the polarity and uncertainty of the claim. A complete interpretation of (6), would be:³

triple: $\langle \textit{Mike}, \textit{does want to go to}, \textit{space} \rangle$
 perspective: $\langle \textit{negative}, \textit{uncertain} \rangle$

³Additional arguments including sentiment may also be included in the perspective. In this work, we will consider *polarity* and *certainty* only.

3 Data and annotation

3.1 Data

As not corpus of social dialogue has been made available with sufficient quality and scope, several datasets were combined. The data originates from *PersonaChat* [4], *DailyDialogs* [1] and the Google Circa datasets [2]. *PersonaChat* is a large corpus of one-on-one, introductory chat conversations. Participants were instructed to get to know each other by conversing about various everyday topics ranging from work and hobbies to family life, taking into account an artificial persona (personality). The dialogues in *PersonaChat* are topically diverse and cover a total of 1000 speaker personas, making them highly applicable to the setting of open-ended social conversations with different speakers.

The *DailyDialogs corpus* is a collection of short (written) dialogues between two speakers. Unlike *PersonaChat*, the dialogues are situated, that is, the speakers share the environment in which the conversation takes place (e.g. spontaneous conversations on the street, at doctor’s office, and so on).

Circa is a large dataset of polar yes/no questions with direct and indirect user responses, constructed with the intent of training dialogue systems to understand implicit responses, e.g. *"Do you have kids? I got a cat."*. The dataset was built to span different social situations and contain a variety of different responses and questions.

Combined, *PersonaChat*, *DailyDialogs* and *Circa* amount to 22.000 dialogues, or approximately 250.000 utterances. As it will not be feasible to annotate the entire dataset within the estimated time frame of the project, we limit the dataset to a random sample of 1800 training and 1800 validation (test set) dialogues, each consisting of three consecutive turns; a (user) *context turn*, a (system) *question turn* and a (user) *response turn*, e.g.

Context: *"I love travelling!"*

Question: *"Me too! Where did you last go on holiday?"*

Response: *"Milan."*

3.2 Annotation procedure

Each annotator will be provided with a subset of the full dataset, consisting of 80 (?) turn-triplets. To assist in the annotation process and ensure a consistent annotation format, a custom annotation tool has been developed. The interface, shown in Figure 1, shows a list of 6 triples (left column) and their associated perspectives (right column) along with the dialogue (top). As shown, the annotation is performed by assigning the right tokens to the right triple and perspective arguments.


As explained, triples contain three arguments; a *subject*, a *predicate* and an *object*. To populate the arguments of a triple with tokens from the dialogue, one presses the button of the corresponding argument (e.g. ) , which will highlight this argument;



Figure 1: Interface of the annotation tool. Five triples and perspectives have already been marked; the first triple and perspective are intentionally left blank.

the user can then click on the corresponding tokens in the dialogue to fill it in. If a mistake has been made, the user can click again on the argument button which will clear the tokens assigned to that argument.

Like the triples, to annotate the perspectives with polarity and certainty (columns \neg and $?$, respectively), one also clicks on the corresponding argument followed by the token which signals the polarity or certainty. These arguments only have to be marked when the associated triple is negated (often indicated by the tokens *not*, *never*, *n't*, and so on) or when the speaker raises some doubt (e.g. *believe*, *think*).

After annotating the dialogue, that is, populating the triples (and possibly perspectives) with their corresponding arguments, the user can save the annotation by pressing . To skip an annotation (e.g. when the dialogue is unintelligible), you press the button. If a mistake has been made in a previously submitted annotation, the annotator can go back and redo the annotation by pressing .

4 Guidelines

In this section I will provide a list of annotation guidelines to ensure a consistent annotation and highlight possible ambiguities and best practices.

4.1 Triple annotation

- Try to annotate triples in all three dialogue turns, irrespective of speaker (system triples can be filtered out when needed).

- Mark triples twice when information is repeated, e.g.

Question: "*Mike loves cats?*" → $\langle \textit{Mike}, \textit{loves}, \textit{cats} \rangle$

Response: "*Yes, Mike loves cats.*" → $\langle \textit{Mike}, \textit{loves}, \textit{cats} \rangle$

- The dialogue might contain too little information to fill in all triples (e.g. only 1 or 2 claims are made). In this case, there is no need to fill in all 6 slots; you can leave the remaining slots empty.
- The order of the annotations is not important (does not need to follow order of occurrence of triples in the text), but arguments of one triple should be placed in the same triple.

- Triple arguments need not be a continuous span in the text, e.g.

Question: "*Do you like animals?*"

Response: "*Yes.*" → $\langle \textit{you}, \textit{do like}, \textit{animals} \rangle$

- In case of ellipsis (missing subject or predicate), try to complete the triple with information from the context (e.g. the preceding turn);

Question: "*What sports do you like?*"

Response: "*Soccer.*" → $\langle \textit{you}, \textit{do like}, \textit{soccer} \rangle$

- In some cases, there may not be a subject mentioned at all in the dialogue (often *I* or *you*). In this case, the subject can be left blank and you can fill in the remainder of the triples, e.g.

Context: "*went to the cinema.*" → $\langle \quad, \textit{went to}, \textit{the cinema} \rangle$

Question: "*saw a good movie?*" → $\langle \quad, \textit{saw}, \textit{a good movie} \rangle$

Response: "*no, not recently.*"

- Try to leave out semantic sugar such as propositional phrases that are not essential to the information conveyed;

Response: "*I saw a movie on Saturday evening with all my friends.*"

→ $\langle \textit{I}, \textit{saw}, \textit{a movie} \rangle$

- Do include auxiliary verbs (e.g. *do*, *does*) and particles (e.g. *to*, *on*) in the predicate when possible:

Question: "*What does Mike like to eat?*"

Response: "*Oven pizza mostly.*" $\rightarrow \langle \textit{Mike}, \textit{does like to eat}, \textit{oven pizza} \rangle$

- Aim to keep subjects and objects as simple as possible; not all tokens need to be added to a triple (propositional phrases).
- Try to resolve antecedents of referring expressions (pronouns, definite NPs) when possible; if not, mark pronouns themselves.

Question: "*Does Mark like bars?*"

Response: "*Yes, he loves them.*" $\rightarrow \langle \textit{Mark}, \textit{loves}, \textit{bars} \rangle$

- Lastly, as the examples shown, not all triples require context to be understood. Annotate those triples anyway.

4.2 Perspective annotation

In the most simple case, a claim is made which has a positive polarity and no uncertainty on part of the speaker. For example,

"*I am a student*" $\rightarrow \langle \textit{I}, \textit{am}, \textit{a student} \rangle$

"*Do you play the piano? Yes.*" $\rightarrow \langle \textit{I}, \textit{play}, \textit{the piano} \rangle$

"*I want to have a cat.*" $\rightarrow \langle \textit{I}, \textit{want to have}, \textit{a cat} \rangle$

In this case, there is no need to fill in the perspective column; triples are assumed to have a positive polarity and complete certainty by default.

When the information presented by the user is denied or the user is uncertain about what is said, the perspective column should be used, e.g.

Context: "*My back is hurting.*"

Question: "*That isn't good, have you tried a chiropractor?*"

Response: "*Yes, but he didn't listen to me about my pain.*"

From this example, four triples can be derived, only two of which mark negation or uncertainty:

$\langle \textit{My back}, \textit{is}, \textit{hurting} \rangle$	(positive \rightarrow leave blank)
$\langle \textit{That}, \textit{is}, \textit{good} \rangle$	(negated in text \rightarrow mark " <i>n't</i> ")
$\langle \textit{You}, \textit{have tried}, \textit{a chiropractor} \rangle$	(confirmed by " <i>Yes</i> " \rightarrow leave blank)
$\langle \textit{chiropractor}, \textit{did listen to me about}, \textit{my pain} \rangle$	(negative \rightarrow mark " <i>n't</i> ")

4.2.1 Additional notes

- Only mark *polarity* when the triple is negated, e.g. by *not*, *n't*, *never*, *no* (in the follow-up response), etc.
- Only mark *certainty* when the user indicates to be uncertain about the claim made (e.g. by *believe*, *think*, *might*, *may*, etc.).
- In case of implicit signalling of negation (or uncertainty), mark the polarity (uncertainty) with some other token, such as punctuation. For example,

Question: "Does he have children?"

Response: "I think he *only* has birds." (implicitly negates the question)

→ $\langle he, does\ have, children \rangle + \langle '?', \rangle$

→ $\langle he, only\ has, birds \rangle + \langle , 'think' \rangle$

5 Examples

To illustrate how these dialogues ought to be annotated, I have included a couple of additional examples below.


5.1 Example 1

Annotating personachat-train-000758


that	sounds	like	wonderful	family	time	.	most	my	family	is	not	around	.
oh do you have any close friends ?													
i	am	71	and	live	in	the	countryside	most	my	friends	can	not	travel as well .

< that , sounds like , wonderful family time >	< ¬ , ? >
< most my family , is , around >	< not , >
< you , have , close friends >	< not , >
< i , am , 71 >	< , >
< i , live in , the countryside >	< , >
< most my friends , can , travel >	< not , >


5.2 Example 2

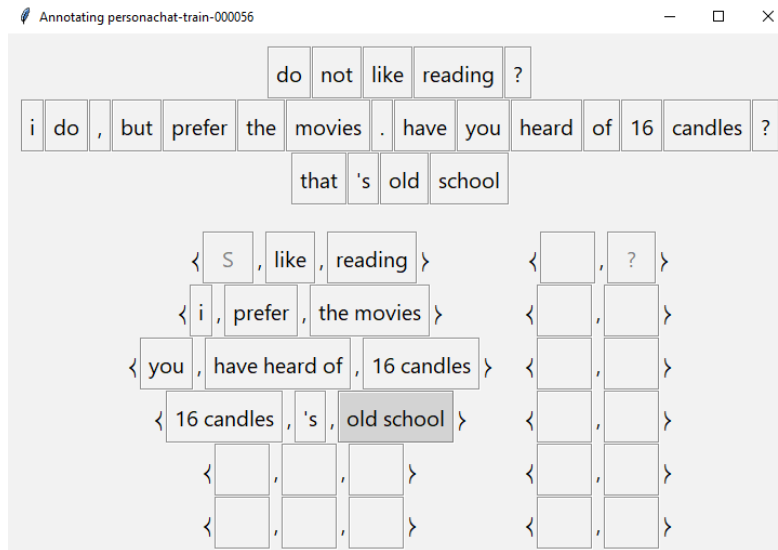

5.3 Example 3

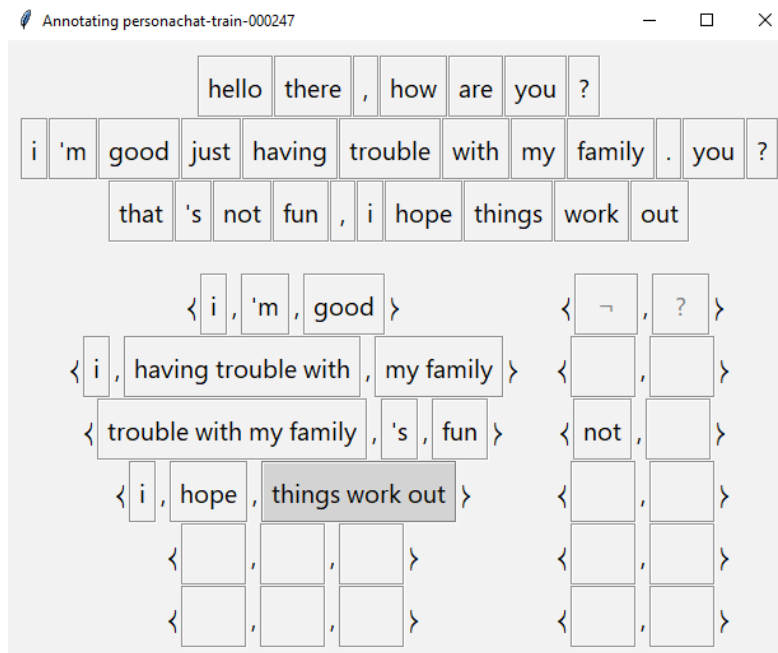

5.4 Example 4

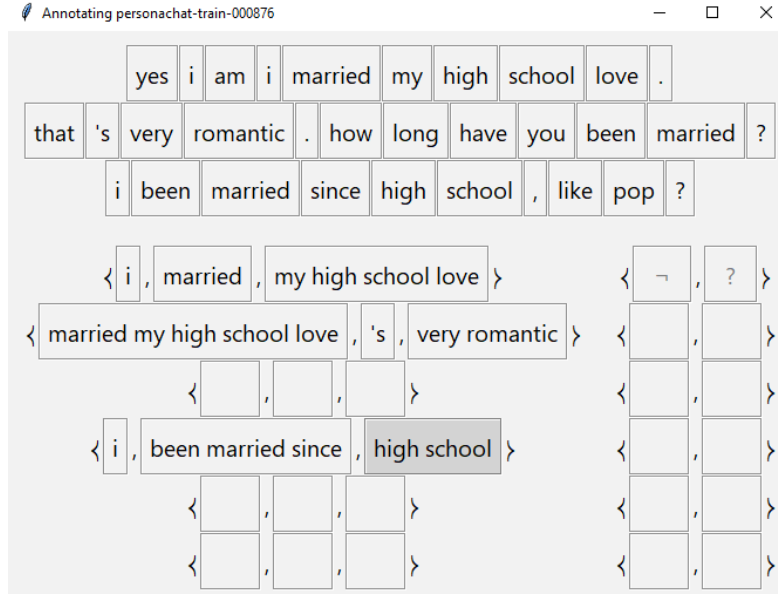

References

- [1] Yanran Li et al. “Dailydialog: A manually labelled multi-turn dialogue dataset”. In: *arXiv preprint arXiv:1710.03957* (2017).
- [2] Annie Louis, Dan Roth, and Filip Radlinski. “I’d rather just go to bed: Understanding Indirect Answers”. In: *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing*. 2020.
- [3] Brian MacWhinney and William O’Grady. *The handbook of language emergence*. John Wiley & Sons, 2015.
- [4] Saizheng Zhang et al. “Personalizing dialogue agents: I have a dog, do you have pets too?” In: *arXiv preprint arXiv:1801.07243* (2018).