

KONFIGURASI PRESTASHOP DEBIAN 10

1. Lihat interfaces pada Debian dengan perintah :

ip a

```
SERVER-1 [Running] - Oracle VirtualBox
File Machine View Input Devices Help
root@debian:~# ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host
        valid_lft forever preferred_lft forever
2: enp0s3: <BROADCAST,MULTICAST> mtu 1500 qdisc noop state DOWN group default qlen 1000
    link/ether 08:00:27:5d:62:f7 brd ff:ff:ff:ff:ff:ff
root@debian:~# _
```

2. Setting IP ADDRESS pada Debian (IP Address menyesuaikan pada soal UKK):

nano /etc/network/interfaces

```
GNU nano 3.2 /etc/network/interfaces
# This file describes the network interfaces available on your system
# and how to activate them. For more information, see interfaces(5).

source /etc/network/interfaces.d/*

# The loopback network interface
auto lo
iface lo inet loopback

auto enp0s3
iface enp0s3 inet static
    address 192.168.1.100/24
    gateway 192.168.1.1
```

3. Restart network pada Debian :

/etc/init.d/networking restart

```
root@debian:~# /etc/init.d/networking restart
[ ok ] Restarting networking (via systemctl): networking.service.
root@debian:~# _
```

4. Setting DNS google dengan perintah :

nano /etc/resolv.conf

setelah itu tambahkan : **nameserver 8.8.8.8**

```
GNU nano 3.2 /etc/resolv.conf
nameserver 8.8.8.8
```

5. Setelah restart network pastikan bisa ping pada google :

ping google.com

6. Setting repository Debian 10 dengan perintah :

nano /etc/apt/sources.list

kemudian edit repository seperti berikut

```
GNU nano 3.2 /etc/apt/sources.list
#
# deb cdrom:[Debian GNU/Linux 10.10.0 _Buster_ - Official amd64 DVD Binary-1 20210619-16:12]/ buster
# deb cdrom:[Debian GNU/Linux 10.10.0 _Buster_ - Official amd64 DVD Binary-1 20210619-16:12]/ buster
# Line commented out by installer because it failed to verify:
deb http://security.debian.org/debian-security buster/updates main contrib
# Line commented out by installer because it failed to verify:
# deb-src http://security.debian.org/debian-security buster/updates main contrib

# buster-updates, previously known as 'volatile'
# A network mirror was not selected during install. The following entries
# are provided as examples, but you should amend them as appropriate
# for your mirror of choice.
#
deb http://deb.debian.org/debian/ buster-updates main contrib
deb http://deb.debian.org/debian/ buster main contrib
```

7. Install beberapa paket pendukung sebagai berikut :

Apache2

Database mariadb

Php7.3

Dengan perintah sebagai berikut :

```
root@debian:~# apt install apache2 mariadb-server php php-mysql php-mbstring php-xml php
-intl php-curl php-gd php-zip
```

8. Setting database prestashop seperti dibawah ini :

mysql -u root -p

kemudian setting database seperti dibawah ini

```
root@debian:~# mysql -u root -p
Enter password:
Welcome to the MariaDB monitor. Commands end with ; or \g.
Your MariaDB connection id is 46
Server version: 10.3.39-MariaDB-0+deb10u2 Debian 10

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> create database prestashop;
Query OK, 1 row affected (0.000 sec)

MariaDB [(none)]> create user 'demit'@'localhost' identified by 'root';
Query OK, 0 rows affected (0.001 sec)

MariaDB [(none)]> grant all privileges on *.* to 'demit'@'localhost';
Query OK, 0 rows affected (0.000 sec)

MariaDB [(none)]> flush privileges;
Query OK, 0 rows affected (0.000 sec)

MariaDB [(none)]> exit
Bye
root@debian:~#
```

9. Install paket wget dan unzip :

apt install wget unzip

10. Download prestashop menggunakan perintah wget :

wget https://github.com/PrestaShop/PrestaShop/releases/download/8.2.0/prestashop_8.2.0.zip

11. Setelah terdownload ekstrak file prestashop :

unzip prestashop_8.2.0.zip

12. Setelah itu pindah file **prestashop.zip** ke directory html :

mv prestashop.zip /var/www/html/

13. Setelah itu masuk ke directory html :

cd /var/www/html

14. Hapus file index.html :

rm index.html

15. Ekstrak file prestashop :

unzip prestashop.zip

16. Mengubah izin untuk memodifikasi berkas atau directory dengan perintah :

chmod 777 prestashop.zip

17. Mengubah pemilik berkas atau directory prestashop dengan perintah :

chown www-data -R *


18. Mengaktifkan mod_rewrite :

a2enmod rewrite


19. Restart apache2 :

/etc/init.d/apache2 restart

20. Masuk ke prestashop menggunakan *ip Debian* dibrowser :

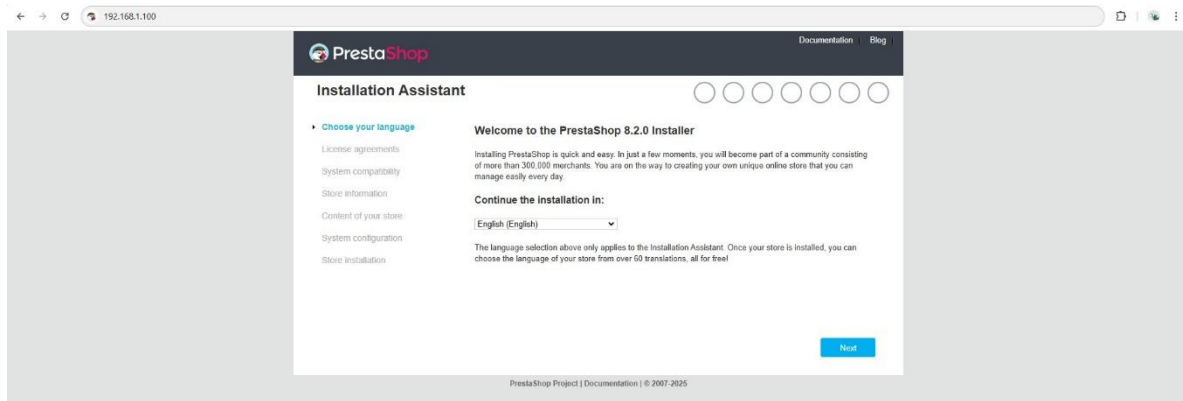

21. Centang pada bagian berikut :

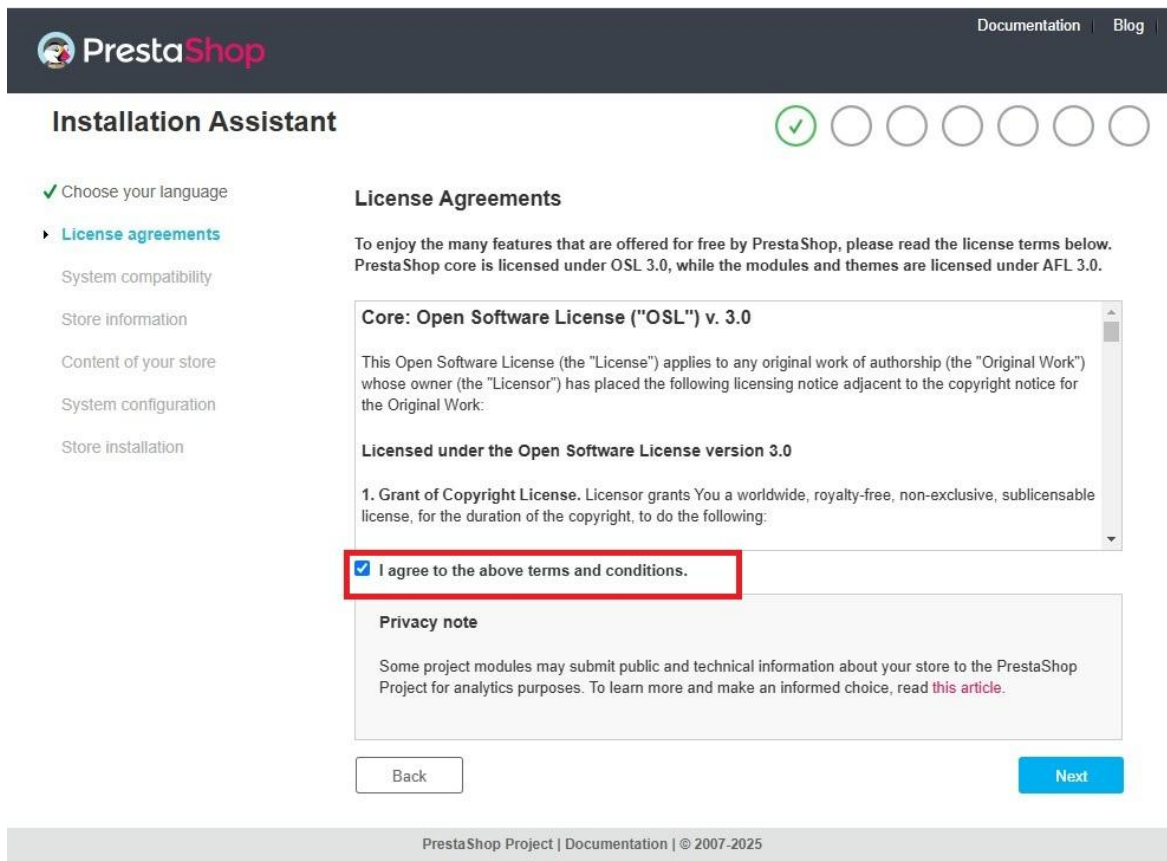

22. Ubah dan tambahkan beberapa bagian sebagai berikut :

Installation Assistant

✓ Choose your language

✓ License agreements

✓ System compatibility

▶ **Store information**

Content of your store

System configuration

Store installation

Information about your Store

Store name

TKJ Shop

Main activity

Computer Hardware and Softw...

Country

Indonesia

Store timezone

Asia/Jakarta

Enable SSL

☐ Yes ☒ No

Your Account

First name

tkj

Last name

musake

E-mail address

tkjmusake@gmail.com

Store password

Very strong

✓ Enter a password between 8 and 72 characters

✓ The minimum score must be: Strong

Re-type to confirm

Back

Next

23. Pilih next

Documentation | Blog

Installation Assistant

✓ Choose your language

✓ License agreements

✓ System compatibility

✓ Store information

▶ **Content of your store**

System configuration

Store installation

Content of your store

Installation of demo products

☒ Yes ☐ No

Installation of modules

☒ Install all modules (recommended)
☐ Select the modules to install

Demo products are a good way to learn how to use PrestaShop. You should install them if you are not familiar with it.

If you are using PrestaShop for the first time, you should install all modules now and uninstall the ones you don't need later.

Back

Next

24. Tambahkan

- Nama database
- User database
- Password database

 Documentation | Blog

Installation Assistant

- ✓ Choose your language
- ✓ License agreements
- ✓ System compatibility
- ✓ Store information
- ✓ Content of your store
- System configuration
- Store installation

Configure your database by filling out the following fields

To use PrestaShop, you must **create a database** to collect all of your store's data-related activities. Please complete the fields below in order for PrestaShop to connect to your database.

Database server address
The default port is 3306. To use a different port, add the port number at the end of your server's address i.e "4242"

Database name

Database login

Database password

Tables prefix

Drop existing tables

☒

Test your database connection now!

Back

Next

25. Tunggu sampai proses selesai

 Documentation | Blog

Installation Assistant

- ✓ Choose your language
- ✓ License agreements
- ✓ System compatibility
- ✓ Store information
- ✓ Content of your store
- ✓ System configuration
- Store installation


Create database tables...

12%

Create file parameters

Create database tables

26. Pilih back office

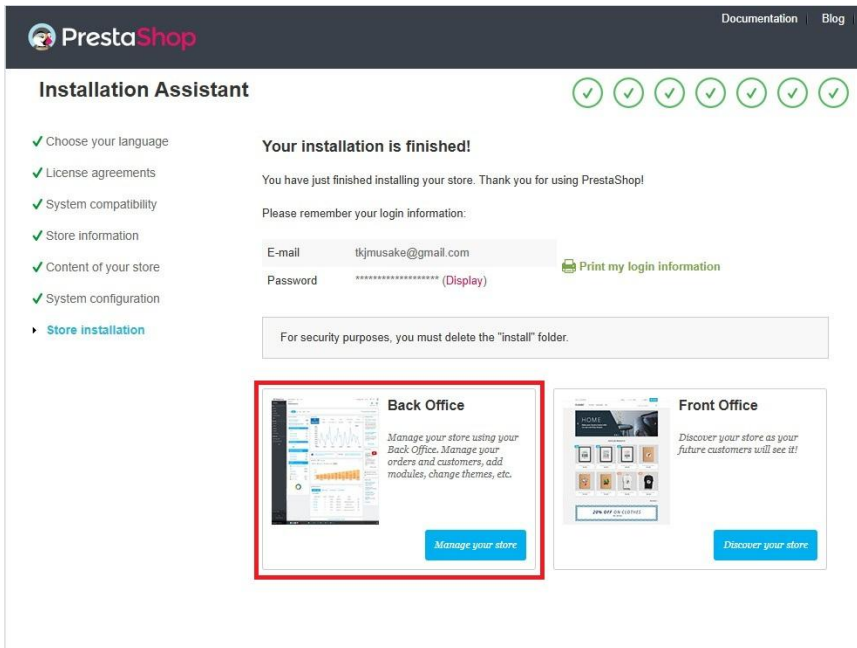

27. Hapus folder install dan ganti nama folder admin dengan perintah :

```
rm -r install  
mv admin/ admintkj
```

28. Selesai

