

Programming with Python

1. Organisation

Thomas Weise (汤卫思)

tweise@hfu.edu.cn · <https://thomasweise.github.io>

School of Artificial Intelligence and Big Data
Hefei University
Hefei, Anhui, China

人工智能与大数据学院
合肥大学
中国安徽省合肥市

Programming with Python



Dies ist ein Kurs über das Programmieren mit der Programmiersprache Python an der Universität Hefei (合肥大学).

Die Webseite mit dem Lehrmaterial dieses Kurses ist <https://thomasweise.github.io/programmingWithPython> (siehe auch den QR-Code unten rechts). Dort können Sie das Kursbuch (in Englisch) und diese Slides finden. Das Repository mit den Beispielprogrammen in Python finden Sie unter <https://github.com/thomasWeise/programmingWithPythonCode>.



Outline



1. Willkommen
2. Lehrer
3. Zeitplan
4. Aspekte
5. Lehrmaterial
6. Ökosystem
7. Voraussetzungen
8. Warnung
9. Zusammenfassung





Willkommen



Willkommen

- Willkommen zum Kurs **Programmieren mit Python.**



Willkommen

- Willkommen zum Kurs **Programmieren mit Python**.
- Wir befinden uns im Wintersemester 2026/2027 an der Universität Hefei (合肥大学) in der schönen Stadt Hefei (合肥市) in der Provinz Anhui (安徽省) in China.



Willkommen

- Willkommen zum Kurs **Programmieren mit Python**.
- Wir befinden uns im Wintersemester 2026/2027 an der Universität Hefei (合肥大学) in der schönen Stadt Hefei (合肥市) in der Provinz Anhui (安徽省) in China.
- Dieser Kurs lehrt das Programmieren mit der Programmiersprache Python.



Willkommen

- Willkommen zum Kurs **Programmieren mit Python**.
- Wir befinden uns im Wintersemester 2026/2027 an der Universität Hefei (合肥大学) in der schönen Stadt Hefei (合肥市) in der Provinz Anhui (安徽省) in China.
- Dieser Kurs lehrt das Programmieren mit der Programmiersprache Python.
- Der Kurs wird in deutscher Sprache unterrichtet.





Lehrer



Lehrer

- Prof. Dr. Thomas WEISE (汤卫思)



Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.



Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.



© Ewald Judd CC BY 4.0

Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.



© Ewald Judt CC BY 4.0



© Kolossos CC BY-SA 3.0

Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.



© Ewald Judt CC BY 4.0



© Ewald Judt CC BY 4.0



© Kolossos CC BY-SA 3.0

Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.



© Ewald Judt CC BY 4.0



© Ewald Judt CC BY 4.0



© Kolossos CC BY-SA 3.0

Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.



© Ewald Judt CC BY 4.0



© eagle77 Pixabay Content License



© Kolossos CC BY-SA 3.0

Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.



© Ewald Judt CC BY 4.0



© eagle77 Pixabay Content License



© Kolossos CC BY-SA 3.0

© eagle77 Pixabay Content License

Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.



© Ewald Judt CC BY 4.0



© eagle77 Pixabay Content License

© Firstclasspixel Pixabay Content License




© Kolossos CC BY-SA 3.0

© eagle77 Pixabay Content License

Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.

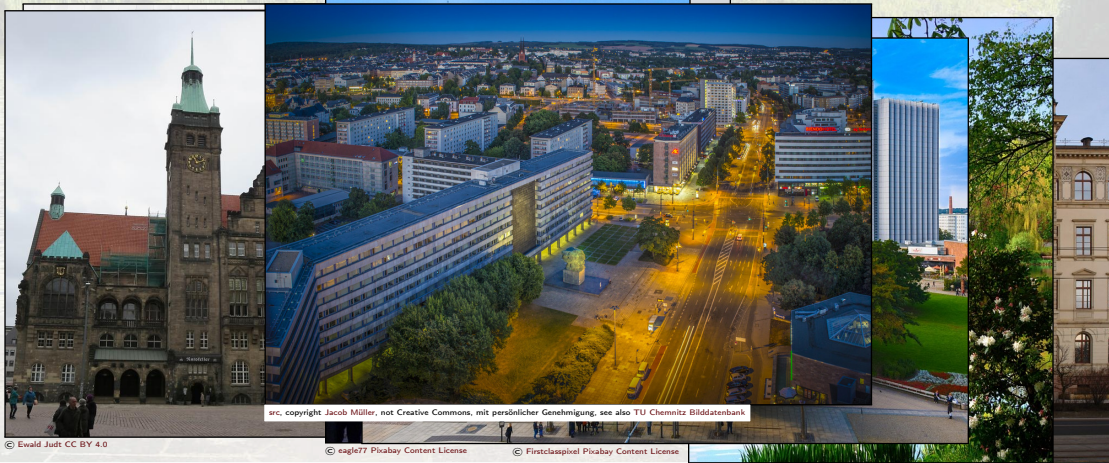


src, copyright Jacob Müller, not Creative Commons, mit persönlicher Genehmigung, see also TU Chemnitz Bilddatenbank

Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.

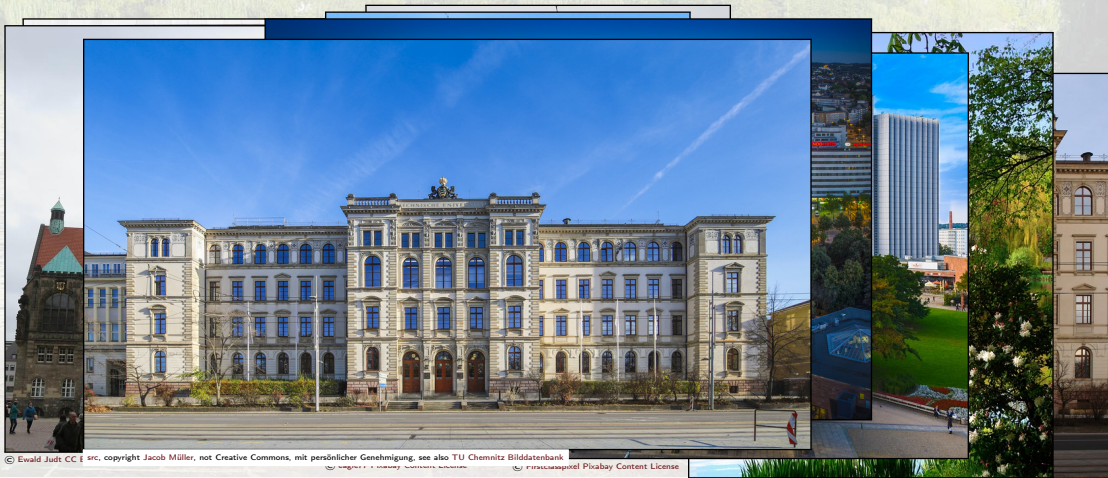

Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.



src, copyright Jacob Müller, not Creative Commons, mit persönlicher Genehmigung, see also TU Chemnitz Bilddatenbank

© Ewald Judt CC BY-SA 3.0 src, copyright Jacob Müller, not Creative Commons, mit persönlicher Genehmigung, see also TU Chemnitz Bilddatenbank

© sagie77 Pixabay Content License

© firstclasspixel Pixabay Content License

© Kolossos CC BY-SA 3.0

© sagie77 Pixabay Content License

Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.



src, copyright Jacob Müller, not Creative Commons, mit persönlicher Genehmigung, see also TU Chemnitz Bilddatenbank




Genehmigung, see also TU Chemnitz Bilddatenbank

Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.

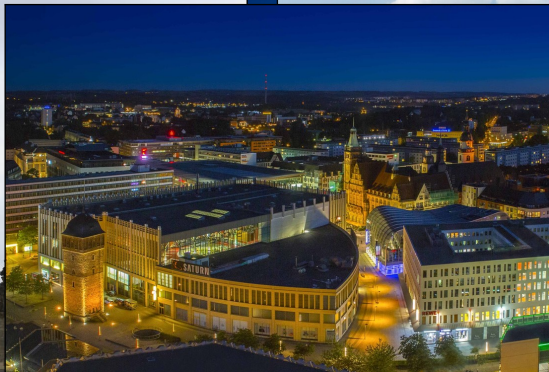

src, copyright Jacob Müller, not Creative Commons, mit persönlicher Genehmigung, see also TU Chemnitz Bilddatenbank



src, copyright Jacob Müller, not Creative Commons, mit persönlicher Genehmigung, see also TU Chemnitz Bilddatenbank

Genehmigung, see also TU Chemnitz Bilddatenbank

Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.
- Doktor der Informatik an der Universität Kassel in Hessen, Deutschland, im Jahr 2009.



Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.
- Doktor der Informatik an der Universität Kassel in Hessen, Deutschland, im Jahr 2009.



© till_westhof Pixabay Content License

Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.
- Doktor der Informatik an der Universität Kassel in Hessen, Deutschland, im Jahr 2009.



© till_westhof Pixabay Content License



© webandi Pixabay Content License

Lehrer




- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.
- Doktor der Informatik an der Universität Kassel in Hessen, Deutschland, im Jahr 2009.



© till_westhof Pixabay Content License



© webandi Pixabay Content License

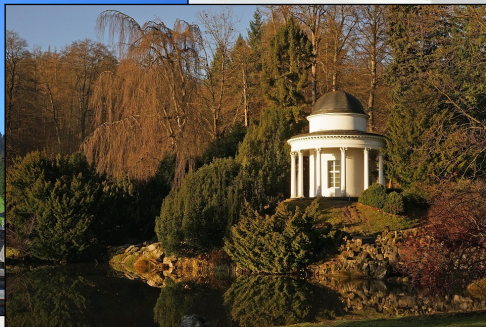

© Barni1 Pixabay Content License

Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.
- Doktor der Informatik an der Universität Kassel in Hessen, Deutschland, im Jahr 2009.



© till_westhof Pixabay Content License



© webar

© Barni1 Pixabay Content License



ense

Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.
- Doktor der Informatik an der Universität Kassel in Hessen, Deutschland, im Jahr 2009.



U N I K A S S E L
V E R S I T Ä T

Copyright Universität Kassel, mit Genehmigung der Pressestelle der Universität Kassel
© till_westhof Pixabay Content License

© webar

© Barni1 Pixabay Content License

Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.
- Doktor der Informatik an der Universität Kassel in Hessen, Deutschland, im Jahr 2009.



U N I K A S S E L
V E R S I T Ä T

Copyright Universität Kassel, mit Genehmigung der Pressestelle der Universität Kassel
© till_westhof Pixabay Content License

© webar

© Barni1 Pixabay Content License

Copyright Universität Kassel, mit Genehmigung der Pressestelle der Universität Kassel

Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.
- Doktor der Informatik an der Universität Kassel in Hessen, Deutschland, im Jahr 2009.




U N I K A S S
V E R S I T Ä T

Copyright Universität Kassel, mit Genehmigung der Pressestelle der Universität Kassel
© till_westhof Pixabay Content License



Copyright Universität Kassel, mit Genehmigung der Pressestelle der Universität Kassel

© webar



© Barni1 Pixabay Content License

© Barni1 Pixabay Content License

Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.
- Doktor der Informatik an der Universität Kassel in Hessen, Deutschland, im Jahr 2009.



UNI KASSEL
VERSITÄT

Copyright Universität Kassel, mit Genehmigung der Pressestelle der Universität Kassel
© till_westhof Pixabay Content License



Copyright Universität Kassel, mit Genehmigung der

© webar



© Barni1 P



Copyright Universität Kassel, mit Genehmigung der Pressestelle der Universität Kassel

Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.
- Doktor der Informatik an der Universität Kassel in Hessen, Deutschland, im Jahr 2009.




U N I K A
V E R S

Copyright Universität Kassel, mit Genehmigung der
© till_westhof Pixabay Content License



Copyright Universität Kassel, mit Genehmigung der Pressestelle der Universität Kassel

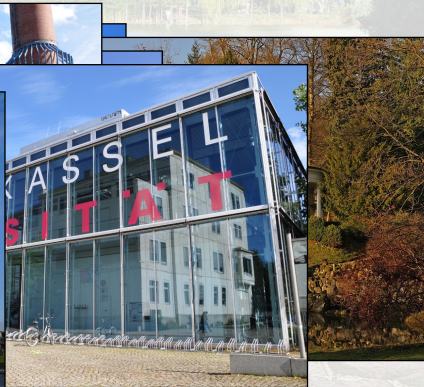

g der Pressestelle der Universität Kassel

Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.
- Doktor der Informatik an der Universität Kassel in Hessen, Deutschland, im Jahr 2009.
- 2009-2011: PostDoc (博士后) an der University of Science and Technology of China (USTC, 中国科学技术大学) in Hefei, Anhui, China.



Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.
- Doktor der Informatik an der Universität Kassel in Hessen, Deutschland, im Jahr 2009.
- 2009-2011: PostDoc (博士后) an der University of Science and Technology of China (USTC, 中国科学技术大学) in Hefei, Anhui, China.



Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.
- Doktor der Informatik an der Universität Kassel in Hessen, Deutschland, im Jahr 2009.
- 2009-2011: PostDoc (博士后) an der University of Science and Technology of China (USTC, 中国科学技术大学) in Hefei, Anhui, China.



Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.
- Doktor der Informatik an der Universität Kassel in Hessen, Deutschland, im Jahr 2009.
- 2009-2011: PostDoc (博士后) an der University of Science and Technology of China (USTC, 中国科学技术大学) in Hefei, Anhui, China.



Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.
- Doktor der Informatik an der Universität Kassel in Hessen, Deutschland, im Jahr 2009.
- 2009-2011: PostDoc (博士后) an der University of Science and Technology of China (USTC, 中国科学技术大学) in Hefei, Anhui, China.



Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.
- Doktor der Informatik an der Universität Kassel in Hessen, Deutschland, im Jahr 2009.
- 2009-2011: PostDoc (博士后) an der University of Science and Technology of China (USTC, 中国科学技术大学) in Hefei, Anhui, China.



Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.
- Doktor der Informatik an der Universität Kassel in Hessen, Deutschland, im Jahr 2009.
- 2009-2011: PostDoc (博士后) an der University of Science and Technology of China (USTC, 中国科学技术大学) in Hefei, Anhui, China.



Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.
- Doktor der Informatik an der Universität Kassel in Hessen, Deutschland, im Jahr 2009.
- 2009-2011: PostDoc (博士后) an der University of Science and Technology of China (USTC, 中国科学技术大学) in Hefei, Anhui, China.



Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.
- Doktor der Informatik an der Universität Kassel in Hessen, Deutschland, im Jahr 2009.
- 2009-2011: PostDoc (博士后) an der University of Science and Technology of China (USTC, 中国科学技术大学) in Hefei, Anhui, China.



Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.
- Doktor der Informatik an der Universität Kassel in Hessen, Deutschland, im Jahr 2009.
- 2009-2011: PostDoc (博士后) an der University of Science and Technology of China (USTC, 中国科学技术大学) in Hefei, Anhui, China.



Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.
- Doktor der Informatik an der Universität Kassel in Hessen, Deutschland, im Jahr 2009.
- 2009-2011: PostDoc (博士后) an der University of Science and Technology of China (USTC, 中国科学技术大学) in Hefei, Anhui, China.



Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.
- Doktor der Informatik an der Universität Kassel in Hessen, Deutschland, im Jahr 2009.
- 2009-2011: PostDoc (博士后) an der University of Science and Technology of China (USTC, 中国科学技术大学) in Hefei, Anhui, China.



Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.
- Doktor der Informatik an der Universität Kassel in Hessen, Deutschland, im Jahr 2009.
- 2009-2011: PostDoc (博士后) an der University of Science and Technology of China (USTC, 中国科学技术大学) in Hefei, Anhui, China.



Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.
- Doktor der Informatik an der Universität Kassel in Hessen, Deutschland, im Jahr 2009.
- 2009-2011: PostDoc (博士后) an der University of Science and Technology of China (USTC, 中国科学技术大学) in Hefei, Anhui, China.
- 2011-2016: Associate Professor (副教授) an der USTC.



Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.
- Doktor der Informatik an der Universität Kassel in Hessen, Deutschland, im Jahr 2009.
- 2009-2011: PostDoc (博士后) an der University of Science and Technology of China (USTC, 中国科学技术大学) in Hefei, Anhui, China.
- 2011-2016: Associate Professor (副教授) an der USTC.
- Seit 2016: Full Professor (教授) der Universität Hefei (合肥大学) in Hefei, Anhui, China.

Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.
- Doktor der Informatik an der Universität Kassel in Hessen, Deutschland, im Jahr 2009.
- 2009-2011: PostDoc (博士后) an der University of Science and Technology of China (USTC, 中国科学技术大学) in Hefei, Anhui, China.
- 2011-2016: Associate Professor (副教授) an der USTC.
- Seit 2016: Full Professor (教授) der Universität Hefei (合肥大学) in Hefei, Anhui, China.
- Forschungsfeld: Optimierungsverfahren, Metaheuristiken, Operations Research

Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.
- Doktor der Informatik an der Universität Kassel in Hessen, Deutschland, im Jahr 2009.
- 2009-2011: PostDoc (博士后) an der University of Science and Technology of China (USTC, 中国科学技术大学) in Hefei, Anhui, China.
- 2011-2016: Associate Professor (副教授) an der USTC.
- Seit 2016: Full Professor (教授) der Universität Hefei (合肥大学) in Hefei, Anhui, China.
- Forschungsfeld: Optimierungsverfahren, Metaheuristiken, Operations Research
- 150 publications, 8 in 中国科学院分1区, 2 in 中国计算机学会A类, 8 in 中国人工智能学会A类, and of 8 in 中国自动化学会A+类, and 2 in 清华大学计算机学科A群; PI of, e.g., 国家自然科学基金委员会 面上项目 and 外国青年学者研究基金, 中国科学院外籍青年科学家计划, and 中国博士后科学基金会 projects.

Lehrer



- Prof. Dr. Thomas WEISE (汤卫思)
- Diplom-Informatiker (硕士) der TU Chemnitz in Sachsen, Deutschland, im Jahr 2005.
- Doktor der Informatik an der Universität Kassel in Hessen, Deutschland, im Jahr 2009.
- 2009-2011: PostDoc (博士后) an der University of Science and Technology of China (USTC, 中国科学技术大学) in Hefei, Anhui, China.
- 2011-2016: Associate Professor (副教授) an der USTC.
- Seit 2016: Full Professor (教授) der Universität Hefei (合肥大学) in Hefei, Anhui, China.
- Forschungsfeld: Optimierungsverfahren, Metaheuristiken, Operations Research
- 150 publications, 8 in 中国科学院分1区, 2 in 中国计算机学会A类, 8 in 中国人工智能学会A类, and of 8 in 中国自动化学会A+类, and 2 in 清华大学计算机学科A群; PI of, e.g., 国家自然科学基金委员会 面上项目 and 外国青年学者研究基金, 中国科学院外籍青年科学家计划, and 中国博士后科学基金会 projects.
- Kontakt: tweise@hfuu.edu.cn.



Zeitplan



Zeitplan: Python 2026/2027 1



Vorlesung / Übung						Vorlesung / Übung					
周次	月-日	星期	节	Zeit	Raum	周次	月-日	星期	节	Zeit	Raum
6	10-12	Mo	1-2	08:20-10:00	36-202	6	10-14	Mi	1-2	08:20-10:00	36-202
7	10-19	Mo	1-2	08:20-10:00	36-202	7	10-21	Mi	1-2	08:20-10:00	36-202
7	10-23	Fr	3-4	10:30-12:10	37-410						
8	10-26	Mo	1-2	08:20-10:00	36-202	8	10-28	Mi	1-2	08:20-10:00	36-202
8	10-30	Fr	3-4	10:30-12:10	37-410						
9	11-02	Mo	1-2	08:20-10:00	36-202	9	11-04	Mi	1-2	08:20-10:00	36-202
9	11-06	Fr	3-4	10:30-12:10	37-410						
10	11-09	Mo	1-2	08:20-10:00	36-202	10	11-11	Mi	1-2	08:20-10:00	36-202
10	11-13	Fr	3-4	10:30-12:10	37-410						
11	11-16	Mo	1-2	08:20-10:00	36-202	11	11-18	Mi	1-2	08:20-10:00	36-202
11	11-20	Fr	3-4	10:30-12:10	37-410						
12	11-23	Mo	1-2	08:20-10:00	36-202	12	11-25	Mi	1-2	08:20-10:00	36-202
12	11-27	Fr	3-4	10:30-12:10	37-410						
13	11-30	Mo	1-2	08:20-10:00	36-202	13	12-04	Fr	3-4	10:30-12:10	37-410
14	12-07	Mo	1-2	08:20-10:00	36-202	14	12-11	Fr	3-4	10:30-12:10	37-410



Aspekte



Aspekte



Aspekte

- Die Durchführung des Kurses hat drei wesentliche Aspekte von meiner Seite



Aspekte



- Die Durchführung des Kurses hat drei wesentliche Aspekte von meiner Seite:
 1. Alles, was gelehrt wird, wird aktiv praktisch und selbstständig von den Studierenden ausprobiert.

Aspekte



- Die Durchführung des Kurses hat drei wesentliche Aspekte von meiner Seite:
 1. Alles, was gelehrt wird, wird aktiv praktisch und selbstständig von den Studierenden ausprobiert. **Auf Ihrem eigenen Laptop-Computer.**

Aspekte



- Die Durchführung des Kurses hat drei wesentliche Aspekte von meiner Seite:
 1. Alles, was gelehrt wird, wird aktiv praktisch und selbstständig von den Studierenden ausprobiert. **Auf Ihrem eigenen Laptop-Computer.**
 2. Umfangreiches unterstützendes Lehrmaterial wird zur Verfügung gestellt.

Aspekte



- Die Durchführung des Kurses hat drei wesentliche Aspekte von meiner Seite:
 1. Alles, was gelehrt wird, wird aktiv praktisch und selbstständig von den Studierenden ausprobiert. **Auf Ihrem eigenen Laptop-Computer.**
 2. Umfangreiches unterstützendes Lehrmaterial wird zur Verfügung gestellt. Alles kann nachgelesen und nachvollzogen werden.

Aspekte



- Die Durchführung des Kurses hat drei wesentliche Aspekte von meiner Seite:
 1. Alles, was gelehrt wird, wird aktiv praktisch und selbstständig von den Studierenden ausprobiert. **Auf Ihrem eigenen Laptop-Computer.**
 2. Umfangreiches unterstützendes Lehrmaterial wird zur Verfügung gestellt. Alles kann nachgelesen und nachvollzogen werden.
 3. Das ist keine Arbeit, kein Auswendiglernen.

Aspekte



- Die Durchführung des Kurses hat drei wesentliche Aspekte von meiner Seite:
 1. Alles, was gelehrt wird, wird aktiv praktisch und selbstständig von den Studierenden ausprobiert. **Auf Ihrem eigenen Laptop-Computer.**
 2. Umfangreiches unterstützendes Lehrmaterial wird zur Verfügung gestellt. Alles kann nachgelesen und nachvollzogen werden.
 3. Das ist keine Arbeit, kein Auswendiglernen. Es soll nicht langweilig sein.

Aspekte




- Die Durchführung des Kurses hat drei wesentliche Aspekte von meiner Seite:
 1. Alles, was gelehrt wird, wird aktiv praktisch und selbstständig von den Studierenden ausprobiert. **Auf Ihrem eigenen Laptop-Computer.**
 2. Umfangreiches unterstützendes Lehrmaterial wird zur Verfügung gestellt. Alles kann nachgelesen und nachvollzogen werden.
 3. Das ist keine Arbeit, kein Auswendiglernen. Es soll nicht langweilig sein. Das Ziel ist, dass Sie Freude beim Lernen und bei der Arbeit mit unserem Themengebiet fühlen.



Lehrmaterial





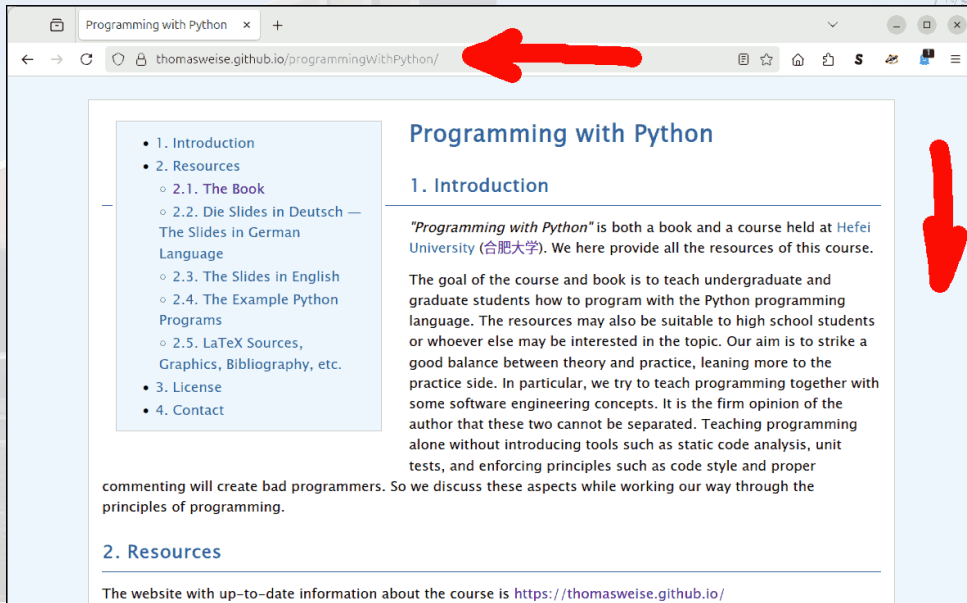

The screenshot shows a web browser window with the address bar displaying `thomasweise.github.io/programmingWithPython/`. A red arrow points to the URL. The page title is "Programming with Python". On the left, a sidebar contains a table of contents with items like "1. Introduction", "2. Resources", and "2.1. The Book". A red arrow points to this sidebar. The main content area has a section titled "1. Introduction" which describes the course and its goals. At the bottom, it provides a link to the up-to-date website: `https://thomasweise.github.io/`.

Programming with Python

- 1. Introduction
- 2. Resources
 - 2.1. The Book
 - 2.2. Die Slides in Deutsch — The Slides in German Language
 - 2.3. The Slides in English
 - 2.4. The Example Python Programs
 - 2.5. LaTeX Sources, Graphics, Bibliography, etc.
- 3. License
- 4. Contact

1. Introduction

"Programming with Python" is both a book and a course held at [Hefei University \(合肥大学\)](#). We here provide all the resources of this course.

The goal of the course and book is to teach undergraduate and graduate students how to program with the Python programming language. The resources may also be suitable to high school students or whoever else may be interested in the topic. Our aim is to strike a good balance between theory and practice, leaning more to the practice side. In particular, we try to teach programming together with some software engineering concepts. It is the firm opinion of the author that these two cannot be separated. Teaching programming alone without introducing tools such as static code analysis, unit tests, and enforcing principles such as code style and proper commenting will create bad programmers. So we discuss these aspects while working our way through the principles of programming.

2. Resources

The website with up-to-date information about the course is <https://thomasweise.github.io/>

Programming with Python x +

← → ↻ 🔒 thomasweise.github.io/programmingWithPython/ 📄 ☆ 🏠 📄 S 🗑️ 📄 ☰

alone without introducing tools such as static code analysis, unit tests, and enforcing principles such as code style and proper commenting will create bad programmers. So we discuss these aspects while working our way through the principles of programming.

2. Resources

The website with up-to-date information about the course is <https://thomasweise.github.io/programmingWithPython/>.

2.1. The Book

The book itself can be downloaded as pdf at <https://thomasweise.github.io/programmingWithPython/programmingWithPython.pdf>.

2.2. Die Slides in Deutsch — The Slides in German Language

Die Slides zum Kurs in deutscher Sprache können unter <https://thomasweise.github.io/programmingWithPythonSlidesDE> gefunden werden und sind hier aufgelistet:

1. Organisation
2. Einleitung
3. Python Installieren
4. PyCharm Installieren
5. Programme Erstellen und Ausführen
6. Beispiele Herunterladen
7. Der Datentyp `int`



- Ich habe für diesen Kurs ein Buch geschrieben: *Programming with Python*²⁵⁹.

Buch



- Ich habe für diesen Kurs ein Buch geschrieben: *Programming with Python*²⁵⁹.
- Das Buch ist in Englisch geschrieben.

Buch



- Ich habe für diesen Kurs ein Buch geschrieben: *Programming with Python*²⁵⁹.
- Das Buch ist in Englisch geschrieben.
- Dieses Buch steht kostenlos im Internet.

- Ich habe für diesen Kurs ein Buch geschrieben: *Programming with Python*²⁵⁹.
- Das Buch ist in Englisch geschrieben.
- Dieses Buch steht kostenlos im Internet.
- Es wird noch aktiv weiterentwickelt.



- Ich habe für diesen Kurs ein Buch geschrieben: *Programming with Python*²⁵⁹.
- Das Buch ist in Englisch geschrieben.
- Dieses Buch steht kostenlos im Internet.
- Es wird noch aktiv weiterentwickelt.
- **Sie** können mir helfen, es weiterzuentwickeln, durch Fragen, Anregungen, das Finden von Fehlern, usw.



- Ich habe für diesen Kurs ein Buch geschrieben: *Programming with Python*²⁵⁹.
- Das Buch ist in Englisch geschrieben.
- Dieses Buch steht kostenlos im Internet.
- Es wird noch aktiv weiterentwickelt.
- **Sie** können mir helfen, es weiterzuentwickeln, durch Fragen, Anregungen, das Finden von Fehlern, usw.

URL: <https://thomasweise.github.io/programmingWithPython/programmingWithPython.pdf>

Buch: Features

- Das Buch ist explizit für Anfänger auf dem Gebiet geschrieben.



Buch: Features

- Das Buch ist explizit für Anfänger auf dem Gebiet geschrieben.
- Es beinhaltet viele Beispiele, die Schritt-für-Schritt erklärt werden.



Buch: Features



- Das Buch ist explizit für Anfänger auf dem Gebiet geschrieben.
- Es beinhaltet viele Beispiele, die Schritt-für-Schritt erklärt werden.
- Fachbegriffe, die Sie vielleicht nicht kennen, werden in einem Glossary erklärt.

Buch: Features



- Das Buch ist explizit für Anfänger auf dem Gebiet geschrieben.
- Es beinhaltet viele Beispiele, die Schritt-für-Schritt erklärt werden.
- Fachbegriffe, die Sie vielleicht nicht kennen, werden in einem Glossary erklärt.
- Das Glossary beinhaltet auch Abkürzungen, Programme, mathematische Notationen, usw.

Buch: Features



- Das Buch ist explizit für Anfänger auf dem Gebiet geschrieben.
- Es beinhaltet viele Beispiele, die Schritt-für-Schritt erklärt werden.
- Fachbegriffe, die Sie vielleicht nicht kennen, werden in einem Glossary erklärt.
- Das Glossary beinhaltet auch Abkürzungen, Programme, mathematische Notationen, usw.
- Zum Beispiel `stdin`, UCS, UML, HTML, JSON, 1NF, breakpoint, venv, client-server architecture, $\mathbb{R}$, $\mathcal{NP}$ -hard, `psql`, `PyPI`, `Matplotlib`...

Buch: Features



- Das Buch ist explizit für Anfänger auf dem Gebiet geschrieben.
- Es beinhaltet viele Beispiele, die Schritt-für-Schritt erklärt werden.
- Fachbegriffe, die Sie vielleicht nicht kennen, werden in einem Glossary erklärt.
- Das Glossary beinhaltet auch Abkürzungen, Programme, mathematische Notationen, usw.
- Zum Beispiel `stdin`, UCS, UML, HTML, JSON, 1NF, breakpoint, venv, client-server architecture, $\mathbb{R}$, $\mathcal{NP}$ -hard, `psql`, `PyPI`, `Matplotlib`...
- Diese Terme sind jeweils im Text auf das Glossary verlinkt.

Buch: Features



- Das Buch ist explizit für Anfänger auf dem Gebiet geschrieben.
- Es beinhaltet viele Beispiele, die Schritt-für-Schritt erklärt werden.
- Fachbegriffe, die Sie vielleicht nicht kennen, werden in einem Glossary erklärt.
- Das Glossary beinhaltet auch Abkürzungen, Programme, mathematische Notationen, usw.
- Zum Beispiel `stdin`, UCS, UML, HTML, JSON, 1NF, breakpoint, venv, client-server architecture, $\mathbb{R}$, $\mathcal{NP}$ -hard, `psql`, `PyPI`, `Matplotlib`...
- Diese Terme sind jeweils im Text auf das Glossary verlinkt.
- Und im Glossary gibt es dann immer weiterführende Literaturhinweise.

Slides und Übungen/Fragen



- Die Slides zu diesem Kurs sind ebenfalls auf der Kurswebseite online.

Slides und Übungen/Fragen



- Die Slides zu diesem Kurs sind ebenfalls auf der Kurswebseite online.
- Ebenso finden Sie eine Liste mit Übungsfragen auf der Kurswebseite.

Slides und Übungen/Fragen



- Die Slides zu diesem Kurs sind ebenfalls auf der Kurswebseite online.
- Ebenso finden Sie eine Liste mit Übungsfragen auf der Kurswebseite.
- URL: <https://thomasweise.github.io/programmingWithPython>

Beispiele



- In diesem Kurs werden wir sehr viele Beispiele verwenden.

```
1 print("Hello World!")
```

↓ `python3 very_first_program.py` ↓

```
1 Hello World!
```

Beispiele



- In diesem Kurs werden wir sehr viele Beispiele verwenden.
- Sie können (und sollen!) also jeden Schritt jedes Beispiels genau nachvollziehen.

```
1 print("Hello World!")
```

↓ `python3 very_first_program.py` ↓

```
1 Hello World!
```

Beispiele



- In diesem Kurs werden wir sehr viele Beispiele verwenden.
- Sie können (und sollen!) also jeden Schritt jedes Beispiels genau nachvollziehen.
- Im Buch finden Sie jeweils im Titel des Programms gleich noch den Link zum Sourcecode auf GitHub.

```
1 print("Hello World!")
```

↓ `python3 very_first_program.py` ↓

```
1 Hello World!
```

Komplexere Beispielprogramme



- Für einige Beispiele mit komplexeren Kommandos werden der Programmcode, die Kommandozeile zu dessen Ausführung, der standard output stream (stdout)¹³⁷, der Exit-Code¹³⁵, und die Softwareversion mit angezeigt.

Link zur Datei auf Github

Listing 4.15: Listing 4.11, but `int` the variable explicitly hinted as `int`. (stored in file `variable_types_wrong_hints_1.py`; output in Listing 4.16)

```
1 int_var: int = 1 + 7 # Create a variable hinted as integer.
2 print(type(int_var)) # This prints "<class 'int'>".
3
4 int_var = int_var / 3 # / returns a float, but we may expect an int?
5 print(type(int_var)) # This now prints "<class 'float'>".
```

↓ `python3 variable_types_wrong_hints_1.py` ↓

Listing 4.16: The stdout of the program `variable_types_wrong_hints_1.py` given in Listing 4.15.

```
1 <class 'int'>
2 <class 'float'>
```

Kommando im Terminal

Listing 4.19: The results of static type checking the program `variable_types_wrong_hints_1.py` with Mypy of the program `main` in Listing 4.15.

```
1 $ mypy variable_types_wrong_hints_1.py --no-strict-optional --check-untyped
   ↳ -defs
2 variable_types_wrong_hints_1.py:4: error: Incompatible types in assignment
   ↳ (expression has type "float", variable has type "int") [assignment]
3 Found 1 error in 1 file (checked 1 source file)
4 # mypy 1.16.1 failed with exit code 1.
```

Softwareversion, Ergebnis, und Exit Code

Komplexere Beispielprogramme



- Für einige Beispiele mit komplexeren Kommandos werden der Programmcode, die Kommandozeile zu dessen Ausführung, der standard output stream (stdout)¹³⁷, der Exit-Kode¹³⁵, und die Softwareversion mit angezeigt.
- Natürlich mit einem Link zum Code auf GitHub.

Link zur Datei auf Github

Listing 4.15: Listing 4.11, but  the variable explicitly hinted as `int`. (stored in file `variable_types_wrong_hints_1.py`; output in Listing 4.16)

```
1 int_var: int = 1 + 7 # Create a variable hinted as integer.
2 print(type(int_var)) # This prints "<class 'int'>".
3
4 int_var = int_var / 3 # / returns a float, but we may expect an int?
5 print(type(int_var)) # This now prints "<class 'float'>".
```

↓ `python3 variable_types_wrong_hints_1.py` ↓

Listing 4.16: The stdout of the program `variable_types_wrong_hints_1.py` given in Listing 4.15.

```
1 <class 'int'>
2 <class 'float'>
```

Kommando im Terminal

Listing 4.19: The results of static type checking the program `variable_types_wrong_hints_1.py` with Mypy of the program  given in Listing 4.15.

```
1 $ mypy variable_types_wrong_hints_1.py --no-strict-optional --check-untyped
   ↳ -defs
2 variable_types_wrong_hints_1.py:4: error: Incompatible types in assignment
   ↳ (expression has type "float", variable has type "int") [assignment]
3 Found 1 error in 1 file (checked 1 source file)
4 # mypy 1.16.1 failed with exit code 1.
```

Softwareversion, Ergebnis, und Exit Code

Software



- Wir nutzen viele verschiedene Werkzeuge.

Software



- Wir nutzen viele verschiedene Werkzeuge.
- Diese sind alle kostenlos im Internet verfügbar.

Software



- Wir nutzen viele verschiedene Werkzeuge.
- Diese sind alle kostenlos im Internet verfügbar.
- Die meisten sind Open Source software.

Software



- Wir nutzen viele verschiedene Werkzeuge.
- Diese sind alle kostenlos im Internet verfügbar.
- Die meisten sind Open Source software.
- Für jedes Werkzeug haben wir Installationshinweise ausgearbeitet.



- Wir nutzen viele verschiedene Werkzeuge.
- Diese sind alle kostenlos im Internet verfügbar.
- Die meisten sind Open Source software.
- Für jedes Werkzeug haben wir Installationshinweise ausgearbeitet. Mit Screenshots für Microsoft Windows^{9,110,220,240,249} und Ubuntu Linux^{50,111}.

Literaturhinweise



- Haben Sie die kleinen roten Zahlen in dem Satz „Mit Screenshots für Microsoft Windows^{9,110,220,240,249} und Ubuntu Linux^{50,111}.“ bemerkt?

Literaturhinweise



- Haben Sie die kleinen roten Zahlen in dem Satz „*Mit Screenshots für Microsoft Windows^{9,110,220,240,249} und Ubuntu Linux^{50,111}.*“ bemerkt?
- Dies sind Literaturhinweise, die am Ende der Slides gelistet werden.

Literaturhinweise



- Haben Sie die kleinen roten Zahlen in dem Satz „*Mit Screenshots für Microsoft Windows^{9,110,220,240,249} und Ubuntu Linux^{50,111}.*“ bemerkt?
- Dies sind Literaturhinweise, die am Ende der Slides gelistet werden.
- Im Buch *Programming with Python²⁵⁹* finden Sie ebenfalls viele Literaturhinweise, dort allerdings in eckigen Klammern, also eher so: [259].

Literaturhinweise



- Haben Sie die kleinen roten Zahlen in dem Satz „*Mit Screenshots für Microsoft Windows^{9,110,220,240,249} und Ubuntu Linux^{50,111}.*“ bemerkt?
- Dies sind Literaturhinweise, die am Ende der Slides gelistet werden.
- Im Buch *Programming with Python²⁵⁹* finden Sie ebenfalls viele Literaturhinweise, dort allerdings in eckigen Klammern, also eher so: [259].
- Wir haben für alles was wir lehren, für jedes Werkzeug, das verwendet wird, für alle Befehle und Datenformate, die wir benutzen, Literaturhinweise herausgesucht.

- Haben Sie die kleinen roten Zahlen in dem Satz „*Mit Screenshots für Microsoft Windows^{9,110,220,240,249} und Ubuntu Linux^{50,111}.*“ bemerkt?
- Dies sind Literaturhinweise, die am Ende der Slides gelistet werden.
- Im Buch *Programming with Python²⁵⁹* finden Sie ebenfalls viele Literaturhinweise, dort allerdings in eckigen Klammern, also eher so: [259].
- Wir haben für alles was wir lehren, für jedes Werkzeug, das verwendet wird, für alle Befehle und Datenformate, die wir benutzen, Literaturhinweise herausgesucht.
- Wir beziehen uns auf Standards, wissenschaftliche Veröffentlichungen, Dokumentationen, Vorlesungen an anderen Universitäten, und selbst auf aktuelle Gesetzgebung.

- Haben Sie die kleinen roten Zahlen in dem Satz „*Mit Screenshots für Microsoft Windows^{9,110,220,240,249} und Ubuntu Linux^{50,111}*.“ bemerkt?
- Dies sind Literaturhinweise, die am Ende der Slides gelistet werden.
- Im Buch *Programming with Python²⁵⁹* finden Sie ebenfalls viele Literaturhinweise, dort allerdings in eckigen Klammern, also eher so: [259].
- Wir haben für alles was wir lehren, für jedes Werkzeug, das verwendet wird, für alle Befehle und Datenformate, die wir benutzen, Literaturhinweise herausgesucht.
- Wir beziehen uns auf Standards, wissenschaftliche Veröffentlichungen, Dokumentationen, Vorlesungen an anderen Universitäten, und selbst auf aktuelle Gesetzgebung.
- Wo immer möglich, werden die entsprechenden Quellen im Literaturverzeichnis verlinkt und ich verwende, wo immer möglich, Quellen, die online verfügbar sind.



- Haben Sie die kleinen roten Zahlen in dem Satz „*Mit Screenshots für Microsoft Windows^{9,110,220,240,249} und Ubuntu Linux^{50,111}*.“ bemerkt?
- Dies sind Literaturhinweise, die am Ende der Slides gelistet werden.
- Im Buch *Programming with Python²⁵⁹* finden Sie ebenfalls viele Literaturhinweise, dort allerdings in eckigen Klammern, also eher so: [259].
- Wir haben für alles was wir lehren, für jedes Werkzeug, das verwendet wird, für alle Befehle und Datenformate, die wir benutzen, Literaturhinweise herausgesucht.
- Wir beziehen uns auf Standards, wissenschaftliche Veröffentlichungen, Dokumentationen, Vorlesungen an anderen Universitäten, und selbst auf aktuelle Gesetzgebung.
- Wo immer möglich, werden die entsprechenden Quellen im Literaturverzeichnis verlinkt und ich verwende, wo immer möglich, Quellen, die online verfügbar sind.
- Am Ende der Slides finden Sie oft ein Glossary (allerdings in Englisch).



- Haben Sie die kleinen roten Zahlen in dem Satz „*Mit Screenshots für Microsoft Windows^{9,110,220,240,249} und Ubuntu Linux^{50,111}*.“ bemerkt?
- Dies sind Literaturhinweise, die am Ende der Slides gelistet werden.
- Im Buch *Programming with Python²⁵⁹* finden Sie ebenfalls viele Literaturhinweise, dort allerdings in eckigen Klammern, also eher so: [259].
- Wir haben für alles was wir lehren, für jedes Werkzeug, das verwendet wird, für alle Befehle und Datenformate, die wir benutzen, Literaturhinweise herausgesucht.
- Wir beziehen uns auf Standards, wissenschaftliche Veröffentlichungen, Dokumentationen, Vorlesungen an anderen Universitäten, und selbst auf aktuelle Gesetzgebung.
- Wo immer möglich, werden die entsprechenden Quellen im Literaturverzeichnis verlinkt und ich verwende, wo immer möglich, Quellen, die online verfügbar sind.
- Am Ende der Slides finden Sie oft ein Glossary (allerdings in Englisch).
- Sie können *alles* nachlesen.

Alles ist da.



- Wir wissen, dass es nicht einfach ist, neue Dinge in einer fremden Sprache zu lernen.

Alles ist da.



- Wir wissen, dass es nicht einfach ist, neue Dinge in einer fremden Sprache zu lernen.
- Daher versuchen wir, alle Informationen so klar wie möglich darzustellen.

Alles ist da.



- Wir wissen, dass es nicht einfach ist, neue Dinge in einer fremden Sprache zu lernen.
- Daher versuchen wir, alle Informationen so klar wie möglich darzustellen.
- Wir stellen umfangreiches Lehrmaterial zur Verfügung.

Alles ist da.



- Wir wissen, dass es nicht einfach ist, neue Dinge in einer fremden Sprache zu lernen.
- Daher versuchen wir, alle Informationen so klar wie möglich darzustellen.
- Wir stellen umfangreiches Lehrmaterial zur Verfügung.
- Und wir machen den Kurs so praktisch wie möglich.



Ökosystem



Ökosystem



- Wir versuchen, ein Ökosystem von Lehrmaterial aufzubauen.

Ökosystem



- Wir versuchen, ein Ökosystem von Lehrmaterial aufzubauen.
- Aktuell gibt es folgende beiden Kurse

Ökosystem



- Wir versuchen, ein Ökosystem von Lehrmaterial aufzubauen.
- Aktuell gibt es folgende beiden Kurse:
 - Python, mit dem Textbuch *Thomas Weise (汤卫思). Programming with Python. Hefei University (合肥大学), School of Artificial Intelligence and Big Data (人工智能与大数据学院), 2024–2026. URL:*
<https://thomasweise.github.io/programmingWithPython>

Ökosystem



- Wir versuchen, ein Ökosystem von Lehrmaterial aufzubauen.
- Aktuell gibt es folgende beiden Kurse:
 - Python, mit dem Textbuch *Thomas Weise (汤卫思). Programming with Python. Hefei University (合肥大学), School of Artificial Intelligence and Big Data (人工智能与大数据学院), 2024–2026. URL: <https://thomasweise.github.io/programmingWithPython> und*
 - Datenbanken, mit dem Textbuch *Thomas Weise (汤卫思). Databases. Hefei University (合肥大学), School of Artificial Intelligence and Big Data (人工智能与大数据学院), 2025. URL: <https://thomasweise.github.io/databases>.*

Ökosystem



- Wir versuchen, ein Ökosystem von Lehrmaterial aufzubauen.
- Aktuell gibt es folgende beiden Kurse:
 - Python, mit dem Textbuch *Thomas Weise (汤卫思). Programming with Python. Hefei University (合肥大学), School of Artificial Intelligence and Big Data (人工智能与大数据学院), 2024–2026. URL:*
<https://thomasweise.github.io/programmingWithPython> und
 - Datenbanken, mit dem Textbuch *Thomas Weise (汤卫思). Databases. Hefei University (合肥大学), School of Artificial Intelligence and Big Data (人工智能与大数据学院), 2025. URL:*
<https://thomasweise.github.io/databases>.
- Diese Kurse sind miteinander verzahnt und vom Material her gleich strukturiert.

Ökosystem



- Wir versuchen, ein Ökosystem von Lehrmaterial aufzubauen.
- Aktuell gibt es folgende beiden Kurse:
 - Python, mit dem Textbuch *Thomas Weise (汤卫思). Programming with Python. Hefei University (合肥大学), School of Artificial Intelligence and Big Data (人工智能与大数据学院), 2024–2026. URL: <https://thomasweise.github.io/programmingWithPython> und*
 - Datenbanken, mit dem Textbuch *Thomas Weise (汤卫思). Databases. Hefei University (合肥大学), School of Artificial Intelligence and Big Data (人工智能与大数据学院), 2025. URL: <https://thomasweise.github.io/databases>.*
- Diese Kurse sind miteinander verzahnt und vom Material her gleich strukturiert.
- Sie sind eingeladen, sich die Materialien beider Kurse anzuschauen.

Ökosystem



- Wir versuchen, ein Ökosystem von Lehrmaterial aufzubauen.
- Aktuell gibt es folgende beiden Kurse:
 - Python, mit dem Textbuch *Thomas Weise (汤卫思). Programming with Python. Hefei University (合肥大学), School of Artificial Intelligence and Big Data (人工智能与大数据学院), 2024–2026. URL: <https://thomasweise.github.io/programmingWithPython> und*
 - Datenbanken, mit dem Textbuch *Thomas Weise (汤卫思). Databases. Hefei University (合肥大学), School of Artificial Intelligence and Big Data (人工智能与大数据学院), 2025. URL: <https://thomasweise.github.io/databases>.*
- Diese Kurse sind miteinander verzahnt und vom Material her gleich strukturiert.
- Sie sind eingeladen, sich die Materialien beider Kurse anzuschauen.
- Beide werden aktiv weiterentwickelt.



Voraussetzungen



Voraussetzungen



- Bringen Sie Ihren Laptop mit.

Voraussetzungen



- Bringen Sie Ihren Laptop mit.
 1. Ihren eigenen Laptop.

Voraussetzungen



- Bringen Sie Ihren Laptop mit.
 1. Ihren eigenen Laptop.
 2. Immer.

Voraussetzungen



- Bringen Sie Ihren Laptop mit.
 1. Ihren eigenen Laptop.
 2. Immer.
 3. Vollziehen Sie unsere Beispiele nach.

Voraussetzungen



- Bringen Sie Ihren Laptop mit.
 1. Ihren eigenen Laptop.
 2. Immer.
 3. Vollziehen Sie unsere Beispiele nach.
 4. Am Besten während der Vorlesung.

Voraussetzungen



- Bringen Sie Ihren Laptop mit.
 1. Ihren eigenen Laptop.
 2. Immer.
 3. Vollziehen Sie unsere Beispiele nach.
 4. Am Besten während der Vorlesung.
 5. Auf Ihrem eigenen Laptop.

Voraussetzungen



- Bringen Sie Ihren Laptop mit.
 1. Ihren eigenen Laptop.
 2. Immer.
 3. Vollziehen Sie unsere Beispiele nach.
 4. Am Besten während der Vorlesung.
 5. Auf Ihrem eigenen Laptop.
- Das sind schon alle Voraussetzungen.

Voraussetzungen



- Bringen Sie Ihren Laptop mit.
 1. Ihren eigenen Laptop.
 2. Immer.
 3. Vollziehen Sie unsere Beispiele nach.
 4. Am Besten während der Vorlesung.
 5. Auf Ihrem eigenen Laptop.
- Das sind schon alle Voraussetzungen.
- Bonus: Im Idealfall arbeiten Sie mit dem Betriebssystem Ubuntu Linux^{50,111}.

Voraussetzungen



- Bringen Sie Ihren Laptop mit.
 1. Ihren eigenen Laptop.
 2. Immer.
 3. Vollziehen Sie unsere Beispiele nach.
 4. Am Besten während der Vorlesung.
 5. Auf Ihrem eigenen Laptop.
- Das sind schon alle Voraussetzungen.
- Bonus: Im Idealfall arbeiten Sie mit dem Betriebssystem Ubuntu Linux^{50,111}. Sie könnten es ja in einer virtuellen Maschine installieren.



Warnung



Warnung

- Sie sind chinesische Studierende.



Warnung

- Sie sind chinesische Studierende.
- Es ist normal, zu denken: „OK, mir das auf Deutsch anzuhören oder auf Englisch zu lesen ist anstrengend. Ich lese einfach ein chinesisches Buch.“



Warnung



- Sie sind chinesische Studierende.
- Es ist normal, zu denken: „OK, mir das auf Deutsch anzuhören oder auf Englisch zu lesen ist anstrengend. Ich lese einfach ein chinesisches Buch.“
- Ich werde ihnen auch weiterführende englische/deutsche Literatur nennen.

Warnung



- Sie sind chinesische Studierende.
- Es ist normal, zu denken: „OK, mir das auf Deutsch anzuhören oder auf Englisch zu lesen ist anstrengend. Ich lese einfach ein chinesisches Buch.“
- Ich werde ihnen auch weiterführende englische/deutsche Literatur nennen.
- **ABER: Lesen Sie andere Bücher nur *begleitend*, um Aspekte zu klären, die Sie vielleicht in meinem Material nicht verstanden haben!**

Warnung



- Sie sind chinesische Studierende.
- Es ist normal, zu denken: „OK, mir das auf Deutsch anzuhören oder auf Englisch zu lesen ist anstrengend. Ich lese einfach ein chinesisches Buch.“
- Ich werde ihnen auch weiterführende englische/deutsche Literatur nennen.
- **ABER: Lesen Sie andere Bücher nur *begleitend*, um Aspekte zu klären, die Sie vielleicht in meinem Material nicht verstanden haben!**
- Sie **müssen** mein Material zu diesem Kurs lesen, wenn Sie bestehen wollen.

Warnung



- Sie sind chinesische Studierende.
- Es ist normal, zu denken: „OK, mir das auf Deutsch anzuhören oder auf Englisch zu lesen ist anstrengend. Ich lese einfach ein chinesisches Buch.“
- Ich werde ihnen auch weiterführende englische/deutsche Literatur nennen.
- **ABER: Lesen Sie andere Bücher nur *begleitend*, um Aspekte zu klären, die Sie vielleicht in meinem Material nicht verstanden haben!**
- Sie **müssen** mein Material zu diesem Kurs lesen, wenn Sie bestehen wollen.
- Dafür gibt es viele Gründe

Warnung



- Ich werde ihnen auch weiterführende englische/deutsche Literatur nennen.
- **ABER:** Lesen Sie andere Bücher nur *begleitend*, um Aspekte zu klären, die Sie vielleicht in meinem Material nicht verstanden haben!
- Sie **müssen** mein Material zu diesem Kurs lesen, wenn Sie bestehen wollen.
- Dafür gibt es viele Gründe
 1. Viele existierende Bücher sind veraltet oder haben einen anderen Fokus.

Warnung



- Ich werde ihnen auch weiterführende englische/deutsche Literatur nennen.
- **ABER:** Lesen Sie andere Bücher nur *begleitend*, um Aspekte zu klären, die Sie vielleicht in meinem Material nicht verstanden haben!
- Sie **müssen** mein Material zu diesem Kurs lesen, wenn Sie bestehen wollen.
- Dafür gibt es viele Gründe
 1. Viele existierende Bücher sind veraltet oder haben einen anderen Fokus.
 2. Wir lernen die *aktuellen und modernsten* Aspekte der praktischen Arbeit auf unserem Gebiet kennen.

Warnung



- Ich werde ihnen auch weiterführende englische/deutsche Literatur nennen.
- **ABER:** Lesen Sie andere Bücher nur *begleitend*, um Aspekte zu klären, die Sie vielleicht in meinem Material nicht verstanden haben!
- Sie **müssen** mein Material zu diesem Kurs lesen, wenn Sie bestehen wollen.
- Dafür gibt es viele Gründe
 1. Viele existierende Bücher sind veraltet oder haben einen anderen Fokus.
 2. Wir lernen die *aktuellen und modernsten* Aspekte der praktischen Arbeit auf unserem Gebiet kennen.
 3. Sehr viele unserer Themen kommen **NICHT** in anderen Büchern vor!

Warnung



- Ich werde ihnen auch weiterführende englische/deutsche Literatur nennen.
- **ABER:** Lesen Sie andere Bücher nur *begleitend*, um Aspekte zu klären, die Sie vielleicht in meinem Material nicht verstanden haben!
- Sie **müssen** mein Material zu diesem Kurs lesen, wenn Sie bestehen wollen.
- Dafür gibt es viele Gründe
 1. Viele existierende Bücher sind veraltet oder haben einen anderen Fokus.
 2. Wir lernen die *aktuellen und modernsten* Aspekte der praktischen Arbeit auf unserem Gebiet kennen.
 3. Sehr viele unserer Themen kommen **NICHT** in anderen Büchern vor!
 4. Sie kommen aber alle in der Prüfung vor!

Warnung



- Ich werde ihnen auch weiterführende englische/deutsche Literatur nennen.
- **ABER:** Lesen Sie andere Bücher nur *begleitend*, um Aspekte zu klären, die Sie vielleicht in meinem Material nicht verstanden haben!
- Sie **müssen** mein Material zu diesem Kurs lesen, wenn Sie bestehen wollen.
- Dafür gibt es viele Gründe
 1. Viele existierende Bücher sind veraltet oder haben einen anderen Fokus.
 2. Wir lernen die *aktuellen und modernsten* Aspekte der praktischen Arbeit auf unserem Gebiet kennen.
 3. Sehr viele unserer Themen kommen **NICHT** in anderen Büchern vor!
 4. Sie kommen aber alle in der Prüfung vor!
 5. Wenn Sie nicht unser Material durcharbeiten, dann sitzen Sie nachher in einer Prüfung und verstehen nicht mal die Fragen...

Warnung



- ABER: Lesen Sie andere Bücher nur *begleitend*, um Aspekte zu klären, die Sie vielleicht in meinem Material nicht verstanden haben!
- Sie **müssen** mein Material zu diesem Kurs lesen, wenn Sie bestehen wollen.
- Dafür gibt es viele Gründe
 1. Viele existierende Bücher sind veraltet oder haben einen anderen Fokus.
 2. Wir lernen die *aktuellen und modernsten* Aspekte der praktischen Arbeit auf unserem Gebiet kennen.
 3. Sehr viele unserer Themen kommen **NICHT** in anderen Büchern vor!
 4. Sie kommen aber alle in der Prüfung vor!
 5. Wenn Sie nicht unser Material durcharbeiten, dann sitzen Sie nachher in einer Prüfung und verstehen nicht mal die Fragen. . .
 6. Wenn Sie sich das Wissen nur mit anderen Materialien aneignen wollen, **dann werden Sie zu 100% durch die Prüfung durchfallen!**

Warnung



- **ABER:** Lesen Sie andere Bücher nur *begleitend*, um Aspekte zu klären, die Sie vielleicht in meinem Material nicht verstanden haben!
- Sie **müssen** mein Material zu diesem Kurs lesen, wenn Sie bestehen wollen.
- Dafür gibt es viele Gründe
 1. Viele existierende Bücher sind veraltet oder haben einen anderen Fokus.
 2. Wir lernen die *aktuellen und modernsten* Aspekte der praktischen Arbeit auf unserem Gebiet kennen.
 3. Sehr viele unserer Themen kommen **NICHT** in anderen Büchern vor!
 4. Sie kommen aber alle in der Prüfung vor!
 5. Wenn Sie nicht unser Material durcharbeiten, dann sitzen Sie nachher in einer Prüfung und verstehen nicht mal die Fragen. . .
 6. Wenn Sie sich das Wissen nur mit anderen Materialien aneignen wollen, **dann werden Sie zu 100% durch die Prüfung durchfallen!**.
- **Hören Sie in der Vorlesung zu! Lesen Sie mein Material (englisch oder deutsch)!**



Zusammenfassung



Kurs Programmieren mit Python



- Willkommen zum Kurs **Programmieren mit Python**.

Kurs Programmieren mit Python



- Willkommen zum Kurs **Programmieren mit Python**.
- Ich freue mich auf unsere Zusammenarbeit und hoffe, dass wir Spaß mit diesem Gebiet haben werden.

Kurs Programmieren mit Python



- Willkommen zum Kurs **Programmieren mit Python**.
- Ich freue mich auf unsere Zusammenarbeit und hoffe, dass wir Spaß mit diesem Gebiet haben werden.
- Und: Bitte besuchen Sie die Vorlesung, hören Sie zu, und verwenden/lesen Sie mein Vorlesungsmaterial...



谢谢你们！
Thank you!
Vielen Dank!



References I



- [1] Joseph Adams, Egon Balas und Daniel Zawack. "The Shifting Bottleneck Procedure for Job Shop Scheduling". *Management Science* 34(3):391–401, März 1988. Catonsville, MD, USA: The Institute for Operations Research and the Management Sciences (INFORMS). ISSN: 0025-1909. doi:10.1287/mnsc.34.3.391 (siehe S. 186).
- [2] David J. Agans. *Debugging*. New York, NY, USA: AMACOM, Sep. 2002. ISBN: 978-0-8144-2678-4 (siehe S. 183).
- [3] Miguel F. Anjos. *The QAPLIB Challenge*. Edinburgh, Scotland, UK: Miguel F. Anjos @ University of Edinburgh, 19. Nov. 2023. URL: <https://www.miguelanjos.com/projects/2999> (besucht am 2026-09-28). The document lists the 28 instances of QAPLIB ^{37,39} that had not yet been solved to optimality by the time of its writing. (Siehe S. 191).
- [4] Denis Antipov und Benjamin Doerr. "Precise Runtime Analysis for Plateaus". In: *15th International Conference on Parallel Problem Solving from Nature (PPSN XV)*. Bd. 2. 8.–12. Sep. 2018, Coimbra, Portugal. Hrsg. von Anne Auger, Carlos M. Fonseca, Nuno Lourenço, Penousal Machado, Luís Paquete und L. Darrell Whitley. Bd. 11102 der Reihe Lecture Notes in Computer Science (LNCS). Cham, Switzerland: Springer, 2018, S. 117–128. ISSN: 0302-9743. ISBN: 978-3-319-99258-7. doi:10.1007/978-3-319-99259-4_10 (siehe S. 190).
- [5] David Lee Applegate, Robert E. Bixby, Vašek Chvátal und William John Cook. *The Traveling Salesman Problem: A Computational Study*. 2. Aufl. Bd. 17 der Reihe Princeton Series in Applied Mathematics. Princeton, NJ, USA: Princeton University Press, 2007. ISBN: 978-0-691-12993-8. This book also discusses the Concorde Traveling Salesperson Problem (TSP) solver. (Siehe S. 183, 194).
- [6] David Lee Applegate und William John Cook. "A Computational Study of the Job-Shop Scheduling Problem". *ORSA Journal on Computing* 3(2):149–156, Mai 1991. Catonsville, MD, USA: The Institute for Operations Research and the Management Sciences (INFORMS). ISSN: 0899-1499. doi:10.1287/ijoc.3.2.149. The Job Shop Scheduling Problem (JSSP) instances used were generated in Bonn in 1986. (Siehe S. 186).
- [7] Paul Gustav Heinrich Bachmann. *Die Analytische Zahlentheorie / Dargestellt von Paul Bachmann*. Bd. Zweiter Theil der Reihe Zahlentheorie: Versuch einer Gesamtdarstellung dieser Wissenschaft in ihren Haupttheilen. Leipzig, Sachsen, Germany: B. G. Teubner, 1894. ISBN: 978-1-4181-6963-3. URL: <http://gallica.bnf.fr/ark:/12148/bpt6k994750> (besucht am 2023-12-13) (siehe S. 198).
- [8] Thomas Bäck, David B. Fogel und Zbigniew „Zbyszek“ Michalewicz, Hrsg. *Handbook of Evolutionary Computation*. Bristol, England, UK: IOP Publishing Ltd und Oxford, Oxfordshire, England, UK: Oxford University Press, 1997. ISBN: 978-0-7503-0392-7 (siehe S. 183).

References II



- [9] Daniel J. Barrett. *Efficient Linux at the Command Line*. Sebastopol, CA, USA: O'Reilly Media, Inc., Feb. 2022. ISBN: 978-1-0981-1340-7 (siehe S. 89–101, 187, 193).
- [10] Roberto Battiti und Giampietro Tecchiolli. "Local Search with Memory: Benchmarking RTS". *OR Spectrum: Quantitative Approaches in Management. Formerly Operations-Research-Spektrum* 17:67–86, Juni 1995. London, England, UK: Springer Nature Limited. ISSN: 0171-6468. doi:10.1007/BF01719249 (siehe S. 192).
- [11] Roberto Battiti und Giampietro Tecchiolli. "Simulated Annealing and Tabu Search in the Long Run: A Comparison on QAP Tasks". *Computers & Mathematics with Applications* 28(6):1–8, Sep. 1994. Amsterdam, The Netherlands: Elsevier B.V. ISSN: 0898-1221. doi:10.1016/0898-1221(94)00147-2 (siehe S. 192, 193).
- [12] Roberto Battiti und Giampietro Tecchiolli. "The Reactive Tabu Search". 6(2):126–140, Mai 1994. doi:10.1287/ijoc.6.2.126. Applications of Reactive Tabu Search (RTS) to the 0-1 Knapsack and Quadratic Assignment Problem (QAP). (Siehe S. 192, 193).
- [13] Roberto Battiti und Giampietro Tecchiolli. "Training Neural Nets with the Reactive Tabu Search". *IEEE Transactions on Neural Networks* 6(5):1185–1200, Sep. 1995. Piscataway, NJ, USA: Institute of Electrical and Electronics Engineers (IEEE). ISSN: 1045-9227. doi:10.1109/72.410361. See also "Training Neural Nets with the Reactive Tabu Search, Technical Report UTM 421, Trento, Alto Adige/Südtirol, Italy: University of Trento, 11 1993" (siehe S. 192).
- [14] James C. Bean. "Genetic Algorithms and Random Keys for Sequencing and Optimization". *ORSA Journal on Computing* 6(2):107–220, Frühling 1994. Catonsville, MD, USA: The Institute for Operations Research and the Management Sciences (INFORMS). ISSN: 0899-1499. doi:10.1287/ijoc.6.2.154. Applies the Random Keys encoding to scheduling and the QAP. See ¹⁵. (Siehe S. 144, 182, 191).
- [15] James C. Bean. *Genetics and Random Keys for Sequencing and Optimization*. Techn. Ber. 92-43. Ann Arbor, MI, USA: University of Michigan, Department of Industrial & Operations Engineering, 30. Juni 1992. URL: <https://www.math.wm.edu/~rrkinc/homework/RdmKeyGA.pdf> (besucht am 2026-10-01). See ¹⁴. (Siehe S. 144, 182, 191).
- [16] John Edward Beasley. "OR-Library: Distributing Test Problems by Electronic Mail". *The Journal of the Operational Research Society (JORS)* 41:1069–1072, Nov. 1990. London, England, UK: Taylor and Francis Ltd. and London, England, UK: Springer Nature Limited. ISSN: 0160-5682. doi:10.1057/jors.1990.166. See the website ¹⁷ (siehe S. 145, 186, 190).

References III



- [17] John Edward Beasley. *Welcome to OR-Library*. Uxbridge, Middlesex, England, UK: Brunel University of London, Juni 1990–Feb. 2018. URL: <https://people.brunel.ac.uk/~mastjjb/jeb/info.html> (besucht am 2026-09-30). See the article ¹⁸. Contains instances of the JSSP, 1D- and 2D-Packing, Knapsack, periodic TSPs, amongst others. (Siehe S. 144, 186, 190).
- [18] Andreas Beham, Michael Affenzeller und Erik Pitzer. "Metaheuristic Algorithms for the Quadratic Assignment Problem: Performance and Comparison". In: *Innovative Technologies in Management and Science*. Hrsg. von Ryszard Klempous und Jan Nikodem. Bd. 10 der Reihe Topics in Intelligent Engineering and Informatics (TIEI). Cham, Switzerland: Springer, 2015, S. 171–190. ISSN: 2193-9411. ISBN: 978-3-319-12651-7. doi:10.1007/978-3-319-12652-4_10. Algorithms like stochastic local search (SLS)/iterated local search (ILS), Simulated Annealing (SA), Tabu Search (TS), Variable Neighborhood Search (VNS), evolutionary algorithms (EAs), Memetic Algorithms (MAs) are compared and, with the exception of SA and EA, all perform best on some instance groups of QAPLIB. (Siehe S. 191).
- [19] Bengt-Erik Bengtsson. "Packing Rectangular Pieces— A Heuristic Approach". *The Computer Journal* 25(3):353–357, Aug. 1982. Oxford, Oxfordshire, England, UK: Oxford University Press. ISSN: 0010-4620. doi:10.1093/comjnl/25.3.353 (siehe S. 181).
- [20] Tim Berners-Lee. *Re: Qualifiers on Hypertext links...* Geneva, Switzerland: World Wide Web project, European Organization for Nuclear Research (CERN) und Newsgroups: alt.hypertext, 6. Aug. 1991. URL: <https://www.w3.org/People/Berners-Lee/1991/08/art-6484.txt> (besucht am 2025-02-05) (siehe S. 184, 196).
- [21] Tim Berners-Lee, Larry Masinter und Mark P. McCahill. *Uniform Resource Locators (URL)*. Request for Comments (RFC) 1738. Wilmington, DE, USA: Internet Engineering Task Force (IETF), Dez. 1994. URL: <https://www.ietf.org/rfc/rfc1738.txt> (besucht am 2025-02-05) (siehe S. 195).
- [22] Alex Berson. *Client/Server Architecture*. 2. Aufl. Computer Communications Series. New York, NY, USA: McGraw-Hill, 29. März 1996. ISBN: 978-0-07-005664-0 (siehe S. 183).
- [23] Muhammed Beyaz, Tansel Dökeroğlu und Ahmet Cosar. "Robust Hyper-Heuristic Algorithms for the Offline Oriented/Non-Oriented 2D Bin Packing Problems". *Applied Soft Computing (ASOC)* 36:236–245, Nov. 2015. Amsterdam, The Netherlands: Elsevier B.V. ISSN: 1568-4946. doi:10.1016/j.asoc.2015.06.063 (siehe S. 181).

References IV



- [24] Christian Bierwirth. "A Generalized Permutation Approach to Job Shop Scheduling with Genetic Algorithms". *OR Spectrum: Quantitative Approaches in Management. Formerly Operations-Research-Spektrum* 17(2–3):87–92, Juni 1995. London, England, UK: Springer Nature Limited. ISSN: **0171-6468**. doi:[10.1007/BF01719250](https://doi.org/10.1007/BF01719250). URL: <https://www.researchgate.net/publication/240263036> (besucht am 2026-09-30). Proposes a permutations-with-repetitions based encoding for the JSSP, see also ²⁵. (Siehe S. **146, 156, 186, 197**).
- [25] Christian Bierwirth, Dirk C. Mattfeld und Herbert Kopfer. "On Permutation Representations for Scheduling Problems". In: *4th International Conference on Parallel Problem Solving from Nature (PPSN IV)*. 22.–24. Sep. 1996, Berlin, Germany. Hrsg. von Hans-Michael Voigt, Werner Ebeling, Ingo Rechenberg und Hans-Paul Schwefel. Bd. 1141 der Reihe Lecture Notes in Computer Science (LNCS). Berlin/Heidelberg, Germany: Springer-Verlag GmbH Germany, 1996, S. 310–318. ISSN: **0302-9743**. ISBN: **978-3-540-61723-5**. doi:[10.1007/3-540-61723-X_995](https://doi.org/10.1007/3-540-61723-X_995). URL: <https://www.researchgate.net/publication/2753293> (besucht am 2026-09-30). Proposes a permutations-with-repetitions based encoding for the JSSP, see also ²⁴. (Siehe S. **146, 156, 186, 197**).
- [26] Jacek Błażewicz, Wolfgang Domschke und Erwin Pesch. "The Job Shop Scheduling Problem: Conventional and New Solution Techniques". *European Journal of Operational Research* 93(1):1–33, Aug. 1996. Amsterdam, The Netherlands: Elsevier B.V. ISSN: **0377-2217**. doi:[10.1016/0377-2217\(95\)00362-2](https://doi.org/10.1016/0377-2217(95)00362-2) (siehe S. **186**).
- [27] Joshua Bloch. *Effective Java*. Reading, MA, USA: Addison-Wesley Professional, Mai 2008. ISBN: **978-0-321-35668-0** (siehe S. **186**).
- [28] Christian Blum und Verena Schmid. "Solving the 2D Bin Packing Problem by Means of a Hybrid Evolutionary Algorithm". In: *International Conference on Computational Science (ICCS'2013)*. 5.–7. Juni 2013, Barcelona, Spain. Hrsg. von Vassil Alexandrov, Michael Lees, Valeria V. Krzhizhanovskaya, Jack J. Dongarra und Peter M. A. Sloot. Bd. 18 der Reihe Procedia Computer Science. Amsterdam, The Netherlands: Elsevier B.V., 2013, S. 899–908. ISSN: **1877-0509**. doi:[10.1016/j.procs.2013.05.255](https://doi.org/10.1016/j.procs.2013.05.255). An EA for the oriented two-dimensional Bin Packing Problem with free cuts (2BP|O|F) using the heuristic by Wong und Lee [269]. (Siehe S. **181**).
- [29] Ethan Bommarito und Michael Bommarito. *An Empirical Analysis of the Python Package Index (PyPI)*. arXiv.org: Computing Research Repository (CoRR) abs/1907.11073. Ithaca, NY, USA: Cornell University Library, 26. Juli 2019. doi:[10.48550/arXiv.1907.11073](https://doi.org/10.48550/arXiv.1907.11073). URL: <https://arxiv.org/abs/1907.11073> (besucht am 2024-08-17). arXiv:1907.11073v2 [cs.SE] 26 Jul 2019 (siehe S. **190**).
- [30] Grady Booch, James Rumbaugh und Ivar Jacobson. *The Unified Modeling Language Reference Manual*. 1. Aufl. Reading, MA, USA: Addison-Wesley Professional, Jan. 1999. ISBN: **978-0-201-57168-4** (siehe S. **195**).

References V



- [31] Borko Bošković und Janez Brest. "Computational Search of Long Skew-Symmetric Binary Sequences with High Merit Factors". *MENDEL – Soft Computing Journal* 28(2):17–24, Dez. 2022. Brno, Czech Republic: Brno University of Technology (Vysoké učení technické v Brně). ISSN: **1803-3814**. doi:[10.13164/mendel.2022.2.017](https://doi.org/10.13164/mendel.2022.2.017) (siehe S. 187).
- [32] Borko Bošković, Franc Brglez und Janez Brest. "Low-Autocorrelation Binary Sequences: On Improved Merit Factors and Runtime Predictions to Achieve Them". *Applied Soft Computing (ASOC)* 56:262–285, Juli 2017. Amsterdam, The Netherlands: Elsevier B.V. ISSN: **1568-4946**. doi:[10.1016/J.ASOC.2017.02.024](https://doi.org/10.1016/J.ASOC.2017.02.024) (siehe S. 187).
- [33] Ed Bott. *Windows 11 Inside Out*. Hoboken, NJ, USA: Microsoft Press, Pearson Education, Inc., Feb. 2023. ISBN: **978-0-13-769132-6** (siehe S. 189).
- [34] Ron Brash und Ganesh Naik. *Bash Cookbook*. Birmingham, England, UK: Packt Publishing Ltd, Juli 2018. ISBN: **978-1-78862-936-2** (siehe S. 182).
- [35] Tim Bray. *The JavaScript Object Notation (JSON) Data Interchange Format*. Request for Comments (RFC) 8259. Wilmington, DE, USA: Internet Engineering Task Force (IETF), Dez. 2017. URL: <https://www.ietf.org/rfc/rfc8259.txt> (besucht am 2025-02-05) (siehe S. 186).
- [36] Janez Brest und Borko Bošković. "A Heuristic Algorithm for a Low Autocorrelation Binary Sequence Problem with Odd Length and High Merit Factor". *IEEE Access* 6:4127–4134, Jan. 2018. Piscataway, NJ, USA: Institute of Electrical and Electronics Engineers (IEEE). ISSN: **2169-3536**. doi:[10.1109/ACCESS.2018.2789916](https://doi.org/10.1109/ACCESS.2018.2789916) (siehe S. 187).
- [37] Rainer E. Burkard, Eranda Çela, Stefan E. Karisch, Franz Rendl, Miguel F. Anjos und Peter M. Hahn. *QAPLIB – A Quadratic Assignment Problem Library – Problem Instances and Solutions*. Edinburgh, Scotland, UK: University of Edinburgh, 20. Apr. 2012–31. März 2022. doi:[10.7488/ds/3428](https://doi.org/10.7488/ds/3428). This is the 2012 status of the QAPLIB dataset from ³⁹ (siehe S. 143, 148, 191).
- [38] Rainer E. Burkard, Eranda Çela, Panos Miltiades Pardalos und Leonidas S. Pitsoulis. "The Quadratic Assignment Problem". In: *Handbook of Combinatorial Optimization*. Hrsg. von Panos Miltiades Pardalos, Ding-Zhu Du und Ronald Lewis Graham. 1. Aufl. Boston, MA, USA: Springer, 1998, S. 1713–1809. ISBN: **978-1-4613-7987-4**. doi:[10.1007/978-1-4613-0303-9_27](https://doi.org/10.1007/978-1-4613-0303-9_27) (siehe S. 191).

References VI



- [39] Rainer E. Burkard, Stefan E. Karisch und Franz Rendl. "QAPLIB – A Quadratic Assignment Problem Library". *Journal of Global Optimization* 10(4):391–403, Juni 1997. London, England, UK: Springer Nature Limited. ISSN: 0925-5001. doi:10.1023/A:1008293323270. This article introduces QAPLIB, a set of benchmark problems for the QAP, now hosted at ³⁷. (Siehe S. 143, 147, 191).
- [40] Rainer E. Burkard und Josef Offermann. "Entwurf von Schreibmaschinentastaturen mittels quadratischer Zuordnungsprobleme". *Zeitschrift für Operations Research (ZOR). now Mathematical Methods of Operations Research (MMOR)* 21:B121–B132, Aug. 1977. Heidelberg, Baden-Württemberg, Germany: Physica-Verlag; now London, England, UK: Springer Nature Limited. ISSN: 0340-9422. doi:10.1007/BF01918175. Keyboard layout modeled as QAPs. (Siehe S. 191).
- [41] Jason Cannon. *High Availability for the LAMP Stack*. Shelter Island, NY, USA: Manning Publications, Juni 2022 (siehe S. 192).
- [42] Eduardo Carvalho Pinto und Carola Doerr. *Towards a More Practice-Aware Runtime Analysis of Evolutionary Algorithms*. arXiv.org: Computing Research Repository (CoRR) abs/1812.00493. Ithaca, NY, USA: Cornell University Library, 3. Dez. 2018. doi:10.48550/arXiv.1812.00493. URL: <https://arxiv.org/abs/1812.00493> (besucht am 2025-08-08). arXiv:1812.00493v1 [cs.NE] 3 Dec 2018 (siehe S. 180).
- [43] Josh Centers. *Take Control of iOS 18 and iPadOS 18*. San Diego, CA, USA: Take Control Books, Dez. 2024. ISBN: 978-1-990783-55-5 (siehe S. 185).
- [44] Vladimír Černý. "Thermodynamical Approach to the Traveling Salesman Problem: An Efficient Simulation Algorithm". *Journal of Optimization Theory and Applications* 45(1):41–51, Jan. 1985. New York, NY, USA: Springer Science+Business Media, LLC. ISSN: 0022-3239. doi:10.1007/BF00940812 (siehe S. 192).
- [45] Bo Chen, Chris N. Potts und Gerhard J. Woeginger. "A Review of Machine Scheduling: Complexity, Algorithms and Approximability". In: *Handbook of Combinatorial Optimization*. Hrsg. von Panos Miltiades Pardalos, Ding-Zhu Du und Ronald Lewis Graham. 1. Aufl. Boston, MA, USA: Springer, 1998, S. 1493–1641. ISBN: 978-1-4613-7987-4. doi:10.1007/978-1-4613-0303-9_25. See also pages 21–169 in volume 3/3 by Norwell, MA, USA: Kluwer Academic Publishers. Discusses, amongst others, that the JSSP is $\mathcal{NP}$ -hard. (Siehe S. 186, 198).

References VII



- [46] Jiayang Chen (陈嘉阳), Zhize Wu (吴志泽), Sarah Louise Thomson und Thomas Weise (汤卫恩). "Frequency Fitness Assignment: Optimization Without Bias for Good Solution Outperforms Randomized Local Search on the Quadratic Assignment Problem". In: *16th International Joint Conference on Computational Intelligence (IJCCI'24)*. 20.–22. Nov. 2024, Porto, Portugal. Hrsg. von Francesco Marcelloni, Kurosh Madani, Niki van Stein und Joaquim Filipe. Porto, Portugal: SciTePress: Science and Technology Publications, Lda, 2024, S. 27–37. ISSN: **2184-3236**. ISBN: **978-989-758-721-4**. doi:[10.5220/0012888600003837](https://doi.org/10.5220/0012888600003837) (siehe S. **184**, **191**).
- [47] T. C. Edwin Cheng, Bo Peng und Zhipeng Lü. "A Hybrid Evolutionary Algorithm to Solve the Job Shop Scheduling Problem". *Annals of Operations Research* 242(2):223–237, Juli 2016. London, England, UK: Springer Nature Limited. ISSN: **0254-5330**. doi:[10.1007/s10479-013-1332-5](https://doi.org/10.1007/s10479-013-1332-5). A MA utilizing TS (siehe S. **188**).
- [48] Philippe Chrétienne, Edward G. Coffman, Jan Karel Lenstra und Zhen Liu, Hrsg. *Scheduling Theory and Its Applications*. Chichester, West Sussex, England, UK: John Wiley and Sons Ltd., Sep. 1995. ISBN: **978-0-471-94059-3** (siehe S. **186**).
- [49] Nestor M. Cid-Garcia und Yasmin A. Rios-Solis. "Positions and Covering: A Two-Stage Methodology to Obtain Optimal Solutions for the 2D-Bin Packing Problem". *PLoS ONE* 15(4):e0229358, Apr. 2020. San Francisco, CA, USA: Public Library of Science (PLOS). ISSN: **1932-6203**. doi:[10.1371/journal.pone.0229358](https://doi.org/10.1371/journal.pone.0229358). An exact method for the two-dimensional Bin Packing Problem with free cuts and rotation (2BP|R|F) and the 2BP|O|F. (Siehe S. **181**).
- [50] David Clinton und Christopher Negus. *Ubuntu Linux Bible*. 10. Aufl. Bible Series. Chichester, West Sussex, England, UK: John Wiley and Sons Ltd., 10. Nov. 2020. ISBN: **978-1-119-72233-5** (siehe S. **89–101**, **115–123**, **193**, **195**).
- [51] Edgar Frank „Ted“ Codd. *Normalized Data Base Structure: A Brief Tutorial*. IBM Research Report RJ935. San Jose, CA, USA: IBM Research Laboratory, 1971. URL: [https://www.fsmwarden.com/Codd/Normalized%20data%20base%20structure_%20a%20brief%20tutorial\(1971,%20nov\).pdf](https://www.fsmwarden.com/Codd/Normalized%20data%20base%20structure_%20a%20brief%20tutorial(1971,%20nov).pdf) (besucht am 2025-05-04) (siehe S. **149**).
- [52] Edgar Frank „Ted“ Codd. "Normalized Data Base Structure: A Brief Tutorial". In: *ACM SIGFIDET Workshop on Data Description, Access, and Control*. 11.–12. Nov. 1971, San Diego, CA, USA. Hrsg. von Edgar Frank „Ted“ Codd und Albert L. Dean Jr. New York, NY, USA: Association for Computing Machinery (ACM), 1971, S. 1–17. ISBN: **978-1-4503-7300-5**. doi:[10.1145/1734714.1734716](https://doi.org/10.1145/1734714.1734716). See also ⁵¹ (siehe S. **181**).

References VIII



- [53] Edgar Frank „Ted“ Codd. "A Relational Model of Data for Large Shared Data Banks". *Communications of the ACM (CACM)* 13(6):377–387, Juni 1970. New York, NY, USA: Association for Computing Machinery (ACM). ISSN: 0001-0782. doi:10.1145/362384.362685. URL: <https://www.seas.upenn.edu/~zives/03f/cis550/codd.pdf> (besucht am 2025-01-05) (siehe S. 181).
- [54] Edgar Frank „Ted“ Codd. *Further Normalization of the Data Base Relational Model*. IBM Research Report RJ909. San Jose, CA, USA: IBM Research Laboratory, 31. Aug. 1971. URL: <https://forum.thethirdmanifesto.com/wp-content/uploads/asgarosforum/987737/00-efc-further-normalization.pdf> (besucht am 2025-05-04). Reprinted in and presented at ²¹⁰ (siehe S. 181).
- [55] Stephen Arthur Cook. "The Complexity of Theorem-Proving Procedures". In: *Third Annual ACM Symposium on Theory of Computing (STOC'1971)*. 3.–5. Mai 1971, Shaker Heights, OH, USA. Hrsg. von Michael A. Harrison, Ranan B. Banerji und Jeffrey D. Ullman. New York, NY, USA: Association for Computing Machinery (ACM), 1971, S. 151–158. ISBN: 978-1-4503-7464-4. doi:10.1145/800157.805047 (siehe S. 188, 198).
- [56] William John Cook. *Concorde TSP Solver*. Waterloo, ON, Canada: University of Waterloo, 1997. URL: <https://math.uwaterloo.ca/tsp/concorde> (besucht am 2026-09-26) (siehe S. 183).
- [57] William John Cook. *In Pursuit of the Traveling Salesman: Mathematics at the Limits of Computation*. Princeton, NJ, USA: Princeton University Press, 2012–9. Nov. 2014. ISBN: 978-0-691-16352-9 (siehe S. 183, 188).
- [58] William John Cook. *World TSP*. Waterloo, ON, Canada: University of Waterloo, 2013–25. Okt. 2025. URL: <http://www.math.uwaterloo.ca/tsp/world> (besucht am 2026-01-03) (siehe S. 188, 194).
- [59] Cemre Çubukçuoğlu, Pirouz Nourian, M. Fatih Tasgetiren, I. Sevil Sariyildiz und Shervin Azadi. "Hospital Layout Design Renovation as a Quadratic Assignment Problem with Geodesic Distances". *Journal of Building Engineering* 44:102952, Dez. 2021. Amsterdam, The Netherlands: Elsevier B.V. ISSN: 2352-7102. doi:10.1016/j.jobbe.2021.102952 (siehe S. 191).
- [60] Christopher J. Date. *An Introduction to Database Systems*. 8. Aufl. Hoboken, NJ, USA: Pearson Education, Inc., Juli 2003. ISBN: 978-0-321-19784-9 (siehe S. 181, 189).
- [61] *Definition of Operations Research*. University of Western Ontario, London, ON, Canada: International Federation of Operational Research Societies (IFORS), 2020. URL: <https://www.ifors.org/what-is-or> (besucht am 2026-01-01) (siehe S. 190).

References IX



- [62] Paul Deitel, Harvey Deitel und Abbey Deitel. *Internet & World Wide Web: How to Program*. 5. Aufl. Hoboken, NJ, USA: Pearson Education, Inc., Nov. 2011. ISBN: **978-0-13-299045-5** (siehe S. **196**).
- [63] Maxence Delorme, Manuel Iori und Silvano Martello. "Bin Packing and Cutting Stock Problems: Mathematical Models and Exact Algorithms". *European Journal of Operational Research* 255(1):1–20, Nov. 2016. Amsterdam, The Netherlands: Elsevier B.V. ISSN: **0377-2217**. doi:**10.1016/j.ejor.2016.04.030** (siehe S. **182**).
- [64] Ebru Demirkol, Sanjay V. Mehta und Reha Uzsoy. "Benchmarks for Shop Scheduling Problems". *European Journal of Operational Research* 109(1):137–141, Aug. 1998. Amsterdam, The Netherlands: Elsevier B.V. ISSN: **0377-2217**. doi:**10.1016/S0377-2217(97)00019-2** (siehe S. **186**).
- [65] Miroslav Dimitrov. *New Classes of Binary Sequences with High Merit Factor*. arXiv.org: Computing Research Repository (CoRR). Ithaca, NY, USA: Cornell University Library, 24. Juni 2022. doi:**10.48550/arXiv.2206.12070**. URL: **<https://arxiv.org/pdf/2206.12070>** (besucht am 2026-09-21). arXiv:2206.12070v1 [cs.IT] 24 Jun 2022 (siehe S. **187**).
- [66] Miroslav Dimitrov, Tsonka Baitcheva und Nikolay Nikolov. "Efficient Generation of Low Autocorrelation Binary Sequences". *IEEE Signal Processing Letters* 27:341–345, 2020. Piscataway, NJ, USA: Institute of Electrical and Electronics Engineers (IEEE). ISSN: **1558-2361**. doi:**10.1109/LSP.2020.2972127** (siehe S. **187**).
- [67] Slobodan Dmitrović. *Modern C for Absolute Beginners: A Friendly Introduction to the C Programming Language*. New York, NY, USA: Apress Media, LLC, März 2024. ISBN: **979-8-8688-0224-9** (siehe S. **182**).
- [68] Benjamin Doerr, Carola Doerr und Franziska Ebel. "From Black-Box Complexity to Designing New Genetic Algorithms". *Theoretical Computer Science* 567:87–104, Feb. 2015. Amsterdam, The Netherlands: Elsevier B.V. ISSN: **0304-3975**. doi:**10.1016/J.TCS.2014.11.028** (siehe S. **189**).
- [69] Carola Doerr, Furong Ye, Naama Horesh, Hao Wang und Ofer M. ShirThomas Bäck. "Benchmarking Discrete Optimization Heuristics with IOHprofiler". In: *21st Genetic and Evolutionary Computation Conference Companion (GECCO'2019)*. 13.–17. Juli 2019, Prague, Czech Republic. Hrsg. von Manuel López-Ibáñez, Anne Auger und Thomas Stützle. New York, NY, USA: Association for Computing Machinery (ACM), 2019, S. 1798–1806. ISBN: **978-1-4503-6748-6**. doi:**10.1145/3319619.3326810**. See also ^{70,71} (siehe S. **152**).

References X



- [70] Carola Doerr, Furong Ye, Naama Horesh, Hao Wang und Ofer M. ShirThomas Bäck. "Benchmarking Discrete Optimization Heuristics with IOHprofiler". *Applied Soft Computing (ASOC)* 88:106027, März 2020. Amsterdam, The Netherlands: Elsevier B.V. ISSN: **1568-4946**. doi:[10.1016/j.asoc.2019.106027](https://doi.org/10.1016/j.asoc.2019.106027). See also ^{69,71} (siehe S. **151, 152, 180, 185, 186, 189**).
- [71] Carola Doerr, Furong Ye, Naama Horesh, Hao Wang und Ofer M. ShirThomas Bäck. "Benchmarking Discrete Optimization Heuristics with IOHprofiler". (abs/1912.09237), 31. Jan. 2021. doi:[10.48550/arXiv.1912.09237](https://doi.org/10.48550/arXiv.1912.09237). URL: <https://arxiv.org/abs/1912.09237> (besucht am 2024-06-27). arXiv:1912.09237v2 [cs.NE] 31 Jan 2021, see also ^{69,70} (siehe S. **151, 152**).
- [72] Marco Dorigo, Mauro Birattari und Thomas Stützle. "Ant Colony Optimization". *IEEE Computational Intelligence Magazine (CIM)* 1(4):28–39, Nov. 2006. Piscataway, NJ, USA: Institute of Electrical and Electronics Engineers (IEEE). ISSN: **1556-603X**. doi:[10.1109/MCI.2006.329691](https://doi.org/10.1109/MCI.2006.329691). URL: <https://www.researchgate.net/publication/308953674> (besucht am 2025-07-25) (siehe S. **181**).
- [73] Marco Dorigo, Vittorio Maniezzo und Alberto Coloni. "Ant System: Optimization by a Colony of Cooperating Agents". *IEEE Transactions on Systems, Man, and Cybernetics – Part B: Cybernetics* 26(1):29–41, Feb. 1996. Piscataway, NJ, USA: Institute of Electrical and Electronics Engineers (IEEE). ISSN: **1083-4419**. doi:[10.1109/3477.484436](https://doi.org/10.1109/3477.484436). URL: <https://www.researchgate.net/publication/5589170> (besucht am 2025-07-26) (siehe S. **181**).
- [74] Marco Dorigo und Thomas Stützle. *Ant Colony Optimization*. Cambridge, MA, USA: MIT Press, 2004. ISBN: **978-0-262-04219-2** (siehe S. **181**).
- [75] Johann Dréo, Alain Pérowski, Patrick Siarry und Éric D. Taillard. *Metaheuristics for Hard Optimization – Methods and Case Studies*. Berlin/Heidelberg, Germany: Springer-Verlag GmbH Germany, 2006. ISBN: **978-3-540-23022-9**. doi:[10.1007/3-540-30966-7](https://doi.org/10.1007/3-540-30966-7). Discusses SA, TS, EAs, and Ant Colony Optimization (ACO). (Siehe S. **191**).
- [76] Stefan Droste, Thomas Jansen und Ingo Wegener. "On the Analysis of the (1 + 1) Evolutionary Algorithm". *Theoretical Computer Science* 276(1-2):51–81, Apr. 2002. Amsterdam, The Netherlands: Elsevier B.V. ISSN: **0304-3975**. doi:[10.1016/S0304-3975\(01\)00182-7](https://doi.org/10.1016/S0304-3975(01)00182-7) (siehe S. **180, 187, 193**).
- [77] Stefan Droste, Thomas Jansen und Ingo Wegener. "Upper and Lower Bounds for Randomized Search Heuristics in Black-Box Optimization". *Theoretical Computer Science* 39(4):525–544, Juli 2006. Amsterdam, The Netherlands: Elsevier B.V. ISSN: **0304-3975**. doi:[10.1007/S00224-004-1177-Z](https://doi.org/10.1007/S00224-004-1177-Z) (siehe S. **189**).

References XI



- [78] Harald Dyckhoff und Ute Finke. *Cutting and Packing in Production and Distribution: A Typology and Bibliography*. Contributions to Management Science. Heidelberg, Baden-Württemberg, Germany: Physica-Verlag, 1992. ISSN: 1431-1941. ISBN: 978-3-642-63487-1. doi:10.1007/978-3-642-58165-6 (siehe S. 182).
- [79] Kelly Easton, George L. Nemhauser und Michael A. Trick. "The Traveling Tournament Problem Description and Benchmarks". In: *7th International Conference on Principles and Practice of Constraint Programming (CP'01)*. 26. Nov.–1. Dez. 2001, Paphos, Cyprus. Hrsg. von Toby Walsh. Bd. 2239 der Reihe Lecture Notes in Computer Science (LNCS). Berlin/Heidelberg, Germany: Springer-Verlag GmbH Germany, 2001, S. 580–584. ISSN: 0302-9743. ISBN: 978-3-540-42863-3. doi:10.1007/3-540-45578-7_43 (siehe S. 194).
- [80] *ECMAScript Language Specification*. Standard ECMA-262, 3rd Edition. Geneva, Switzerland: Ecma International, Dez. 1999. URL: https://ecma-international.org/wp-content/uploads/ECMA-262_3rd_edition_december_1999.pdf (besucht am 2024-12-15) (siehe S. 186).
- [81] Ramez Elmasri und Shamkant Navathe. *Fundamentals of Database Systems*. 7. Aufl. Hoboken, NJ, USA: Pearson Education, Inc., Juni 2015. ISBN: 978-0-13-397077-7 (siehe S. 181, 189).
- [82] Alwalid N. Elshafei. "Hospital Layout as a Quadratic Assignment Problem". *The Journal of the Operational Research Society (JORS)* 28(1):167–179, Apr. 1977. London, England, UK: Taylor and Francis Ltd. and London, England, UK: Springer Nature Limited. ISSN: 0160-5682. doi:10.1057/jors.1977.29 (siehe S. 191).
- [83] Bernhard Eschermann und Hans-Joachim Wunderlich. "Optimized Synthesis of Self-Testable Finite State Machines". In: *20th International Symposium Fault-Tolerant Computing (FTCS'1990): Digest of Papers*. 26.–28. Juni 1990, Newcastle Upon Tyne, England, UK. Piscataway, NJ, USA: Institute of Electrical and Electronics Engineers (IEEE), 1990. ISBN: 978-0-8186-2051-5. doi:10.1109/FTCS.1990.89393 (siehe S. 191).
- [84] Thomas A. Feo und Mauricio G. C. Resende. "Greedy Randomized Adaptive Search Procedures". *Journal of Global Optimization* 6(2):109–133, März 1995. London, England, UK: Springer Nature Limited. ISSN: 0925-5001. doi:10.1007/BF01096763. Introduces Greedy Randomized Adaptive Search Procedures (GRASPs) and applies them to the set covering problem, among others, and lists many problem domains. (Siehe S. 184).
- [85] Luca Ferrari und Enrico Pirozzi. *Learn PostgreSQL*. 2. Aufl. Birmingham, England, UK: Packt Publishing Ltd, Okt. 2023. ISBN: 978-1-83763-564-1 (siehe S. 190).

References XII



- [86] Paola Festa und Mauricio G. C. Resende. "An Annotated Bibliography of GRASP—Part I: Algorithms". *International Transactions on Operational Research (ITOR)* 16(1):1–24, Jan. 2009. Chichester, West Sussex, England, UK: John Wiley and Sons Ltd. ISSN: 0969-6016. doi:10.1111/j.1475-3995.2009.00663.x. See also ⁸⁷ (siehe S. 154, 184).
- [87] Paola Festa und Mauricio G. C. Resende. "An Annotated Bibliography of GRASP—Part II: Applications". *International Transactions on Operational Research (ITOR)* 16(2):131–172, März 2009. Chichester, West Sussex, England, UK: John Wiley and Sons Ltd. ISSN: 0969-6016. doi:10.1111/j.1475-3995.2009.00664.x. See also ⁸⁸ (siehe S. 154, 184).
- [88] Simon Fischer. "A Polynomial Upper Bound for a Mutation-Based Algorithm on the Two-Dimensional Ising Model". In: *6th Genetic and Evolutionary Computation Conference (GECCO'2004), Part I*. 26.–30. Juni 2004, Seattle, WA, USA. Hrsg. von Kalyanmoy Deb, Riccardo Poli, Wolfgang Banzhaf, Hans-Georg Beyer, Edmund K. Burke, Paul J. Darwen, Dipankar Dasgupta, Dario Floreano, James A. Foster, Mark Harman, Owen Holland, Pier Luca Lanzi, Lee Spector, Andrea Tettamanzi, Dirk Thierens und Andrew M. Tyrrell. Bd. 3102 der Reihe Lecture Notes in Computer Science (LNCS). Berlin/Heidelberg, Germany: Springer-Verlag GmbH Germany, 2004, S. 1100–1112. ISSN: 0302-9743. ISBN: 978-3-540-22344-3. doi:10.1007/978-3-540-24854-5_108 (siehe S. 185, 186).
- [89] Simon Fischer und Ingo Wegener. "The One-Dimensional Ising Model: Mutation versus Recombination". *Theoretical Computer Science* 344(2-3):208–225, Nov. 2005. Amsterdam, The Netherlands: Elsevier B.V. ISSN: 0304-3975. doi:10.1016/J.TCS.2005.04.002 (siehe S. 185, 186).
- [90] Henry Fisher und Gerald L. Thompson. "Probabilistic Learning Combinations of Local Job-Shop Scheduling Rules". In: *Industrial Scheduling*. Hrsg. von John F. Muth und Gerald L. Thompson. Englewood Cliffs, NJ, USA: Prentice-Hall, 1963. Kap. 3.2, S. 225–251 (siehe S. 186).
- [91] Charles Fleurent und Jacques A. Ferland. "Genetic Hybrids for the Quadratic Assignment Problem". In: *Quadratic Assignment and Related Problems, Proceedings of a DIMACS Workshop*. 20.–21. Mai 1993, New Brunswick, NJ, USA: Rutgers University. Hrsg. von Panos Miltiades Pardalos und Henry Wolkowicz. Providence, RI, USA: American Mathematical Society (AMS), 1994, S. 173–187. ISBN: 978-0-8218-6607-8. A MA using the TS from ²³⁰ as local search performs well. (Siehe S. 188, 191).
- [92] Martin Fowler. *UML Distilled: A Brief Guide to the Standard Object Modeling Language*. 3. Aufl. The Addison-Wesley Object Technology Series. Reading, MA, USA: Addison-Wesley Professional, Sep. 2003. ISBN: 978-0-321-19368-1 (siehe S. 195).

References XIII



- [93] Tobias Friedrich, Pietro Simone Oliveto, Dirk Sudholt und Carsten Witt. "Analysis of Diversity-Preserving Mechanisms for Global Exploration". *Evolutionary Computation* 17(4):455–476, Winter 2009. Cambridge, MA, USA: MIT Press. ISSN: **1063-6560**. doi:[10.1162/evco.2009.17.4.17401](https://doi.org/10.1162/evco.2009.17.4.17401) (siehe S. **195**).
- [94] Tobias Friedrich, Francesco Quinzan und Markus Wagner. "Escaping Large Deceptive Basins of Attraction with Heavy-Tailed Mutation Operators". In: *20th Genetic and Evolutionary Computation Conference (GECCO'2018)*. 15.–19. Juli 2018, Kyōto, Kyōto-fu, Japan. Hrsg. von Hernán E. Aguirre und Keiki Takadama. New York, NY, USA: Association for Computing Machinery (ACM), 2018, S. 293–300. ISBN: **978-1-4503-5618-3**. doi:[10.1145/3205455.3205515](https://doi.org/10.1145/3205455.3205515) (siehe S. **187, 195**).
- [95] José E. Gallardo, Carlos Cotta und Antonio J. Fernández. "A Memetic Algorithm for the Low Autocorrelation Binary Sequence Problem". In: *9th Genetic and Evolutionary Computation Conference (GECCO'2007)*. 7.–11. Juli 2007, London, England, UK. Hrsg. von Hod Lipson. New York, NY, USA: Association for Computing Machinery (ACM), 2007, S. 1226–1233. ISBN: **978-1-59593-697-4**. doi:[10.1145/1276958.1277195](https://doi.org/10.1145/1276958.1277195) (siehe S. **187**).
- [96] Michael R. Garey und David Stifler Johnson. *Computers and Intractability: A Guide to the Theory of NP-Completeness*. New York, NY, USA: W. H. Freeman and Company, 1979. ISBN: **978-0-7167-1045-5** (siehe S. **194**).
- [97] Mitsuo Gen, Yasuhiro Tsujimura und Erika Kubota. "Solving Job-Shop Scheduling Problems by Genetic Algorithm". In: *Humans, Information and Technology: Proceedings of the 1994 IEEE International Conference on Systems, Man and Cybernetics (SMC'1994)*. Bd. 2. 2.–5. Okt. 1994, San Antonio, TX, USA. Piscataway, NJ, USA: Institute of Electrical and Electronics Engineers (IEEE), 1994, S. 1577–1582. ISBN: **978-0-7803-2129-8**. doi:[10.1109/ICSMC.1994.400072](https://doi.org/10.1109/ICSMC.1994.400072). Proposes a permutations-with-repetitions based encoding for the JSSP. (Siehe S. **156, 186, 197**).
- [98] Fred Glover. "Tabu Search – Part I". *ORSA Journal on Computing* 1(3):190–206, Sommer 1989. Catonsville, MD, USA: The Institute for Operations Research and the Management Sciences (INFORMS). ISSN: **0899-1499**. doi:[10.1287/ijoc.1.3.190](https://doi.org/10.1287/ijoc.1.3.190) (siehe S. **193**).
- [99] Fred Glover. "Tabu Search – Part II". *ORSA Journal on Computing* 2(1):4–32, Winter 1990. Catonsville, MD, USA: The Institute for Operations Research and the Management Sciences (INFORMS). ISSN: **0899-1499**. doi:[10.1287/ijoc.2.1.4](https://doi.org/10.1287/ijoc.2.1.4) (siehe S. **193**).
- [100] Fred Glover und Gary A. Kochenberger, Hrsg. *Handbook of Metaheuristics*. Bd. 57 der Reihe International Series in Operations Research & Management Science (ISOR). Cham, Switzerland: Springer, 2003. ISSN: **0884-8289**. ISBN: **978-0-306-48056-0**. doi:[10.1007/b101874](https://doi.org/10.1007/b101874) (siehe S. **189**).

References XIV



- [101] Fred Glover, Éric D. Taillard und Dominique de Werra. "A User's Guide to Tabu Search". *Annals of Operations Research* 41(1):3–28, März 1993. London, England, UK: Springer Nature Limited. ISSN: 0254-5330. doi:10.1007/BF02078647. Special issue on TS. (Siehe S. 193).
- [102] José Fernando Gonçalves und Mauricio G. C. Resende. "A Biased Random Key Genetic Algorithm for two-dimensional Bin Packing Problem (2BP) and 3D Bin Packing Problems". *International Journal of Production Economics (IJPE)* 145(2):500–510, Okt. 2013. Amsterdam, The Netherlands: Elsevier B.V. ISSN: 0925-5273. doi:10.1016/j.ijpe.2013.04.019. Applies the Biased Random Key Genetic Algorithm (BRKGA) to the 2BP|R|F and 2BP|O|F as well as 3D packing. Continuous vectors are translated to permutations and orientation data which is then the input of a placement heuristic. (Siehe S. 181, 182).
- [103] José Fernando Gonçalves und Mauricio G. C. Resende. "An Extended Akers Graphical Method with a Biased Random-Key Genetic Algorithm for Job-Shop Scheduling". *International Transactions on Operational Research (ITOR)* 21(2):215–246, März 2014. Chichester, West Sussex, England, UK: John Wiley and Sons Ltd. ISSN: 0969-6016. doi:10.1111/itor.12044. URL: <http://mauricio.resende.info/doc/brkga-jss2011.pdf> (besucht am 2026-09-30). The BRKGA basically is a MA using a continuous encoding of permutations that are decoded to schedules using the method from ^{24,25,97,217} and then refined via a TS. (Siehe S. 182, 186).
- [104] José Fernando Gonçalves und Mauricio G. C. Resende. "Biased Random-Key Genetic Algorithms for Combinatorial Optimization". *Journal of Heuristics* 17:487–525, Okt. 2010. London, England, UK: Springer Nature Limited. ISSN: 1381-1231. doi:10.1007/s10732-010-9143-1 (siehe S. 182).
- [105] Michael T. Goodrich. *A Gentle Introduction to NP-Completeness*. Irvine, CA, USA: University of California, Irvine, Apr. 2022. URL: <https://ics.uci.edu/~goodrich/teach/cs165/notes/NPComplete.pdf> (besucht am 2025-08-01) (siehe S. 198).
- [106] Ronald Lewis Graham, Eugene Leighton Lawler, Jan Karel Lenstra und Alexander Hendrik George Rinnooy Kan. "Optimization and Approximation in Deterministic Sequencing and Scheduling: A Survey". *Annals of Discrete Mathematics* (5):287–326. Hrsg. von Peter Ladislaw Hammer, Ellis Lane Johnson und Bernhard H. Korte, 1979. ISSN: 0167-5060. doi:10.1016/S0167-5060(08)70356-X. An early review on JSSPs and FSSPs. (Siehe S. 184, 186).

References XV



- [107] Martin Grötschel, Michael Jünger und Gerhard Reinelt. "Optimal Control of Plotting and Drilling Machines: A Case Study". *Zeitschrift für Operations Research (ZOR)*. now *Mathematical Methods of Operations Research (MMOR)* 35(1):61–84, Jan. 1991. Heidelberg, Baden-Württemberg, Germany: Physica-Verlag; now London, England, UK: Springer Nature Limited. ISSN: 0340-9422. doi:10.1007/BF01415960. This paper tackles circuit board plotting and drilling problems by modelling (parts of) them as symmetric Traveling Salesperson Problems (STSPs). (Siehe S. 194).
- [108] Gregory Z. Gutin und Abraham P. Punnen, Hrsg. *The Traveling Salesman Problem and its Variations*. Bd. 12 der Reihe Combinatorial Optimization (COOP). New York, NY, USA: Springer New York, Mai 2002. ISSN: 1388-3011. doi:10.1007/b101971 (siehe S. 194).
- [109] Pierre Hansen, Nenad Mladenović und José Andrés Moreno Pérez. "Variable Neighbourhood Search: Methods and Applications. Invited Survey". *4OR* 6(4):319–360, Dez. 2008. ISSN: 1619-4500. doi:10.1007/s10288-008-0089-1. URL: <https://www.researchgate.net/publication/225155945> (besucht am 2026-10-02) (siehe S. 196).
- [110] Michael Hausenblas. *Learning Modern Linux*. Sebastopol, CA, USA: O'Reilly Media, Inc., Apr. 2022. ISBN: 978-1-0981-0894-6 (siehe S. 89–101, 187).
- [111] Matthew Helmke. *Ubuntu Linux Unleashed 2021 Edition*. 14. Aufl. Reading, MA, USA: Addison-Wesley Professional, Aug. 2020. ISBN: 978-0-13-668539-5 (siehe S. 89–101, 115–123, 195).
- [112] Keld Helsgaun. "General k -opt Submoves for the Lin-Kernighan TSP Heuristic". *Mathematical Programming Computation* 1(2-3):119–163, Juli 2009. London, England, UK: Springer Nature Limited. ISSN: 1867-2949. doi:10.1007/s12532-009-0004-6. URL: <https://www2.seas.gwu.edu/~simhaweb/champalg/tsp/papers/Helsgaun2.pdf> (besucht am 2026-09-26) (siehe S. 188).
- [113] Keld Helsgaun. "An Effective Implementation of the Lin-Kernighan Traveling Salesman Heuristic". 126(1):106–130, Okt. 2000. doi:10.1016/S0377-2217(99)00284-2. URL: http://akira.ruc.dk/~keld/research/LKH/LKH-2.0/DOC/LKH_REPORT.pdf (besucht am 2026-09-26) (siehe S. 188).
- [114] André Henning. "Praktische Job-Shop Scheduling-Probleme". Diss. Jena, Thüringen, Germany: Friedrich-Schiller-Universität Jena, Aug. 2002. URL: <http://www.db-thueringen.de/servlets/DocumentServlet?id=873> (besucht am 2026-09-30). Alternate url: <https://nbn-resolving.org/urn:nbn:de:gbv:27-20060809-115700-4>. Applies MA-like algorithms to the JSSP. (Siehe S. 186, 188).

References XVI



- [115] Ian Hickson, Robin Berjon, Steve Faulkner, Travis Leithead, Erika Doyle Navara, Theresa O'Connor und Silvia Pfeiffer, Hrsg. *HTML5: A Vocabulary and Associated APIs for HTML and XHTML*. W3C Recommendation. Wakefield, MA, USA: World Wide Web Consortium (W3C), 28. Okt. 2014. URL: <http://www.w3.org/TR/2014/REC-html5-20141028> (besucht am 2024-12-17) (siehe S. 184).
- [116] Holger H. Hoos und Thomas Stützle. *Stochastic Local Search: Foundations & Applications*. The Morgan Kaufmann Series in Artificial Intelligence. Amsterdam, The Netherlands: Elsevier B.V., 2005. ISBN: 978-1-55860-872-6. doi:10.1016/B978-1-55860-872-6.X5016-1 (siehe S. 188, 192).
- [117] Holger H. Hoos und Thomas Stützle. *SATLIB – The Satisfiability Library*. 1.4.4. Vancouver, BC, Canada: The University of British Columbia (UBC), 11. Mai 2001. URL: <https://www.cs.ubc.ca/~hoos/SATLIB/index-ubc.html> (besucht am 2026-09-20). See paper ¹¹⁸ (siehe S. 158, 192).
- [118] Holger H. Hoos und Thomas Stützle. "SATLIB: An Online Resource for Research on SAT". In: *SAT2000 – Highlights of Satisfiability Research in the Year 2000*. Hrsg. von Ian Philip Gent, Toby Walsh und Hans van Maaren. Bd. 63 der Reihe Frontiers in Artificial Intelligence and Applications. Amsterdam, The Netherlands: IOS Press BV, Jan. 2000, S. 283–292. ISSN: 0922-6389. ISBN: 978-1-58603-061-2. See the website ¹¹⁷ (siehe S. 158, 192).
- [119] John Hunt. *A Beginners Guide to Python 3 Programming*. 2. Aufl. Undergraduate Topics in Computer Science (UTICS). Cham, Switzerland: Springer, 2023. ISSN: 1863-7310. ISBN: 978-3-031-35121-1. doi:10.1007/978-3-031-35122-8 (siehe S. 190).
- [120] John D. Hunter. "Matplotlib: A 2D Graphics Environment". *Computing in Science & Engineering* 9(3):90–95, Mai–Juni 2007. Piscataway, NJ, USA: Institute of Electrical and Electronics Engineers (IEEE). ISSN: 1521-9615. doi:10.1109/MCSE.2007.55 (siehe S. 188).
- [121] John D. Hunter, Darren Dale, Eric Firing, Michael Droettboom und The Matplotlib Development Team. *Matplotlib: Visualization with Python*. Austin, TX, USA: NumFOCUS, Inc., 2012–2025. URL: <https://matplotlib.org> (besucht am 2025-02-02) (siehe S. 188).
- [122] *Information Technology – Universal Coded Character Set (UCS)*. International Standard ISO/IEC 10646:2020. Geneva, Switzerland: International Organization for Standardization (ISO) und International Electrotechnical Commission (IEC), Dez. 2020 (siehe S. 178, 195).

References XVII



- [123] *Python 3 Documentation. Installing Python Modules*. Beaverton, OR, USA: Python Software Foundation (PSF), 2001–2025. URL: <https://docs.python.org/3/installing> (besucht am 2024-08-17) (siehe S. 190).
- [124] Manuel Iori, Vinícius Loti de Lima, Silvano Martello, Flávio K. Miyazaw und Michele Monaci. “Exact Solution Techniques for Two-Dimensional Cutting and Packing”. *European Journal of Operational Research* 289(2):399–415, März 2021. Amsterdam, The Netherlands: Elsevier B.V. ISSN: 0377-2217. doi:10.1016/j.ejor.2020.06.050. See also arXiv:2004.12619v1 [math.OC] 27 Apr 2020 at doi:10.1016/j.ejor.2020.06.050. (Siehe S. 181).
- [125] Christoph Jabs, Dieter Vandesande, Jeremias Berg, Johannes Fichte, George Katsirelos, Ruben Martins, André Schidler und Dominik Schreiber. *MaxSAT Evaluation: Complete Benchmark Collection*. 2026. Aufl. Geneva, Switzerland: zenodo (hosted by European Organization for Nuclear Research (CERN)), 9. Juli 2026. doi:10.5281/zenodo.21283148. All versions of this dataset can be reached directly via doi:10.5281/zenodo.21283147. See also <https://github.com/maxsat-evaluations/data> and <https://maxsat-evaluations.github.io>. (Siehe S. 189).
- [126] Dean Jacobs, Jan Prins, Peter Siegel und Kenneth Wilson. “Monte Carlo Techniques in Code Optimization”. In: *15th Annual Workshop on Microprogramming (MICRO 15)*. 5.–7. Okt. 1982. Hrsg. von Joseph Allen Fisher, William J. Tracz und Bill Hopkins. Palo Alto, CA, USA: Piscataway, NJ, USA: Institute of Electrical and Electronics Engineers (IEEE) und New York, NY, USA: Association for Computing Machinery (ACM), Okt. 1982, S. 143–148. doi:10.5555/800036.800944. See ¹²⁷ (siehe S. 159).
- [127] Dean Jacobs, Jan Prins, Peter Siegel und Kenneth Wilson. “Monte Carlo Techniques in Code Optimization”. *ACM SIGMICRO Newsletter* 13(4):143–148, Dez. 1982. New York, NY, USA: Association for Computing Machinery (ACM). ISSN: 1050-916X. doi:10.1145/1014194.800944. See ¹²⁶ (siehe S. 159, 192).
- [128] Stefan Jakobs. “On Genetic Algorithms for the Packing of Polygons”. *European Journal of Operational Research* 88(1):165–181, Jan. 1996. Amsterdam, The Netherlands: Elsevier B.V. ISSN: 0377-2217. doi:10.1016/0377-2217(94)00166-9 (siehe S. 185).
- [129] Wassim Jaziri, Hrsg. *Tabu Search*. London, England, UK: IntechOpen Limited, 1. Aug. 2008. ISBN: 978-3-902613-34-9. doi:10.5772/65. URL: <https://www.intechopen.com/books/6114> (besucht am 2026-09-30) (siehe S. 193).
- [130] Robert Johansson. *Numerical Python: Scientific Computing and Data Science Applications with NumPy, SciPy and Matplotlib*. New York, NY, USA: Apress Media, LLC, Dez. 2018. ISBN: 978-1-4842-4246-9 (siehe S. 188).

References XVIII



- [131] David Stifler Johnson, Gregory Z. Gutin, Lyle Andrew McGeoch, Anders Yeo, Weixiong Zhang und Alexei Zverovitch. *Experimental Analysis of Heuristics for the ATSP*. Hrsg. von Gregory Z. Gutin und Abraham P. Punnen. New York, NY, USA, Mai 2002. doi:10.1007/0-306-48213-4_10. URL: <https://archive.dimacs.rutgers.edu/Challenges/TSP/papers/atpschap.pdf> (besucht am 2026-09-25) (siehe S. 194).
- [132] David Stifler Johnson und Lyle Andrew McGeoch. *Experimental Analysis of Heuristics for the STSP*. Hrsg. von Gregory Z. Gutin und Abraham P. Punnen. New York, NY, USA, Mai 2002. doi:10.1007/0-306-48213-4_9. URL: <https://archive.dimacs.rutgers.edu/Challenges/TSP/papers/stspchap.pdf> (besucht am 2026-09-25) (siehe S. 194).
- [133] David Stifler Johnson, Lyle Andrew McGeoch, Fred Glover und Cesar Rego. *8th DIMACS Implementation Challenge: The Traveling Salesman Problem*. 1. Juni 2000–19. Nov. 2013. URL: <https://archive.dimacs.rutgers.edu/Challenges/TSP> (besucht am 2026-09-25) (siehe S. 194).
- [134] Selmer Martin Johnson. "Optimal Two- and Three-Stage Production Schedules with Setup Times Included". *Naval Research Logistics Quarterly* 1(1):61–68, März 1954. Chichester, West Sussex, England, UK: John Wiley and Sons Ltd. ISSN: 0894-069X. doi:10.1002/nav.3800010110. URL: <https://www.rand.org/content/dam/rand/pubs/papers/2008/P402.pdf> (besucht am 2023-12-06) (siehe S. 184).
- [135] "exit – Terminate a Process". In: *POSIX.1-2024: The Open Group Base Specifications Issue 8, IEEE Std 1003.1™-2024 Edition*. Hrsg. von Andrew Josey. Piscataway, NJ, USA: Institute of Electrical and Electronics Engineers (IEEE) und San Francisco, CA, USA: The Open Group, 8. Aug. 2024. URL: <https://pubs.opengroup.org/onlinepubs/9799919799/functions/exit.html> (besucht am 2024-10-30) (siehe S. 87, 88).
- [136] Andrew Josey, Hrsg. *POSIX.1-2024: The Open Group Base Specifications Issue 8, IEEE Std 1003.1™-2024 Edition*. Piscataway, NJ, USA: Institute of Electrical and Electronics Engineers (IEEE) und San Francisco, CA, USA: The Open Group, 8. Aug. 2024. URL: <https://pubs.opengroup.org/onlinepubs/9799919799> (besucht am 2024-10-30).
- [137] "stderr, stdin, stdout – Standard I/O Streams". In: *POSIX.1-2024: The Open Group Base Specifications Issue 8, IEEE Std 1003.1™-2024 Edition*. Hrsg. von Andrew Josey. Piscataway, NJ, USA: Institute of Electrical and Electronics Engineers (IEEE) und San Francisco, CA, USA: The Open Group, 8. Aug. 2024. URL: <https://pubs.opengroup.org/onlinepubs/9799919799/functions/stdin.html> (besucht am 2024-10-30) (siehe S. 87, 88, 192, 193).

References XIX



- [138] William (Bill) Kent. "A Simple Guide to Five Normal Forms in Relational Database Theory". *Communications of the ACM (CACM)* 26(2):120–125, Sep. 1982–Feb. 1983. New York, NY, USA: Association for Computing Machinery (ACM). ISSN: 0001-0782. doi:10.1145/358024.358054. URL: <https://www.cs.dartmouth.edu/~cs61/Resources/Papers/CACM%20Kent%20Five%20Normal%20Forms.pdf> (besucht am 2025-05-03) (siehe S. 181, 189).
- [139] Scott Kirkpatrick, C. Daniel Gelatt, Jr. und Mario P. Vecchi. "Optimization by Simulated Annealing". *Science Magazine* 220(4598):671–680, 13. Mai 1983. Washington, D.C., USA: American Association for the Advancement of Science (AAAS). ISSN: 0036-8075. doi:10.1126/science.220.4598.671. URL: <https://www.researchgate.net/publication/6026283> (besucht am 2025-08-08) (siehe S. 192).
- [140] Robert Klein. *Scheduling of Resource-Constrained Projects*. Bd. 10 der Reihe Operations Research/Computer Science Interfaces Series (ORCS). New York, NY, USA: Springer New York, 2000. ISSN: 1387-666X. ISBN: 978-0-7923-8637-7. doi:10.1007/978-1-4615-4629-0 (siehe S. 184).
- [141] Donald Ervin Knuth. "Big Omicron and Big Omega and Big Theta". *ACM SIGACT News* 8(2):18–24, Apr.–Juni 1976. New York, NY, USA: Association for Computing Machinery (ACM). ISSN: 0163-5700. doi:10.1145/1008328.1008329 (siehe S. 198).
- [142] Donald Ervin Knuth. *Fundamental Algorithms*. 3. Aufl. Bd. 1 der Reihe The Art of Computer Programming. Reading, MA, USA: Addison-Wesley Professional, 1997. ISBN: 978-0-201-89683-1 (siehe S. 198).
- [143] Tjalling Charles Koopmans und Martin Beckmann. "Assignment Problems and the Location of Economic Activities". *Econometrica* 25(1):53–76, 1957. New Haven, CT, USA: The Econometric Society and Chichester, West Sussex, England, UK: John Wiley and Sons Ltd. ISSN: 0012-9682. doi:10.2307/1907742 (siehe S. 191).
- [144] Jakob Krarup und Peter Mark Pruzan. "Computer-aided Layout Design". In: *Mathematical Programming in Use*. Hrsg. von Michel Louis Balinski und Claude Lemaréchal. Bd. 9 der Reihe. Berlin/Heidelberg, Germany: Springer-Verlag GmbH Germany, 1978. Kap. 6, S. 75–94. ISSN: 0303-3929. ISBN: 978-3-642-00796-5. doi:10.1007/BFb0120827. Uses QAPs as model for designing architectural layouts. (Siehe S. 191).
- [145] Mark W. Krentel. "The Complexity of Optimization Problems". *Journal of Computer and System Sciences* 36(3):490–509, Juni 1988. Amsterdam, The Netherlands: Elsevier B.V. ISSN: 0022-0000. Explores the hardness (optimization) problems such TSP, Clique, and Coloring, where computing the optimal value is $\mathcal{NP}$ -complete. (Siehe S. 194).

References XX



- [146] Jay LaCroix. *Mastering Ubuntu Server*. 4. Aufl. Birmingham, England, UK: Packt Publishing Ltd, Sep. 2022. ISBN: **978-1-80323-424-3** (siehe S. **192**).
- [147] Edmund Landau. *Handbuch der Lehre von der Verteilung der Primzahlen*. Leipzig, Sachsen, Germany: B. G. Teubner, 1909. ISBN: **978-0-8218-2650-8** (siehe S. **198**).
- [148] Eugene Leighton Lawler, Jan Karel Lenstra und Alexander Hendrik George Rinnooy Kan. "Recent Developments in Deterministic Sequencing and Scheduling: A Survey". In: *Deterministic and Stochastic Scheduling: Proceedings of the NATO Advanced Study and Research Institute on Theoretical Approaches to Scheduling Problems*. 6.–17. Juni 1981, Durham, England, UK. Hrsg. von Michael Anthony Howe Dempster, Jan Karel Lenstra und Alexander Hendrik George Rinnooy Kan. Bd. 84 der Reihe Nato Science Series C: Mathematical and Physical Science (ASIC). London, England, UK: Springer Nature Limited, Apr. 1982, S. 35–73. ISBN: **978-90-277-1397-1**. doi:[10.1007/978-94-009-7801-0_3](https://doi.org/10.1007/978-94-009-7801-0_3). The JSSP is $\mathcal{NP}$ -hard. (Siehe S. **186**).
- [149] Eugene Leighton Lawler, Jan Karel Lenstra, Alexander Hendrik George Rinnooy Kan und David B. Shmoys. "Sequencing and Scheduling: Algorithms and Complexity". In: *Production Planning and Inventory*. Hrsg. von Stephen C. Graves, Alexander Hendrik George Rinnooy Kan und Paul H. Zipkin. Bd. IV der Reihe Handbooks of Operations Research and Management Science. Amsterdam, The Netherlands: Elsevier B.V., 1993. Kap. 9, S. 445–522. ISSN: **0927-0507**. ISBN: **978-0-444-87472-6**. doi:[10.1016/S0927-0507\(05\)80189-6](https://doi.org/10.1016/S0927-0507(05)80189-6). URL: <http://alexandria.tue.nl/repository/books/339776.pdf> (besucht am 2023-12-06). Discusses, amongst others, that the JSSP is $\mathcal{NP}$ -hard. (Siehe S. **186, 198**).
- [150] Eugene Leighton Lawler, Jan Karel Lenstra, Alexander Hendrik George Rinnooy Kan und David B. Shmoys. *The Traveling Salesman Problem: A Guided Tour of Combinatorial Optimization*. Estimation, Simulation, and Control – Wiley-Interscience Series in Discrete Mathematics and Optimization. Chichester, West Sussex, England, UK: Wiley Interscience, Sep. 1985. ISSN: **0277-2698**. ISBN: **978-0-471-90413-7** (siehe S. **194**).
- [151] Stephen R. Lawrence. "Resource Constrained Project Scheduling: An Experimental Investigation of Heuristic Scheduling Techniques". Diss. Pittsburgh, PA, USA: Graduate School of Industrial Administration (GSIA), Carnegie-Mellon University, 1984 (siehe S. **186**).
- [152] Kent D. Lee und Steve Hubbard. *Data Structures and Algorithms with Python*. Undergraduate Topics in Computer Science (UTICS). Cham, Switzerland: Springer, 2015. ISSN: **1863-7310**. ISBN: **978-3-319-13071-2**. doi:[10.1007/978-3-319-13072-9](https://doi.org/10.1007/978-3-319-13072-9) (siehe S. **190**).

References XXI



- [153] Xueping Li und Kaike Zhang. "Single Batch Processing Machine Scheduling with Two-Dimensional Bin Packing Constraints". *International Journal of Production Economics (IJPE)* 196:113–121, Feb. 2018. Amsterdam, The Netherlands: Elsevier B.V. ISSN: 0925-5273. doi:10.1016/j.ijpe.2017.11.015. Mentions some scheduling tasks of Additive Manufacturing jobs can be viewed as instance of the 2BP|R|F. (Siehe S. 181).
- [154] Tianyu Liang (梁天宇), Zhize Wu (吴志泽), Jörg Lässig, Daan van den Berg, Sarah Louise Thomson und Thomas Weise (汤卫思). "Addressing the Traveling Salesperson Problem with Frequency Fitness Assignment and Hybrid Algorithms". *Soft Computing* 28(17-18):9495–9508, Juli 2024. London, England, UK: Springer Nature Limited. ISSN: 1432-7643. doi:10.1007/S00500-024-09718-8 (siehe S. 184, 194).
- [155] Tianyu Liang (梁天宇), Zhize Wu (吴志泽), Jörg Lässig, Daan van den Berg und Thomas Weise (汤卫思). "Solving the Traveling Salesperson Problem using Frequency Fitness Assignment". In: *IEEE Symposium Series on Computational Intelligence (SSCI'2022)*. 4.–7. Dez. 2022, Singapore. Piscataway, NJ, USA: Institute of Electrical and Electronics Engineers (IEEE), 2022. ISBN: 978-1-6654-8769-6. doi:10.1109/SSCI51031.2022.10022296 (siehe S. 184).
- [156] Shen Lin und Brian W. Kernighan. "An Effective Heuristic Algorithm for the Traveling-Salesman Problem". *Operations Research* 21(2):498–516, März–Apr. 1973. Catonsville, MD, USA: The Institute for Operations Research and the Management Sciences (INFORMS). ISSN: 0030-364X. doi:10.1287/opre.21.2.498. URL: <https://www.cs.princeton.edu/~bwk/btl.mirror/tsp.pdf> (besucht am 2026-09-26) (siehe S. 188).
- [157] Dequan Liu (刘德全) und Hongfei Teng (滕弘飞). "An Improved BL-Algorithm for EAGenetic Algorithm of the Orthogonal Packing of Rectangles". *European Journal of Operational Research* 112(2):413–420, Jan. 1999. Amsterdam, The Netherlands: Elsevier B.V. ISSN: 0377-2217. doi:10.1016/S0377-2217(97)00437-2 (siehe S. 185).
- [158] Andrea Lodi, Silvano Martello und Michele Monaci. "Two-Dimensional Packing Problems: A Survey". *European Journal of Operational Research* 141(2):241–252, Sep. 2002. Amsterdam, The Netherlands: Elsevier B.V. ISSN: 0377-2217. doi:10.1016/S0377-2217(02)00123-6 (siehe S. 181, 182).
- [159] Andrea Lodi, Silvano Martello und Daniele Vigo. "Heuristic and Metaheuristic Approaches for a Class of Two-Dimensional Bin Packing Problems". *INFORMS Journal on Computing* 11(4):345–357, Herbst 1999. Catonsville, MD, USA: The Institute for Operations Research and the Management Sciences (INFORMS). ISSN: 1091-9856. doi:10.1287/ijoc.11.4.345 (siehe S. 181).

References XXII



- [160] Andrea Lodi, Silvano Martello und Daniele Vigo. "Recent Advances on Two-Dimensional Bin Packing Problems". *Discrete Applied Mathematics* 123(1–3):379–396, Nov. 2002. Amsterdam, The Netherlands: Elsevier B.V. ISSN: 0166-218X. doi:10.1016/S0166-218X(01)00347-X (siehe S. 181, 182).
- [161] Eliane Maria Loiola, Nair Maria Maia de Abreu, Paulo Oswaldo Boaventura-Netto, Peter M. Hahn und Tania Querido. "A Survey for the Quadratic Assignment Problem". *European Journal of Operational Research* 176(2):657–690, 2007. Amsterdam, The Netherlands: Elsevier B.V. ISSN: 0377-2217. doi:10.1016/j.ejor.2005.09.032 (siehe S. 191).
- [162] Mariana A. Londe, Luciana S. Pessoa, Carlos E. Andrade und Mauricio G. C. Resende. *Biased Random-Key Genetic Algorithms: A Review*. arXiv.org: Computing Research Repository (CoRR) abs/2312.00961v2. Ithaca, NY, USA: Cornell University Library, 6. Dez. 2023. doi:10.48550/arXiv.2312.00961. URL: <https://arxiv.org/abs/2312.00961v2> (besucht am 2024-06-27). arXiv:2312.00961v2 [cs.NE] 06 Dec 2023; See ¹⁶³ (siehe S. 164).
- [163] Mariana A. Londe, Luciana S. Pessoa, Carlos E. Andrade und Mauricio G. C. Resende. "Biased Random-Key Genetic Algorithms: A Review". *European Journal of Operational Research* 321(1):1–22, Feb. 2025. Amsterdam, The Netherlands: Elsevier B.V. ISSN: 0377-2217. doi:10.1016/j.ejor.2024.03.030. See ¹⁶² (siehe S. 164, 182).
- [164] Gloria Lotha, Aakanksha Gaur, Erik Gregersen, Swati Chopra und William L. Hosch. "Client-Server Architecture". In: *Encyclopaedia Britannica*. Hrsg. von The Editors of Encyclopaedia Britannica. Chicago, IL, USA: Encyclopædia Britannica, Inc., 3. Jan. 2025. URL: <https://www.britannica.com/technology/client-server-architecture> (besucht am 2025-01-20) (siehe S. 183).
- [165] Marc Loy, Patrick Niemeyer und Daniel Leuck. *Learning Java*. 5. Aufl. Sebastopol, CA, USA: O'Reilly Media, Inc., März 2020. ISBN: 978-1-4920-5627-0 (siehe S. 186).
- [166] Mark Lutz. *Learning Python*. 6. Aufl. Sebastopol, CA, USA: O'Reilly Media, Inc., März 2025. ISBN: 978-1-0981-7130-8 (siehe S. 190).
- [167] Reinhard Männer und Bernard Manderick, Hrsg. *Parallel Problem Solving from Nature 2 (PPSN-II)*. 28.–30. Sep. 1992, Brussels, Belgium. Amsterdam, The Netherlands: Elsevier B.V., 1992.
- [168] Francesco Marcelloni, Kurosh Madani, Niki van Stein und Joaquim Filipe, Hrsg. *16th International Joint Conference on Computational Intelligence (IJCCI'24)*. 20.–22. Nov. 2024, Porto, Portugal. Porto, Portugal: SciTePress: Science and Technology Publications, Lda, 2024. ISSN: 2184-3236. ISBN: 978-989-758-721-4. doi:10.5220/0000195000003837.

References XXIII



- [169] Silvano Martello und Daniele Vigo. "Exact Solution of the Two-Dimensional Finite Bin Packing Problem". 44(3):388–399, März 1998. doi:10.1287/mnsc.44.3.388 (siehe S. 181).
- [170] Stephan Mertens. "Exhaustive Search for Low-Autocorrelation Binary Sequences". *Journal of Physics A: Mathematical and General* 29(18):L473, Sep. 1996. Bristol, England, UK: IOP Publishing Ltd. ISSN: 0305-4470. doi:10.1088/0305-4470/29/18/005 (siehe S. 187).
- [171] Peter Merz und Bernd Freisleben. "A Comparison of MAMemetic Algorithms, TSTabu Search, and ACOAnt Colonies for the QAPQuadratic Assignment Problem". In: *Congress on Evolutionary Computation (CEC'1999)*. 6.–9. Juli 1999, Washington, D.C., USA. Piscataway, NJ, USA: Institute of Electrical and Electronics Engineers (IEEE), 1999, S. 2063–2070. doi:10.1109/CEC.1999.785529 (siehe S. 191).
- [172] Carl Meyer. *Python Virtual Environments*. Python Enhancement Proposal (PEP) 405. Beaverton, OR, USA: Python Software Foundation (PSF), 13. Juni 2011–24. Mai 2012. URL: <https://peps.python.org/pep-0405> (besucht am 2024-12-25) (siehe S. 196).
- [173] Burkhard Militzer, Michele Zamparelli und Dieter Beule. "Evolutionary Search for Low Autocorrelated Binary Sequences". *IEEE Transactions on Evolutionary Computation* 2(1):34–39, Apr. 1998. Los Alamitos, CA, USA: IEEE Computer Society. ISSN: 1089-778X. doi:10.1109/4235.728212 (siehe S. 187).
- [174] Alfonsas Misevičius. "A Tabu Search Algorithm for the Quadratic Assignment Problem". *Computational Optimization and Applications* 30:95–111, Jan. 2005. London, England, UK: Springer Nature Limited. ISSN: 0926-6003. doi:10.1007/s10589-005-4562-x (siehe S. 193).
- [175] Alfonsas Misevičius. "A Modified Simulated Annealing Algorithm for the Quadratic Assignment Problem". *Informatica* 14(4):497–514, Jan. 2003. Vilnius, Lithuania: Vilnius University, Institute of Data Science and Digital Technologies (DMSTI), Lithuanian Academy of Sciences. ISSN: 0868-4952. doi:10.15388/Informatica.2003.037 (siehe S. 192).
- [176] Alfonsas Misevičius. *An Implementation of the Iterated Tabu Search Algorithm for the Quadratic Assignment Problem*. Working Paper. Kaunas, Lithuania: Kaunas University of Technology, 2008. See also ¹⁷⁷ (siehe S. 165).
- [177] Alfonsas Misevičius. "An Implementation of the Iterated Tabu Search Algorithm for the Quadratic Assignment Problem". *OR Spectrum: Quantitative Approaches in Management. Formerly Operations-Research-Spektrum* 34(3):665–690, Juli 2012. London, England, UK: Springer Nature Limited. ISSN: 0171-6468. doi:10.1007/s00291-011-0274-z. See also ¹⁷⁶ (siehe S. 165, 191, 193).

References XXIV



- [178] Nenad Mladenović und Pierre Hansen. "Variable Neighborhood Search". *Computers & Operations Research* 24(11):1097–1100, Nov. 1997. Amsterdam, The Netherlands: Elsevier B.V. ISSN: **0305-0548**. doi:[10.1016/S0305-0548\(97\)00031-2](https://doi.org/10.1016/S0305-0548(97)00031-2) (siehe S. 196).
- [179] Wai Ho Mow, Ke-Lin Du und Wei Hsiang Wu. "New Evolutionary Search for Long Low Autocorrelation Binary Sequences". *IEEE Transactions on Aerospace and Electronic Systems* 51(1):290–303, Jan. 2015. Piscataway, NJ, USA: Institute of Electrical and Electronics Engineers (IEEE). ISSN: **0018-9251**. doi:[10.1109/TAES.2014.130518](https://doi.org/10.1109/TAES.2014.130518) (siehe S. 187).
- [180] Heinz Mühlenbein. "How Genetic Algorithms Really Work: Mutation and Hillclimbing". In: *Parallel Problem Solving from Nature 2 (PPSN-II)*. 28.–30. Sep. 1992, Brussels, Belgium. Hrsg. von Reinhard Männer und Bernard Manderick. Amsterdam, The Netherlands: Elsevier B.V., 1992, S. 15–26. URL: <https://www.researchgate.net/publication/284805798> (besucht am 2025-08-15) (siehe S. 189).
- [181] Cameron Newham und Bill Rosenblatt. *Learning the Bash Shell – Unix Shell Programming: Covers Bash 3.0*. 3. Aufl. Sebastopol, CA, USA: O'Reilly Media, Inc., 2005. ISBN: **978-0-596-00965-6** (siehe S. 182).
- [182] Siegfried Nijssen und Thomas Bäck. "An Analysis of the Behavior of Simplified Evolutionary Algorithms on Trap Functions". *IEEE Transactions on Evolutionary Computation* 7(1):11–22, Feb. 2003. Los Alamitos, CA, USA: IEEE Computer Society. ISSN: **1089-778X**. doi:[10.1109/TEVC.2002.806169](https://doi.org/10.1109/TEVC.2002.806169) (siehe S. 193).
- [183] Eugeniusz Nowicki und Czesław Smutnicki. "A Fast Taboo Search Algorithm for the Job Shop Problem". *Management Science* 42(6):783–938, Juni 1996. Catonsville, MD, USA: The Institute for Operations Research and the Management Sciences (INFORMS). ISSN: **0025-1909**. doi:[10.1287/mnsc.42.6.797](https://doi.org/10.1287/mnsc.42.6.797) (siehe S. 193).
- [184] Regina O. Obe und Leo S. Hsu. *PostgreSQL: Up and Running*. 3. Aufl. Sebastopol, CA, USA: O'Reilly Media, Inc., Okt. 2017. ISBN: **978-1-4919-6336-4** (siehe S. 190).
- [185] **OMG® Unified Modeling Language® (OMG UML®). Version 2.5.1**. OMG Document formal/2017-12-05. Milford, MA, USA: Object Management Group, Inc. (OMG), Dez. 2017. URL: <https://www.omg.org/spec/UML/2.5.1/PDF> (besucht am 2025-03-30) (siehe S. 195).
- [186] Robert Orfali, Dan Harkey und Jeri Edwards. *Client/Server Survival Guide*. 3. Aufl. Chichester, West Sussex, England, UK: John Wiley and Sons Ltd., 25. Jan. 1999. ISBN: **978-0-471-31615-2** (siehe S. 183).

References XXV



- [187] Tom Packebusch und Stephan Mertens. "Low Autocorrelation Binary Sequences". *Journal of Physics A: Mathematical and Theoretical* 49(16):165001, März 2016. Bristol, England, UK: IOP Publishing Ltd. ISSN: **1751-8121**. doi:[10.1088/1751-8113/49/16/165001](https://doi.org/10.1088/1751-8113/49/16/165001) (siehe S. 187).
- [188] Ashwin Pajankar. *Hands-on Matplotlib: Learn Plotting and Visualizations with Python 3*. New York, NY, USA: Apress Media, LLC, Nov. 2021. ISBN: **978-1-4842-7410-1** (siehe S. 188).
- [189] Panos Miltiades Pardalos, Ding-Zhu Du und Ronald Lewis Graham, Hrsg. *Handbook of Combinatorial Optimization*. 1. Aufl. Boston, MA, USA: Springer, 1998. ISBN: **978-1-4613-7987-4**.
- [190] Panos Miltiades Pardalos, Oleg V. Shylo und Alkis Vazacopoulos. "Solving Job Shop Scheduling Problems Utilizing the Properties of Backbone and "Big Valley"". *Computational Optimization and Applications* 47(1):61–76, Sep. 2010. London, England, UK: Springer Nature Limited. ISSN: **0926-6003**. doi:[10.1007/s10589-008-9206-5](https://doi.org/10.1007/s10589-008-9206-5). An algorithm similar to SA. (Siehe S. 186, 192).
- [191] Francisco Parreño, Ramón Alvarez-Valdés, José Fernando Oliveira und José Manuel Tamarit. "A Hybrid GRASP/VND Algorithm for Two- and Three-Dimensional Bin Packing". *Annals of Operations Research* 179(1):203–220, Sep. 2010. London, England, UK: Springer Nature Limited. ISSN: **0254-5330**. doi:[10.1007/s10479-008-0449-4](https://doi.org/10.1007/s10479-008-0449-4) (siehe S. 181, 184, 196).
- [192] Bo Peng, Zhipeng Lü und T. C. Edwin Cheng. "A Tabu Search/Path Relinking Algorithm to Solve the Job Shop Scheduling Problem". *Computers & Operations Research* 53:154–164, Jan. 2015. Amsterdam, The Netherlands: Elsevier B.V. ISSN: **0305-0548**. doi:[10.1016/j.cor.2014.08.006](https://doi.org/10.1016/j.cor.2014.08.006). URL: <http://arxiv.org/abs/1402.5613> (besucht am 2026-09-30) (siehe S. 186, 193).
- [193] Yasset Pérez-Riverol, Laurent Gatto, Rui Wang, Timo Sachsenberg, Julian Uszkoreit, Felipe da Veiga Leprevost, Christian Fufezan, Tobias Ternent, Stephen J. Eglén, Daniel S. Katz, Tom J. Pollard, Alexander Kononov, Robert M. Flight, Kai Blin und Juan Antonio Vizcaino. "Ten Simple Rules for Taking Advantage of Git and GitHub". *PLOS Computational Biology* 12(7), 14. Juli 2016. San Francisco, CA, USA: Public Library of Science (PLOS). ISSN: **1553-7358**. doi:[10.1371/JOURNAL.PCBI.1004947](https://doi.org/10.1371/JOURNAL.PCBI.1004947) (siehe S. 184).
- [194] Ferdinando Pezzella und Emanuela Merelli. "A Tabu Search Method Guided by Shifting Bottleneck for the Job Shop Scheduling Problem". *European Journal of Operational Research* 120(2):297–310, Jan. 2000. Amsterdam, The Netherlands: Elsevier B.V. ISSN: **0377-2217**. doi:[10.1016/S0377-2217\(99\)00158-7](https://doi.org/10.1016/S0377-2217(99)00158-7). URL: [https://www2.cs.sfu.ca/CourseCentral/827/havens/papers/topic%5C%2310\(JobShop\)/Tabu%5C%20With%5C%20Shifting.pdf](https://www2.cs.sfu.ca/CourseCentral/827/havens/papers/topic%5C%2310(JobShop)/Tabu%5C%20With%5C%20Shifting.pdf) (besucht am 2026-09-30) (siehe S. 193).

References XXVI



- [195] Martin Pincus. "Letter to the Editor – A Monte Carlo Method for the Approximate Solution of Certain Types of Constrained Optimization Problems". *Operations Research* 18(6):1225–1228, Nov.–Dez. 1970. Catonsville, MD, USA: The Institute for Operations Research and the Management Sciences (INFORMS). ISSN: 0030-364X. doi:10.1287/opre.18.6.1225 (siehe S. 192).
- [196] Marcelo Pinto, Cristóvão Silva, Matthias Thüerer und Samuel Moniz. "Survey in Operations Research and Management Science. Nesting and Scheduling Optimization of Additive Manufacturing Systems: Mapping the Territory". *Computers & Operations Research* 165(106592), Feb. 2024. Amsterdam, The Netherlands: Elsevier B.V. ISSN: 0305-0548. doi:10.1016/j.cor.2024.106592. Mentions some scheduling tasks of Additive Manufacturing jobs can be viewed as instance of the 2BP|R|F. (Siehe S. 181).
- [197] pip Developers. *pip Documentation v24.3.1*. Beaverton, OR, USA: Python Software Foundation (PSF), 27. Okt. 2024. URL: <https://pip.pypa.io> (besucht am 2024-12-25) (siehe S. 190).
- [198] *PostgreSQL Essentials: Leveling Up Your Data Work*. Sebastopol, CA, USA: O'Reilly Media, Inc., März 2024 (siehe S. 190).
- [199] S. D. Prestwich. *Improved Branch-and-Bound for Low Autocorrelation Binary Sequences*. arXiv.org: Computing Research Repository (CoRR) abs/1305.6187. Ithaca, NY, USA: Cornell University Library, 3. Apr. 2024. doi:10.48550/arXiv.1305.6187. URL: <https://arxiv.org/abs/1305.6187> (besucht am 2013-07-23). arXiv:1305.6187v2 [cs.AI] 23 Jul 2013 (siehe S. 187).
- [200] *Programming Languages – C, Working Document of SC22/WG14*. International Standard ISO/3IEC9899:2017 C17 Ballot N2176. Geneva, Switzerland: International Organization for Standardization (ISO) und International Electrotechnical Commission (IEC), Nov. 2017. URL: <https://files.lhmouse.com/standards/ISO%20C%20N2176.pdf> (besucht am 2024-06-29) (siehe S. 182).
- [201] Sanatan Rai und George Vairaktarakis. "NP-Complete Problems and Proof Methodology". In: *Encyclopedia of Optimization*. Hrsg. von Christodoulos A. Floudas und Panos Miltiades Pardalos. 2. Aufl. Boston, MA, USA: Springer, Sep. 2008, S. 2675–2682. ISBN: 978-0-387-74758-3. doi:10.1007/978-0-387-74759-0_462 (siehe S. 198).
- [202] Soraya B. Rana und L. Darrell Whitley. "Genetic Algorithm Behavior in the MAXSAT Domain". In: *5th International Conference on Parallel Problem Solving from Nature (PPSN V)*. 27.–30. Sep. 1998, Amsterdam, The Netherlands. Hrsg. von Ágoston Endre Eiben, Thomas Bäck, Marc Schoenauer und Hans-Paul Schwefel. Lecture Notes in Computer Science (LNCS). 1998, S. 785–794. ISSN: 0302-9743. ISBN: 978-3-540-65078-2. doi:10.1007/BFb0056920 (siehe S. 188).

References XXVII



- [203] Abhishek Ratan, Eric Chou, Pradeeban Kathiravelu und Dr. M.O. Faruque Sarker. *Python Network Programming*. Birmingham, England, UK: Packt Publishing Ltd, Jan. 2019. ISBN: **978-1-78883-546-6** (siehe S. **183**).
- [204] Gerhard Reinelt. "TSPLIB – A Traveling Salesman Problem Library". *ORSA Journal on Computing* 3(4):376–384, Herbst 1991. Catonsville, MD, USA: The Institute for Operations Research and the Management Sciences (INFORMS). ISSN: **0899-1499**. doi:**10.1287/ijoc.3.4.376** (siehe S. **194**).
- [205] Gerhard Reinelt. *TSPLIB95*. Techn. Ber. Heidelberg, Baden-Württemberg, Germany: Universität Heidelberg, Institut für Angewandte Mathematik, 1995–28. Apr. 2016. URL: <https://github.com/shredderzwj/TSPLIB> (besucht am 2026-09-25). The original Uniform Resource Locator (URL) of the repository has become defunct in 2026. Therefore, we provide the repository listed as main URL which contains the data. Additionally, you may also check <https://github.com/thomasWeise/tspSuite> of our own project *TSPSuite*, which contains all the TSPLib instances as well as Java code to load them. (Siehe S. **194**).
- [206] Mark Richards und Neal Ford. *Fundamentals of Software Architecture: An Engineering Approach*. Sebastopol, CA, USA: O'Reilly Media, Inc., Jan. 2020. ISBN: **978-1-4920-4345-4** (siehe S. **183**).
- [207] Kristian Rother. *Pro Python Best Practices: Debugging, Testing and Maintenance*. New York, NY, USA: Apress Media, LLC, März 2017. ISBN: **978-1-4842-2241-6** (siehe S. **183**).
- [208] Ernest E. Rothman, Rich Rosen und Brian Jepson. *Mac OS X for Unix Geeks*. 4. Aufl. Sebastopol, CA, USA: O'Reilly Media, Inc., Sep. 2008. ISBN: **978-0-596-52062-5** (siehe S. **188**).
- [209] Günter Rudolph. *Convergence Properties of Evolutionary Algorithms*. Bd. 35 der Reihe Forschungsergebnisse zur Informatik. Hamburg, Germany: Verlag Dr. Kovač, 1997. ISSN: **1435-6260**. ISBN: **978-3-86064-554-3** (siehe S. **187**).
- [210] Randall Rustin, Hrsg. *Data Base Systems: Courant Computer Science Symposium 6*. 24.–25. Mai 1971, New York, NY, USA. Englewood Cliffs, NJ, USA: Prentice-Hall, 1972. ISBN: **978-0-13-196741-0** (siehe S. **150**).
- [211] Ahmad Sahar. *iOS 26 Programming for Beginners*. 10. Aufl. Birmingham, England, UK: Packt Publishing Ltd, Nov. 2025. ISBN: **978-1-80602-393-6** (siehe S. **196**).

References XXVIII



- [212] Sartaj Sahni und Teofilo Francisco Gonzalez Arce. "P-complete Approximation Problems". *Journal of the ACM (JACM)* 23(3):555–565, Juli 1976. New York, NY, USA: Association for Computing Machinery (ACM). ISSN: 0004-5411. doi:10.1145/321958.321975. URL: <https://sites.cs.ucsb.edu/~teo/papers/JACM-PCOM.pdf> (besucht am 2026-02-21) (siehe S. 191).
- [213] Guntram Scheithauer. *Introduction to Cutting and Packing Optimization: Problems, Modeling Approaches, Solution Methods*. Bd. 263 der Reihe International Series in Operations Research & Management Science (ISOR). Cham, Switzerland: Springer, 2018. ISSN: 0884-8289. ISBN: 978-3-319-64402-8. doi:10.1007/978-3-319-64403-5 (siehe S. 182).
- [214] Yuriy Shamshin. *Databases*. Riga, Latvia: ISMA University of Applied Sciences, Mai 2024. URL: <https://dbs.academy.lv> (besucht am 2025-01-11).
- [215] Yuriy Shamshin. "Normalization". In: *Databases*. Riga, Latvia: ISMA University of Applied Sciences, Mai 2024. Kap. 07a. URL: https://dbs.academy.lv/lection/dbs_LS07ENa_normalization.pdf (besucht am 2025-05-03) (siehe S. 189).
- [216] Yuriy Shamshin. "RDM Normalization. Data Anomalies. Functional Dependency. Normal Forms.". In: *Databases*. Riga, Latvia: ISMA University of Applied Sciences, Mai 2024. Kap. 07. URL: https://dbs.academy.lv/lection/dbs_LS07EN_normalization.pdf (besucht am 2025-05-03) (siehe S. 189).
- [217] Guoyong Shi, Hitoshi Ima und Nobuo Sannomiya. "New Encoding Scheme for Solving Job Shop Problems by Genetic Algorithm". In: *35th IEEE Conference on Decision and Control (CDC'96)*. Bd. 4. 11.–13. Dez. 1996. Kōbe, Hyōgo-ken, Japan: Institute of Electrical and Electronics Engineers (IEEE), 1997, S. 4395–4400. ISBN: 978-0-7803-3590-5. doi:10.1109/CDC.1996.577484. URL: <https://www.researchgate.net/publication/224238934> (besucht am 2026-09-30). Proposes a permutations-with-repetitions based encoding for the JSSP. (Siehe S. 156, 186, 197).
- [218] Oleg V. Shylo. *Job Shop Scheduling (Personal Homepage)*. Knoxville, TN, USA: Oleg V. Shylo, Aug. 2019. URL: <http://optimizizer.com/jobshop.php> (besucht am 2026-09-30). Contains many JSSP benchmark instances. (Siehe S. 171, 186).

References XXIX



- [219] Oleg V. Shylo und Hesam Shams. *Boosting Binary Optimization via Binary Classification: A Case Study of Job Shop Scheduling*. arXiv.org: Computing Research Repository (CoRR) abs/1808.10813. Proposes a TS using regression to adapt the tabu tenures for each variable of the solution vector of a JSSP separately. Many results are available in the GitHub repository <https://github.com/quasiquasar/gta-jobshop-data>; other results are published Shylo's website <http://optimizer.com/jobshop.php>. Ithaca, NY, USA: Cornell University Library, 31. Aug. 2018. doi:10.48550/arXiv.1808.10813. URL: <https://arxiv.org/abs/1808.10813> (besucht am 2026-09-30) (siehe S. 186, 193).
- [220] Ellen Siever, Stephen Figgins, Robert Love und Arnold Robbins. *Linux in a Nutshell*. 6. Aufl. Sebastopol, CA, USA: O'Reilly Media, Inc., Sep. 2009. ISBN: 978-0-596-15448-6 (siehe S. 89–101, 187).
- [221] Anna Skoulikari. *Learning Git*. Sebastopol, CA, USA: O'Reilly Media, Inc., Mai 2023. ISBN: 978-1-0981-3391-7 (siehe S. 184).
- [222] Drew Smith. *Modern Apple Platform Administration – macOS and iOS Essentials (2025)*. Birmingham, England, UK: Packt Publishing Ltd, Feb. 2025. ISBN: 978-1-80580-309-6 (siehe S. 185, 188).
- [223] Hossein M. Soroush. "Scheduling in Stochastic Bicriteria Single Machine Systems with Set-up Times". *International Journal of Planning and Scheduling* 1(1–2):109–145, Jan. 2011. Geneva, Switzerland: Inderscience Publishers. ISSN: 2044-494X. doi:10.1504/IJPS.2011.044605. A scheduling problem is phrased as QAP. (Siehe S. 191).
- [224] Leon Steinberg. "The Backboard Wiring Problem: A Placement Algorithm". *SIAM Review* 3(1):37–50, Jan. 1961. Philadelphia, PA, USA: Society for Industrial and Applied Mathematics Publications (SIAM). ISSN: 0036-1445. doi:10.1137/1003003. The problem is modeled as a QAP (siehe S. 191).
- [225] Robert H. Storer, S. David Wu und Renzo Vaccari. "New Search Spaces for Sequencing Problems with Application to Job Shop Scheduling". *Management Science* 38(10):1495–1509, Okt. 1992. Catonsville, MD, USA: The Institute for Operations Research and the Management Sciences (INFORMS). ISSN: 0025-1909. doi:10.1287/mnsc.38.10.1495 (siehe S. 186).

References XXX



- [226] Thomas Strecker und Leonhard Hennig. "Automatic Layouting of Personalized Newspaper Pages". In: *Operations Research Proceedings 2008: Selected Papers of the Annual International Conference of the German Operations Research Society (GOR)*. 3.–5. Sep. 2008, Augsburg, Bayern, Germany: University of Augsburg. Hrsg. von Bernhard Fleischmann, Karl-Heinz Borgwardt, Robert Klein und Axel Tuma. Bd. 2008 der Reihe Operations Research Proceedings (ORP), Gesellschaft für Operations Research e.V., (GOR). Berlin/Heidelberg, Germany: Springer-Verlag GmbH Germany, 2009, S. 469–474. ISSN: **0721-5924**. doi:[10.1007/978-3-642-00142-0_76](https://doi.org/10.1007/978-3-642-00142-0_76) (siehe S. 181).
- [227] Thomas Stützle. "Iterated Local Search for the Quadratic Assignment Problem". *European Journal of Operational Research* 174(3):1519–1539, Nov. 2006. Amsterdam, The Netherlands: Elsevier B.V. ISSN: **0377-2217**. doi:[10.1016/j.ejor.2005.01.066](https://doi.org/10.1016/j.ejor.2005.01.066) (siehe S. 185, 191).
- [228] Éric D. Taillard. "Benchmarks for Basic Scheduling Problems". *European Journal of Operational Research* 64(2):278–285, Jan. 1993. Amsterdam, The Netherlands: Elsevier B.V. ISSN: **0377-2217**. doi:[10.1016/0377-2217\(93\)90182-M](https://doi.org/10.1016/0377-2217(93)90182-M). URL: <https://arodes.hes-so.ch/record/8224/files/Preprint.pdf> (besucht am 2026-02-20) (siehe S. 186).
- [229] Éric D. Taillard. "Comparison of Iterative Searches for the Quadratic Assignment Problem". *Location Science. Now incorporated into Computers & Operations Research* 3(2):87–105, Aug. 1995. Amsterdam, The Netherlands: Elsevier B.V. doi:[10.1016/0966-8349\(95\)00008-6](https://doi.org/10.1016/0966-8349(95)00008-6) (siehe S. 193).
- [230] Éric D. Taillard. "Robust Taboo Search for the Quadratic Assignment Problem". *Parallel Computing* 17(4–5):443–455, Juli 1991. Amsterdam, The Netherlands: Elsevier B.V. ISSN: **0167-8191**. doi:[10.1016/S0167-8191\(05\)80147-4](https://doi.org/10.1016/S0167-8191(05)80147-4) (siehe S. 154, 172, 191, 193).
- [231] Éric D. Taillard und Luca M. Gambardella. *Adaptive Memories for the Quadratic Assignment Problem*. Techn. Ber. IDSIA-87-97. Lugano, Switzerland: Istituto Dalle Molle Di Studi Sull Intelligenza Artificiale (IDSIA), 10. Sep. 1997. URL: <https://mistic.iict-heig-vd.ch/taillard/articles.dir/TaillardGambardella1997.pdf> (besucht am 2026-09-28). A MA using TS from ²³⁰ as well as a ACO-based approach refining its solutions with a very simple SLS are presented. (Siehe S. 191).
- [232] Alkin Tezuysal und Ibrar Ahmed. *Database Design and Modeling with PostgreSQL and MySQL*. Birmingham, England, UK: Packt Publishing Ltd, Juli 2024. ISBN: **978-1-80323-347-5** (siehe S. 190).
- [233] *The JSON Data Interchange Syntax*. Standard ECMA-404, 2nd Edition. Geneva, Switzerland: Ecma International, Dez. 2017. URL: <https://ecma-international.org/publications-and-standards/standards/ecma-404> (besucht am 2024-12-15) (siehe S. 186).

References XXXI



- [234] *The Python Package Index (PyPI)*. Beaverton, OR, USA: Python Software Foundation (PSF), 2024. URL: <https://pypi.org> (besucht am 2024-08-17) (siehe S. 190).
- [235] *The Unicode Standard, Version 15.1: Archived Code Charts*. South San Francisco, CA, USA: The Unicode Consortium, 25. Aug. 2023. URL: <https://www.unicode.org/Public/15.1.0/charts/CodeCharts.pdf> (besucht am 2024-07-26) (siehe S. 195).
- [236] Dirk Thierens, David Edward Goldberg und Angela Guimarães Pereira. "Domino Convergence, Drift, and the Temporal-Saliency Structure of Problems". In: S. 535–540. doi:10.1109/ICEC.1998.700085 (siehe S. 180).
- [237] Sarah Louise Thomson, Gabriela Ochoa, Daan van den Berg, Tianyu Liang (梁天宇) und Thomas Weise (汤卫恩). "Entropy, Search Trajectories, and Explainability for Frequency Fitness Assignment". In: *Parallel Problem Solving from Nature (PPSN XVIII)*. Bd. 1. 14.–18. Sep. 2024, Hagenberg, Mühlkreis, Austria. Hrsg. von Michael Affenzeller, Stephan M. Winkler, Anna V. Kononova, Heike Trautmann, Tea Tušar, Penousal Machado und Thomas Bäck. Bd. 15148 der Reihe Lecture Notes in Computer Science (LNCS). Cham, Switzerland: Springer. ISSN: 0302-9743. ISBN: 978-3-031-70054-5. doi:10.1007/978-3-031-70055-2_23. Explores randomized local search (RLS), RLS with FFA (FRLS), and SA on the QAP. (Siehe S. 184).
- [238] Ulrich Wilhelm Thonemann und Andreas Bölte. *An Improved Simulated Annealing Algorithm for the Quadratic Assignment Problem*. Working Paper. Paderborn, Nordrhein-Westfalen, Germany: School of Business, Department of Production and Operations Research, University of Paderborn, 1994 (siehe S. 192).
- [239] Marco Tomassini. "Complex Networks Analysis of the Energy Landscape of the Low Autocorrelation Binary Sequences Problem". *Physica A: Statistical Mechanics and its Applications* 577:126089, 1. Sep. 2021. Amsterdam, The Netherlands: Elsevier B.V. ISSN: 0378-4371. doi:10.1016/j.physa.2021.126089. Lists the LABS as $\mathcal{NP}$ -hard. (Siehe S. 187).
- [240] Linus Torvalds. "The Linux Edge". *Communications of the ACM (CACM)* 42(4):38–39, Apr. 1999. New York, NY, USA: Association for Computing Machinery (ACM). ISSN: 0001-0782. doi:10.1145/299157.299165 (siehe S. 89–101, 187).
- [241] Brad Traversy. *Modern HTML & CSS From The Beginning 2.0*. 2. Aufl. Birmingham, England, UK: Packt Publishing Ltd, Juli 2024. ISBN: 978-1-83588-056-2 (siehe S. 184).
- [242] Mariot Tsitoara. *Beginning Git and GitHub: Version Control, Project Management and Teamwork for the New Developer*. New York, NY, USA: Apress Media, LLC, März 2024. ISBN: 979-8-8688-0215-7 (siehe S. 184, 195).

References XXXII



- [243] *UML Notation Guide*. Version 1.1. Santa Clara, CA, USA: Rational Software Corporation, Redmond, WA, USA: Microsoft Corporation, Palo Alto, CA, USA: Hewlett-Packard Company, Redwood Shores, CA, USA: Oracle Corporation, Dallas, TX, USA: Sterling Software, Ottawa, ON, Canada: MCI Systemhouse Corporation, Blue Bell, PA, USA: Unisys Corporation, Blue Bell, PA, USA: ICON Computing, Santa Clara, CA, USA: IntelliCorp, Burlington, MA, USA: i-Logix, Armonk, NY, USA: International Business Machines Corporation (IBM), Kanata, ON, Canada: ObjectTime Limited, Chicago, IL, USA: Platinum Technology Inc., Boston, MA, USA: Ptech Inc., Orlando, FL, USA: Taskon A/S, Paoli, PA, USA: Reich Technologies und Paris, Île-de-France, France: Softeam, 1. Sep. 1997. URL: <https://web.cse.msu.edu/~cse870/Materials/uml-notation-guide-9-97.pdf> (besucht am 2025-03-30) (siehe S. 195).
- [244] *Unicode®15.1.0*. South San Francisco, CA, USA: The Unicode Consortium, 12. Sep. 2023. ISBN: 978-1-936213-33-7. URL: <https://www.unicode.org/versions/Unicode15.1.0> (besucht am 2024-07-26) (siehe S. 195).
- [245] Marat Valiev, Bogdan Vasilescu und James D. Herbsleb. "Ecosystem-Level Determinants of Sustained Activity in Open-Source Projects: A Case Study of the PyPI Ecosystem". In: *ACM Joint Meeting on European Software Engineering Conference and Symposium on the Foundations of Software Engineering (ESEC/SIGSOFT FSE'2018)*. 4.–9. Nov. 2018, Lake Buena Vista, FL, USA. Hrsg. von Gary T. Leavens, Alessandro F. Garcia und Corina S. Păsăreanu. New York, NY, USA: Association for Computing Machinery (ACM), 2018, S. 644–655. ISBN: 978-1-4503-5573-5. doi:10.1145/3236024.3236062 (siehe S. 190).
- [246] Daan van den Berg, Florian Braam, Mark Moes, Emiel Suilen und Sandjai Bhulai. "Almost Squares in Almost Squares: Solving the Final Instance". In: *5th International Conference on Data Analytics (DATA ANALYTICS'2016)*. 9.–13. Okt. 2016, Venice, Venezia, Veneto, Italy. Hrsg. von Sandjai Bhulai und Ivana Semanjski. Wilmington, DE, USA: International Academy, Research, and Industry Association (IARIA), 2016, S. 69–74. ISSN: 2308-4464. ISBN: 978-1-61208-510-4. URL: https://math.vu.nl/~sbhulai/publications/data_analytics2016b.pdf (besucht am 2026-10-01). This poses a very interesting 2BP|R|F problem, where „almost squars," i.e., rectangles with sizes $(i, i + 1)$, must be placed in an almost square. (Siehe S. 181, 182).
- [247] Bruce M. Van Horn II und Quan Nguyen. *Hands-On Application Development with PyCharm*. 2. Aufl. Birmingham, England, UK: Packt Publishing Ltd, Okt. 2023. ISBN: 978-1-83763-235-0 (siehe S. 190).

References XXXIII




- [248] Clarissa Van Hoyweghen, David Edward Goldberg und Bart Naudts. "From Twomax To The Ising Model: Easy And Hard Symmetrical Problems". In: *4th Genetic and Evolutionary Computation Conference (GECCO'2002)*. 9.–13. Juli 2002, New York, NY, USA. Hrsg. von William B. Langdon, Erick Cantú-Paz, Keith E. Mathias, Rajkumar Roy, David Davis, Riccardo Poli, Karthik Balakrishnan, Vasant G. Honavar, Günter Rudolph, Joachim Wegener, Larry Bull, Mitchell A. Potter, Alan C. Schultz, Julian F. Miller, Edmund K. Burke und Natasa Jonoska. Burlington, MA, USA/San Mateo, CA, USA: Morgan Kaufmann Publishers, 2002, S. 626–633. ISBN: **978-1-55860-878-8** (siehe S. **195**).
- [249] Sander van Vugt. *Linux Fundamentals*. 2. Aufl. Hoboken, NJ, USA: Pearson IT Certification, Juni 2022. ISBN: **978-0-13-792931-3** (siehe S. **89–101, 187**).
- [250] Dieter Vandesande, Christoph Jabs, Jeremias Berg, Johannes Fichte, George Katsirelos, Ruben Martins, André Schidler und Dominik Schreiber. *MaxSAT Evaluation 2026: Solvers, Benchmarks & Results*. v1. Geneva, Switzerland: zenodo (hosted by European Organization for Nuclear Research (CERN)), 14. Juli 2026. doi:**10.5281/zenodo.21358014**. See also <https://maxsat-evaluations.github.io>. (Siehe S. **189**).
- [251] "[venv](#) – Creation of Virtual Environments". In: *Python 3 Documentation. The Python Standard Library*. Beaverton, OR, USA: Python Software Foundation (PSF), 2001–2025. URL: <https://docs.python.org/3/library/venv.html> (besucht am 2024-12-25) (siehe S. **196**).
- [252] Kristian Verduin, Sarah Louise Thomson und Daan van den Berg. "Too Constrained for Genetic Algorithms. Too Hard for Evolutionary Computing. The Traveling Tournament Problem". In: *15th International Joint Conference on Computational Intelligence (IJCCI'23)*. 13.–15. Nov. 2023, Rome, Italy. Hrsg. von Niki van Stein, Francesco Marcelloni, H. K. Lam, Marie Cottrell und Joaquim Filipe. Porto, Portugal: SciTePress: Science and Technology Publications, Lda, 2023, S. 246–257. ISSN: **2184-3236**. ISBN: **978-989-758-674-3**. doi:**10.5220/0012192100003595** (siehe S. **194**).
- [253] Petr Vilím, Philippe Laborie und Paul Shaw. "Failure-Directed Search for Constraint-Based Scheduling". In: *12th International Conference on the Integration of AI and OR Techniques in Constraint Programming (CPAIOR'2015)*. Hrsg. von Laurent Michel. Bd. 9075 der Reihe Theoretical Computer Science and General Issues (LNTCS), sub-series of Lecture Notes in Computer Science (LNCS). Barcelona, Spain: Springer, 2015, S. 437–453. ISSN: **2512-2010**. ISBN: **978-3-319-18007-6**. doi:**10.1007/978-3-319-18008-3_30**. URL: <https://www.researchgate.net/publication/280223626> (besucht am 2026-09-30) (siehe S. **186**).

References XXXIV



- [254] "Virtual Environments and Packages". In: *Python 3 Documentation. The Python Tutorial*. Beaverton, OR, USA: Python Software Foundation (PSF), 2001–2025. Kap. 12. URL: <https://docs.python.org/3/tutorial/venv.html> (besucht am 2024-12-24) (siehe S. 196).
- [255] Thomas Weise (汤卫思). *Databases*. Hefei, Anhui, China (中国安徽省合肥市): Hefei University (合肥大学), School of Artificial Intelligence and Big Data (人工智能与大数据学院), 2025. URL: <https://thomasweise.github.io/databases> (besucht am 2025-01-05) (siehe S. 107–113, 183).
- [256] Thomas Weise (汤卫思). *Global Optimization Algorithms – Theory and Application*. self-published, 2009. URL: <https://www.researchgate.net/publication/200622167> (besucht am 2025-07-25) (siehe S. 183, 188, 189, 192).
- [257] Thomas Weise (汤卫思). *jssplInstancesAndResults: Results, Data, and Instances of the Job Shop Scheduling Problem*. San Francisco, CA, USA: GitHub Inc, 2019–2020. URL: <https://github.com/thomasWeise/jssplInstancesAndResults> (besucht am 2025-08-20) (siehe S. 186).
- [258] Thomas Weise (汤卫思). *Programming with C*. Hefei, Anhui, China (中国安徽省合肥市): Hefei University (合肥大学), School of Artificial Intelligence and Big Data (人工智能与大数据学院), 2026. URL: <https://thomasweise.github.io/programmingWithC> (besucht am 2026-05-10) (siehe S. 182).
- [259] Thomas Weise (汤卫思). *Programming with Python*. Hefei, Anhui, China (中国安徽省合肥市): Hefei University (合肥大学), School of Artificial Intelligence and Big Data (人工智能与大数据学院), 2024–2026. URL: <https://thomasweise.github.io/programmingWithPython> (besucht am 2025-01-05) (siehe S. 68–73, 87, 88, 94–101, 107–113, 183, 190).
- [260] Thomas Weise (汤卫思), Raymond Chiong, Jörg Lässig, Ke Tang (唐珂), Shigeyoshi Tsutsui, Wenxiang Chen (陈文祥), Zbigniew „Zbyszek“ Michalewicz und Xin Yao (姚新). "Benchmarking Optimization Algorithms: An Open Source Framework for the Traveling Salesman Problem". *IEEE Computational Intelligence Magazine (CIM)* 9(3):40–52, Aug. 2014. Piscataway, NJ, USA: Institute of Electrical and Electronics Engineers (IEEE). ISSN: 1556-603X. doi:10.1109/MCI.2014.2326101. Applies a multitude of algorithms including SLSes, EAs, MAs, ACO, and EDAs to the TSPLib instances. (Siehe S. 194, 196).
- [261] Thomas Weise (汤卫思), Xinlu Li (李新路), Yan Chen (陈岩) und Zhize Wu (吴志泽). "Solving Job Shop Scheduling Problems without using a Bias for Good Solutions". In: *23rd Genetic and Evolutionary Computation Conference (GECCO'2021), Companion Volume*. 10.–14. Juli 2021, Lille, France. Hrsg. von Krzysztof Krawiec. New York, NY, USA: Association for Computing Machinery (ACM), 2021, S. 1459–1466. ISBN: 978-1-4503-8351-6. doi:10.1145/3449726.3463124. Applies Frequency Fitness Assignment (FFA) to the JSSP. (Siehe S. 197).

References XXXV



- [262] Thomas Weise (汤卫思), Mingxu Wan (万明绪), Pu Wang (王璞), Ke Tang (唐珂), Alexandre Devert und Xin Yao (姚新). "Frequency Fitness Assignment". *IEEE Transactions on Evolutionary Computation* 18(2):226–243, Apr. 2014. Los Alamitos, CA, USA: IEEE Computer Society. ISSN: **1089-778X**. doi:**10.1109/TEVC.2013.2251885**. The article introducing FFA. (Siehe S. **184**).
- [263] Thomas Weise (汤卫思), Zhize Wu (吴志泽), Xinlu Li (李新路) und Yan Chen (陈岩). "Frequency Fitness Assignment: Making Optimization Algorithms Invariant under Bijective Transformations of the Objective Function Value". *IEEE Transactions on Evolutionary Computation* 25(2):307–319, Apr. 2021. Los Alamitos, CA, USA: IEEE Computer Society. ISSN: **1089-778X**. doi:**10.1109/TEVC.2020.3032090** (siehe S. **180, 184, 186, 187, 189, 193, 195**).
- [264] Thomas Weise (汤卫思), Zhize Wu (吴志泽), Xinlu Li (李新路), Yan Chen (陈岩) und Jörg Lässig. "Frequency Fitness Assignment: Optimization without Bias for Good Solutions can be Efficient". *IEEE Transactions on Evolutionary Computation* 27(4):980–992, 2023. Los Alamitos, CA, USA: IEEE Computer Society. ISSN: **1089-778X**. doi:**10.1109/TEVC.2022.3191698**. Applies many FFA-based algorithm variants to problems such as OneMax, LeadingOnes, Linear Harmonic Function (LinHarm), TwoMax, Trap, Jump, Plateau, Ising Model, and N-Queens. (Siehe S. **180, 184, 187, 193, 195**).
- [265] Thomas Weise (汤卫思), Yuezhong Wu (吴越钟), Raymond Chiong, Ke Tang (唐珂) und Jörg Lässig. "Global versus Local Search: The Impact of Population Sizes on Evolutionary Algorithm Performance". *Journal of Global Optimization* 66(3):511–534, Feb. 2016. London, England, UK: Springer Nature Limited. ISSN: **0925-5001**. doi:**10.1007/s10898-016-0417-5** (siehe S. **194**).
- [266] L. Darrell Whitley. "The GENITOR Algorithm and Selection Pressure: Why Rank-Based Allocation of Reproductive Trials is Best". In: *3rd International Conference on Genetic Algorithms (ICGA'1989)*. Juni 1989, Fairfax, VA, USA: George Mason University. Hrsg. von J. David Schaffer. Burlington, MA, USA/San Mateo, CA, USA: Morgan Kaufmann Publishers, 1989, S. 116–123. ISBN: **978-1-55860-066-9**. URL: <https://www.researchgate.net/publication/2527551> (besucht am 2025-08-08) (siehe S. **187**).
- [267] James M. Wilson. "Gantt Charts: A Centenary Appreciation". *European Journal of Operational Research* 149(2):430–437, Sep. 2003. Amsterdam, The Netherlands: Elsevier B.V. ISSN: **0377-2217**. doi:**10.1016/S0377-2217(02)00769-5** (siehe S. **184**).
- [268] Kevin Wilson. *Python Made Easy*. Birmingham, England, UK: Packt Publishing Ltd, Aug. 2024. ISBN: **978-1-83664-615-0** (siehe S. **183, 190**).

References XXXVI




- [269] L. Wong und Lai-Soon Lee. "Heuristic Placement Routines for Two-Dimensional Bin Packing Problem". 5(4):334–341, Dez. 2009. doi:[10.3844/jmssp.2009.334.341](https://doi.org/10.3844/jmssp.2009.334.341). URL: <https://www.thescipub.com/pdf/jmssp.2009.334.341> (besucht am 2026-10-02). A heuristic for the 2BP|R|F and the 2BP|O|F (siehe S. 146).
- [270] CAO Xiang (曹翔), Zhize Wu (吴志泽), Daan van den Berg und Thomas Weise (汤卫思). "Randomized Local Search vs. NSGA-II vs. Frequency Fitness Assignment on The Traveling Tournament Problem". In: *16th International Joint Conference on Computational Intelligence (IJCCI'24)*. 20.–22. Nov. 2024, Porto, Portugal. Hrsg. von Francesco Marcelloni, Kurosh Madani, Niki van Stein und Joaquim Filipe. Porto, Portugal: SciTePress: Science and Technology Publications, Lda, 2024, S. 38–49. ISSN: 2184-3236. ISBN: 978-989-758-721-4. doi:[10.5220/0012891500003837](https://doi.org/10.5220/0012891500003837) (siehe S. 194, 197).
- [271] Takeshi Yamada und Ryohei Nakano. "A Genetic Algorithm Applicable to Large-Scale Job-Shop Instances". In: *Parallel Problem Solving from Nature 2 (PPSN-II)*. 28.–30. Sep. 1992, Brussels, Belgium. Hrsg. von Reinhard Männer und Bernard Manderick. Amsterdam, The Netherlands: Elsevier B.V., 1992, S. 281–290. URL: <https://www.researchgate.net/publication/220701684> (besucht am 2026-09-30) (siehe S. 186).
- [272] Martin Yanev. *PyCharm Productivity and Debugging Techniques*. Birmingham, England, UK: Packt Publishing Ltd, Okt. 2022. ISBN: 978-1-83763-244-2 (siehe S. 190).
- [273] Kinza Yasar und Craig S. Mullins. *Definition: Database Management System (DBMS)*. Newton, MA, USA: TechTarget, Inc., Juni 2024. URL: <https://www.techtarget.com/searchdatamanagement/definition/database-management-system> (besucht am 2025-01-11) (siehe S. 183).
- [274] François Yergeau. *UTF-8, A Transformation Format of ISO 10646*. Request for Comments (RFC) 3629. Wilmington, DE, USA: Internet Engineering Task Force (IETF), Nov. 2003. URL: <https://www.ietf.org/rfc/rfc3629.txt> (besucht am 2025-02-05). See Unicode and ¹²² (siehe S. 195).
- [275] Giorgio Zarrelli. *Mastering Bash*. Birmingham, England, UK: Packt Publishing Ltd, Juni 2017. ISBN: 978-1-78439-687-9 (siehe S. 182).

References XXXVII



- [276] Jiazheng Zeng (曾嘉政), Thomas Weise (汤卫恩), Zhize Wu (吴志泽) und Markus Wagner. "When Frequency Fitness Assignment Fails: Trapped States in Frequency-Guided Local Search". In: *28th Genetic and Evolutionary Computation Conference (GECCO'2026)*. 13.–17. Juli 2026, San José, Costa Rica. Hrsg. von Leonardo Trujillo und Ting Hu. New York, NY, USA: Association for Computing Machinery (ACM), 2026, S. 233–242. ISBN: **979-8-4007-2487-9**. doi:[10.1145/3795095.3805098](https://doi.org/10.1145/3795095.3805098). Explores $(1 + 1)$ evolutionary algorithm $((1 + 1) \text{ EA})$, $(1 + 1) \text{ EA}$ with FFA $((1 + 1) \text{ FEA})$, RLS, and FRLS as well as hybrid algorithms on a variety of discrete benchmarks such as OneMax, LeadingOnes, LinHarm, Binary Integer (BinInt), TwoMax, Trap, Jump, Plateau, Ising Model, N-Queens and also applies them to the search for Low-Autocorrelation Binary Sequences (LABS). (Siehe S. **180**, **184–187**, **189–191**, **193**, **195**).
- [277] Chaoyong Zhang, Xinyu Shao, Yunqing Rao und Haobo Qiu. "Some New Results on Tabu Search Algorithm Applied to the Job-Shop Scheduling Problem". In: *Tabu Search*. Hrsg. von Wassim Jaziri. London, England, UK: IntechOpen Limited, 1. Aug. 2008. Kap. 8. ISBN: **978-3-902613-34-9**. doi:[10.5772/5593](https://doi.org/10.5772/5593). URL: <https://www.intechopen.com/chapters/4596> (besucht am 2026-09-30) (siehe S. **186**, **193**).
- [278] Rui Zhao (赵睿), Tianyu Liang (梁天宇), Zhize Wu (吴志泽), Daan van den Berg, Matthias Thüerer und Thomas Weise (汤卫恩). "Randomized Local Search on the 2D Rectangular Bin Packing Problem with Item Rotation". In: *26th Genetic and Evolutionary Computation Conference (GECCO'2024)*. 14.–18. Juli 2024, Melbourne, VIC, Australia. Hrsg. von Xiaodong Li und Julia Handl. New York, NY, USA: Association for Computing Machinery (ACM), 2024, S. 235–238. ISBN: **979-8-4007-0494-9**. doi:[10.1145/3638530.3654139](https://doi.org/10.1145/3638530.3654139) (siehe S. **181**, **185**).
- [279] Rui Zhao (赵睿), Zhize Wu (吴志泽), Daan van den Berg, Matthias Thüerer, Tianyu Liang (梁天宇), Ming Tan (檀明) und Thomas Weise (汤卫恩). "Randomized Local Search for Two-Dimensional Bin Packing and a Negative Result for Frequency Fitness Assignment". In: *16th International Joint Conference on Computational Intelligence (IJCCI'24)*. 20.–22. Nov. 2024, Porto, Portugal. Hrsg. von Francesco Marcelloni, Kurosh Madani, Niki van Stein und Joaquim Filipe. Porto, Portugal: SciTePress: Science and Technology Publications, Lda, 2024, S. 15–26. ISSN: **2184-3236**. ISBN: **978-989-758-721-4**. doi:[10.5220/0012888500003837](https://doi.org/10.5220/0012888500003837) (siehe S. **181**, **182**, **185**).

Glossary (in English) I



- (1 + 1) EA The (1 + 1) EA is a local search algorithm that retains the best solution x_c discovered so far during the search^{42,76}. In each step, it applies a unary search operator to this best-so-far solution x_c and derives a new solution x_n . If the new solution x_n is *better or equally good* when compared with x_c , i.e., not worse, then it replaces it, i.e., is stored as the new x_c . If the search space are bit strings of length n , then the (1 + 1) EA uses a unary search operator that flips each bit independently with probability m/n , where usually $m = 1$. This operator is the main difference to randomized local search (RLS). The (1 + 1) EA is a special case of the $(\mu + \lambda)$ evolutionary algorithm $((\mu + \lambda)$ EA) where $\mu = \lambda = 1$.
- (1 + 1) FEA The (1 + 1) EA with FFA plugged in^{263,264,276}. On the discrete bit-string domains, this algorithm has a very specific structure: Its unary search operator flips each bit with probability $1/n$, where n is the dimension of the search space, distinguishing it from the unary operator in FRLS which flips exactly one bit. On other domains, such as permutations, the term is used synonymously with FRLS.
- $(\mu + \lambda)$ EA The $(\mu + \lambda)$ EA is an evolutionary algorithm (EA) where, in each generation, λ offspring solutions are generated from the current population of μ parent solutions. The offspring and parent populations are merged, yielding $\mu + \lambda$ solutions, from which then the best μ solutions are retained to form the parent population of the next generation. If the search space is the bit strings of length n , then this algorithm usually applies a mutation operator flipping each bit independently with probability $1/n$.
- BinInt The *Binary Integer Problem* is a benchmark problem for bit-string based black-box search^{236,276}. It is very similar to OneMax: It tries to maximize the number of 1 bits in the bit string of a chosen dimension n . Different from OneMax, where each bit has the same weight in the objective function, the bits of BinInt have an exponentially increasing weight: The bit string is treated as a binary-encoded integer whose value should be maximized. The objective function $f(x)$ of the minimization variant of this problem can be defined as $f(x) = 2^n - 1 - \sum_{i=1}^n 2^{i-1} \cdot x_i$. The problem is unimodal, i.e., has only a single global optimum and no local optimum. It is fully separable, i.e., we can optimize each variable separately.
- LinHarm The Linear Harmonic Function is a benchmark problem for bit-string based black-box search^{70,76,276}. It is very similar to OneMax: It tries to maximize the number of 1 bits in the bit string of a chosen dimension n . Different from OneMax, where each bit has the same weight in the objective function, the bits of LinHarm have a linear increasing weight. The objective function $f(x)$ of the minimization variant of this problem can be defined as $f(x) = \frac{1}{2}n(n+1) - \sum_{i=1}^n i \cdot x_i$. The problem is unimodal, i.e., has only a single global optimum and no local optimum. It is fully separable, i.e., we can optimize each variable separately. The (1 + 1) EA can solve this problem with an expected runtime in $\Theta(n \ln n)$ ^{70,76}.

Glossary (in English) II



1NF The first normal form (NF) in relational databases (DBs) ^{53,60,81,138}.

2BP In the two-dimensional Bin Packing Problem (BP), the goal is to pack rectangles into rectangular bins without overlap and such that their edges are parallel to the edges of the bins ^{124,158,160}. The 2BP is strongly $\mathcal{NP}$ -hard ¹⁶⁰. The variants of this problem include the 2BP|O|F, 2BP|R|F, 2BP|O|G, and 2BP|R|G ^{159,160}. Different objective function for the 2BP|O|F and 2BP|R|F are presented in ²⁷⁸. 2BPs have many practical applications, including cutting (wood, glas) ¹⁶⁰, packing (transportation, warehouse) ¹⁶⁰, and newspaper page layout ²²⁶.

2BP|O|F In the oriented 2BP with free cuts, the rectangles to pack have fixed orientations, i.e., cannot be rotated, but can otherwise be arranged freely ^{159,160,169,279}. Permutation-based search spaces can be used for this problem by using the Improved Bottom Left (IBL) encoding. The state-of-the-art (SOTA) for this problem comprises ^{23,28,49,102,191,279}.

2BP|O|G In the oriented 2BP with guillotine cuts, the rectangles to pack have fixed orientations, i.e., cannot be rotated, and must be arranged such that they can be extracted by edge-to-edge cuts ^{159,160}.

2BP|R|F In this variant of the 2BP with free cuts, the rectangles to pack can be rotated by 90° if need be and can freely be arranged ^{19,159,160,278,279}. Besides packing and cutting, this problem also occurs in scheduling and build formation in additive manufacturing ^{153,106}. The almost-squares-in-almost-squares (Asqas) problem ²⁴⁸ is also a 2BP|R|F. Search spaces based on signed permutations can be used for this problem by using the IBL encoding. The SOTA for this problem comprises ^{23,49,102,278,279}.

2BP|R|G In this variant of the 2BP with guillotine cuts, the rectangles to pack can be rotated by 90° if need be, but must be arranged such that they can be extracted by edge-to-edge cuts ^{159,160}.

2NF The second normal form (NF) in relational DBs ^{52,54,60,81,138}.

3NF The third normal form (NF) in relational DBs ^{52,54,60,81,138}.


ACO *Ant Colony Optimization* is a nature-inspired optimization method for combinatorial problems where solutions are generated by „ants“ that move from node to node in a graph choosing edges based on (1) the simulated pheromone on the edges and (2) a per-edge heuristic value ^{72~74}. If an ant produced a good solution, „pheromone“ is distributed over the edges it visited, making it more likely to be re-visited by other ants.

Glossary (in English) III



- Asqas** An „almost-square“ be a rectangle with size $i \times (i + 1)$ with $i \in \mathbb{N}_1$. The *almost-squares-in-almost-squares* problem²⁴⁶ is a special case of the 2BP|R|F. Here, almost-square rectangles of sizes $1 \times 2, 2 \times 3, \dots, n \times (n + 1)$ must be placed into an almost-square bin without waste. This requires that there exists a natural number $p \in \mathbb{N}_1$ such that $p(p + 1) = \sum_{i=1}^n i(i + 1)$ ²⁴⁶. There are exactly five Asqas instances²⁴⁶, namely with bin sizes 1×2 for $n = 1, p = 1, 5 \times 4$ for $n = 3, p = 4, 15 \times 16$ for $n = 8, p = 15, 55 \times 56$ for $n = 20, p = 55$, and 119×120 for $n = 34, p = 119$.
- ATSP** The general case for TSPs are *asymmetric Traveling Salesperson Problems*, where the $n \times n$ distance matrix A does not need to be symmetric. In other words, it is possible that $\exists a, b \in 1..n$ with $A[a, b] \neq A[b, a]$. Notice that while such index tuple may exist, this is not always or necessarily the case. In this case, one may consider the STSP as a special case of the ATSP, while ATSPs may be considered as synonymous to TSPs.
- Bash** is a shell used under Ubuntu Linux, i.e., the program that „runs“ in the terminal and interprets your commands, allowing you to start and interact with other programs^{34,181,275}. Learn more at <https://www.gnu.org/software/bash>.
- BP** The *Bin Packing Problem*^{78,213} is one of the classical problems from Operations Research (OR). The goal is to pack a set of objects into containers, using as few containers as possible. Different flavors of BPs can be distinguished, e.g., by the number of dimensions^{63,158} that the objects and containers have (see, e.g., the 2BP), and/or whether the objects can be rotated²⁷⁹, as well as other constraints and limitations. Both the one- and two-dimensional BP are strongly $\mathcal{NP}$ -hard¹⁶⁰.
- breakpoint** A breakpoint is a mark in a line of code in an Integrated Development Environment (IDE) at which the debugger will pause the execution of a program.
- BRKGA** The *Biased Random Key Genetic Algorithm* is a EA with a continuous search space $\mathbb{X} \subset [0, 1]^n$ and a decoding function γ translating this space to something else and biased, uniform, and elitist mating strategies^{104,163}. The *bias* comes from the fact that one of the parents used for the binary operation is biased to be of higher fitness than the other parent¹⁰⁴. Often, γ is the Random Keys encoding^{14,15} procedure translating $\mathbb{X}$ to permutations of the first n natural numbers¹⁰³. Sometimes, it is actually a MA further refining the translation result with a local search (LS)¹⁰³. Sometimes the permutations are then further translated to more complex data structures, such as Gantt charts for the JSSP¹⁰³, or packing plans for 2BP 3D packing¹⁰².
- C** is a programming language, which is very successful in system programming situations^{67,200,258}.

Glossary (in English) IV



client In a client-server architecture, the client is a device or process that requests a service from the server. It initiates the communication with the server, sends a request, and receives the response with the result of the request. Typical examples for clients are web browsers in the internet as well as clients for database management systems (DBMSes), such as psql.

client-server architecture is a system design where a central server receives requests from one or multiple clients ^{22,164,186,203,206}. These requests and responses are usually sent over network connections. A typical example of such a system is the World Wide Web (WWW), where web servers host websites and make them available to web browsers, the clients. Another typical example is the structure of DB software, where a central server, the DBMS, offers access to the DB to the different clients. Here, the client can be some terminal software shipping with the DBMS, such as psql, or the different applications that access the DBs.

Concorde is an exact solver for the TSP ^{5,56,57}, which could even solve the largest instance of TSPLib (with 85 900 cities) to optimality.

DB A *database* is an organized collection of structured information or data, typically stored electronically in a computer system. Databases are discussed in our book *Databases* ²⁵⁵.

DBMS A *database management system* is the software layer located between the user or application and the DB. The DBMS allows the user/application to create, read, write, update, delete, and otherwise manipulate the data in the DB ²⁷³.

debugger A debugger is a tool that lets you execute a program step-by-step while observing the current values of variables. This allows you to find errors in the code more easily ^{2,207,268}. Learn more about debugging in ²⁵⁹.

EA An *evolutionary algorithm* is a metaheuristic optimization method that maintains a population of candidate solutions, which undergo selection (where better solutions are chosen with higher probability) and reproduction (where mutation and recombination create a new candidate solution from one or two existing ones, respectively) ^{8,256}.

Glossary (in English) V



FFA *Frequency Fitness Assignment* (中文: 频率适应度分配) is a algorithm plugin for optimization methods applied to discrete or combinatorial problems with not-too-many different possible objective values²⁶²⁻²⁶⁴. It replaces the objective values in all comparisons with their absolute encounter frequency so far during the search. FFA has successfully been applied to the Maximum Satisfiability (MaxSAT)^{263,264}, the TSP^{154,155}, and the QAP^{46,237}, amongst others. Its properties have been intensely researched on discrete benchmark functions such as OneMax, LeadingOnes, Trap, TwoMax, Jump, and Plateau^{263,264,276}. The most common realizations of FFA so far are the $(1 + 1)$ FEA and FRLS.

FSSP The *Flow Shop Scheduling Problem* is a variant of a JSSP where all products go through the same sequence of machines^{106,134}.

Gantt chart Gantt charts are two-dimensional diagrams illustrating the steps of a process^{140,267}. Their horizontal axis represents the time, the vertical axis represents work packages, machines, or workers. In the diagram area, bars located at certain vertical locations indicate that the work package, machine, or worker is processed or works at the time range covered by the bar as projected to the horizontal axis.

Git is a distributed Version Control System (VCS) which allows multiple users to work on the same code while preserving the history of the code changes^{221,242}. Learn more at <https://git-scm.com>.

GitHub is a website where software projects can be hosted and managed via the Git VCS^{193,242}. Learn more at <https://github.com>.

GRASP A *Greedy Randomized Adaptive Search Procedure* is a metaheuristic where each cycle consists of two main components^{84,86,87}: First, a starting point is generated using a heuristic method (as opposed to being randomly sampled). Then, a LS is applied to refine the solution. Then, another cycle starts and proceeds in the same way. The overall best solution is retained as result. Many examples for applications of GRASPs are listed in⁸⁷. GRASP in combination with VND has been applied to the 2BP|O|F in¹⁹¹.

HTML The *Hyper Text Markup Language* is the text format used by the WWW^{20,115,241}.

Glossary (in English) VI



IBL The *improved bottom left* heuristic is a one-shot algorithm constructing a solution for 2BP¹⁵⁷. For the 2BP|O|F problem variant, the input of the IBL algorithm is a permutation of the first n natural numbers, each number identifying one rectangle to be packed. For the 2BP|R|F problem flavor, the permutation elements are signed, where a negative sign indicates a rotation by 90° ¹⁵⁷. In^{278,279} it is adapted to a multi-bin situation as follows: The algorithm iterates over the (potentially signed) permutation x and places the rectangles into the packing plan in the prescribed order. It first places the rectangle outside on top of the current bin b , with its bottom-right corner onto the top-right corner of the current bin b . It then moves the rectangle downwards and leftwards as far as possible, prioritizing the downward movement whenever possible. If the rectangle cannot be moved any further, it checks if it is completely contained in the bin b . If yes, it can remain there. Otherwise, a new bin is opened ($b \leftarrow b + 1$) and the rectangle is placed at its bottom-left corner. Once a new bin is opened, this bin is used for all further insertions. IBL is suitable as a decoding function γ inside an EA¹⁵⁷. Historically, it improves upon the BL algorithm¹²⁸: That algorithm cannot represent all possible optimal packings using a permutation, but the IBL can¹⁵⁷.

IDE An *Integrated Developer Environment* is a program that allows the user do multiple different activities required for software development in one single system. It often offers functionality such as editing source code, debugging, testing, or interaction with a distributed version control system. For Python, we recommend using PyCharm. On Apple systems, Xcode is often used.

ILS An *iterated local search* is a variant of the LS which applies cycles of local search and perturbation²²⁷. First, an initial solution is generated and refined by the local search. Then the cycle begins: A perturbation, i.e., a large search move that likely destroys a good part of the solution, is applied. The resulting new solution is refined by local search. Then, an acceptance criterion decides whether we should use this or the previous solution to continue in the next cycle. ILS has successfully been applied to the QAP.

iOS is the operating system that powers Apple iPhones^{43,222}. Learn more at <https://www.apple.com/ios>.

Ising Model The Ising models are benchmark problems for bit-string based black-box search^{70,88,89,276}. Here, a neighborhood is defined around each bit. The bit needs to have the same value as all bits in the neighborhood structure T . Thus, we try to achieve that all bits have the same value. The objective function $f(x)$ of the minimization variant of this problem family can be defined as $f(x, T) = \sum_{(i,j) \in T} |x_i - x_j|$, where T contains the index pairs of neighboring bits and is defined differently for the Ising model instances Ising 1D and Ising 2D. The problems are highly epistatic, as all variables interact with some other variables.

Glossary (in English) VII



- Ising 1D** The 1D is a benchmark problem for bit-string based black-box search^{70,89,276}. The bits are arranged in a one-dimensional ring and we try to minimize the number of bits that have different values than their neighbors. Hence, the neighborhood structure T is defined as $T_{1D} = \{(i+1, (i+1 \bmod n) + 1) \mid i \in [0..n-1]\}$. The problems are highly epistatic, as all variables interact with some other variables. The $(1+1)$ EA has an expected runtime in $\mathcal{O}(n^3)$ on 1-Dimensional Ising Model (Ising 1D)⁸⁹.
- Ising 2D** The 2D is a benchmark problem for bit-string based black-box search^{70,88,276}. The bits are arranged in a two-dimensional torus and we try to minimize the number of bits that have different values than their neighbors. Hence, the neighborhood structure $T = T_{2D}$ is defined as the set of all $\{(\alpha + \beta N, \gamma + \delta N)\}$ pairs with $\alpha, \beta, \gamma, \delta \in [0..N-1]$ and either $(\gamma = (\alpha + 1) \bmod N \text{ and } \delta = \beta)$ or $(\gamma = \alpha \text{ and } \delta = (\beta + 1) \bmod N)$ with $n = N^2$. The problems are highly epistatic, as all variables interact with some other variables. On a similar class of problems, the $(1+1)$ EA has an exponential expected runtime⁸⁸.
- Java** is another very successful programming language, with roots in the C family of languages^{27,165}.
- JavaScript** JavaScript is the predominant programming language used in websites to develop interactive contents for display in browsers⁸⁰.
- JSON** *JavaScript Object Notation* is a data interchange format^{35,233} based on JavaScript⁸⁰ syntax.
- JSSP** The *Job Shop Scheduling Problem*^{26,48,106,149} is one of the most prominent and well-studied scheduling tasks. In a JSSP instance, there are m machines and k jobs²²⁸. Each job must be processed once by each machine in a job-specific sequence and has a job-specific processing time on each machine. The goal is to find an assignment of jobs to machines that results in an overall shortest makespan, i.e., the schedule (Gantt chart) which can complete all the jobs in the shortest time. The JSSP is $\mathcal{NP}$ -complete^{45,148,149}. The 8 most common sets of JSSP benchmark instances are abz ¹, dmu ⁶⁴, ft ⁹⁰, la ¹⁵¹, orb ⁶, swv ²²⁵, ta ²²⁸, and yn ²⁷¹. Their data can be found (sometimes partially) in several repositories, such as the OR-Library^{16,17},²¹⁸, and²⁵⁷, the latter of which also contains many results from existing works. Encodings based on permutations with repetition are proposed in^{24,25,97,217} and used in²⁶³. The SOTA of the JSSP includes^{103,114,190,192,219,253,277}.

Glossary (in English) VIII



Jump The Jump problem is a benchmark problem for bit-string based black-box search^{76,94,276}. Like the OneMax, it tries to maximize the number of 1 bits in a bit string of chosen length n . However, the solutions representing the last ω bits around the optimum to flip are deceptive, meaning that they are actually worse and getting worse than surrounding solutions. The objective function $f(x)$ of the minimization variant is $n - \|x\|_1$ if $\|x\|_1 = n$ or $\|x\|_1 \leq n - \omega$ hold, and $\omega + \|x\|_1$ otherwise, where $\|x\|_1 = \sum_{i=1}^n x_i$. This means that, the larger ω , the larger the deceptive basin around the optimum that an algorithm needs to cross. An $(1 + 1)$ EA will converge to the resulting local optimum and thus have an expected runtime of $\Theta(n^\omega + n \ln n)$ ⁷⁶. In experiments, the $(1 + 1)$ FEA achieves polynomial runtime on Jump, seemingly in $\mathcal{O}(n^2 \ln n)$ ^{263,264,276}.

LABS *Low-Autocorrelation Binary Sequences* are bit strings of length n whose autocorrelation is as low as possible^{31,32,36,65,66,95,170,173,179,187,199}. This means that sub-sequences of any length $1 \leq k < n$ should ideally never repeat. The objective function $f : \{0, 1\}^n \mapsto \mathbb{N}_0$ represents the energy of a bit string x and is subject to minimization. We can define it as $f(x) = \sum_{k=1}^{n-1} \left(\sum_{i=0}^{n-1-k} s_i \cdot s_{i+k} \right)^2$ with $s_j = 2x_j - 1$. Such sequences are needed for communication engineering^{32,36,179}, cryptography^{65,179}, as well as modulation pulses in radar and sonar ranging¹⁸⁷. The LABS is $\mathcal{NP}$ -hard²³⁹. The SOTA on LABS contains^{31,36,65,66,179}.

LeadingOnes The LeadingOnes problem is a benchmark problem for bit-string based black-box search^{209,266,276}. It tries to maximize the number of *leading* 1 bits in the bit string of a chosen dimension n . The objective function $f(x)$ of the minimization variant of this problem can be defined as $f(x) = n - \sum_{i=1}^n \prod_{j=1}^i x_j$. Different from OneMax, the contribution to the objective value of the bit at index i thus depends on the state of all the bits *before* this index. The problem is unimodal, i.e., has only a single global optimum and no local optimum. Different from OneMax, it is not separable, i.e., we can optimize each variable separately. The expected runtime of $(1 + 1)$ EA on LeadingOnes is in $\Theta(n^2)$ ⁷⁶. The average runtime $(1 + 1)$ FEA on LeadingOnes seems to be slower by factor proportional to n , i.e., seems to be in $\mathcal{O}(n^3)$ ²⁶³.


Linux is the leading open source operating system, i.e., a free alternative to Microsoft Windows^{9,110,220,240,249}. We recommend using it for this course, for software development, and for research. Learn more at <https://www.linux.org>. Its variant Ubuntu is particularly easy to use and install.

Glossary (in English) IX



- LK** The *Lin-Kernighan* (LK) algorithm ¹⁵⁶ is a SLS method for the TSP. The LK algorithm performs iterative k -opt moves, i.e., in each step, it constructs the two sets X and Y of k edges such that removing the edges in X from the current tour T and then adding the edges from Y to T results in a better tour. The LK algorithm is one of the most classical approaches to the TSP.
- LKH** The *Lin-Kernighan-Helsgaun* algorithm ^{57,112,113} is a SLS method for the TSP based on the Lin-Kernighan (LK) algorithm ¹⁵⁶. LKH-1 was proposed in ¹¹³ and LKH-2 in ¹¹². It holds the record in the *World TSP* ⁵⁸ as of 2025.
- LS** A *local search* is an algorithm where a single „current“ candidate solution is maintained and new solutions are selected from its neighborhood in each step. Most LSeS are randomized, i.e., stochastic local search (SLS).
- MA** A *Memetic Algorithm* is an EA where each new solution is refined by a LS before it enters the population ²⁵⁶. As LS, we can use, e.g., RLS, but TS ^{47,91} is maybe a better choice. Some SOTA algorithms in some domains may be classified as MAs, e.g., Lin-Kernighan Helsgaun (LKH) basically uses a population that is refined via a local search. MAs also worked well on the JSSP ^{47,114} and the TSP ⁹¹.
- macOS** or Mac OS is the operating system that powers Apple Mac(intosh) computers ^{208,222}. Learn more at <https://www.apple.com/macos>.
- Matplotlib** is a Python package for plotting diagrams and charts ^{120,121,130,188}. Learn more at <https://matplotlib.org> ¹²¹.
- MaxSAT** The goal of satisfiability problems is to find an assignment for n Boolean variables that make a given Boolean formula $F : \{0, 1\}^n \mapsto \{0, 1\}$ become true. In the *Maximum Satisfiability* problem (MaxSAT) ¹¹⁶, F is given in conjunctive normal form, i.e., the variables appear either directly or negated in m „or“ clauses, which are all combined into one „and.“ The objective function $f(x)$, subject to minimization, computes the number of clauses which are false under the variable setting x . If $f(x) = 0$, then all clauses of F are true, which solves the problem. The MaxSAT problem is $\mathcal{NP}$ -complete ⁵⁵ and exhibits low epistasis but deceptiveness ²⁰², making it hard for local searches. Typical benchmark instances can be found in SATLIB, which contains smaller-scale instances, and the up-to-date MaxSAT Evaluation (MSE), providing SOTA benchmarks, algorithms, and results.

Glossary (in English) X



- metaheuristic** A *metaheuristic* is an optimization algorithm which performs a cycle of trial and error during which candidate solutions are sampled from the solution space $\mathbb{Y}$ and evaluated using an objective function $f : \mathbb{Y} \mapsto \mathbb{R}$ ^{100,250}. The results of the objective function are used to decide which solution is promising. The neighborhoods around promising solutions or similarly-structured solutions are then sampled in the next cycle. Prominent metaheuristics are SLSes, SA, TS, and EAs.
- Microsoft Windows** is a commercial proprietary operating system³³. It is widely spread, but we recommend using a Linux variant such as Ubuntu for software development and for our course. Learn more at <https://www.microsoft.com/windows>.
- MSE** The *MaxSAT Evaluation* is a regularly updated set of benchmark instances for the MaxSAT¹²⁵. It also includes solver software and benchmark results²⁵⁰.
- N-Queens** The N-Queens Problem is a benchmark problem for bit-string based black-box search^{70,276}. The goal is to arrange N queens on an $N \times N$ chessboard so that none can attack the other. The search space has thus dimension $n = N^2$, with each bit standing for a field and encoding whether or not a queen is placed there. The objective function $f(x)$ of the minimization variant is $N - (\sum_{i=1}^n x_i) - N \sum_{\xi} \max \{0, Q_{\xi}(x) - 1\}$ where $Q_{\xi}(x)$ is the number of queens in the horizontal, vertical, or diagonale ξ . The problem is quite epistatic.
- NF** The *normal forms* define guidelines for the design of relational DBs with the goal to avoid redundancy and to prevent inconsistencies and anomalies^{60,81,138,215,216}. There are several normal forms, 1NF, second normal form (2NF), third normal form (3NF), and so on, each more restrictive than the other.
- OneMax** OneMax is the simplest possible benchmark problem for bit-string based black-box search^{77,180,276}. The goal is to maximize the number of 1 bits in the bit string of a chosen dimension n . The objective function $f(x)$ of the minimization variant of this problem can be defined as $f(x) = n - \sum_{i=1}^n x_i$. The problem is unimodal, i.e., has only a single global optimum and no local optimum. It is fully separable, i.e., we can optimize each variable separately. The expected runtime of $(1+1)$ EA on OneMax is in $\Theta(n \ln n)$ ^{68,180}. The average runtime $(1+1)$ FEA on OneMax seems to be slower by factor proportional to n , i.e., seems to be in $\mathcal{O}(n^2 \ln n)$ ²⁶³.

Glossary (in English) XI



OR Operations Research (or Operational Research) is the application of sciences such as mathematics and computer science to the management and organization of systems, organizations, enterprises, factories, or projects. It encompasses the development and application of problem-solving methods and techniques (such as mathematical optimization, simulation, queueing theory and other stochastic models) with the goal to improve decision-making and efficiency⁶¹.

OR-Library is a library of benchmark instances for various OR problems^{16,17} located at <https://people.brunel.ac.uk/~mastjjb/jeb/info.html>. It contains instances of the JSSP, 1D- and 2D-Packing, Knapsack, periodic TSPs, amongst others.

pip is the standard tool to install Python software packages from the PyPI repository^{123,197}. To install a package `thepackage` hosted on PyPI, type `pip install thepackage` into the terminal. Learn more at <https://packaging.python.org/installing>.

Plateau The Plateau problem is a benchmark problem for bit-string based black-box search^{4,276}. It is structured exactly like Jump, but instead of being deceptive, the last ω bits to flip around the optimum are neutral. The objective function $f(x)$ of the minimization variant is $n - \|x\|_1$ if $\|x\|_1 = n$ or $\|x\|_1 \leq n - \omega$ hold, and ω otherwise, where $\|x\|_1 = \sum_{i=1}^n x_i$. This means that, the larger ω , the larger the neutral plane around the optimum that an algorithm needs to cross. An $(1 + 1)$ EA has an expected runtime of $\Theta(n^\omega)$ on plateaus⁴. The average runtime of the $(1 + 1)$ FEA on Plateaus is slower by a factor seemingly proportional in n .

PostgreSQL An open source object-relational DBMS^{85,184,198,232}. See <https://postgresql.org> for more information.

psql is the client program used to access the PostgreSQL DBMS server.

PyCharm is the convenient Python IDE that we recommend for this course^{247,268,272}. It comes in a free edition, so it can be downloaded and used at no cost. Learn more at <https://www.jetbrains.com/pycharm>.

PyPI The Python Package Index (PyPI) is an online repository that provides the software packages that you can install with `pip`^{29,234,245}. Learn more at <https://pypi.org>.

Python The Python programming language^{119,152,166,259}, i.e., what you will learn about in our book²⁵⁹. Learn more at <https://python.org>.

Glossary (in English) XII



QAP The *Quadratic Assignment Problem* is an optimization problem where the goal is to assign a set of n facilities to a set of n locations^{38,46,143,161}. Such an assignment can be represented as a permutation x of the first n natural numbers, where x_i specifies the location where facility i should be placed. For each QAP instance, a distance matrix A is given, where $A[a, b]$ specifies the distance from location a to location b , as well as a flow matrix B , where $B[i, j]$ is the amount of material flowing (e.g., daily) from facility i to facility j . The objective function $f(x)$ then rates a permutation x as $f(x) = \sum_{i=1}^n \sum_{j=1}^n A[x_i, x_j] * B[i, j]$. The QAP is $\mathcal{NP}$ -complete^{75,212} and even among this problem class, is considered as particularly hard for metaheuristics^{18,38,161,227}. The QAP has applications such as building layout^{59,82,144}, keyboard layout⁴⁰, circuit design⁸³, wiring²²⁴, and scheduling²²³. Typical benchmark instances can be found in QAPLIB. SOTA algorithms for the QAP include^{18,91,171,177,230,231}.

QAPLIB is a library of 136 benchmark instances for the Quadratic Assignment Problem (QAP)^{37,39}, 28 of which have not yet been solved to optimality³ (at least by 2023).

Random Keys encoding is a decoding procedure $\gamma : \mathbb{X} \mapsto \mathbb{Y}$ that maps a continuous search space $\mathbb{X} \subset [0, 1]^n$ which is a subset of the n -dimensional real numbers to the space $\mathbb{Y}$ of permutations of the first n natural numbers^{14,15}. For example, on $n = 5$, the vector $x = (0.49, 0.91, 0.33, 0.75, 0.51)$ is translated to the permutation $y = (3, 1, 5, 4, 2)$, because $x_3 = 0.33$ has the smallest value, putting 3 at the beginning, $x_1 = 0.49$ the second-smallest, placing 1 second, ..., and $x_2 = 0.91$ being the largest value meaning that the last number in y will be 2¹⁵. The advantage of the encoding is that we can search in $\mathbb{X}$ applying arbitrary mathematical operators, crossover, and mutation procedures, but will always get correct permutations. The disadvantage is that $|\mathbb{X}| \gg |\mathbb{Y}|$ and that there actually is no meaning underpinning moves in $\mathbb{X}$ in relation to their projected result in $\mathbb{Y}$.

RLS Randomized local search retains the best solution x_c discovered so far during the search and, in each step, it applies a unary search operator to this best-so-far solution x_c and derives a new solution x_n . If the new solution x_n is *better or equally good* when compared with x_c , i.e., not worse, then it replaces it, i.e., is stored as the new x_c . If the search space are bit strings of length n , then RLS uses a unary search operator that flips exactly one bit. This operator is the main difference to $(1 + 1)$ EA.

FRLS The RLS with FFA plugged in²⁷⁶. On the discrete bit-string domains, this algorithm has a very specific structure: Its unary search operator flips exactly one bit, distinguishing it from the unary operator in the $(1 + 1)$ FEA, which flips each bit with probability $1/n$. On other domains, such as permutations, we use the term synonymously with $(1 + 1)$ FEA.

Glossary (in English) XIII



RTS *Reactive Tabu Search* is a variant of TS where the length of the tabu list is adapted to the problem and to the current evolution of the search, and an escape strategy for diversifying the search is used when that is not sufficient¹⁰⁻¹³. It has successfully been applied to a wide range of problems, from the QAP^{11,12}, to Knapsack problems^{10,12}, the N-K landscape¹⁰ to the training of neural networks¹³.

SA *Simulated Annealing* is a SLS that sometimes accepts a worse solution^{44,127,130,195,250}. The probability to do so decreases over time and with the difference in objective values, i.e., is the lower the worse the new solution is. SA performed well on a variety of problems, including the QAP^{175,238} and the JSSP¹⁹⁰.

SATLIB is a library of benchmark instances for the Maximum Satisfiability (MaxSAT) available at <https://www.cs.ubc.ca/~hoos/SATLIB/index-ubc.html>^{117,118}.

server In a client-server architecture, the server is a process that fulfills the requests of the clients. It usually waits for incoming communication carrying the requests from the clients. For each request, it takes the necessary actions, performs the required computations, and then sends a response with the result of the request. Typical examples for servers are web servers⁴¹ in the internet as well as DBMSes. It is also common to refer to the computer running the server processes as server as well, i.e., to call it the „server computer“¹⁴⁶.

SLS *Stochastic local search* is a local search (LS), one of the simplest metaheuristic search paradigms¹¹⁶: A single „current“ candidate solution is maintained and new solutions are *stochastically* sampled from its neighborhood, i.e., in a way that involves random numbers. If these solutions are deemed interesting based on their objective value, they replace the „current“. The cycle continues. Basic examples are RLS and (1 + 1) EA. More complex examples that add mechanisms to escape local optima on top of the SLS paradigm are TS and SA.

SOTA State-of-the-Art, i.e., the best-performing methods for a field or problem type

stderr The *standard error stream* is one of the three pre-defined streams of a console process (together with the stdin and the stdout)¹³⁷. It is the text stream to which the process writes information about errors and exceptions. If an uncaught **Exception** is raised in Python and the program terminates, then this information is written to standard error stream (stderr). If you run a program in a terminal, then the text that a process writes to its stderr appears in the console.

Glossary (in English) XIV



- stdin** The *standard input stream* is one of the three pre-defined streams of a console process (together with the **stdout** and the **stderr**)¹³⁷. It is the text stream from which the process reads its input text, if any. The Python instruction **input** reads from this stream. If you run a program in a terminal, then the text that you type into the terminal while the process is running appears in this stream.
- stdout** The *standard output stream* is one of the three pre-defined streams of a console process (together with the **stdin** and the **stderr**)¹³⁷. It is the text stream to which the process writes its normal output. The **print** instruction of Python writes text to this stream. If you run a program in a terminal, then the text that a process writes to its **stdout** appears in the console.
- STSP** A *symmetric Traveling Salesperson Problem* is a special case of the TSP, where the $n \times n$ distance matrix A is symmetric, i.e., $A[a, b] = A[b, a] \forall a, b \in 1..n$.
- terminal** A terminal is a text-based window where you can enter commands and execute them^{9,50}. Knowing what a terminal is and how to use it is very essential in any programming- or system administration-related task. If you want to open a terminal under Microsoft Windows, you can Druck auf  + , dann Schreiben von `cmd`, dann Druck auf . Under Ubuntu Linux,  +  +  opens a terminal, which then runs a Bash shell inside.
- Trap** The Trap problem is a benchmark problem for bit-string based black-box search^{76,182,276}. It is structured exactly like OneMax, however the worst and the best solution are swapped. This makes the problem highly deceptive, as following the „gradient“ in the search space leads the search away from the global optimum. For bit strings of length n , the objective function $f(x)$ of the minimization variant is 0 if $\|x\|_1 = 0$ and $n - \|x\|_1 - 1$ otherwise, where $\|x\|_1 = \sum_{i=1}^n x_i$. An $(1 + 1)$ EA will converge to the resulting local optimum and thus have an expected runtime of $\Theta(n^n)$ ⁷⁶. In experiments, the $(1 + 1)$ FEA achieves polynomial runtime on Trap, seemingly in $\mathcal{O}(n^2 \ln n)$ ^{263,264,276}.
- TS** *Tabu Search* is one of the most successful SLSes^{98,99,101,129}. In order to avoid returning to previous solutions, it declares certain solutions or search moves as „tabu.“ For example, if a bit in a discrete problem has been flipped by the search operator, it may be forbidden to flip the bit again for some time, thus preventing the algorithm from getting trapped in a cycle. This rule may be overridden if a new best-so-far solution is discovered that outperforms all previous solutions, in which case it would be accepted (this is the so-called aspiration criterion). TS has performed well on the QAP^{11,12,174,177,229,230} and on the JSSP^{183,192,194,219,277}.

Glossary (in English) XV



TSP In an instance of the *Traveling Salesperson Problem*, also known as *Traveling Salesman Problem*, a set of n cities or locations as well as the distances between them are given^{5,108,150,154,260,265}. The goal is to find the shortest round-trip tour that starts at one city, visits all the other cities one time each, and returns to the origin. The TSP is one of the most well-known $\mathcal{NP}$ -hard combinatorial optimization problems^{96,108,145}. The TSP has many applications⁵, including in transportation, logistics, (circuit) plotting and drilling problems¹⁰⁷, telescope aiming, and genome sequencing. Solutions are often encoded as permutations x of the first n natural numbers, where each city gets a number and the order of numbers in the permutation corresponds to the order of cities in the tour. The distances between the n cities are usually given in a $n \times n$ distance matrix A , where $A[a, b]$ is the distance from city a to city b with $a, b \in 1..n$. Then, the objective function subject to minimization is $f(x) = A[x_n, x_1] + \sum_{i=1}^{n-1} A[x_i, x_{i+1}]$. Typical benchmark instances can be found in TSPLib^{204,205}, the 8th DIMACS challenge¹³¹⁻¹³³, and the *World TSP* repository⁵⁸.

TSPLib is a library of benchmark instances for the Traveling Salesperson Problem (TSP)^{204,205}. Its original URL was available until 2025 and then became defunct. The repository <https://github.com/shredderzsj/TSPLIB> contains the data. Additionally, you may also check <https://github.com/thomasWeise/tspSuite>, which contains all the TSPLib instances as well as Java code to load them. The TSPLib contains 110 instances of the symmetric Traveling Salesperson Problems (STSPs) with scales n ranging from 14 to 85 900, but 93 instances have less than 2000 nodes. There also are 19 asymmetric Traveling Salesperson Problems (ATSPs) with scales $n \in 17..443$.

TTP The *Traveling Tournament Problem* is the combinatorial optimization problem of both efficiently and fairly organizing a tournament of n teams that play against each other in a pairwise fashion^{79,270}. The efficient part boils down to arranging the games such that the total travel length is short, which is somewhat similar to the classical TSP. Initially, each team is at its home location. On each day, a team needs to travel if its scheduled game is not at its present location. On the last day, each team may need to travel back home unless their last game is a home game. The total travel length sums up the lengths of all travels over all teams. The fair part is represented in several constraints, such as doubleRoundRobin, compactness, maxStreak, and noRepeat. The TTP is $\mathcal{NP}$ -hard²⁵².

Glossary (in English) XVI



- TwoMax** The TwoMax problem is a benchmark problem for bit-string based black-box search^{94,248,276}. It has a global and a local optimum, both of about the same size, at opposite ends of the search space. For bit strings of length n , the objective function $f(x)$ of the minimization variant is 0 if $\|x\|_1 = n$ and $1 + n - \max\{\|x\|_1, n - \|x\|_1\}$ otherwise, where $\|x\|_1 = \sum_{i=1}^n x_i$. An $(1 + 1)$ EA has a 50/50 chance to converge to the local or global optimum and thus has an expected runtime in $\Theta(n^n)$ ^{93,94}. In experiments, the $(1 + 1)$ FEA achieves polynomial runtime seemingly in $\mathcal{O}(n^2 \ln n)$ on TwoMax^{263,264,276}.
- Ubuntu** is a variant of the open source operating system Linux^{50,111}. We recommend that you use this operating system to follow this class, for software development, and for research. Learn more at <https://ubuntu.com>. If you are in China, you can download it from <https://mirrors.ustc.edu.cn/ubuntu-releases>.
- UCS** Universal Coded Character Set, see Unicode
- UML** The *Unified Modeling Language* is a graphical language for visualizing, specifying, constructing, and documenting the artifacts of distributed object systems^{30,92,185,243}.
- Unicode** A standard for assigning characters to numbers^{122,235,244}. The Unicode standard supports basically all characters from all languages that are currently in use, as well as many special symbols. It is the predominantly used way to represent characters in computers and is regularly updated and improved.
- URI** A *Uniform Resource Identifier* is an identifier for an abstract or physical resource in the internet²⁷⁴. It can be a URL, a name, or both. URIs are supersets of URLs. The connection strings of the PostgreSQL DBMS are examples for URIs.
- URL** A *Uniform Resource Locator* identifies a resource in the WWW and a way to obtain it by describing a network access mechanism. The most notable example of URLs is the text you write into web browsers to visit websites²¹. URLs are subsets of Uniform Resource Identifiers (URIs).
- VCS** A *Version Control System* is a software which allows you to manage and preserve the historical development of your program code²⁴². A distributed VCS allows multiple users to work on the same code and upload their changes to the server, which then preserves the change history. The most popular distributed VCS is Git.

Glossary (in English) XVII



venv is a Python module and tool for creating virtual environments ²⁵¹. Learn more at <https://docs.python.org/3/library/venv.html> ²⁵¹.

virtual environment A virtual environment is a directory that contains a local Python installation ^{172,254}. It comes with its own package installation directory. Multiple different virtual environments can be installed on a system. This allows different applications to use different versions of the same packages without conflict, because we can simply install these applications into different virtual environments.

VND *Variable Neighborhood Descend*; see VNS. VND in combination with GRASP has been applied to the 2BP|O|F in ¹⁹¹.

VNS *Variable Neighborhood Search* is a metaheuristic framework combining a systematic change of neighborhood with LS ^{109,178}. A *neighborhood* structure in LS defines which solutions can be reached from a given solution within one search step. Usually, one uses a single unary operator and, hence, has a single neighborhood structure. However, for many problems, we can easily design many operators. For permutations, for example, one operator may swap two elements, another one may reverse a section of the permutation, and yet another one, while yet another one may rotate a subsequence one step to the left or right ²⁶⁰. In the VNS framework, a multiple neighborhoods are investigated in a systematic fashion. Assume that we have a list of neighborhood structures. Variable Neighborhood Descend (VND) works in a deterministic fashion. It finds the best solution that can be reached in one step from the current solution under the current neighborhood. If this is better than the current solution, we accept it and continue with the first neighborhood. Otherwise, we continue with the next neighborhood in the list. In Basic VNS, instead of picking the best move from the current neighborhood, the first improving move is used. Also, at the beginning of each cycle, a random point from the current neighborhood around the current solution is chosen as starting point.

WWW World Wide Web ^{20,62}

Xcode is offers the tools for developing, testing, and distributing applications as well as an IDE for Apple platforms such as macOS and iOS ²¹¹.


$i..j$ with $i, j \in \mathbb{Z}$ and $i \leq j$ is the set that contains all integer numbers in the inclusive range from i to j . It always holds that $i..j \subset \mathbb{Z}$. For example, $5..9$ is equivalent to $\{5, 6, 7, 8, 9\}$

Glossary (in English) XVIII



- A the $n \times n$ distance matrix. $A[a, b]$ indicates the distance between locations a and b with $a, b \in 1..n$. A distance matrix can be symmetric, in which case $A[a, b] = A[b, a] \forall a, b \in 1..n$. Distance matrices represent the problem instance data in TSPs and part of the instance data of QAPs.
- B the $n \times n$ flow matrix. $B[a, b]$ is the flow of goods between locations a and b with $a, b \in 1..n$. Flow matrices are one half of the problem instance data of QAPs.
- $f(y)$ The *objective function* $f : \mathbb{Y} \mapsto \mathbb{R}$ can compute a cost or rating for each candidate solution y in the solution space $\mathbb{Y}$. The smaller this value, the better the solution, i.e., in the context of this work, objective functions are subject to minimization. Objective functions are not necessarily continuous and it is also quite common that they have integer or natural numbers as results, e.g., we often have $f : \mathbb{Y} \mapsto \mathbb{N}_0$ instead of $f : \mathbb{Y} \mapsto \mathbb{R}$.
- $\gamma(x)$ The decoding function $\gamma : \mathbb{X} \mapsto \mathbb{Y}$ translates point from the search space $\mathbb{X}$ to one point y in the solution space $\mathbb{Y}$. It is a very common case that $\mathbb{X} = \mathbb{Y}$ and that the decoding function γ is the identity mapping. Examples for encodings that translate from a simple search space $\mathbb{X}$ to a complex solution data structure $\mathbb{Y}$ are the IBL algorithm that translates (potentially signed) permutations to two-dimensional packings on the 2BP, the permutation-based encoding of Gantt charts for the JSSP from ^{24,25,97,217,261}, or the permutation-based encoding of game plans for the Traveling Tournament Problem (TTP) from ²⁷⁰. Encodings can also translate between types of search spaces. The Random Keys encoding, for example, translates from $[0, 1]^n$ to permutations of the first n natural numbers..
- k the number of jobs in an instance of the JSSP.
- m the number of machines in an instance of the JSSP.

Glossary (in English) XIX



n We usually use n to denote the scale, i.e., the size of the problem to solve. For example, in a TSP, this may be the number of cities, in a discrete benchmark problem such as OneMax or Trap, this may be the number of bits over which the problem is defined, in a QAP, this may be the number of facilities and locations, and in a MaxSAT problem, this may be the number of variables that are input to the Boolean formula that we want to become true. There are also problems where the scale is not defined straightforwardly like this. For example, in a JSSP, we have a number of machines and a number of jobs, which together define the size of the problem. But even then, the scale n relates to the size of the solution space $\mathbb{Y}$, and, hence, also of the search space $\mathbb{X}$, which usually grow exponentially with n . And this is already the main issue: The larger n , the (exponentially) larger the number of possible solutions and thus, the larger the runtime of algorithms..

$\mathbb{N}_0$ the set of the natural numbers *including* 0, i.e., 0, 1, 2, 3, and so on. It holds that $\mathbb{N}_0 \subset \mathbb{Z}$ and that $\mathbb{N}_0 = \mathbb{N}_1 \cup \{0\}$.

$\mathbb{N}_1$ the set of the natural numbers *excluding* 0, i.e., 1, 2, 3, 4, and so on. It holds that $\mathbb{N}_1 \subset \mathbb{Z}$ and that $\mathbb{N}_1 = \mathbb{N}_0 \setminus \{0\}$.

$\mathcal{NP}$ is the class of computational problems that can be solved in polynomial time by a non-deterministic machine and can be verified in polynomial time by a deterministic machine (such as a normal computer) ¹⁰⁵.

$\mathcal{NP}$ -complete A decision problem is $\mathcal{NP}$ -complete if it is in $\mathcal{NP}$ and all problems in $\mathcal{NP}$ are reducible to it in polynomial time ^{105,201}. A problem is $\mathcal{NP}$ -complete if it is $\mathcal{NP}$ -hard and if it is in $\mathcal{NP}$.

$\mathcal{NP}$ -hard A problem is $\mathcal{NP}$ -hard if all problems in $\mathcal{NP}$ are reducible to it in polynomial time ¹⁰⁵. Algorithms that guarantee to find the correct solutions of $\mathcal{NP}$ -hard problems ^{45,55,149} have a worst-case runtime that grows exponentially with the problem scale.

$\Omega(g(x))$ If $f(x) = \Omega(g(x))$, then there exist positive numbers $x_0 \in \mathbb{R}^+$ and $c \in \mathbb{R}^+$ such that $f(x) \geq c * g(x) \geq 0 \forall x \geq x_0$ ^{141,142}. In other words, $\Omega(g(x))$ describes a lower bound for function growth.

$\mathcal{O}(g(x))$ If $f(x) = \mathcal{O}(g(x))$, then there exist positive numbers $x_0 \in \mathbb{R}^+$ and $c \in \mathbb{R}^+$ such that $0 \leq f(x) \leq c * g(x) \forall x \geq x_0$ ^{7,141,142,147}. In other words, $\mathcal{O}(g(x))$ describes an upper bound for function growth.

$\Theta(g(x))$ If $f(x) = \Theta(g(x))$, then $f(x) = \mathcal{O}(g(x))$ and $f(x) = \Omega(g(x))$ ^{141,142}. In other words, $\Theta(g(x))$ describes an exact order of function growth.

$\mathbb{R}$ the set of the real numbers.

Glossary (in English) XX



$\mathbb{R}^+$ the set of the positive real numbers, i.e., $\mathbb{R}^+ = \{x \in \mathbb{R} : x > 0\}$.

$\mathbb{X}$ The search space $\mathbb{X}$ is the space through which an optimization algorithm navigates in order to find good solutions. The search operators of metaheuristics are used to sample points $x \in \mathbb{X}$, for example. On many benchmark problems, the objective functions f directly evaluate the elements $x \in \mathbb{X}$, i.e., are defined as $f : \mathbb{X} \mapsto \mathbb{R}$. However, very often these elements x are not the same data structures that the user is interested in and/or that the objective functions evaluate: It is common that the search space $\mathbb{X}$ is a simple and plain data structure that can be tackled with standard operations or mathematical tools, such as real vectors $\mathbb{R}^n$, permutations, or bit strings, whereas the solution space $\mathbb{Y}$ can be something more complicated. Then, the user only cares about the solutions $y \in \mathbb{Y}$ and not about the search space $\mathbb{X}$. A decoding $\gamma : \mathbb{X} \mapsto \mathbb{Y}$ is employed to translate the $x \in \mathbb{X}$ to $y = \gamma(x)$ with $y \in \mathbb{Y}$.

x a point in the search space $\mathbb{X}$.

$\mathbb{Y}$ the set of candidate solutions of an optimization problem is called the *solution space* $\mathbb{Y}$. The solution space corresponds to the data structure holding the candidate solutions y . These are the elements that are passed to the user after the optimization process is completed. They are also the parameters of the objective function(s) $f : \mathbb{Y} \mapsto \mathbb{R}$.

y a candidate solution $y \in \mathbb{Y}$ is one possible solution to an optimization problem. After the optimization process is completed, one or multiple such solutions are passed to the user.

$\mathbb{Z}$ the set of the integers numbers including positive and negative numbers and 0, i.e., $\dots, -3, -2, -1, 0, 1, 2, 3, \dots$, and so on. It holds that $\mathbb{Z} \subset \mathbb{R}$.