

Frequency Fitness Assignment

频率适应度分配

Thomas Weise (汤卫思)

tweise@hfu.edu.cn · <https://thomasweise.github.io>

School of Artificial Intelligence and Big Data
Hefei University
Hefei, Anhui, China

人工智能与大数据学院
合肥大学
中国安徽省合肥市

Outline



1. Introduction
2. Metaheuristic Optimization
3. Invariance Properties
4. Frequency Fitness Assignment
5. Where did we try FFA?
6. Summary
7. Advertisement





Introduction



Introduction to Optimization

- Optimization means finding superlatives.




biggest ... with the least amount
of fuel...
...at the earliest possible time
...highest quality ...longest possible duration
most efficient ... most precise ... cheapest ... fastest...
fewest boxes ...with the highest score
...the longest possible duration most robust ...
...shortest path

The *superlative* form of an adjective is used to show that something has a quality to the greatest or least degree.

Introduction to Optimization



- Optimization means finding superlatives.
- Pick up and deliver packages from different places to customers using the **least** amount of fuel^{173,218–220}.

biggest ... **with the least amount of fuel...**
...at the earliest possible time
...highest quality ...longest possible duration
most efficient ... most precise ... cheapest ... fastest...
fewest boxes ...with the highest score
...the longest possible duration most robust ...
...shortest path

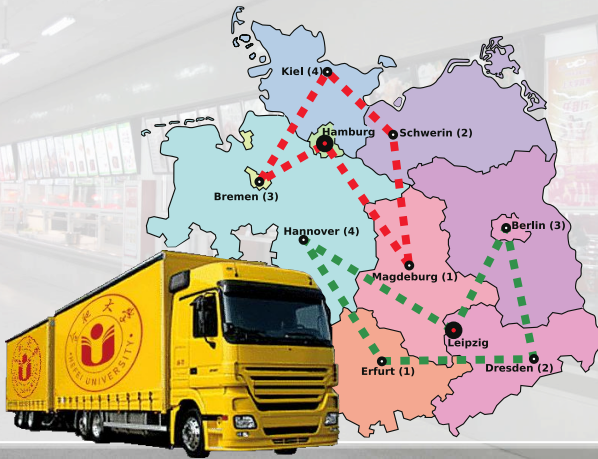

Introduction to Optimization


- Optimization means finding superlatives.
- Pick up and deliver packages from different places to customers using the **least** amount of fuel^{173,218–220}.
- Pack a set of things into the **fewest** boxes^{67,186,238,239}.

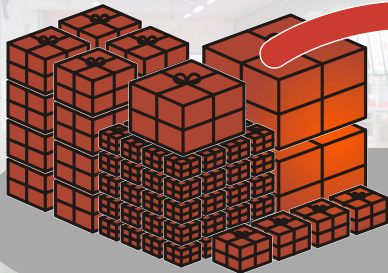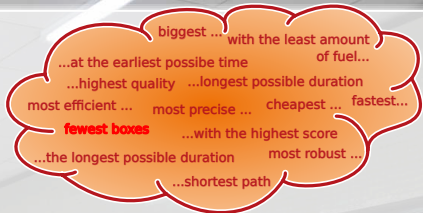

Introduction to Optimization


- Optimization means finding superlatives.
- Pick up and deliver packages from different places to customers using the **least** amount of fuel^{173,218–220}.
- Pack a set of things into the **fewest** boxes^{67,186,238,239}.
- Assign tasks to machines such that we can finish our work the at **earliest** possible time.

biggest ... with the least amount of fuel...
...at the earliest possible time
...highest quality ...longest possible duration
most efficient ... most precise ... cheapest ... fastest...
fewest boxes ...with the highest score
...the longest possible duration most robust ...
...shortest path

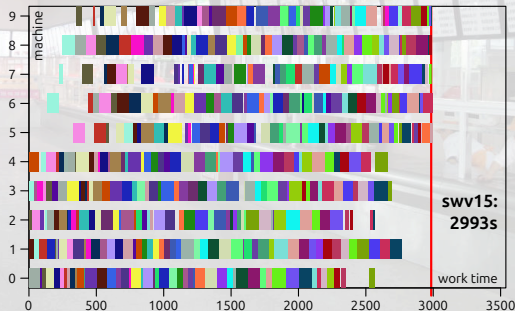

Introduction to Optimization

- Optimization means finding superlatives.
- Pick up and deliver packages from different places to customers using the **least** amount of fuel^{173,218–220}.
- Pack a set of things into the **fewest** boxes^{67,186,238,239}.
- Assign tasks to machines such that we can finish our work the at **earliest** possible time.
- Find a strategy to manage the power of the nodes in this sensor network so that full coverage is guaranteed for the **longest** possible duration.

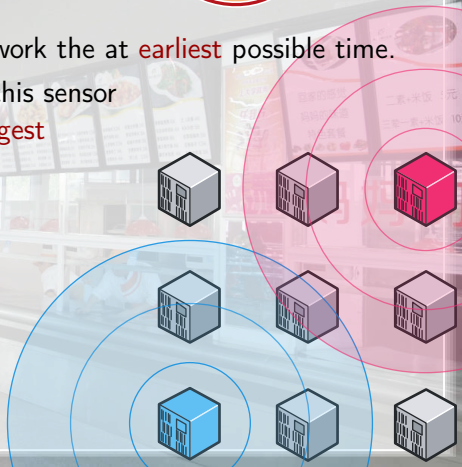

Introduction to Optimization

- Optimization means finding superlatives.
- Pick up and deliver packages from different places to customers using the **least** amount of fuel^{173,218–220}.
- Pack a set of things into the **fewest** boxes^{67,186,238,239}.
- Assign tasks to machines such that we can finish our work the at **earliest** possible time.
- Find a strategy to manage the power of the nodes in this sensor network so that full coverage is guaranteed for the **longest** possible duration.
- And so on.

biggest ... with the least amount of fuel...
...at the earliest possible time
...highest quality ...longest possible duration
most efficient ... most precise ... cheapest ... fastest...
fewest boxes ...with the highest score
...the longest possible duration most robust ...
...shortest path

What are Optimization Problems?

- There are two ways to define optimization problems.



What are Optimization Problems?

- The economic view.

Optimization Problem

An optimization problem is a situation which requires deciding for one choice from a set of possible alternatives in order to reach a predefined or required benefit at minimal costs.



What are Optimization Problems?



- The mathematical view.

Optimization Problem

An optimization problem is a situation which requires deciding for one choice from a set of possible alternatives in order to reach a predefined or required benefit at minimal costs.

Solving an optimization problem requires finding an input element x^* within a set $\mathbb{X}$ of allowed elements for which a mathematical function $f: \mathbb{X} \mapsto \mathbb{R}$ takes on the smallest possible value.

Example: Traveling Salesperson Problem

- In the Traveling Salesperson Problem (TSP)^{5,95,128,132,215,227}, the goal is to find the shortest round-trip tour through a set of n cities.



Example: Traveling Salesperson Problem

- In the Traveling Salesperson Problem (TSP)^{5,95,128,132,215,227}, the goal is to find the shortest round-trip tour through a set of n cities.
- The search space $\mathbb{X}$ thus is the set of all possible round-trip tours through these n cities, usually specified as permutations of the first n natural numbers.



Example: Traveling Salesperson Problem

- In the Traveling Salesperson Problem (TSP)^{5,95,128,132,215,227}, the goal is to find the shortest round-trip tour through a set of n cities.
- The search space $\mathbb{X}$ thus is the set of all possible round-trip tours through these n cities, usually specified as permutations of the first n natural numbers.
- The objective function $f : \mathbb{X} \mapsto \mathbb{R}$, subject to minimization, is the length of the tour.




Example: Traveling Salesperson Problem

- In the Traveling Salesperson Problem (TSP)^{5,95,128,132,215,227}, the goal is to find the shortest round-trip tour through a set of n cities.
- The search space $\mathbb{X}$ thus is the set of all possible round-trip tours through these n cities, usually specified as permutations of the first n natural numbers.
- The objective function $f : \mathbb{X} \mapsto \mathbb{R}$, subject to minimization, is the length of the tour.
- The optimal solution $x^* \in \mathbb{X}$ is the shortest possible tour.




Example: Maximum Satisfiability Problem

- The goal of the Maximum Satisfiability (MaxSAT)^{42,101} problem is to find a setting of n variables that makes a Boolean formula F become True. The variables appear directly or negated in m OR-clauses, whose results flow into one AND-clause.

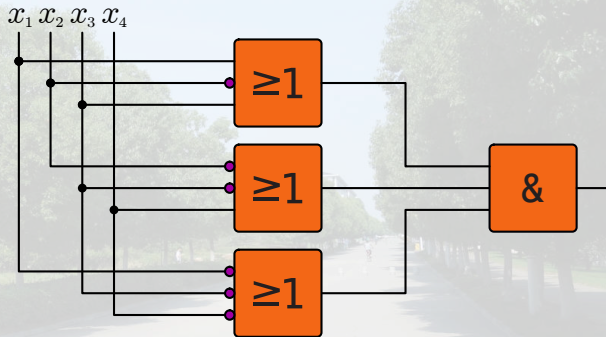


Example: Maximum Satisfiability Problem

- The goal of the Maximum Satisfiability (MaxSAT)^{42,101} problem is to find a setting of n variables that makes a Boolean formula F become True. The variables appear directly or negated in m OR-clauses, whose results flow into one AND-clause.

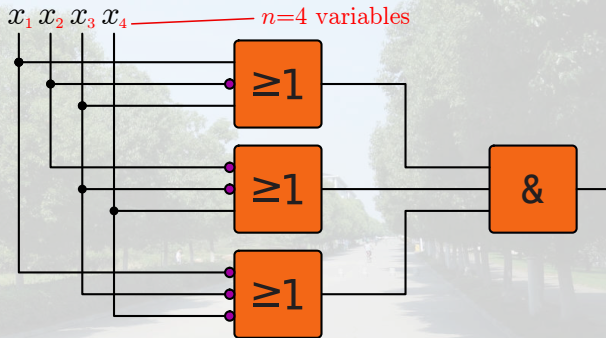


Example: Maximum Satisfiability Problem

- The goal of the Maximum Satisfiability (MaxSAT)^{42,101} problem is to find a setting of n variables that makes a Boolean formula F become True. The variables appear directly or **negated** in m OR-clauses, whose results flow into one AND-clause.

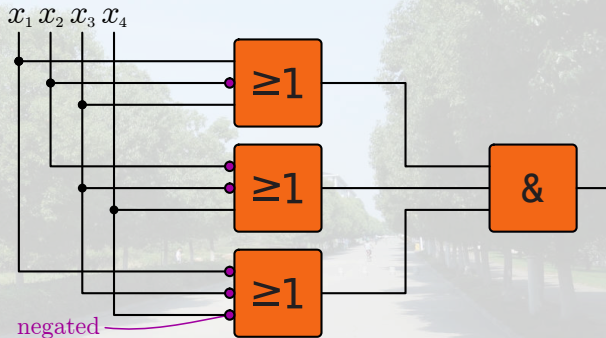


Example: Maximum Satisfiability Problem

- The goal of the Maximum Satisfiability (MaxSAT)^{42,101} problem is to find a setting of n variables that makes a Boolean formula F become True. The variables appear directly or negated in m OR-clauses, whose results flow into one AND-clause.

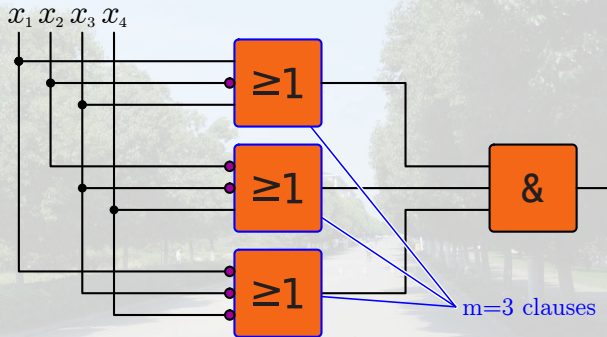


Example: Maximum Satisfiability Problem

- The goal of the Maximum Satisfiability (MaxSAT)^{42,101} problem is to find a setting of n variables that makes a Boolean formula F become True. The variables appear directly or negated in m OR-clauses, whose results flow into one AND-clause.

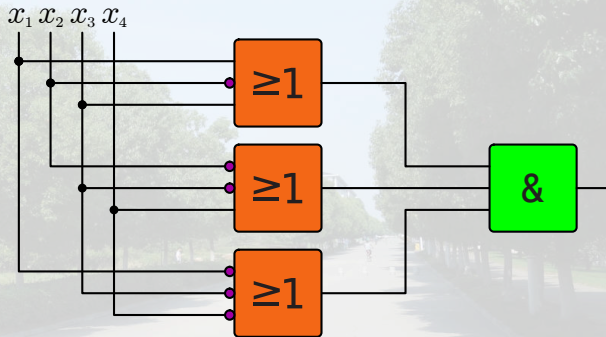


Example: Maximum Satisfiability Problem

- The goal of the Maximum Satisfiability (MaxSAT)^{42,101} problem is to find a setting of n variables that makes a Boolean formula F become True. The variables appear directly or negated in m OR-clauses, whose results flow into one AND-clause.
- $\mathbb{X}$ is the set of all possible bit strings of length n .

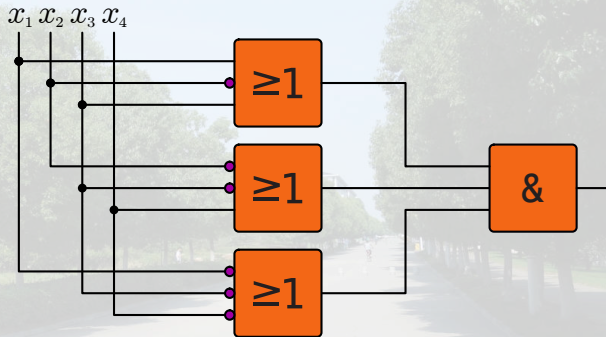


Example: Maximum Satisfiability Problem

- The goal of the Maximum Satisfiability (MaxSAT)^{42,101} problem is to find a setting of n variables that makes a Boolean formula F become True. The variables appear directly or negated in m OR-clauses, whose results flow into one AND-clause.
- $\mathbb{X}$ is the set of all possible bit strings of length n .
- The objective function $f : \mathbb{X} \mapsto \mathbb{N}_0$ is the number of unsatisfied OR-clauses.

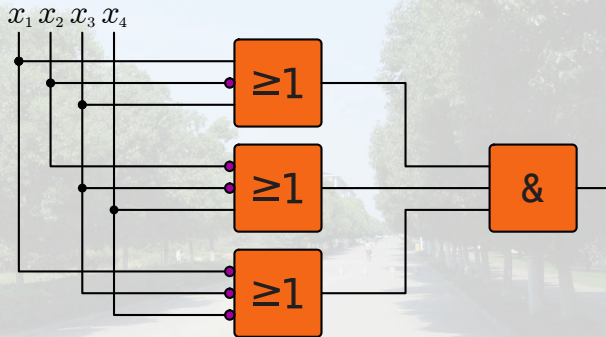


Example: Maximum Satisfiability Problem

- The goal of the Maximum Satisfiability (MaxSAT)^{42,101} problem is to find a setting of n variables that makes a Boolean formula F become True. The variables appear directly or negated in m OR-clauses, whose results flow into one AND-clause.
- $\mathbb{X}$ is the set of all possible bit strings of length n .
- The objective function $f : \mathbb{X} \mapsto \mathbb{N}_0$ is the number of unsatisfied OR-clauses.
- If the problem can be solved, then the optimum $x^* \in \mathbb{X}$ has $f(x^*) = 0$, i.e., all clauses satisfied, i.e., $F(x^*) = \text{True}$.

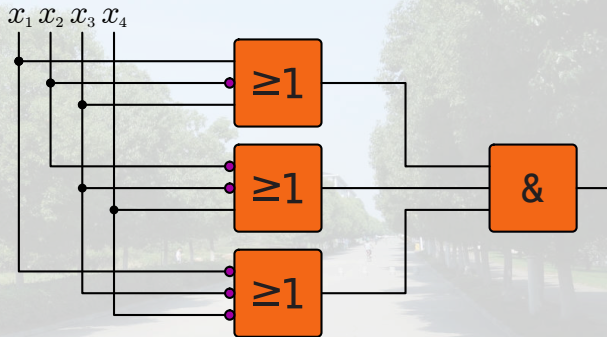


Example: Maximum Satisfiability Problem

- The goal of MaxSAT is to find a setting of n variables that makes a Boolean formula F become True. The variables appear directly or negated in m OR-clauses, whose results flow into one AND-clause.
- $\mathbb{X}$ is the set of all possible bit strings of length n .
- The objective function $f : \mathbb{X} \mapsto \mathbb{N}_0$ is the number of unsatisfied OR-clauses.
- If the problem can be solved, then the optimum $x^* \in \mathbb{X}$ has $f(x^*) = 0$, i.e., all clauses satisfied, i.e., $F(x^*) = \text{True}$.
- MaxSAT is $\mathcal{NP}$ -complete⁴².

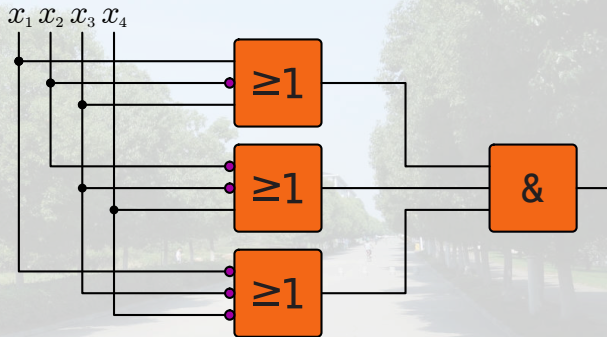


Example: Bin Packing Problem

- The goal of the Bin Packing Problem is to pack n objects, each having a specific size, into as few bins (also of a given size) as possible^{238,239}.

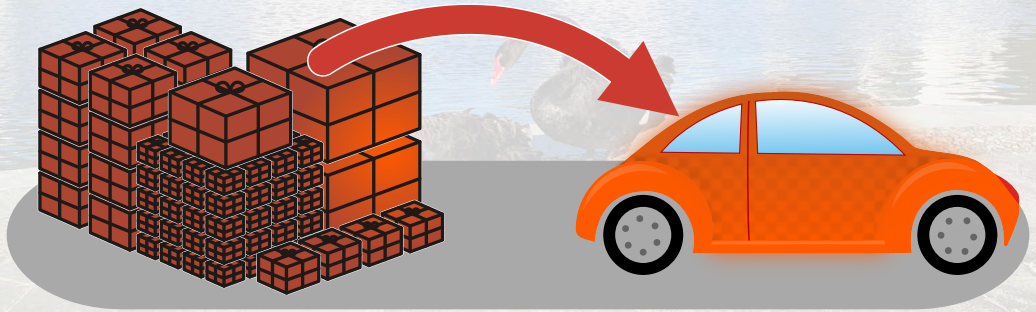

Example: Bin Packing Problem


- The goal of the Bin Packing Problem is to pack n objects, each having a specific size, into as few bins (also of a given size) as possible^{238,239}.
- The $\mathbb{X}$ comprises all possible packing orders of the n objects.

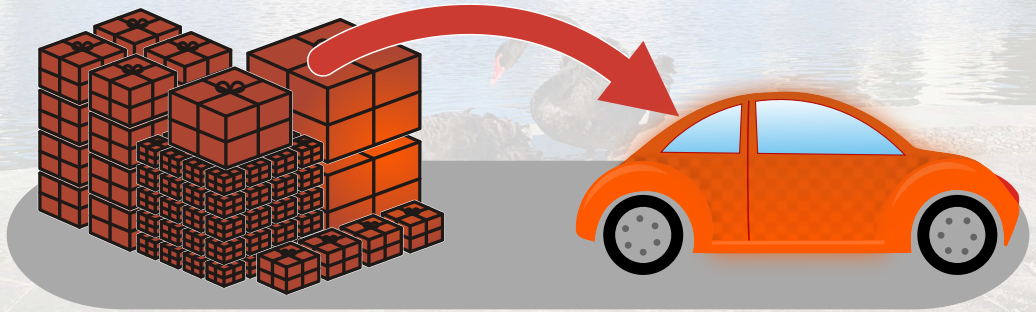

Example: Bin Packing Problem




- The goal of the Bin Packing Problem is to pack n objects, each having a specific size, into as few bins (also of a given size) as possible^{238,239}.
- The $\mathbb{X}$ comprises all possible packing orders of the n objects.
- The objective function f is the number of bins needed by a given packing order.

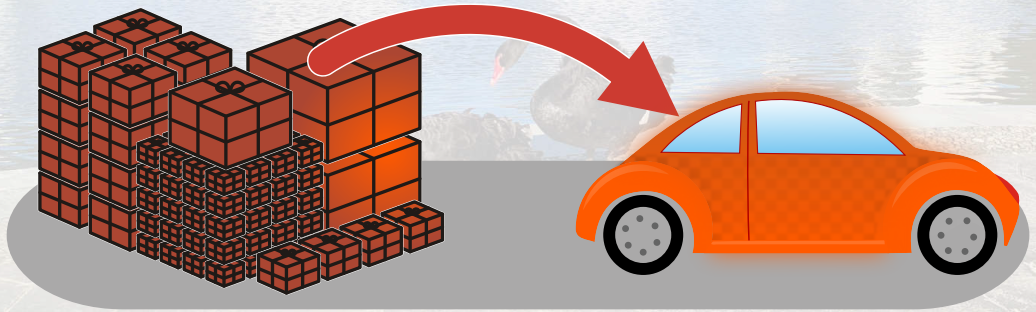

Example: Bin Packing Problem




- The goal of the Bin Packing Problem is to pack n objects, each having a specific size, into as few bins (also of a given size) as possible^{238,239}.
- The $\mathbb{X}$ comprises all possible packing orders of the n objects.
- The objective function f is the number of bins needed by a given packing order.
- The optimum x^* is the packing order requiring the fewest bins.

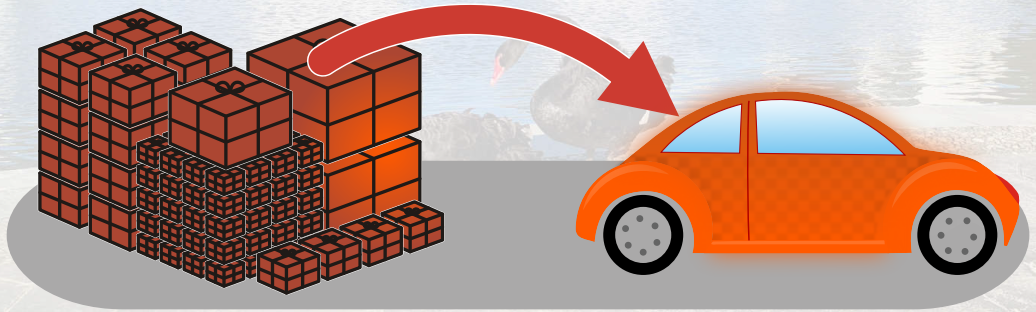

Optimization is Hard

- Finding the globally optimal solution x^* from the set of all possible solutions $\mathbb{X}$ is often an $\mathcal{NP}$ -hard problem.

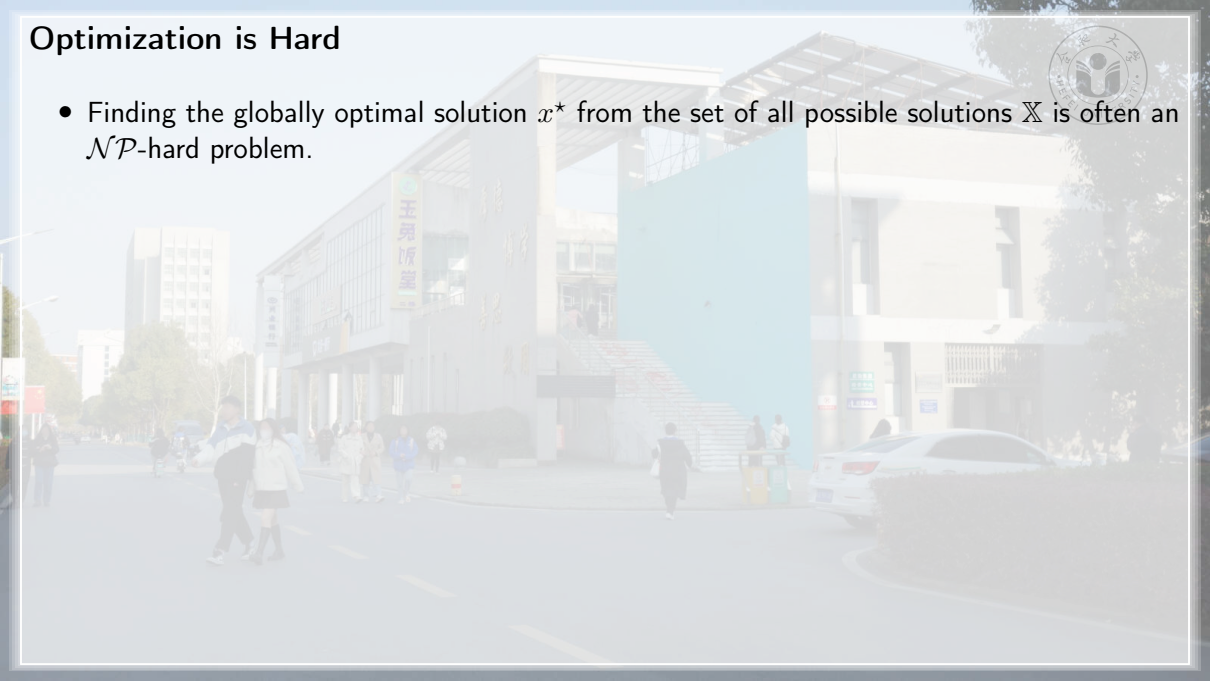

Optimization is Hard




- Finding the globally optimal solution x^* from the set of all possible solutions $\mathbb{X}$ is often an $\mathcal{NP}$ -hard problem.
- Currently, there is no algorithm that can **guarantee** to find the optimal solution of **every instance** of a given $\mathcal{NP}$ -hard problem in a runtime that is not longer than polynomial in the size of the problem (i.e., existing algorithms may need exponential runtime in the **worst case**).

Optimization is Hard



- Finding the globally optimal solution x^* from the set of all possible solutions $\mathbb{X}$ is often an $\mathcal{NP}$ -hard problem.
- Currently, there is no algorithm that can **guarantee** to find the optimal solution of **every instance** of a given $\mathcal{NP}$ -hard problem in a runtime that is not longer than polynomial in the size of the problem (i.e., existing algorithms may need exponential runtime in the **worst case**).

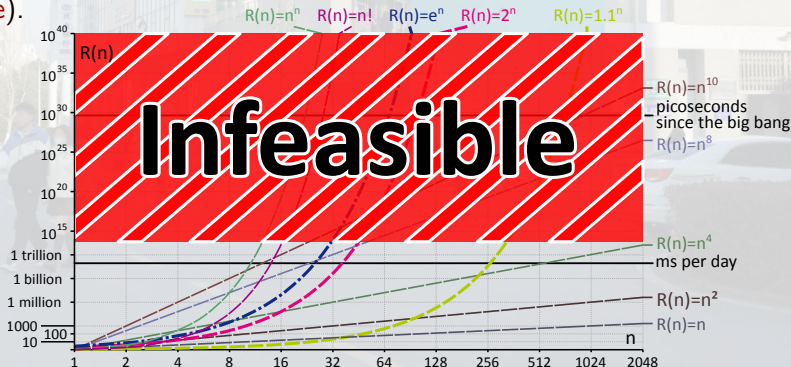

Optimization is Hard



- Finding the globally optimal solution x^* from the set of all possible solutions $\mathbb{X}$ is often an $\mathcal{NP}$ -hard problem.
- Currently, there is no algorithm that can **guarantee** to find the optimal solution of **every instance** of a given $\mathcal{NP}$ -hard problem in a runtime that is not longer than polynomial in the size of the problem (i.e., existing algorithms may need exponential runtime in the **worst case**).
- In other words, if we want to guarantee to find the best possible solution x^* for all possible instances of a problem, we often cannot really be much faster than testing all possible candidate solutions $x \in \mathbb{X}$ in the **worst case**.



Metaheuristic Optimization



Metaheuristics

- Because of this hardness of optimization, metaheuristic algorithms that follow the trial-and-error idea of iterative improvement have emerged.



Metaheuristics

- Because of this hardness of optimization, metaheuristic algorithms that follow the trial-and-error idea of iterative improvement have emerged.
- They drop the guarantee to find the optimal solution.



Metaheuristics

- Because of this hardness of optimization, metaheuristic algorithms that follow the trial-and-error idea of iterative improvement have emerged.
- They drop the guarantee to find the optimal solution.
- They try to find good solutions within a feasible runtime.



Metaheuristics

- Because of this hardness of optimization, metaheuristic algorithms that follow the trial-and-error idea of iterative improvement have emerged.
- They drop the guarantee to find the optimal solution.
- They try to find good solutions within a feasible runtime.
- They (usually) start with random solutions.

Begin with a set $S_0 \subset \mathbb{X}$ of one or multiple randomly sampled solutions



Metaheuristics

- Because of this hardness of optimization, metaheuristic algorithms that follow the trial-and-error idea of iterative improvement have emerged.
- They drop the guarantee to find the optimal solution.
- They try to find good solutions within a feasible runtime.
- They (usually) start with random solutions.
- And then roughly follow this cycle.




Begin with a set $S_0 \subset \mathbb{X}$ of one or multiple randomly sampled solutions



Metaheuristics

- Because of this hardness of optimization, metaheuristic algorithms that follow the trial-and-error idea of iterative improvement have emerged.
- They drop the guarantee to find the optimal solution.
- They try to find good solutions within a feasible runtime.
- They (usually) start with random solutions.
- And then roughly follow this cycle.

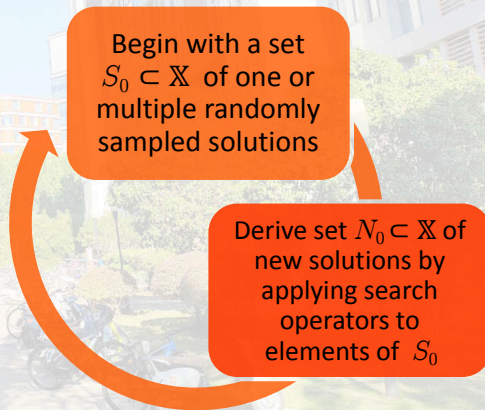

Begin with a set $S_0 \subset \mathbb{X}$ of one or multiple randomly sampled solutions


The diagram illustrates a cycle in the metaheuristic process. It features two orange rounded rectangular boxes. The top box contains the text 'Begin with a set $S_0 \subset \mathbb{X}$ of one or multiple randomly sampled solutions'. The bottom box contains the text 'Derive set $N_0 \subset \mathbb{X}$ of new solutions by applying search operators to elements of S_0 '. A large, thick orange curved arrow starts from the bottom box and points back up to the top box, indicating an iterative cycle.

Derive set $N_0 \subset \mathbb{X}$ of new solutions by applying search operators to elements of S_0




Metaheuristics

- Because of this hardness of optimization, metaheuristic algorithms that follow the trial-and-error idea of iterative improvement have emerged.
- They drop the guarantee to find the optimal solution.
- They try to find good solutions within a feasible runtime.
- They (usually) start with random solutions.
- And then roughly follow this cycle.

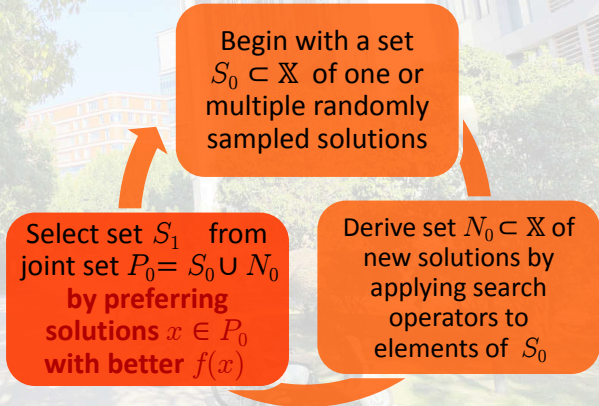


Metaheuristics

- Because of this hardness of optimization, metaheuristic algorithms that follow the trial-and-error idea of iterative improvement have emerged.
- They drop the guarantee to find the optimal solution.
- They try to find good solutions within a feasible runtime.
- They (usually) start with random solutions.
- And then roughly follow this cycle.

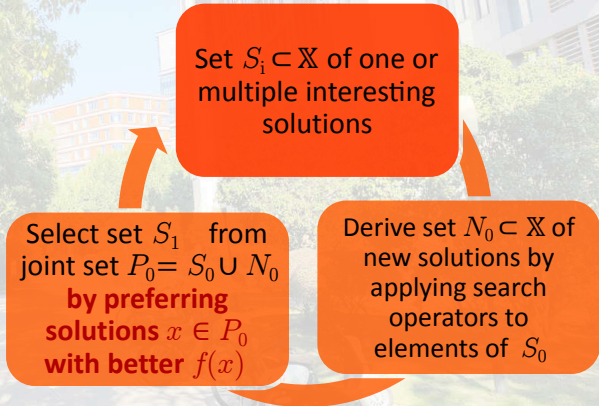


Metaheuristics

- Because of this hardness of optimization, metaheuristic algorithms that follow the trial-and-error idea of iterative improvement have emerged.
- They drop the guarantee to find the optimal solution.
- They try to find good solutions within a feasible runtime.
- They (usually) start with random solutions.
- And then roughly follow this cycle.

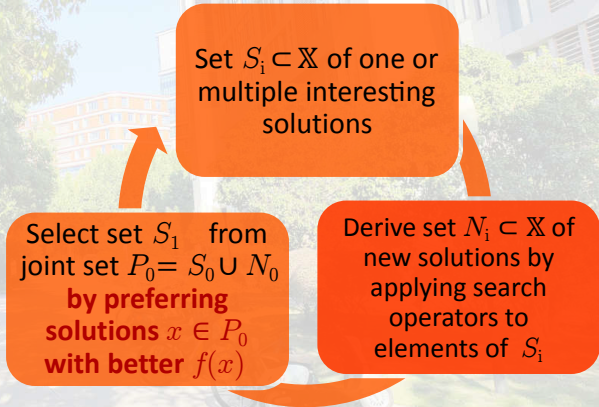

Metaheuristics

- Because of this hardness of optimization, metaheuristic algorithms that follow the trial-and-error idea of iterative improvement have emerged.
- They drop the guarantee to find the optimal solution.
- They try to find good solutions within a feasible runtime.
- They (usually) start with random solutions.
- And then roughly follow this cycle.

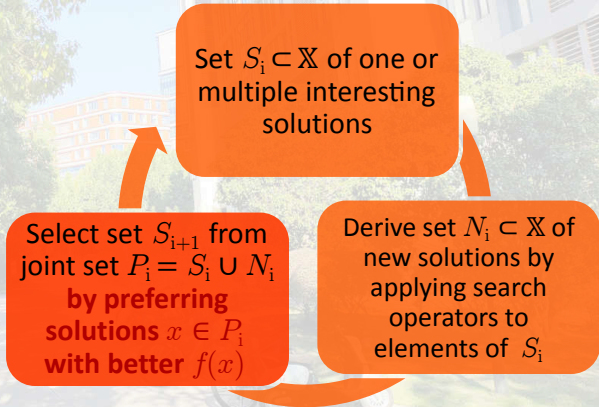

RLS and the $(1 + 1)$ EA



- stochastic local search (SLS) with $|S_i| = |N_i| = 1$ is the simplest realization of the metaheuristic idea.



RLS and the $(1 + 1)$ EA



- SLS with $|S_i| = |N_i| = 1$ is the simplest realization of the metaheuristic idea.
- Randomized local search (RLS) and the $(1 + 1)$ evolutionary algorithm ($(1 + 1)$ EA) work according to this pattern^{35,64}.

procedure $(1 + 1)$ EA($f : \mathbb{X} \mapsto \mathbb{R}$)

RLS and the $(1 + 1)$ EA



- SLS with $|S_i| = |N_i| = 1$ is the simplest realization of the metaheuristic idea.
- Randomized local search (RLS) and the $(1 + 1)$ evolutionary algorithm ($(1 + 1)$ EA) work according to this pattern^{35,64}.

procedure $(1 + 1)$ EA($f : \mathbb{X} \mapsto \mathbb{R}$)
 randomly sample x_c from $\mathbb{X}$;

RLS and the $(1 + 1)$ EA



- SLS with $|S_i| = |N_i| = 1$ is the simplest realization of the metaheuristic idea.
- Randomized local search (RLS) and the $(1 + 1)$ evolutionary algorithm ($(1 + 1)$ EA) work according to this pattern^{35,64}.

procedure $(1 + 1)$ EA($f : \mathbb{X} \mapsto \mathbb{R}$)
 randomly sample x_c from $\mathbb{X}$; $y_c \leftarrow f(x_c)$;

RLS and the $(1 + 1)$ EA



- SLS with $|S_i| = |N_i| = 1$ is the simplest realization of the metaheuristic idea.
- Randomized local search (RLS) and the $(1 + 1)$ evolutionary algorithm ($(1 + 1)$ EA) work according to this pattern^{35,64}.

```
procedure  $(1 + 1)$  EA( $f : \mathbb{X} \mapsto \mathbb{R}$ )  
  randomly sample  $x_c$  from  $\mathbb{X}$ ;  $y_c \leftarrow f(x_c)$ ;  
  while  $\neg$  terminate do
```

RLS and the $(1 + 1)$ EA



- SLS with $|S_i| = |N_i| = 1$ is the simplest realization of the metaheuristic idea.
- Randomized local search (RLS) and the $(1 + 1)$ evolutionary algorithm ($(1 + 1)$ EA) work according to this pattern^{35,64}.

```
procedure  $(1 + 1)$  EA( $f : \mathbb{X} \mapsto \mathbb{R}$ )  
  randomly sample  $x_c$  from  $\mathbb{X}$ ;  $y_c \leftarrow f(x_c)$ ;  
  while  $\neg$  terminate do  
     $x_n \leftarrow \text{move}(x_c)$ ;
```


RLS and the $(1 + 1)$ EA



- SLS with $|S_i| = |N_i| = 1$ is the simplest realization of the metaheuristic idea.
- Randomized local search (RLS) and the $(1 + 1)$ evolutionary algorithm ($(1 + 1)$ EA) work according to this pattern^{35,64}.

```
procedure  $(1 + 1)$  EA( $f : \mathbb{X} \mapsto \mathbb{R}$ )  
  randomly sample  $x_c$  from  $\mathbb{X}$ ;  $y_c \leftarrow f(x_c)$ ;  
  while  $\neg$  terminate do  
     $x_n \leftarrow \text{move}(x_c)$ ;  $y_n \leftarrow f(x_n)$ ;
```

RLS and the $(1 + 1)$ EA



- SLS with $|S_i| = |N_i| = 1$ is the simplest realization of the metaheuristic idea.
- Randomized local search (RLS) and the $(1 + 1)$ evolutionary algorithm ($(1 + 1)$ EA) work according to this pattern^{35,64}.
- They accept the new solution if it is better or equally good compared to the current solution.

```
procedure  $(1 + 1)$  EA( $f : \mathbb{X} \mapsto \mathbb{R}$ )  
  randomly sample  $x_c$  from  $\mathbb{X}$ ;  $y_c \leftarrow f(x_c)$ ;  
  while  $\neg$  terminate do  
     $x_n \leftarrow \text{move}(x_c)$ ;  $y_n \leftarrow f(x_n)$ ;  
    if  $y_n \leq y_c$  then
```

RLS and the $(1 + 1)$ EA



- SLS with $|S_i| = |N_i| = 1$ is the simplest realization of the metaheuristic idea.
- Randomized local search (RLS) and the $(1 + 1)$ evolutionary algorithm ($(1 + 1)$ EA) work according to this pattern^{35,64}.
- They accept the new solution if it is better or equally good compared to the current solution.

```
procedure  $(1 + 1)$  EA( $f : \mathbb{X} \mapsto \mathbb{R}$ )  
  randomly sample  $x_c$  from  $\mathbb{X}$ ;  $y_c \leftarrow f(x_c)$ ;  
  while  $\neg$  terminate do  
     $x_n \leftarrow \text{move}(x_c)$ ;  $y_n \leftarrow f(x_n)$ ;  
    if  $y_n \leq y_c$  then  $x_c \leftarrow x_n$ ;
```

RLS and the $(1 + 1)$ EA



- SLS with $|S_i| = |N_i| = 1$ is the simplest realization of the metaheuristic idea.
- Randomized local search (RLS) and the $(1 + 1)$ evolutionary algorithm ($(1 + 1)$ EA) work according to this pattern^{35,64}.
- They accept the new solution if it is better or equally good compared to the current solution.

```
procedure  $(1 + 1)$  EA( $f : \mathbb{X} \mapsto \mathbb{R}$ )  
  randomly sample  $x_c$  from  $\mathbb{X}$ ;  $y_c \leftarrow f(x_c)$ ;  
  while  $\neg$  terminate do  
     $x_n \leftarrow \text{move}(x_c)$ ;  $y_n \leftarrow f(x_n)$ ;  
    if  $y_n \leq y_c$  then  $x_c \leftarrow x_n$ ;  $y_c \leftarrow y_n$ ;
```

RLS and the $(1 + 1)$ EA



- SLS with $|S_i| = |N_i| = 1$ is the simplest realization of the metaheuristic idea.
- Randomized local search (RLS) and the $(1 + 1)$ evolutionary algorithm ($(1 + 1)$ EA) work according to this pattern^{35,64}.
- They accept the new solution if it is better or equally good compared to the current solution.

```
procedure  $(1 + 1)$  EA( $f : \mathbb{X} \mapsto \mathbb{R}$ )  
  randomly sample  $x_c$  from  $\mathbb{X}$ ;  $y_c \leftarrow f(x_c)$ ;  
  while  $\neg$  terminate do  
     $x_n \leftarrow \text{move}(x_c)$ ;  $y_n \leftarrow f(x_n)$ ;  
    if  $y_n \leq y_c$  then  $x_c \leftarrow x_n$ ;  $y_c \leftarrow y_n$ ;  
  return  $x_c, y_c$ 
```


Simulated Annealing

- Simulated Annealing (SA)¹¹⁷ is a local search that accepts also worsening moves, but with a probability that decreases over time and with the difference in solution quality.



Simulated Annealing



- Simulated Annealing (SA)¹¹⁷ is a local search that accepts also worsening moves, but with a probability that decreases over time and with the difference in solution quality.
- Let's start with RLS/(1 + 1) EA and modify it to become SA.

```
procedure SA( $f : \mathbb{X} \mapsto \mathbb{R}, T_0, \varepsilon$ )  
  randomly sample  $x_c$  from  $\mathbb{X}$ ;  $y_c \leftarrow f(x_c)$   
  
  while  $\neg$  terminate do  
     $x_n \leftarrow \text{move}(x_c)$ ;  $y_n \leftarrow f(x_n)$   
  
    if  $y_n \leq y_c$  then  
       $x_c \leftarrow x_n$ ;  $y_c \leftarrow y_n$ 
```

Simulated Annealing



- Simulated Annealing (SA)¹¹⁷ is a local search that accepts also worsening moves, but with a probability that decreases over time and with the difference in solution quality.
- $\mathcal{R}_0^1$ be a random number uniformly distributed in $[0, 1)$.

```
procedure SA( $f : \mathbb{X} \mapsto \mathbb{R}, T_0, \varepsilon$ )  
  randomly sample  $x_c$  from  $\mathbb{X}$ ;  $y_c \leftarrow f(x_c)$   
  
  while  $\neg$  terminate do  
     $x_n \leftarrow \text{move}(x_c)$ ;  $y_n \leftarrow f(x_n)$   
  
    if  $\mathcal{R}_0^1 < e^{\frac{y_c - y_n}{T}}$  then  
       $x_c \leftarrow x_n$ ;  $y_c \leftarrow y_n$ 
```


Simulated Annealing

- Simulated Annealing (SA)¹¹⁷ is a local search that accepts also worsening moves, but with a probability that decreases over time and with the difference in solution quality.
- $\mathfrak{R}_0^1$ be a random number uniformly distributed in $[0, 1)$.

```
procedure SA( $f : \mathbb{X} \mapsto \mathbb{R}, T_0, \varepsilon$ )  
  randomly sample  $x_c$  from  $\mathbb{X}$ ;  $y_c \leftarrow f(x_c)$ ;
```

```
  while  $\neg$  terminate do  
     $x_n \leftarrow \text{move}(x_c)$ ;  $y_n \leftarrow f(x_n)$ ;
```

```
    if  $\mathfrak{R}_0^1 < e^{\frac{y_c - y_n}{T}}$  then
```

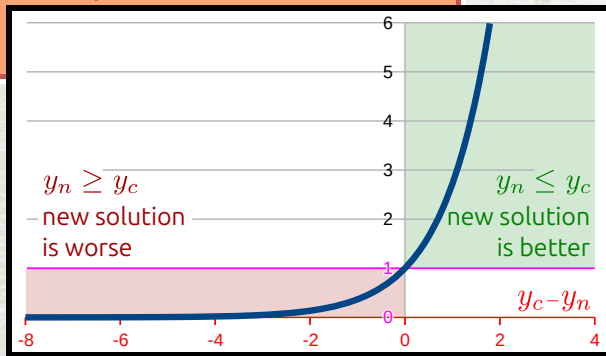

Simulated Annealing



- Simulated Annealing (SA)¹¹⁷ is a local search that accepts also worsening moves, but with a probability that decreases over time and with the difference in solution quality.
- $\mathcal{R}_0^1$ be a random number uniformly distributed in $[0, 1)$.

procedure SA($f : \mathbb{X} \mapsto \mathbb{R}, T_0, \varepsilon$)

randomly sample x_c from $\mathbb{X}$; $y_c \leftarrow f(x_c)$;

while $\neg$ terminate **do**

$x_n \leftarrow \text{move}(x_c)$; $y_n \leftarrow f(x_n)$;

if $\mathcal{R}_0^1 < e^{\frac{y_c - y_n}{T}}$ **then** $\triangleright$ always true if $y_n \leq y_c$

$x_c \leftarrow x_n$; $y_c \leftarrow y_n$;

Simulated Annealing



- Simulated Annealing (SA)¹¹⁷ is a local search that accepts also worsening moves, but with a probability that decreases over time and with the difference in solution quality.
- $\mathcal{R}_0^1$ be a random number uniformly distributed in $[0, 1)$.
- High temperatures T increase the acceptance probability P of worse solutions, low T reduce it.

procedure SA($f : \mathbb{X} \mapsto \mathbb{R}, T_0, \varepsilon$)

randomly sample x_c from $\mathbb{X}$; $y_c \leftarrow f(x_c)$;

while $\neg$ terminate **do**

$x_n \leftarrow \text{move}(x_c)$; $y_n \leftarrow f(x_n)$;

if $\mathcal{R}_0^1 < e^{\frac{y_c - y_n}{T}}$ **then** $\triangleright$ always true if $y_n \leq y_c$
 $x_c \leftarrow x_n$; $y_c \leftarrow y_n$;

Simulated Annealing



- Simulated Annealing (SA)¹¹⁷ is a local search that accepts also worsening moves, but with a probability that decreases over time and with the difference in solution quality.
- $\mathcal{R}_0^1$ be a random number uniformly distributed in $[0, 1)$.
- High temperatures T increase the acceptance probability P of worse solutions, low T reduce it.
- P is regulated by temperature schedule with parameter T_0 .

```
procedure SA( $f : \mathbb{X} \mapsto \mathbb{R}, T_0, \varepsilon$ )  
  randomly sample  $x_c$  from  $\mathbb{X}$ ;  $y_c \leftarrow f(x_c)$   
  
  while  $\neg$  terminate do  
     $x_n \leftarrow \text{move}(x_c)$ ;  $y_n \leftarrow f(x_n)$   
  
     $T \leftarrow T_0$  ;  
    if  $\mathcal{R}_0^1 < e^{\frac{y_c - y_n}{T}}$  then  $\triangleright$  always true if  $y_n \leq y_c$   
       $x_c \leftarrow x_n$ ;  $y_c \leftarrow y_n$ 
```

Simulated Annealing



- Simulated Annealing (SA)¹¹⁷ is a local search that accepts also worsening moves, but with a probability that decreases over time and with the difference in solution quality.
- $\mathfrak{R}_0^1$ be a random number uniformly distributed in $[0, 1)$.
- High temperatures T increase the acceptance probability P of worse solutions, low T reduce it.
- P is regulated by temperature schedule with parameter T_0 .

```
procedure SA( $f : \mathbb{X} \mapsto \mathbb{R}, T_0, \varepsilon$ )  
  randomly sample  $x_c$  from  $\mathbb{X}$ ;  $y_c \leftarrow f(x_c)$   
  
   $\tau \leftarrow 0$ ; ▷  $\tau$  is iteration counter  
  while  $\neg$  terminate do  
     $x_n \leftarrow \text{move}(x_c)$ ;  $y_n \leftarrow f(x_n)$   
  
     $T \leftarrow T_0$  ;  
    if  $\mathfrak{R}_0^1 < e^{\frac{y_c - y_n}{T}}$  then ▷ always true if  $y_n \leq y_c$   
       $x_c \leftarrow x_n$ ;  $y_c \leftarrow y_n$ 
```

Simulated Annealing



- Simulated Annealing (SA)¹¹⁷ is a local search that accepts also worsening moves, but with a probability that decreases over time and with the difference in solution quality.
- $\mathcal{R}_0^1$ be a random number uniformly distributed in $[0, 1)$.
- High temperatures T increase the acceptance probability P of worse solutions, low T reduce it.
- P is regulated by temperature schedule with parameter T_0 .

```
procedure SA( $f : \mathbb{X} \mapsto \mathbb{R}, T_0, \varepsilon$ )  
  randomly sample  $x_c$  from  $\mathbb{X}$ ;  $y_c \leftarrow f(x_c)$   
  
   $\tau \leftarrow 0$ ; ▷  $\tau$  is iteration counter  
  while  $\neg$  terminate do  
     $x_n \leftarrow \text{move}(x_c)$ ;  $y_n \leftarrow f(x_n)$ ;  
     $\tau \leftarrow \tau + 1$ ;  
     $T \leftarrow T_0$  ;  
    if  $\mathcal{R}_0^1 < e^{\frac{y_c - y_n}{T}}$  then ▷ always true if  $y_n \leq y_c$   
       $x_c \leftarrow x_n$ ;  $y_c \leftarrow y_n$ ;
```

Simulated Annealing



- Simulated Annealing (SA)¹¹⁷ is a local search that accepts also worsening moves, but with a probability that decreases over time and with the difference in solution quality.
- $\mathfrak{R}_0^1$ be a random number uniformly distributed in $[0, 1)$.
- High temperatures T increase the acceptance probability P of worse solutions, low T reduce it.
- P is regulated by temperature schedule with parameters T_0 and ε .

```
procedure SA( $f : \mathbb{X} \mapsto \mathbb{R}, T_0, \varepsilon$ )  
  randomly sample  $x_c$  from  $\mathbb{X}$ ;  $y_c \leftarrow f(x_c)$   
  
   $\tau \leftarrow 0$ ; ▷  $\tau$  is iteration counter  
  while  $\neg$  terminate do  
     $x_n \leftarrow \text{move}(x_c)$ ;  $y_n \leftarrow f(x_n)$ ;  
     $\tau \leftarrow \tau + 1$ ;  
     $T \leftarrow T_0(1 - \varepsilon)^{\tau-1}$ ; ▷  $T$  decreases over time  
    if  $\mathfrak{R}_0^1 < e^{\frac{y_c - y_n}{T}}$  then ▷ always true if  $y_n \leq y_c$   
       $x_c \leftarrow x_n$ ;  $y_c \leftarrow y_n$ ;
```


Simulated Annealing



- Simulated Annealing (SA)¹¹⁷ is a local search that accepts also worsening moves, but with a probability that decreases over time and with the difference in solution quality.
- $\mathfrak{R}_0^1$ be a random number uniformly distributed in $[0, 1)$.
- High temperatures T increase the acceptance probability P of worse solutions, low T reduce it.
- P is regulated by temperature schedule with parameters T_0 and ε .
- SA also remembers best-so-far solution x_B and its objective value y_B , because it could get lost.

```
procedure SA( $f : \mathbb{X} \mapsto \mathbb{R}, T_0, \varepsilon$ )  
  randomly sample  $x_c$  from  $\mathbb{X}$ ;  $y_c \leftarrow f(x_c)$ ;  
   $x_B \leftarrow x_c$ ;  $y_B \leftarrow y_c$ ; ▷ preserve best!  
   $\tau \leftarrow 0$ ; ▷  $\tau$  is iteration counter  
  while  $\neg$  terminate do  
     $x_n \leftarrow \text{move}(x_c)$ ;  $y_n \leftarrow f(x_n)$ ;  
     $\tau \leftarrow \tau + 1$ ;  
     $T \leftarrow T_0(1 - \varepsilon)^{\tau-1}$ ; ▷  $T$  decreases over time  
    if  $\mathfrak{R}_0^1 < e^{\frac{y_c - y_n}{T}}$  then ▷ always true if  $y_n \leq y_c$   
       $x_c \leftarrow x_n$ ;  $y_c \leftarrow y_n$ ;
```

Simulated Annealing



- Simulated Annealing (SA)¹¹⁷ is a local search that accepts also worsening moves, but with a probability that decreases over time and with the difference in solution quality.
- $\mathcal{R}_0^1$ be a random number uniformly distributed in $[0, 1)$.
- High temperatures T increase the acceptance probability P of worse solutions, low T reduce it.
- P is regulated by temperature schedule with parameters T_0 and ε .
- SA also remembers best-so-far solution x_B and its objective value y_B , because it could get lost.

```
procedure SA( $f : \mathbb{X} \mapsto \mathbb{R}, T_0, \varepsilon$ )  
  randomly sample  $x_c$  from  $\mathbb{X}$ ;  $y_c \leftarrow f(x_c)$ ;  
   $x_B \leftarrow x_c$ ;  $y_B \leftarrow y_c$ ; ▷ preserve best!  
   $\tau \leftarrow 0$ ; ▷  $\tau$  is iteration counter  
  while  $\neg$  terminate do  
     $x_n \leftarrow \text{move}(x_c)$ ;  $y_n \leftarrow f(x_n)$ ;  
     $\tau \leftarrow \tau + 1$ ;  
     $T \leftarrow T_0(1 - \varepsilon)^{\tau-1}$ ; ▷  $T$  decreases over time  
    if  $\mathcal{R}_0^1 < e^{\frac{y_c - y_n}{T}}$  then ▷ always true if  $y_n \leq y_c$   
       $x_c \leftarrow x_n$ ;  $y_c \leftarrow y_n$ ;  
      if  $y_c < y_B$  then  $x_B \leftarrow x_c$ ;  $y_B \leftarrow y_c$ ;
```

Simulated Annealing



- Simulated Annealing (SA)¹¹⁷ is a local search that accepts also worsening moves, but with a probability that decreases over time and with the difference in solution quality.
- $\mathfrak{R}_0^1$ be a random number uniformly distributed in $[0, 1)$.
- High temperatures T increase the acceptance probability P of worse solutions, low T reduce it.
- P is regulated by temperature schedule with parameters T_0 and ε .
- SA also remembers best-so-far solution x_B and its objective value y_B , because it could get lost.

```
procedure SA( $f : \mathbb{X} \mapsto \mathbb{R}, T_0, \varepsilon$ )  
  randomly sample  $x_c$  from  $\mathbb{X}$ ;  $y_c \leftarrow f(x_c)$ ;  
   $x_B \leftarrow x_c$ ;  $y_B \leftarrow y_c$ ; ▷ preserve best!  
   $\tau \leftarrow 0$ ; ▷  $\tau$  is iteration counter  
  while  $\neg$  terminate do  
     $x_n \leftarrow \text{move}(x_c)$ ;  $y_n \leftarrow f(x_n)$ ;  
     $\tau \leftarrow \tau + 1$ ;  
     $T \leftarrow T_0(1 - \varepsilon)^{\tau-1}$ ; ▷  $T$  decreases over time  
    if  $\mathfrak{R}_0^1 < e^{\frac{y_c - y_n}{T}}$  then ▷ always true if  $y_n \leq y_c$   
       $x_c \leftarrow x_n$ ;  $y_c \leftarrow y_n$ ;  
      if  $y_c < y_B$  then  $x_B \leftarrow x_c$ ;  $y_B \leftarrow y_c$ ;  
  return  $x_B, y_B$ 
```

Standard Genetic Algorithm with Roulette Wheel Selection



- The Standard Genetic Algorithm (SGA) with Fitness Proportionate Selection (Roulette Wheel) is for **maximization** 8,48,88,150,156,211.

Standard Genetic Algorithm with Roulette Wheel Selection



- The Standard Genetic Algorithm (SGA) with Fitness Proportionate Selection (Roulette Wheel) is for **maximization** 8,48,88,150,156,211.
- It uses a population of size ps as well as a unary operator.

procedure SGA($f : \mathbb{X} \mapsto \mathbb{R}^+$, ps , cr)

▷ for maximization!

Standard Genetic Algorithm with Roulette Wheel Selection



- The Standard Genetic Algorithm (SGA) with Fitness Proportionate Selection (Roulette Wheel) is for **maximization** 8,48,88,150,156,211.
- It uses a population of size ps as well as a unary operator.

procedure SGA($f : \mathbb{X} \mapsto \mathbb{R}^+, ps, cr$)

▷ for maximization!

for $j \in 1 \dots ps$ do

▷ random initial population

Standard Genetic Algorithm with Roulette Wheel Selection



- The Standard Genetic Algorithm (SGA) with Fitness Proportionate Selection (Roulette Wheel) is for **maximization** ^{8,48,88,150,156,211}.
- It uses a population of size ps as well as a unary operator.

procedure SGA($f : \mathbb{X} \mapsto \mathbb{R}^+$, ps , cr)

▷ for maximization!

for $j \in 1 \dots ps$ do ▷ random initial population
randomly sample $S_0[j].x$ from $\mathbb{X}$;

Standard Genetic Algorithm with Roulette Wheel Selection



- The Standard Genetic Algorithm (SGA) with Fitness Proportionate Selection (Roulette Wheel) is for **maximization** ^{8,48,88,150,156,211}.
- It uses a population of size ps as well as a unary operator.

procedure SGA($f : \mathbb{X} \mapsto \mathbb{R}^+$, ps , cr)

▷ for maximization!

for $j \in 1 \dots ps$ do ▷ random initial population
randomly sample $S_0[j].x$ from $\mathbb{X}$; $S_0[j].y \leftarrow f(S_0[j].x)$;

Standard Genetic Algorithm with Roulette Wheel Selection



- The Standard Genetic Algorithm (SGA) with Fitness Proportionate Selection (Roulette Wheel) is for **maximization** ^{8,48,88,150,156,211}.
- It uses a population of size ps as well as a unary operator.

procedure SGA($f : \mathbb{X} \mapsto \mathbb{R}^+$, ps , cr)

▷ for maximization!

for $j \in 1 \dots ps$ do ▷ random initial population

randomly sample $S_0[j].x$ from $\mathbb{X}$; $S_0[j].y \leftarrow f(S_0[j].x)$;

for $i \in 0 \dots \infty$ do

▷ iterate “generations”

Standard Genetic Algorithm with Roulette Wheel Selection



- The Standard Genetic Algorithm (SGA) with Fitness Proportionate Selection (Roulette Wheel) is for **maximization** ^{8,48,88,150,156,211}.
- It uses a population of size ps as well as a unary operator.

```
procedure SGA( $f : \mathbb{X} \mapsto \mathbb{R}^+$ ,  $ps$ ,  $cr$ ) ▷ for maximization!  
  
  for  $j \in 1 \dots ps$  do ▷ random initial population  
    randomly sample  $S_0[j].x$  from  $\mathbb{X}$ ;  $S_0[j].y \leftarrow f(S_0[j].x)$ ;  
  
  for  $i \in 0 \dots \infty$  do ▷ iterate “generations”  
    for  $j \in 1 \dots ps$  do ▷ new pop
```


Standard Genetic Algorithm with Roulette Wheel Selection



- The Standard Genetic Algorithm (SGA) with Fitness Proportionate Selection (Roulette Wheel) is for **maximization** ^{8,48,88,150,156,211}.
- It uses a population of size ps as well as a unary operator.

```
procedure SGA( $f : \mathbb{X} \mapsto \mathbb{R}^+$ ,  $ps$ ,  $cr$ ) ▷ for maximization!  
  
  for  $j \in 1 \dots ps$  do ▷ random initial population  
    randomly sample  $S_0[j].x$  from  $\mathbb{X}$ ;  $S_0[j].y \leftarrow f(S_0[j].x)$ ;  
  
  for  $i \in 0 \dots \infty$  do ▷ iterate "generations"  
    for  $j \in 1 \dots ps$  do ▷ new pop. via mutation  
       $N_i[j].x \leftarrow \text{move}(S_i[[\mathfrak{R}_i^*]].x)$ ;
```

Standard Genetic Algorithm with Roulette Wheel Selection



- The Standard Genetic Algorithm (SGA) with Fitness Proportionate Selection (Roulette Wheel) is for **maximization** ^{8,48,88,150,156,211}.
- It uses a population of size ps as well as a unary and binary operator (with crossover rate cr).

procedure SGA($f : \mathbb{X} \mapsto \mathbb{R}^+, ps, cr$)

▷ for maximization!

```
for  $j \in 1 \dots ps$  do                                ▷ random initial population
    randomly sample  $S_0[j].x$  from  $\mathbb{X}$ ;  $S_0[j].y \leftarrow f(S_0[j].x)$ ;

for  $i \in 0 \dots \infty$  do                                ▷ iterate "generations"
    for  $j \in 1 \dots ps$  do                                ▷ new pop. via mutation and crossover
        if  $\mathfrak{R}_0^1 < cr$  then  $N_i[j].x \leftarrow \text{binary}(S_i[[\mathfrak{R}_i^{ps}]].x, S_i[[\mathfrak{R}_i^{ps}]].x)$ ;
        else  $N_i[j].x \leftarrow \text{move}(S_i[[\mathfrak{R}_i^{ps}]].x)$ ;
```

Standard Genetic Algorithm with Roulette Wheel Selection



- The Standard Genetic Algorithm (SGA) with Fitness Proportionate Selection (Roulette Wheel) is for **maximization** ^{8,48,88,150,156,211}.
- It uses a population of size ps as well as a unary and binary operator (with crossover rate cr).

procedure SGA($f : \mathbb{X} \mapsto \mathbb{R}^+$, ps , cr)

▷ for maximization!

```
for  $j \in 1 \dots ps$  do                                ▷ random initial population
    randomly sample  $S_0[j].x$  from  $\mathbb{X}$ ;  $S_0[j].y \leftarrow f(S_0[j].x)$ ;

for  $i \in 0 \dots \infty$  do                                ▷ iterate "generations"
    for  $j \in 1 \dots ps$  do                                ▷ new pop. via mutation and crossover
        if  $\mathfrak{R}_0^1 < cr$  then  $N_i[j].x \leftarrow \text{binary}(S_i[\lceil \mathfrak{R}_i^{ps} \rceil].x, S_i[\lceil \mathfrak{R}_i^{ps} \rceil].x)$ ;
        else  $N_i[j].x \leftarrow \text{move}(S_i[\lceil \mathfrak{R}_i^{ps} \rceil].x)$ ;
         $N_i[j].y \leftarrow f(N_i[j].x)$ ;
```

Standard Genetic Algorithm with Roulette Wheel Selection



- The Standard Genetic Algorithm (SGA) with Fitness Proportionate Selection (Roulette Wheel) is for **maximization** ^{8,48,88,150,156,211}.
- It uses a population of size ps as well as a unary and binary operator (with crossover rate cr).

procedure SGA($f : \mathbb{X} \mapsto \mathbb{R}^+$, ps , cr)

▷ for maximization!

for $j \in 1 \dots ps$ do ▷ random initial population
randomly sample $S_0[j].x$ from $\mathbb{X}$; $S_0[j].y \leftarrow f(S_0[j].x)$;

for $i \in 0 \dots \infty$ do ▷ iterate “generations”
for $j \in 1 \dots ps$ do ▷ new pop. via mutation and crossover
if $\mathfrak{R}_0^1 < cr$ then $N_i[j].x \leftarrow \text{binary}(S_i[[\mathfrak{R}_i^{ps}]].x, S_i[[\mathfrak{R}_i^{ps}]].x)$;
else $N_i[j].x \leftarrow \text{move}(S_i[[\mathfrak{R}_i^{ps}]].x)$;
 $N_i[j].y \leftarrow f(N_i[j].x)$;

$S_{i+1} \leftarrow \text{Roulette Wheel}$: select ps records from $P_i = S_i \cup N_i$ such that, for each of the ps slots, the probability of $P_i[j]$ to be chosen is **proportional to $P_i[j].y$** .

Standard Genetic Algorithm with Roulette Wheel Selection



- The Standard Genetic Algorithm (SGA) with Fitness Proportionate Selection (Roulette Wheel) is for **maximization** ^{8,48,88,150,156,211}.
- It uses a population of size ps as well as a unary and binary operator (with crossover rate cr).

```
procedure SGA( $f : \mathbb{X} \mapsto \mathbb{R}^+$ ,  $ps$ ,  $cr$ )  
     $x_B \leftarrow \emptyset$ ;  $y_B \leftarrow -\infty$ ; ▷ for maximization!  
    for  $j \in 1 \dots ps$  do ▷ best-so-far solution  
        randomly sample  $S_0[j].x$  from  $\mathbb{X}$ ;  $S_0[j].y \leftarrow f(S_0[j].x)$ ; ▷ random initial population  
  
    for  $i \in 0 \dots \infty$  do ▷ iterate "generations"  
        for  $j \in 1 \dots ps$  do ▷ new pop. via mutation and crossover  
            if  $\mathfrak{R}_0^1 < cr$  then  $N_i[j].x \leftarrow \text{binary}(S_i[[\mathfrak{R}_1^{ps}]].x, S_i[[\mathfrak{R}_1^{ps}]].x)$ ;  
            else  $N_i[j].x \leftarrow \text{move}(S_i[[\mathfrak{R}_1^{ps}]].x)$ ;  
             $N_i[j].y \leftarrow f(N_i[j].x)$ ;  
  
     $S_{i+1} \leftarrow \text{Roulette Wheel: select } ps \text{ records from } P_i = S_i \cup N_i$   
    such that, for each of the  $ps$  slots, the probability  
    of  $P_i[j]$  to be chosen is proportional to  $P_i[j].y$ .
```


Standard Genetic Algorithm with Roulette Wheel Selection



- The Standard Genetic Algorithm (SGA) with Fitness Proportionate Selection (Roulette Wheel) is for **maximization** ^{8,48,88,150,156,211}.
- It uses a population of size ps as well as a unary and binary operator (with crossover rate cr).

```
procedure SGA( $f : \mathbb{X} \mapsto \mathbb{R}^+$ ,  $ps$ ,  $cr$ )  
     $x_B \leftarrow \emptyset$ ;  $y_B \leftarrow -\infty$ ; ▷ for maximization!  
    for  $j \in 1 \dots ps$  do ▷ best-so-far solution  
        randomly sample  $S_0[j].x$  from  $\mathbb{X}$ ;  $S_0[j].y \leftarrow f(S_0[j].x)$ ; ▷ random initial population  
        if  $S_0[j].y > y_B$  then  $x_B \leftarrow S_0[j].x$ ;  $y_B \leftarrow S_0[j].y$ ;  
    for  $i \in 0 \dots \infty$  do ▷ iterate "generations"  
        for  $j \in 1 \dots ps$  do ▷ new pop. via mutation and crossover  
            if  $\mathfrak{R}_0^i < cr$  then  $N_i[j].x \leftarrow \text{binary}(S_i[[\mathfrak{R}_0^i]].x, S_i[[\mathfrak{R}_1^i]].x)$ ;  
            else  $N_i[j].x \leftarrow \text{move}(S_i[[\mathfrak{R}_1^i]].x)$ ;  
             $N_i[j].y \leftarrow f(N_i[j].x)$ ;  
  
     $S_{i+1} \leftarrow \text{Roulette Wheel: select } ps \text{ records from } P_i = S_i \cup N_i$   
    such that, for each of the  $ps$  slots, the probability  
    of  $P_i[j]$  to be chosen is proportional to  $P_i[j].y$ .
```

Standard Genetic Algorithm with Roulette Wheel Selection



- The Standard Genetic Algorithm (SGA) with Fitness Proportionate Selection (Roulette Wheel) is for **maximization** ^{8,48,88,150,156,211}.
- It uses a population of size ps as well as a unary and binary operator (with crossover rate cr).

```
procedure SGA( $f : \mathbb{X} \mapsto \mathbb{R}^+$ ,  $ps$ ,  $cr$ )  
     $x_B \leftarrow \emptyset$ ;  $y_B \leftarrow -\infty$ ; ▷ for maximization!  
    for  $j \in 1 \dots ps$  do ▷ best-so-far solution  
        randomly sample  $S_0[j].x$  from  $\mathbb{X}$ ;  $S_0[j].y \leftarrow f(S_0[j].x)$ ; ▷ random initial population  
        if  $S_0[j].y > y_B$  then  $x_B \leftarrow S_0[j].x$ ;  $y_B \leftarrow S_0[j].y$ ;  
    for  $i \in 0 \dots \infty$  do ▷ iterate "generations"  
        for  $j \in 1 \dots ps$  do ▷ new pop. via mutation and crossover  
            if  $\mathfrak{R}_0^i < cr$  then  $N_i[j].x \leftarrow \text{binary}(S_i[[\mathfrak{R}_i^{ps}]].x, S_i[[\mathfrak{R}_i^{ps}]].x)$ ;  
            else  $N_i[j].x \leftarrow \text{move}(S_i[[\mathfrak{R}_i^{ps}]].x)$ ;  
             $N_i[j].y \leftarrow f(N_i[j].x)$ ;  
            if  $N_i[j].y > y_B$  then  $x_B \leftarrow N_i[j].x$ ;  $y_B \leftarrow N_i[j].y$ ;  
     $S_{i+1} \leftarrow \text{Roulette Wheel: select } ps \text{ records from } P_i = S_i \cup N_i$   
        such that, for each of the  $ps$  slots, the probability  
        of  $P_i[j]$  to be chosen is proportional to  $P_i[j].y$ .
```

Standard Genetic Algorithm with Roulette Wheel Selection



- The Standard Genetic Algorithm (SGA) with Fitness Proportionate Selection (Roulette Wheel) is for **maximization** ^{8,48,88,150,156,211}.
- It uses a population of size ps as well as a unary and binary operator (with crossover rate cr).

```
procedure SGA( $f : \mathbb{X} \mapsto \mathbb{R}^+$ ,  $ps$ ,  $cr$ )  
     $x_B \leftarrow \emptyset$ ;  $y_B \leftarrow -\infty$ ; ▷ for maximization!  
    for  $j \in 1 \dots ps$  do ▷ best-so-far solution  
        randomly sample  $S_0[j].x$  from  $\mathbb{X}$ ;  $S_0[j].y \leftarrow f(S_0[j].x)$ ; ▷ random initial population  
        if  $S_0[j].y > y_B$  then  $x_B \leftarrow S_0[j].x$ ;  $y_B \leftarrow S_0[j].y$ ;  
    for  $i \in 0 \dots \infty$  do ▷ iterate "generations"  
        for  $j \in 1 \dots ps$  do ▷ new pop. via mutation and crossover  
            if  $\mathfrak{R}_0^i < cr$  then  $N_i[j].x \leftarrow \text{binary}(S_i[[\mathfrak{R}_i^{ps}]].x, S_i[[\mathfrak{R}_i^{ps}]].x)$ ;  
            else  $N_i[j].x \leftarrow \text{move}(S_i[[\mathfrak{R}_i^{ps}]].x)$ ;  
             $N_i[j].y \leftarrow f(N_i[j].x)$ ;  
            if  $N_i[j].y > y_B$  then  $x_B \leftarrow N_i[j].x$ ;  $y_B \leftarrow N_i[j].y$ ;  
         $S_{i+1} \leftarrow \text{Roulette Wheel: select } ps \text{ records from } P_i = S_i \cup N_i$   
            such that, for each of the  $ps$  slots, the probability  
            of  $P_i[j]$  to be chosen is proportional to  $P_i[j].y$ .  
    return  $x_B, y_B$ 
```

Metaheuristic Optimization


- What we have learned is that different metaheuristics realize the trial-and-error scheme differently.



Metaheuristic Optimization



- What we have learned is that different metaheuristics realize the trial-and-error scheme differently.
- During their selection steps, they all prefer better solutions over worse ones.

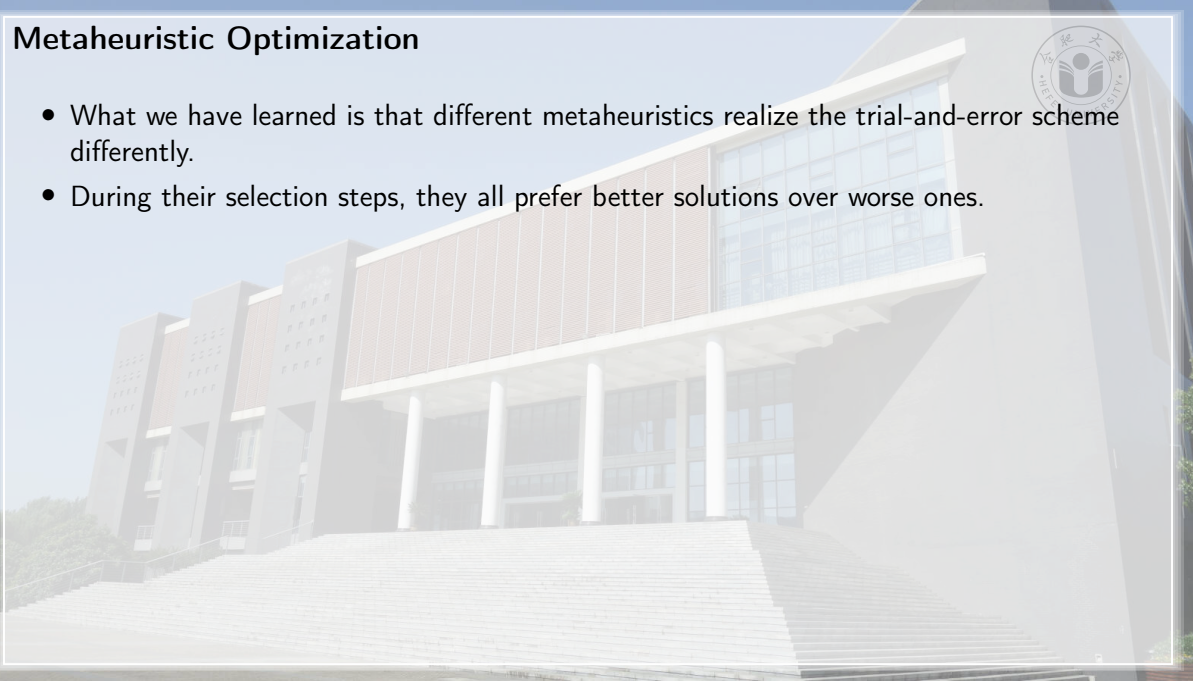

Metaheuristic Optimization



- What we have learned is that different metaheuristics realize the trial-and-error scheme differently.
- During their selection steps, they all prefer better solutions over worse ones.
- If they would always and only accept the better solutions, they could get trapped in local optima.

Metaheuristic Optimization



- What we have learned is that different metaheuristics realize the trial-and-error scheme differently.
- During their selection steps, they all prefer better solutions over worse ones.
- If they would always and only accept the better solutions, they could get trapped in local optima.
- So some of them sometimes accept worse solutions, but the probability to choose a better solution is always higher in average.

Metaheuristic Optimization



- What we have learned is that different metaheuristics realize the trial-and-error scheme differently.
- During their selection steps, they all prefer better solutions over worse ones.
- If they would always and only accept the better solutions, they could get trapped in local optima.
- So some of them sometimes accept worse solutions, but the probability to choose a better solution is always higher in average.
- This is the most fundamental concept of metaheuristic optimization:

If you keep good solutions and modify them, you are likely to get better solutions.

Metaheuristic Optimization



- What we have learned is that different metaheuristics realize the trial-and-error scheme differently.
- During their selection steps, they all prefer better solutions over worse ones.
- If they would always and only accept the better solutions, they could get trapped in local optima.
- So some of them sometimes accept worse solutions, but the probability to choose a better solution is always higher in average.
- This is the most fundamental concept of metaheuristic optimization:

If you keep good solutions and modify them, you are likely to get better solutions.

If you keep accepting better and better solutions, you will get really good solutions eventually.



Invariance Properties



Invariance Properties



- Research in optimization, Machine Learning (ML), and Artificial Intelligence (AI) often use simple problems to test and benchmark algorithms.

Invariance Properties



- Research in optimization, Machine Learning (ML), and Artificial Intelligence (AI) often use simple problems to test and benchmark algorithms.
- These allow for many experiments in a short time.

Invariance Properties



- Research in optimization, Machine Learning (ML), and Artificial Intelligence (AI) often use simple problems to test and benchmark algorithms.
- These allow for many experiments in a short time.
- We often know the optimal solutions or at lower bounds for the optimal objective values.

Invariance Properties



- Research in optimization, Machine Learning (ML), and Artificial Intelligence (AI) often use simple problems to test and benchmark algorithms.
- These allow for many experiments in a short time.
- We often know the optimal solutions or at lower bounds for the optimal objective values.
- We can understand the results well.

Invariance Properties



- Research in optimization, Machine Learning (ML), and Artificial Intelligence (AI) often use simple problems to test and benchmark algorithms.
- These allow for many experiments in a short time.
- We often know the optimal solutions or at lower bounds for the optimal objective values.
- We can understand the results well.
- What we want is that algorithms perform similar to our benchmarking results also on actual, real-world problems.

Invariance Properties




- Research in optimization, Machine Learning (ML), and Artificial Intelligence (AI) often use simple problems to test and benchmark algorithms.
- These allow for many experiments in a short time.
- We often know the optimal solutions or at lower bounds for the optimal objective values.
- We can understand the results well.
- What we want is that algorithms perform similar to our benchmarking results also on actual, real-world problems.
- **We want invariance properties.**^{96,112,163}

Acceptance Criteria



- We have now three example algorithms: $(1 + 1)$ EA, SA, and SGA.

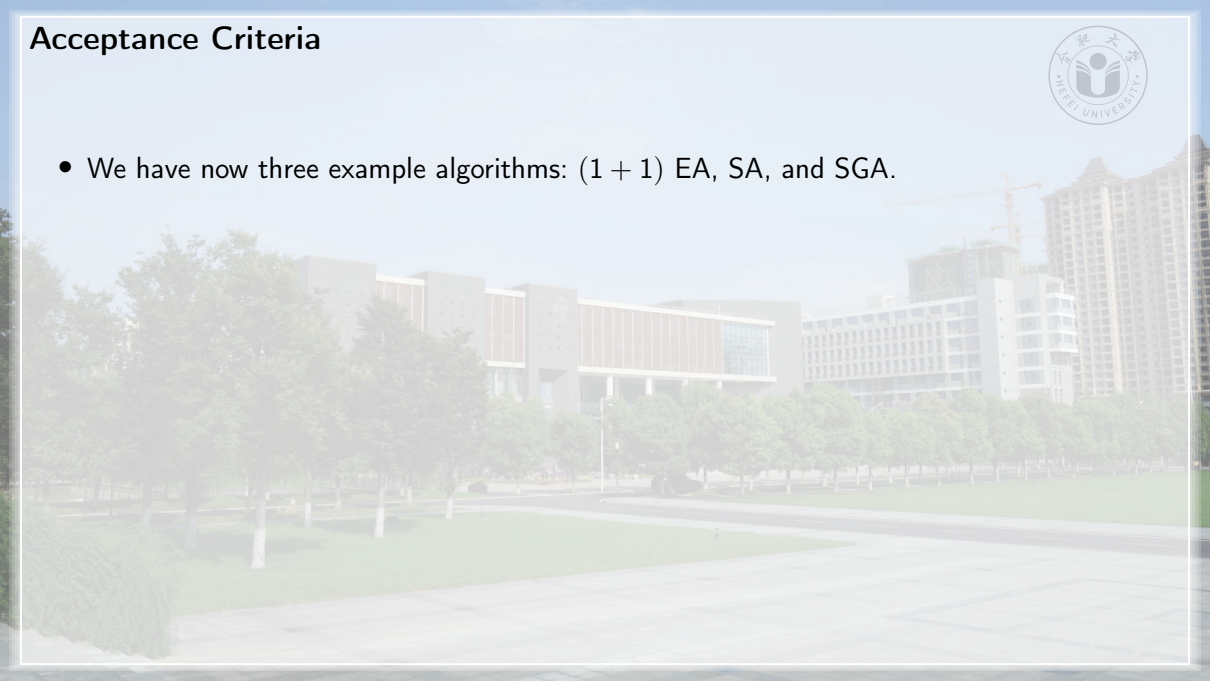

Acceptance Criteria



- We have now three example algorithms: $(1 + 1)$ EA, SA, and SGA.
- Assume that they all work on a population of two solutions, where the new solution be x_n and the old/parent solution be x_c .

Acceptance Criteria



- We have now three example algorithms: $(1 + 1)$ EA, SA, and SGA.
- Assume that they all work on a population of two solutions, where the new solution be x_n and the old/parent solution be x_c and we look at the probability P to accept x_n .

Acceptance Criteria



- We have now three example algorithms: $(1 + 1)$ EA, SA, and SGA.
- Assume that they all work on a population of two solutions, where the new solution be x_n and the old/parent solution be x_c and we look at the probability P to accept x_n .
- For the $(1 + 1)$ EA, $P = 1$ if $f(x_n) \leq f(x_c)$ and 0 otherwise.

Acceptance Criteria



- We have now three example algorithms: $(1 + 1)$ EA, SA, and SGA.
- Assume that they all work on a population of two solutions, where the new solution be x_n and the old/parent solution be x_c and we look at the probability P to accept x_n .
- For the $(1 + 1)$ EA, $P = 1$ if $f(x_n) \leq f(x_c)$ and 0 otherwise.
- In the SA, P depends on the difference $\Delta = f(x_c) - f(x_n)$ and is 1 if x_n is better than x_c .

Acceptance Criteria



- We have now three example algorithms: $(1 + 1)$ EA, SA, and SGA.
- Assume that they all work on a population of two solutions, where the new solution be x_n and the old/parent solution be x_c and we look at the probability P to accept x_n .
- For the $(1 + 1)$ EA, $P = 1$ if $f(x_n) \leq f(x_c)$ and 0 otherwise.
- In the SA, P depends on the difference $\Delta = f(x_c) - f(x_n)$ and is 1 if x_n is better than x_c .
- In an SGA for maximization, P is $f(x_n)/(f(x_c) + f(x_n))$.

Acceptance Criteria



- We have now three example algorithms: $(1 + 1)$ EA, SA, and SGA.
- Assume that they all work on a population of two solutions, where the new solution be x_n and the old/parent solution be x_c and we look at the probability P to accept x_n .
- For the $(1 + 1)$ EA, $P = 1$ if $f(x_n) \leq f(x_c)$ and 0 otherwise.
- In the SA, P depends on the difference $\Delta = f(x_c) - f(x_n)$ and is 1 if x_n is better than x_c .
- In an SGA for maximization, P is $f(x_n)/(f(x_c) + f(x_n))$. If we wanted to do minimization, maybe we could use $1 - f(x_n)/(f(x_c) + f(x_n))$ instead.

Acceptance Criteria



- We have now three example algorithms: $(1 + 1)$ EA, SA, and SGA.
- Assume that they all work on a population of two solutions, where the new solution be x_n and the old/parent solution be x_c and we look at the probability P to accept x_n .
- For the $(1 + 1)$ EA, $P = 1$ if $f(x_n) \leq f(x_c)$ and 0 otherwise.
- In the SA, P depends on the difference $\Delta = f(x_c) - f(x_n)$ and is 1 if x_n is better than x_c .
- In an SGA for maximization, P is $f(x_n)/(f(x_c) + f(x_n))$. If we wanted to do minimization, maybe we could use $1 - f(x_n)/(f(x_c) + f(x_n))$ instead.
- $(1 + 1)$ EA and SA always accept x_n if it is better than x_c , while in the SGA, a better x_n at least has a $P > 0.5$.

Acceptance Criteria




- We have now three example algorithms: $(1 + 1)$ EA, SA, and SGA.
- Assume that they all work on a population of two solutions, where the new solution be x_n and the old/parent solution be x_c and we look at the probability P to accept x_n .
- For the $(1 + 1)$ EA, $P = 1$ if $f(x_n) \leq f(x_c)$ and 0 otherwise.
- In the SA, P depends on the difference $\Delta = f(x_c) - f(x_n)$ and is 1 if x_n is better than x_c .
- In an SGA for maximization, P is $f(x_n)/(f(x_c) + f(x_n))$. If we wanted to do minimization, maybe we could use $1 - f(x_n)/(f(x_c) + f(x_n))$ instead.
- $(1 + 1)$ EA and SA always accept x_n if it is better than x_c , while in the SGA, a better x_n at least has a $P > 0.5$.
- Let's keep these things in mind.

Invariance Properties: OneMax Example




- OneMax is the simplest benchmark problem in discrete optimization ^{65,159,236}.

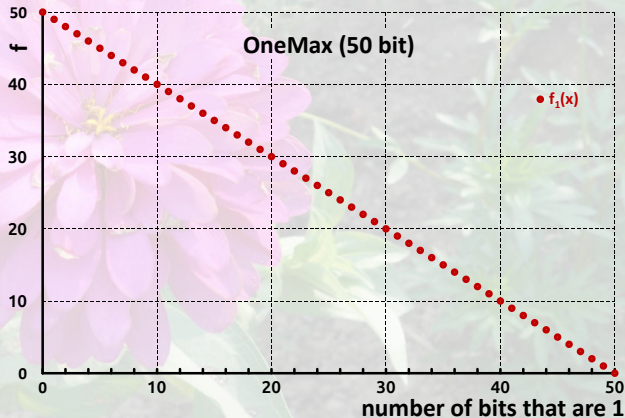

Invariance Properties: OneMax Example




- OneMax is the simplest benchmark problem in discrete optimization^{65,159,236}.
- It is defined over $\mathbb{X} = \{0, 1\}^n$, i.e., the bit strings of length n .

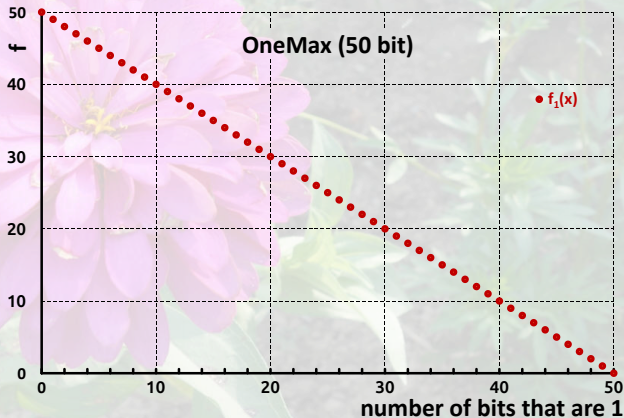

Invariance Properties: OneMax Example




- OneMax is the simplest benchmark problem in discrete optimization^{65,159,236}.
- It is defined over $\mathbb{X} = \{0, 1\}^n$, i.e., the bit strings of length n .
- Goal: "Find the bit string of all 1s!"

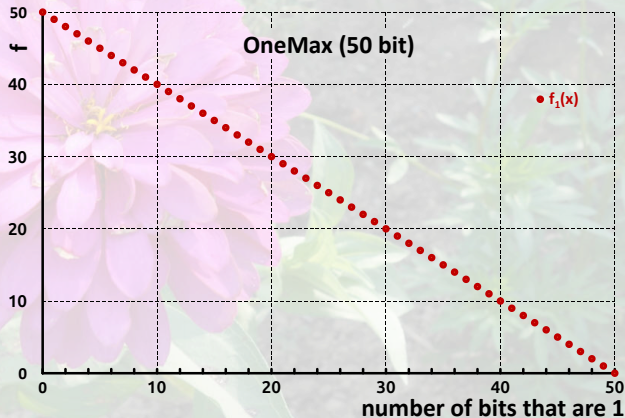

Invariance Properties: OneMax Example




- OneMax is the simplest benchmark problem in discrete optimization^{65,159,236}.
- It is defined over $\mathbb{X} = \{0, 1\}^n$, i.e., the bit strings of length n .
- Goal: "Find the bit string of all 1s!"
- "Maximize the number of 1s!"

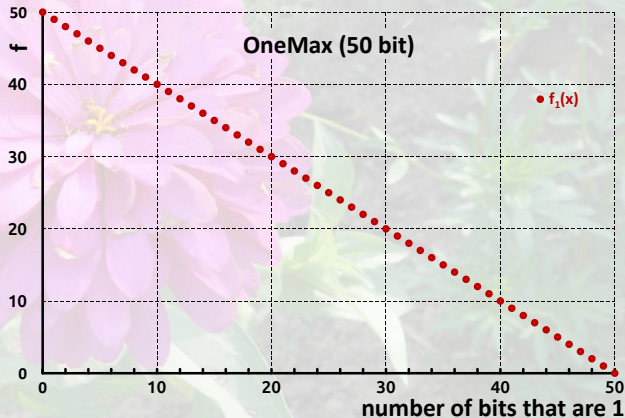

Invariance Properties: OneMax Example




- OneMax is the simplest benchmark problem in discrete optimization^{65,159,236}.
- It is defined over $\mathbb{X} = \{0, 1\}^n$, i.e., the bit strings of length n .
- Goal: "Find the bit string of all 1s!"
- "Maximize the number of 1s!"
- $f_1(x) = n - \sum x$ (for minimization).

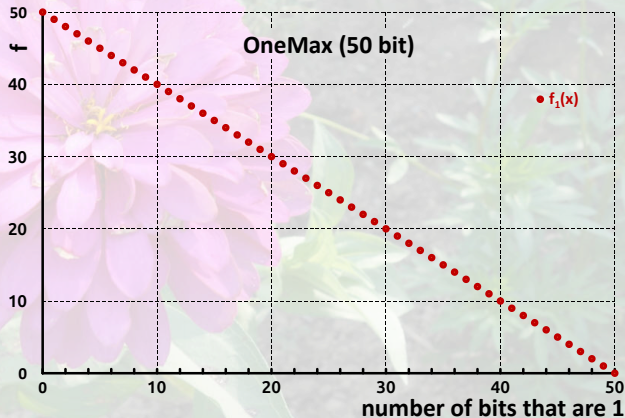

Invariance Properties: OneMax Example




- OneMax is the simplest benchmark problem in discrete optimization^{65,159,236}.
- It is defined over $\mathbb{X} = \{0, 1\}^n$, i.e., the bit strings of length n .
- Goal: "Find the bit string of all 1s!"
- "Maximize the number of 1s!"
- $f_1(x) = n - \sum x$ (for minimization).
- Every reasonable algorithm can solve this problem.

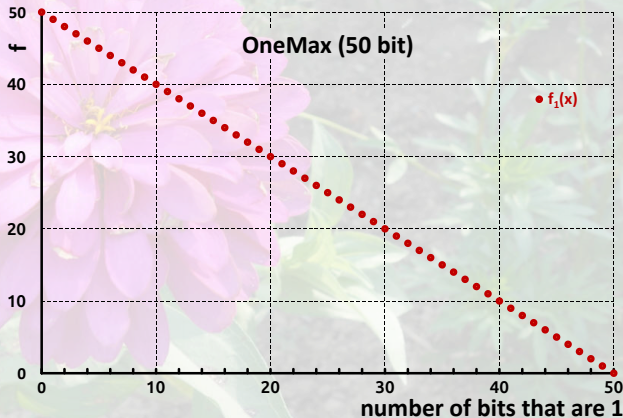

Invariance Properties: OneMax Example – Translation




- Now I create a slightly modified variant of this problem.

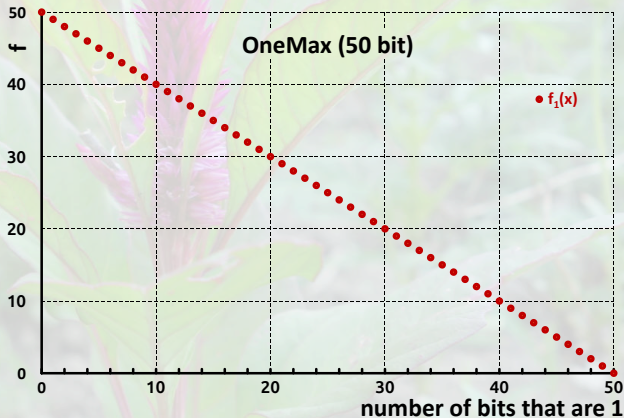

Invariance Properties: OneMax Example – Translation




- Now I create a slightly modified variant of this problem.
- $f_2(x) = f_1(x) + 10$.

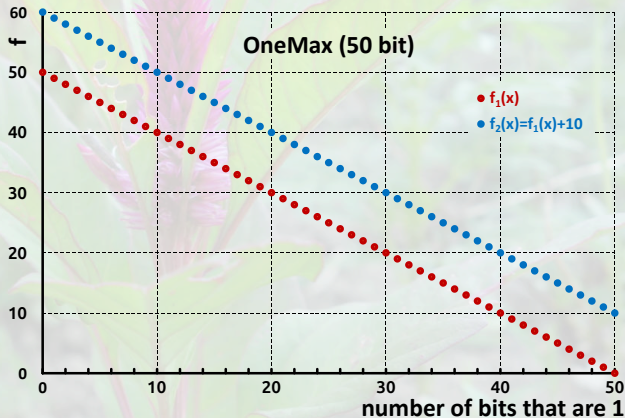

Invariance Properties: OneMax Example – Translation




- Now I create a slightly modified variant of this problem.
- $f_2(x) = f_1(x) + 10$.
- Expectation: Any reasonable algorithm should perform the same on f_1 and f_2 .

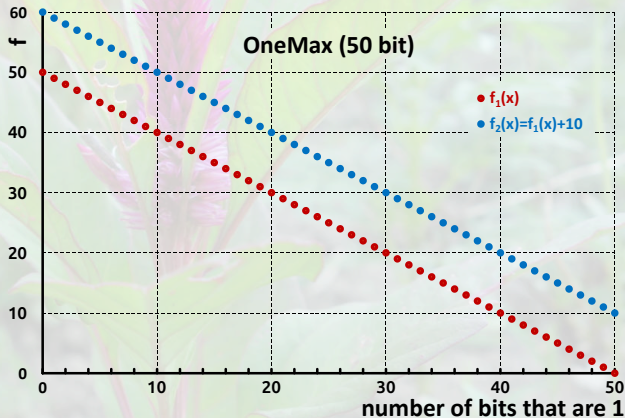

Invariance Properties: OneMax Example – Translation




- Now I create a slightly modified variant of this problem.
- $f_2(x) = f_1(x) + 10$.
- Expectation: Any reasonable algorithm should perform the same on f_1 and f_2 , i.e., make the exact same decisions.

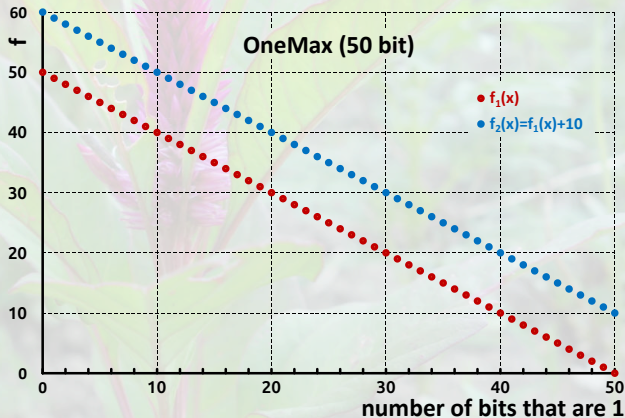

Invariance Properties: OneMax Example – Translation




- Now I create a slightly modified variant of this problem.
- $f_2(x) = f_1(x) + 10$.
- Expectation: Any reasonable algorithm should perform the same on f_1 and f_2 , i.e., make the exact same decisions given the same random seeds.

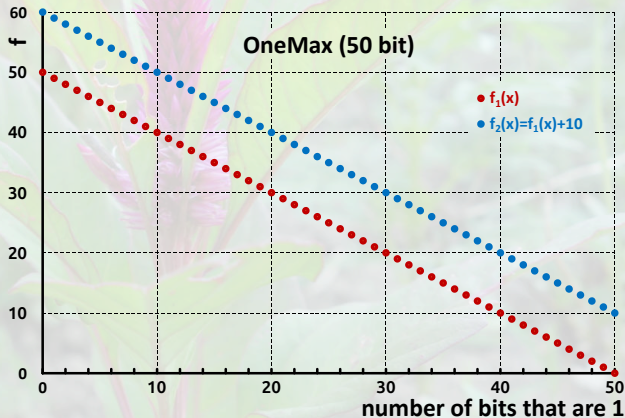

Invariance Properties: OneMax Example – Translation




- Now I create a slightly modified variant of this problem.
- $f_2(x) = f_1(x) + 10$.
- Expectation: Any reasonable algorithm should perform the same on f_1 and f_2 , i.e., make the exact same decisions given the same random seeds.

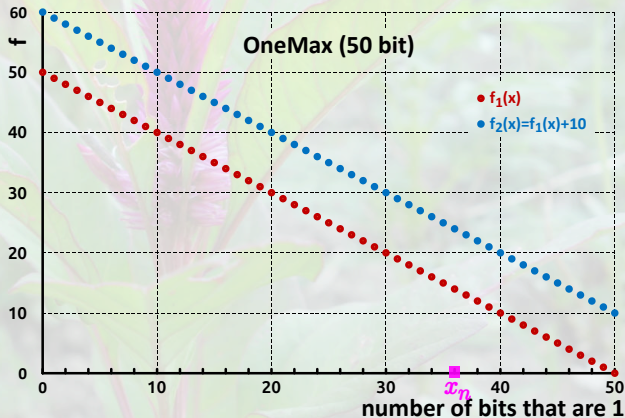

Invariance Properties: OneMax Example – Translation




- Now I create a slightly modified variant of this problem.
- $f_2(x) = f_1(x) + 10$.
- Expectation: Any reasonable algorithm should perform the same on f_1 and f_2 , i.e., make the exact same decisions given the same random seeds.

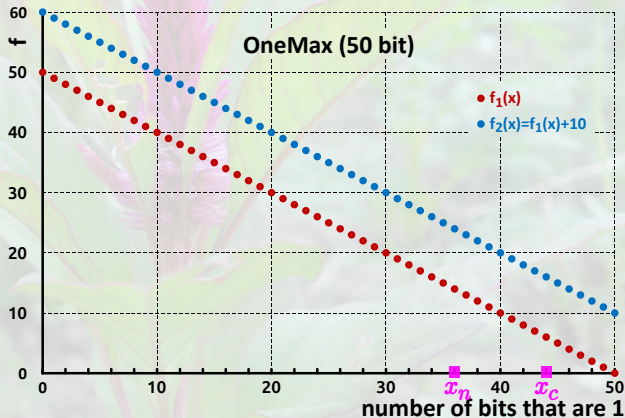

Invariance Properties: OneMax Example – Translation




- Now I create a slightly modified variant of this problem.
- $f_2(x) = f_1(x) + 10$.
- Expectation: Any reasonable algorithm should perform the same on f_1 and f_2 , i.e., make the exact same decisions given the same random seeds.
- $f_1(x_n) = 14$

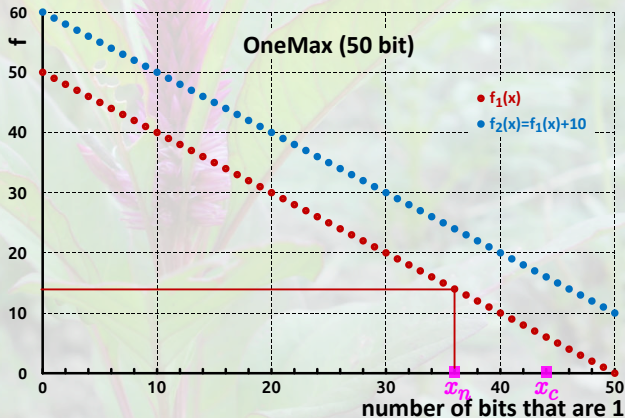

Invariance Properties: OneMax Example – Translation




- Now I create a slightly modified variant of this problem.
- $f_2(x) = f_1(x) + 10$.
- Expectation: Any reasonable algorithm should perform the same on f_1 and f_2 , i.e., make the exact same decisions given the same random seeds.
- $f_1(x_n) = 14$, $f_1(x_c) = 6$

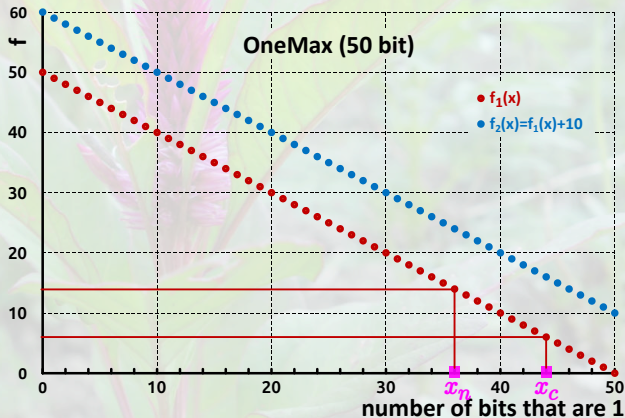

Invariance Properties: OneMax Example – Translation




- Now I create a slightly modified variant of this problem.
- $f_2(x) = f_1(x) + 10$.
- Expectation: Any reasonable algorithm should perform the same on f_1 and f_2 , i.e., make the exact same decisions given the same random seeds.
- $f_1(x_n) = 14$, $f_1(x_c) = 6$,
 $f_2(x_n) = 24$

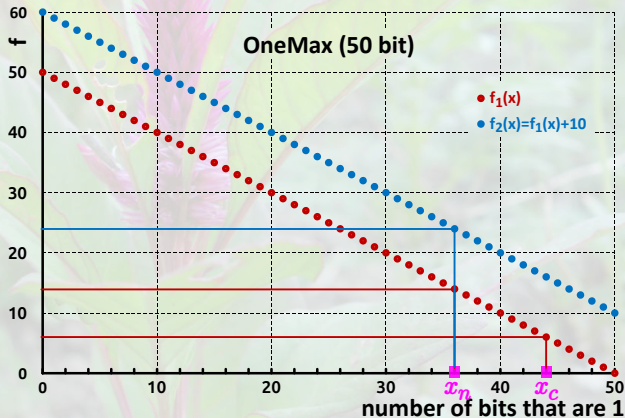

Invariance Properties: OneMax Example – Translation




- Now I create a slightly modified variant of this problem.
- $f_2(x) = f_1(x) + 10$.
- Expectation: Any reasonable algorithm should perform the same on f_1 and f_2 , i.e., make the exact same decisions given the same random seeds.
- $f_1(x_n) = 14$, $f_1(x_c) = 6$,
 $f_2(x_n) = 24$, $f_2(x_c) = 16$

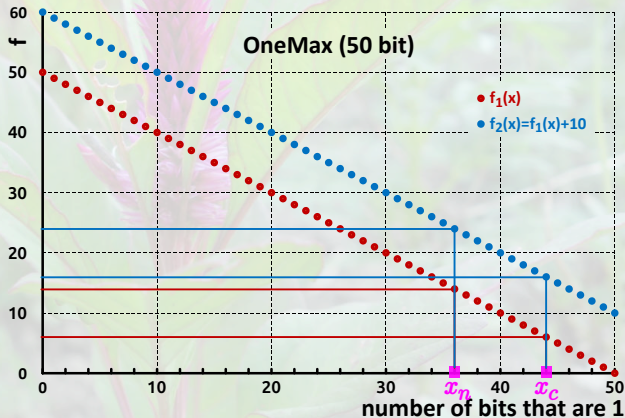

Invariance Properties: OneMax Example – Translation




- Now I create a slightly modified variant of this problem.
- $f_2(x) = f_1(x) + 10$.
- Expectation: Any reasonable algorithm should perform the same on f_1 and f_2 , i.e., make the exact same decisions given the same random seeds.
- $f_1(x_n) = 14$, $f_1(x_c) = 6$,
 $f_2(x_n) = 24$, $f_2(x_c) = 16$
- $(1 + 1)$ EA: $14 \leq 6 = 24 \leq 16$ ✓

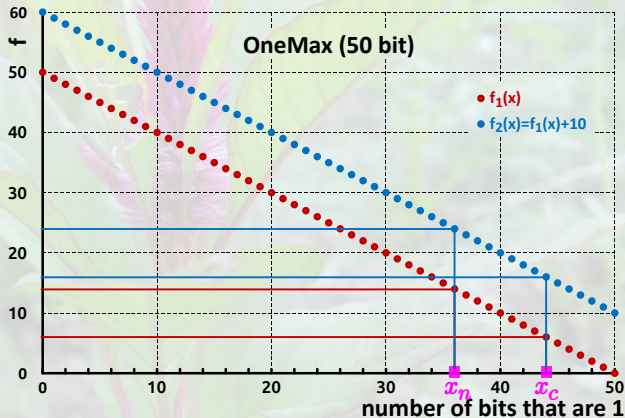

Invariance Properties: OneMax Example – Translation




- Now I create a slightly modified variant of this problem.
- $f_2(x) = f_1(x) + 10$.
- Expectation: Any reasonable algorithm should perform the same on f_1 and f_2 , i.e., make the exact same decisions given the same random seeds.
- $f_1(x_n) = 14$, $f_1(x_c) = 6$,
 $f_2(x_n) = 24$, $f_2(x_c) = 16$
- $(1 + 1)$ EA: $14 \leq 6 = 24 \leq 16$ ✓
- SA: $6 - 14 = 16 - 24$ ✓

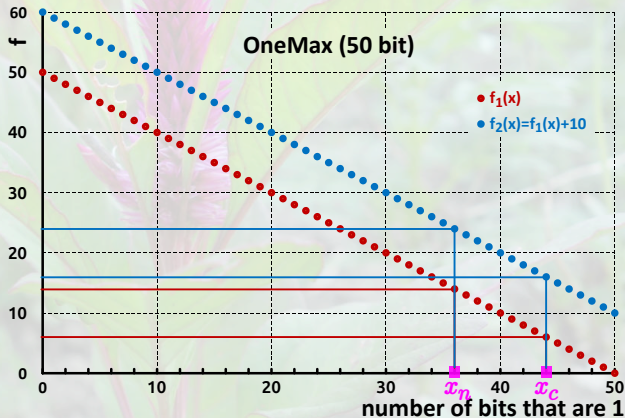

Invariance Properties: OneMax Example – Translation



- Now I create a slightly modified variant of this problem.
- $f_2(x) = f_1(x) + 10$.
- Expectation: Any reasonable algorithm should perform the same on f_1 and f_2 , i.e., make the exact same decisions given the same random seeds.
- $f_1(x_n) = 14$, $f_1(x_c) = 6$,
 $f_2(x_n) = 24$, $f_2(x_c) = 16$
- $(1 + 1)$ EA: $14 \leq 6 = 24 \leq 16$ ✓
- SA: $6 - 14 = 16 - 24$ ✓
- SGA: $1 - 14/(14 + 6) = 0.3 \neq$
 $1 - 24/(24 + 16) = 0.4$ ✗

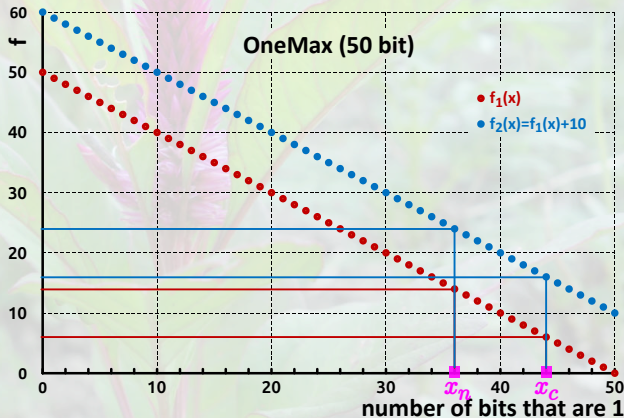

Invariance Properties: OneMax Example – Translation




- Now I create a slightly modified variant of this problem.

- $f_2(x) = f_1(x) + 10.$

- Expectation:
algorithm should
on f_1 and f_2
same decision
random seeds:

- The $(1 + 1)$ EA and SA are invariant under translations of the objective function value.

- $f_1(x_n) = 14$, $f_1(x_c) = 6$,
 $f_2(x_n) = 24$, $f_2(x_c) = 16$
- $(1 + 1)$ EA: $14 \leq 6 = 24 \leq 16$ ✓
- SA: $6 - 14 = 16 - 24$ ✓
- SGA: $1 - 14/(14 + 6) = 0.3 \neq$
 $1 - 24/(24 + 16) = 0.4$ ✗

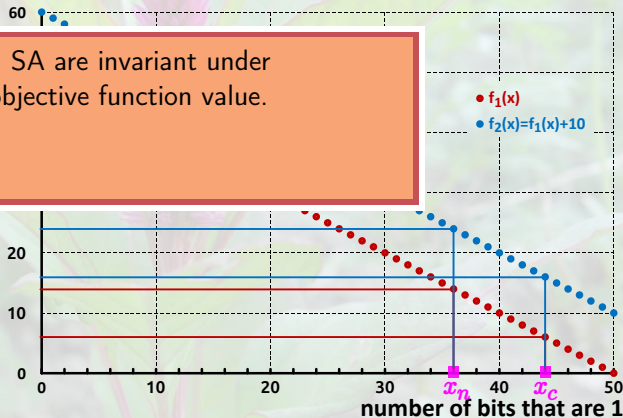

Invariance Properties: OneMax Example – Translation




- Now I create a slightly modified variant of this problem.

- $f_2(x) = f_1(x) + 10.$

- Expectation: algorithm should give the same decision on f_1 and f_2 for the same decision and random seed.

- The $(1 + 1)$ EA and SA are invariant under translations of the objective function value.
- The SGA is not, i.e., may give us different results for f_1 and f_2 .


- $f_1(x_n) = 14$, $f_1(x_c) = 6$,
 $f_2(x_n) = 24$, $f_2(x_c) = 16$
- $(1 + 1)$ EA: $14 \leq 6 = 24 \leq 16$ ✓
- SA: $6 - 14 = 16 - 24$ ✓
- SGA: $1 - 14/(14 + 6) = 0.3 \neq$
 $1 - 24/(24 + 16) = 0.4$ ✗

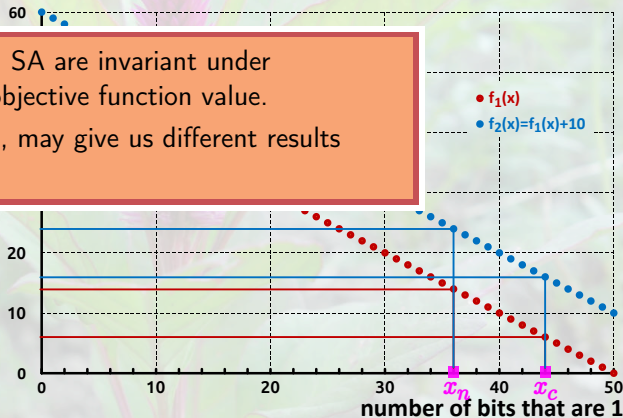

Invariance Properties: OneMax Example – Scaling




- Now I create another slightly modified variant of this problem.

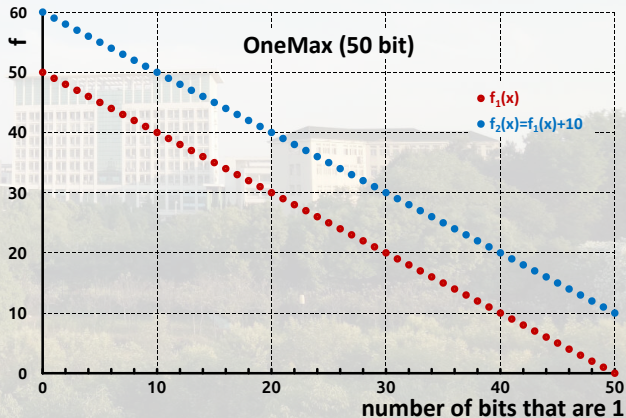

Invariance Properties: OneMax Example – Scaling




- Now I create another slightly modified variant of this problem.
- $f_3(x) = 0.8f_1(x)$.

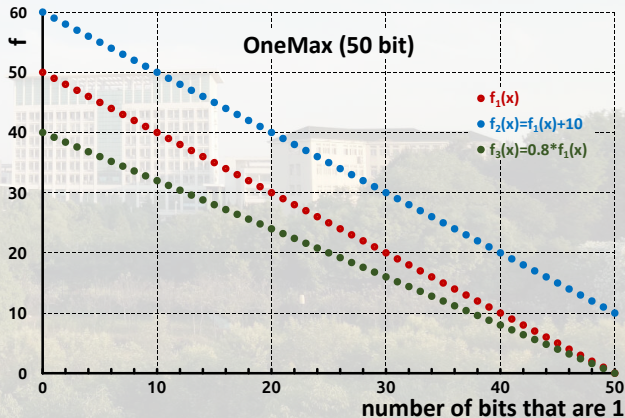

Invariance Properties: OneMax Example – Scaling




- Now I create another slightly modified variant of this problem.
- $f_3(x) = 0.8f_1(x)$.
- Expectation: Any reasonable algorithm should perform the same on f_1 and f_3 , i.e., make the exact same decisions given the same random seeds.

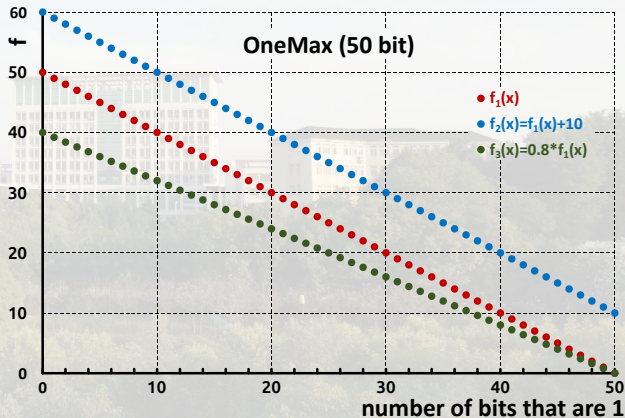

Invariance Properties: OneMax Example – Scaling




- Now I create another slightly modified variant of this problem.
- $f_3(x) = 0.8f_1(x)$.
- Expectation: Any reasonable algorithm should perform the same on f_1 and f_3 , i.e., make the exact same decisions given the same random seeds.

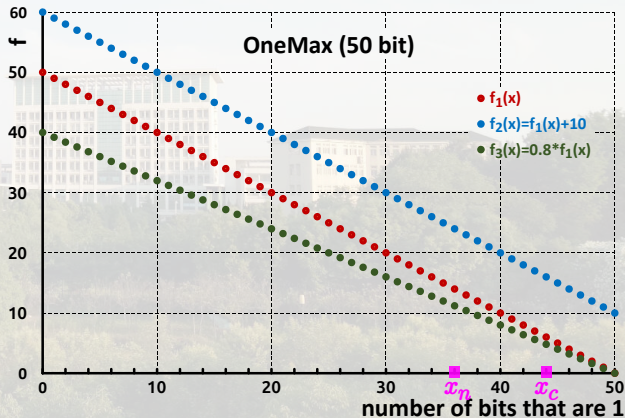

Invariance Properties: OneMax Example – Scaling




- Now I create another slightly modified variant of this problem.
- $f_3(x) = 0.8f_1(x)$.
- Expectation: Any reasonable algorithm should perform the same on f_1 and f_3 , i.e., make the exact same decisions given the same random seeds.
- $f_1(x_n) = 14$, $f_1(x_c) = 6$

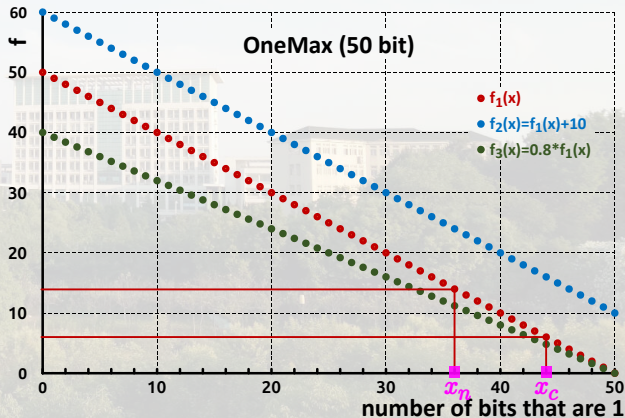

Invariance Properties: OneMax Example – Scaling




- Now I create another slightly modified variant of this problem.
- $f_3(x) = 0.8f_1(x)$.
- Expectation: Any reasonable algorithm should perform the same on f_1 and f_3 , i.e., make the exact same decisions given the same random seeds.
- $f_1(x_n) = 14$, $f_1(x_c) = 6$,
 $f_3(x_n) = 11.2$, $f_3(x_c) = 4.8$

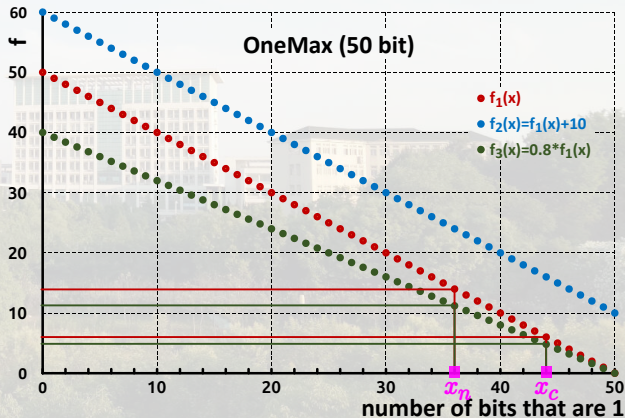

Invariance Properties: OneMax Example – Scaling




- Now I create another slightly modified variant of this problem.
- $f_3(x) = 0.8f_1(x)$.
- Expectation: Any reasonable algorithm should perform the same on f_1 and f_3 , i.e., make the exact same decisions given the same random seeds.
- $f_1(x_n) = 14$, $f_1(x_c) = 6$,
 $f_3(x_n) = 11.2$, $f_3(x_c) = 4.8$
- $(1 + 1)$ EA: $14 \leq 6 = 11.2 \leq 4.8$ ✓

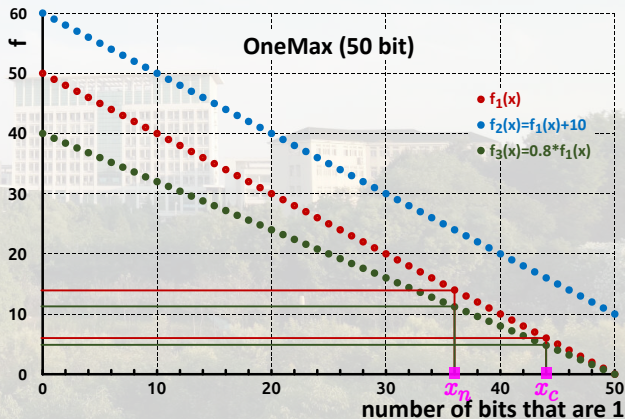

Invariance Properties: OneMax Example – Scaling




- Now I create another slightly modified variant of this problem.
- $f_3(x) = 0.8f_1(x)$.
- Expectation: Any reasonable algorithm should perform the same on f_1 and f_3 , i.e., make the exact same decisions given the same random seeds.
- $f_1(x_n) = 14$, $f_1(x_c) = 6$,
 $f_3(x_n) = 11.2$, $f_3(x_c) = 4.8$
- $(1 + 1)$ EA: $14 \leq 6 \leq 11.2 \leq 4.8$ ✓
- SA: $6 - 14 \neq 4.8 - 11.2$ ✗

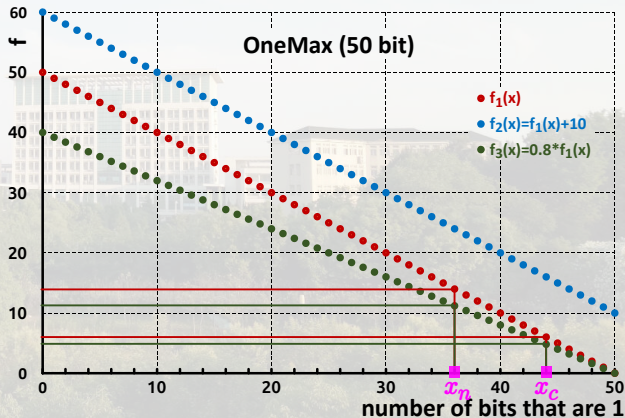

Invariance Properties: OneMax Example – Scaling



- Now I create another slightly modified variant of this problem.
- $f_3(x) = 0.8f_1(x)$.
- Expectation: Any reasonable algorithm should perform the same on f_1 and f_3 , i.e., make the exact same decisions given the same random seeds.
- $f_1(x_n) = 14$, $f_1(x_c) = 6$,
 $f_3(x_n) = 11.2$, $f_3(x_c) = 4.8$
- $(1 + 1)$ EA: $14 \leq 6 = 11.2 \leq 4.8$ ✓
- SA: $6 - 14 \neq 4.8 - 11.2$ ✗
- SGA: $1 - 14/(14 + 6) = 0.3 =$
 $1 - 11.2/(11.2 + 4.8) = 0.3$ ✓

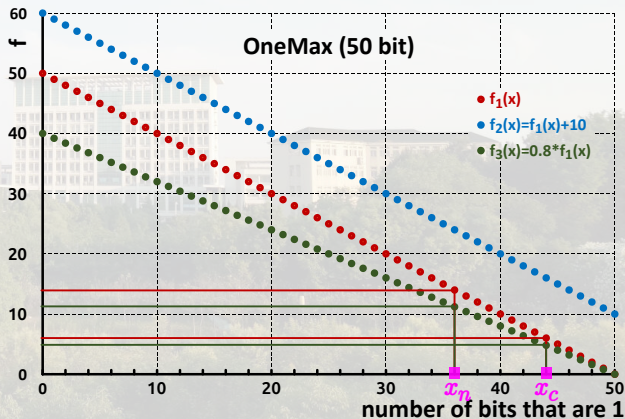

Invariance Properties: OneMax Example – Scaling




- Now I create another slightly modified variant of this problem.

- $f_3(x) = 0.8f_1(x)$.

- Expectation: algorithm should converge on f_1 and f_3 with the same decision with different random seeds:

- The $(1+1)$ EA and SGA are invariant under scaling of the objective function value.

- $f_1(x_n) = 14$, $f_1(x_c) = 6$,
 $f_3(x_n) = 11.2$, $f_3(x_c) = 4.8$
- $(1+1)$ EA: $14 \leq 6 \leq 11.2 \leq 4.8$ ✓
- SA: $6 - 14 \neq 4.8 - 11.2$ ✗
- SGA: $1 - 14/(14 + 6) = 0.3 = 1 - 11.2/(11.2 + 4.8) = 0.3$ ✓

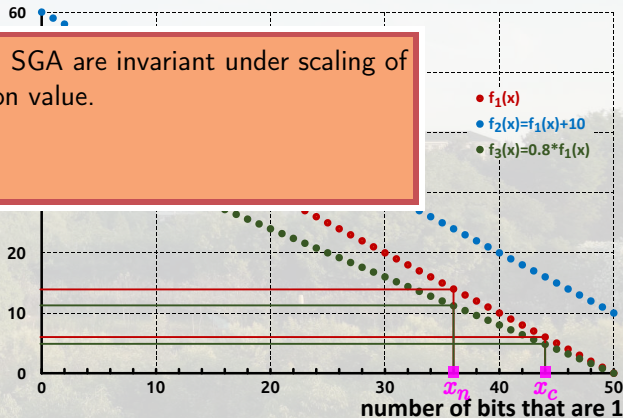

Invariance Properties: OneMax Example – Scaling




- Now I create another slightly modified variant of this problem.

- $f_3(x) = 0.8f_1(x)$.

- Expectation: algorithm should converge on f_1 and f_3 with the same decision for different random seeds:


- The $(1+1)$ EA and SGA are invariant under scaling of the objective function value.
- SA is not, i.e., may give us different results for f_1 and f_3 .

- $f_1(x_n) = 14$, $f_1(x_c) = 6$,
 $f_3(x_n) = 11.2$, $f_3(x_c) = 4.8$
- $(1+1)$ EA: $14 \leq 6 \leq 11.2 \leq 4.8$ ✓
- SA: $6 - 14 \neq 4.8 - 11.2$ ✗
- SGA: $1 - 14/(14 + 6) = 0.3 = 1 - 11.2/(11.2 + 4.8) = 0.3$ ✓

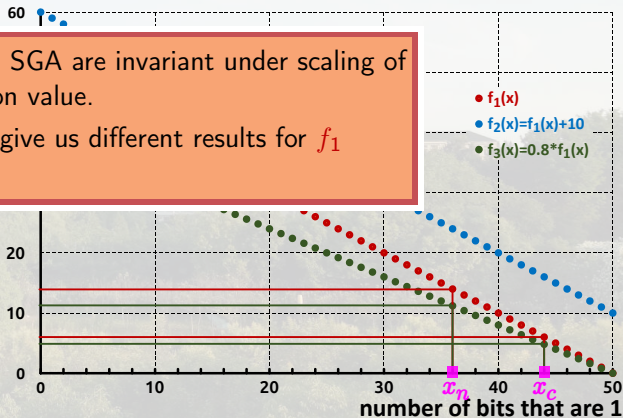

Invariance Properties: OneMax Example – Squaring


- Now I create another slightly modified variant of this problem.

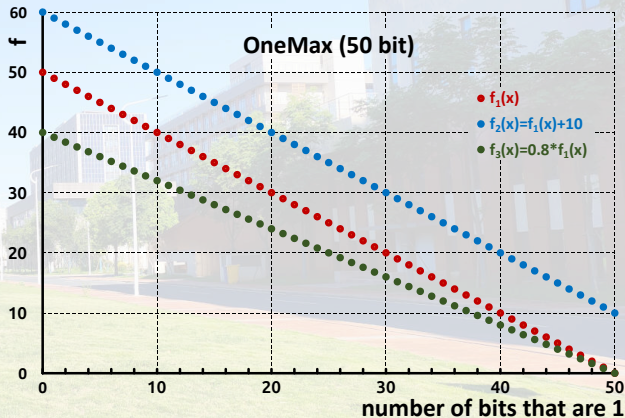

Invariance Properties: OneMax Example – Squaring




- Now I create another slightly modified variant of this problem.
- $f_4(x) = [f_1(x)]^2$.

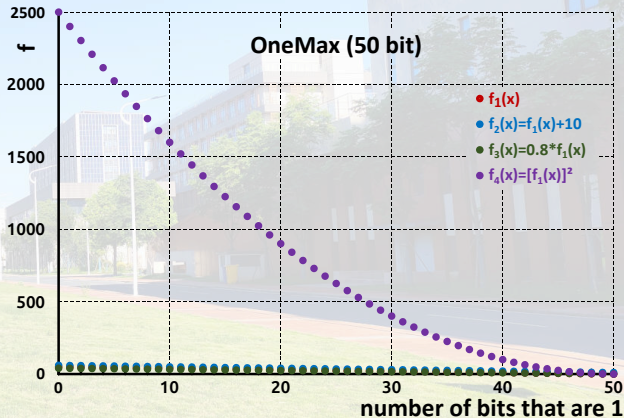

Invariance Properties: OneMax Example – Squaring




- Now I create another slightly modified variant of this problem.
- $f_4(x) = [f_1(x)]^2$.
- Expectation: A nice algorithm should perform the same on f_1 and f_4 , i.e., make the exact same decisions given the same random seeds.

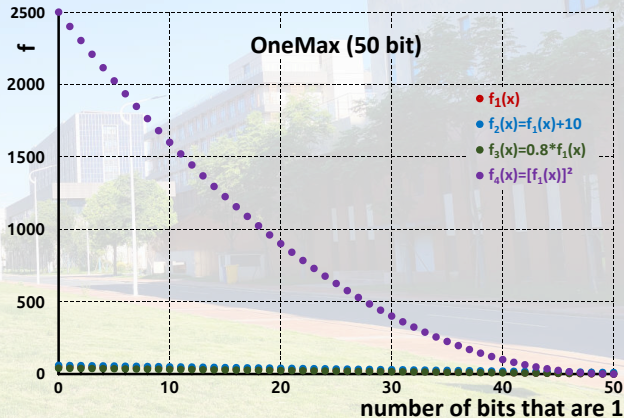



Invariance Properties: OneMax Example – Squaring


- Now I create another slightly modified variant of this problem.
- $f_4(x) = [f_1(x)]^2$.
- Expectation: A nice algorithm should perform the same on f_1 and f_4 , i.e., make the exact same decisions given the same random seeds.
- $f_1(x_n) = 14$, $f_1(x_c) = 6$

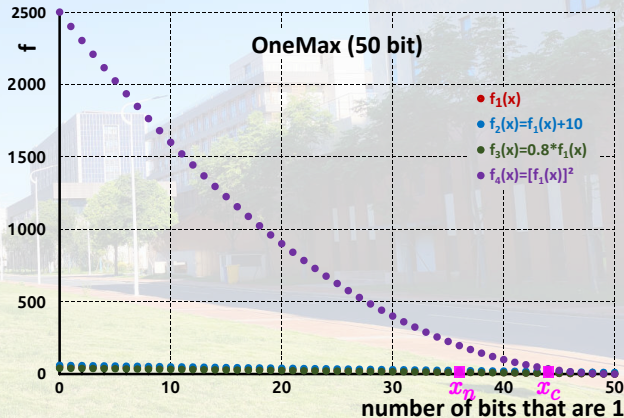




Invariance Properties: OneMax Example – Squaring

- Now I create another slightly modified variant of this problem.
- $f_4(x) = [f_1(x)]^2$.
- Expectation: A nice algorithm should perform the same on f_1 and f_4 , i.e., make the exact same decisions given the same random seeds.
- $f_1(x_n) = 14$, $f_1(x_c) = 6$,
 $f_4(x_n) = 196$, $f_4(x_c) = 36$

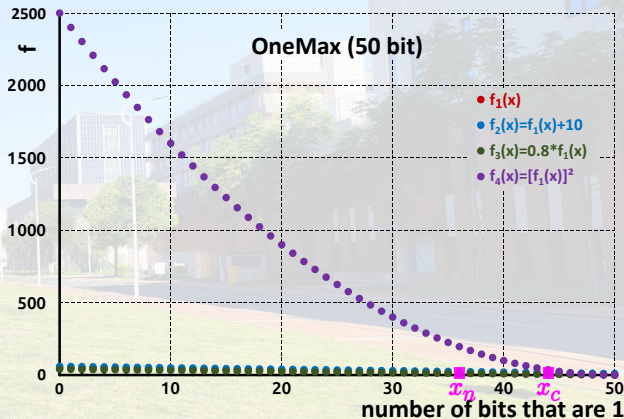

Invariance Properties: OneMax Example – Squaring


- Now I create another slightly modified variant of this problem.
- $f_4(x) = [f_1(x)]^2$.
- Expectation: A nice algorithm should perform the same on f_1 and f_4 , i.e., make the exact same decisions given the same random seeds.
- $f_1(x_n) = 14$, $f_1(x_c) = 6$,
 $f_4(x_n) = 196$, $f_4(x_c) = 36$
- $(1 + 1)$ EA: $14 \leq 6 \leq 196 \leq 36$ ✓

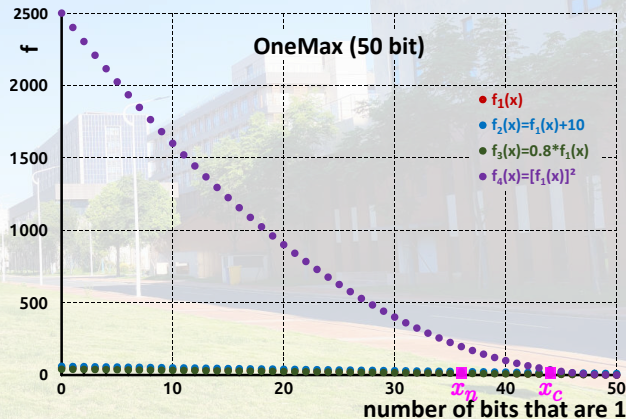

Invariance Properties: OneMax Example – Squaring




- Now I create another slightly modified variant of this problem.
- $f_4(x) = [f_1(x)]^2$.
- Expectation: A nice algorithm should perform the same on f_1 and f_4 , i.e., make the exact same decisions given the same random seeds.
- $f_1(x_n) = 14$, $f_1(x_c) = 6$,
 $f_4(x_n) = 196$, $f_4(x_c) = 36$
- $(1 + 1)$ EA: $14 \leq 6 \leq 196 \leq 36$ ✓
- SA: $6 - 14 \neq 36 - 196$ ✗

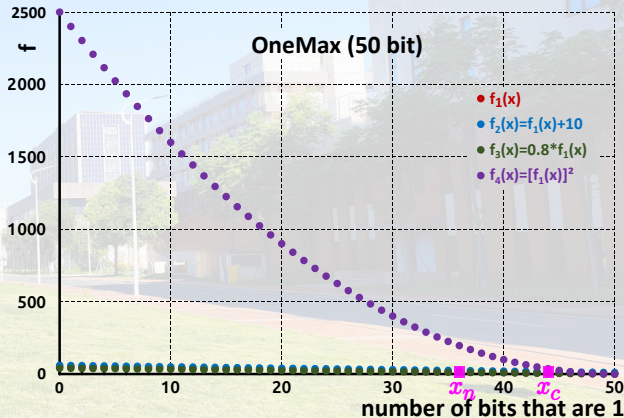

Invariance Properties: OneMax Example – Squaring



- Now I create another slightly modified variant of this problem.
- $f_4(x) = [f_1(x)]^2$.
- Expectation: A nice algorithm should perform the same on f_1 and f_4 , i.e., make the exact same decisions given the same random seeds.
- $f_1(x_n) = 14$, $f_1(x_c) = 6$,
 $f_4(x_n) = 196$, $f_4(x_c) = 36$
- $(1 + 1)$ EA: $14 \leq 6 \Rightarrow 196 \leq 36$ ✓
- SA: $6 - 14 \neq 36 - 196$ ✗
- SGA: $1 - 14/(14 + 6) = 0.3 \neq 1 - 196/(196 + 36) \approx 0.156$ ✗

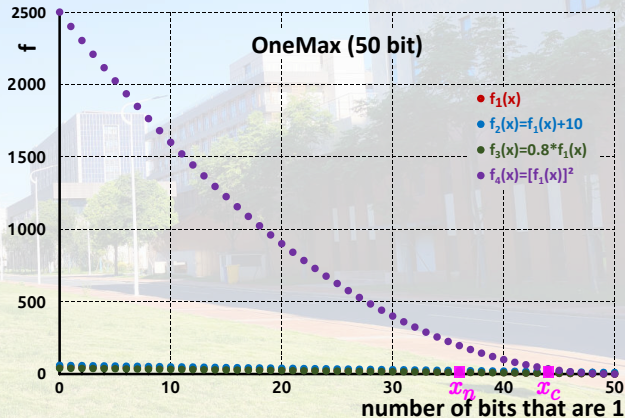

Invariance Properties: OneMax Example – Squaring




- Now I create another slightly modified variant of this problem.

- $f_4(x) = [f_1(x)]^2$.

- Expectation: should perform the same number of decisions given the same seeds.

- The $(1 + 1)$ EA is invariant under all order-preserving transformations of the objective function value.

- $f_1(x_n) = 14$, $f_1(x_c) = 6$,
 $f_4(x_n) = 196$, $f_4(x_c) = 36$
- $(1 + 1)$ EA: $14 \leq 6 \iff 196 \leq 36$ ✓
- SA: $6 - 14 \neq 36 - 196$ ✗
- SGA: $1 - 14/(14 + 6) = 0.3 \neq 1 - 196/(196 + 36) \approx 0.156$ ✗

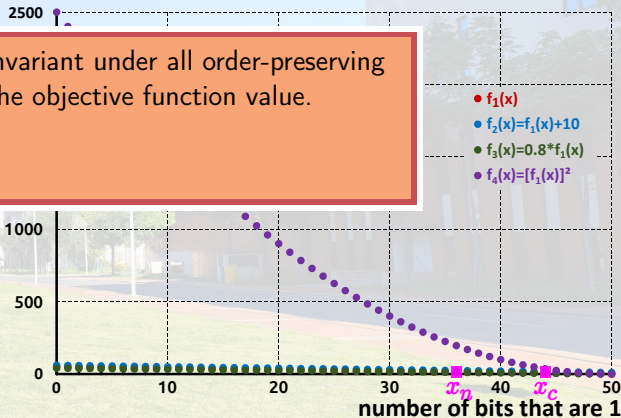



Invariance Properties: OneMax Example – Squaring


- Now I create another slightly modified variant of this problem.

- $f_4(x) = [f_1(x)]^2$.

- Expectation: should perform the same for f_1 and f_4 , i.e., the decisions given by the seeds.

- The $(1 + 1)$ EA is invariant under all order-preserving transformations of the objective function value.
- SA and the SGA are not, i.e., may give us different results for f_1 and f_4 .

- $f_1(x_n) = 14$, $f_1(x_c) = 6$,
 $f_4(x_n) = 196$, $f_4(x_c) = 36$
- $(1 + 1)$ EA: $14 \leq 6 \leq 196 \leq 36$ ✓
- SA: $6 - 14 \neq 36 - 196$ ✗
- SGA: $1 - 14/(14 + 6) = 0.3 \neq 1 - 196/(196 + 36) \approx 0.156$ ✗

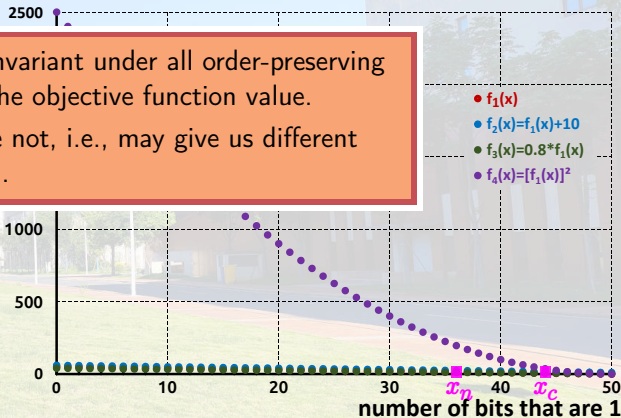




Now let's enter eerie territory...

Invariance Properties: OneMax Example – Trap



- Now I create another modified variant of this problem: a Trap^{64,160}.

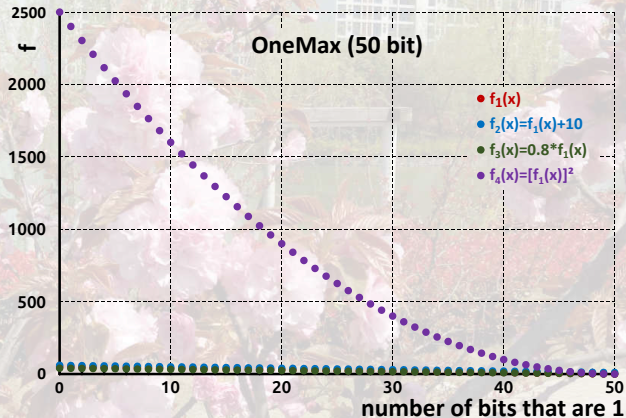


Invariance Properties: OneMax Example – Trap



- Now I create another modified variant of this problem: a Trap^{64,160}.

- $f_5(x) = \begin{cases} 0 & \text{if } f_1(x) = 50 \\ 1 + f_1(x) & \text{otherwise} \end{cases}$

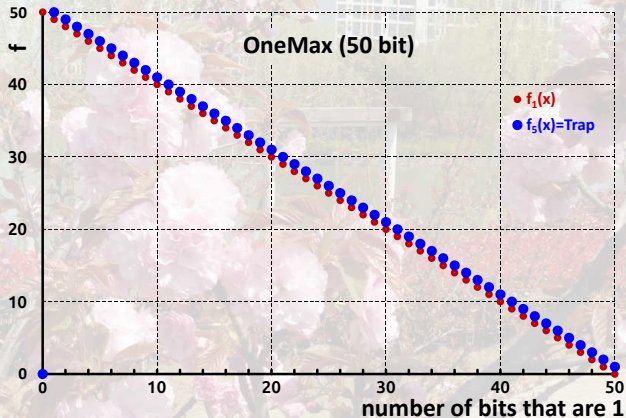


Invariance Properties: OneMax Example – Trap



- Now I create another modified variant of this problem: a Trap^{64,160}.

- $f_5(x) = \begin{cases} 0 & \text{if } f_1(x) = 50 \\ 1 + f_1(x) & \text{otherwise} \end{cases}$

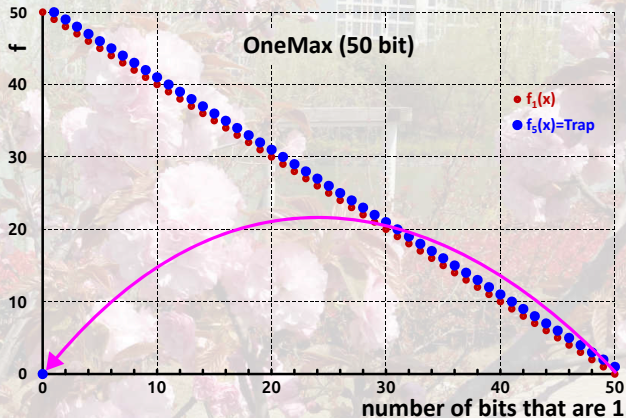


Invariance Properties: OneMax Example – Trap



- Now I create another modified variant of this problem: a Trap^{64,160}.

- $f_5(x) = \begin{cases} 0 & \text{if } f_1(x) = 50 \\ 1 + f_1(x) & \text{otherwise} \end{cases}$

- Expectation: Algorithm performance on f_1 does not carry over to f_5 .

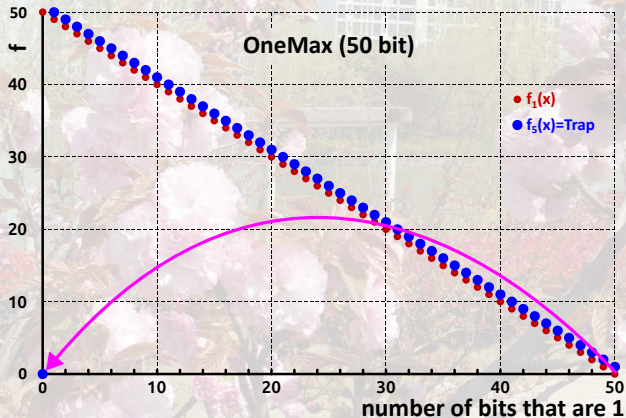

Invariance Properties: OneMax Example – Trap




- Now I create another modified variant of this problem: a Trap^{64,160}.

- $f_5(x) = \begin{cases} 0 & \text{if } f_1(x) = 50 \\ 1 + f_1(x) & \text{otherwise} \end{cases}$

- Expectation: Algorithm performance on f_1 does not carry over to f_5 .

- Neither the $(1 + 1)$ EA, SA, nor the SGA can deal with this well.

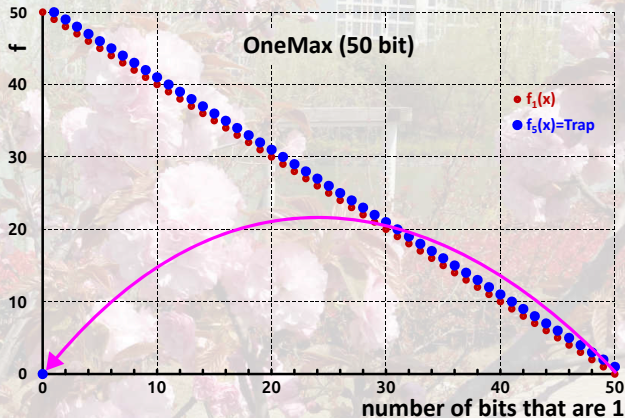

Invariance Properties: OneMax Example – Trap




- Now I create another modified variant of this problem: a Trap^{64,160}.

- $f_5(x) = \begin{cases} 0 & \text{if } f_1(x) = 50 \\ 1 + f_1(x) & \text{otherwise} \end{cases}$

- Expectation: Algorithm performance on f_1 does not carry over to f_5 .

- Neither the $(1 + 1)$ EA, SA, nor the SGA can deal with this well.


- The $(1 + 1)$ EA has expected runtime $\Theta(n^n)$ on Traps⁶⁴.

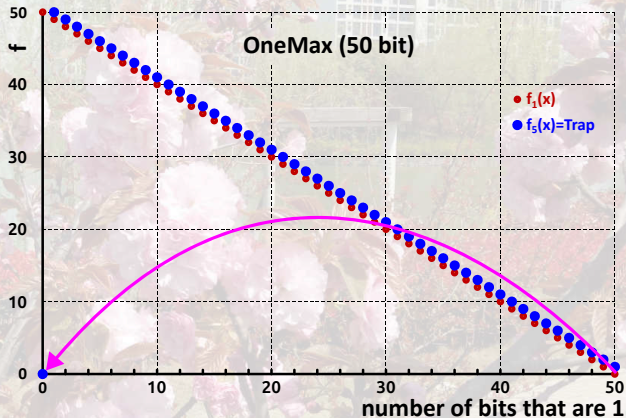

Invariance Properties: OneMax Example – Jump




- Now I create another modified variant of this problem: a jump of width $\omega = 10$ bits.

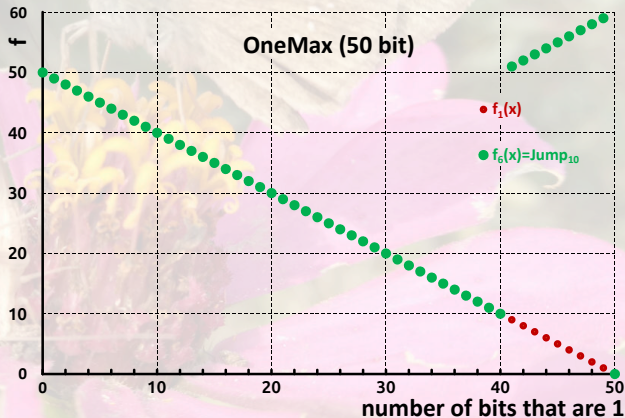

Invariance Properties: OneMax Example – Jump




- Now I create another modified variant of this problem: a jump of width $\omega = 10$ bits.
- $f_6(x)$ has a deceptive area of $\omega - 1$ bits before the optimum.

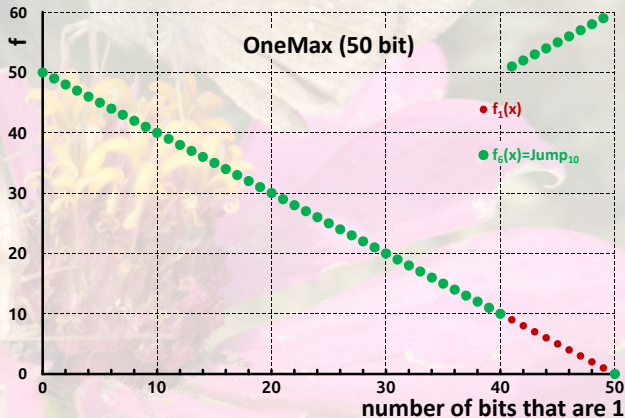

Invariance Properties: OneMax Example – Jump




- Now I create another modified variant of this problem: a jump of width $\omega = 10$ bits.
- $f_6(x)$ has a deceptive area of $\omega - 1$ bits before the optimum.
- Expectation: Algorithm performance on f_1 does not carry over to f_6 .

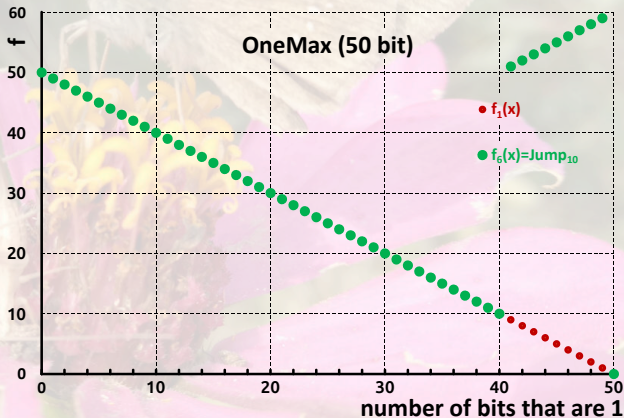

Invariance Properties: OneMax Example – Jump




- Now I create another modified variant of this problem: a jump of width $\omega = 10$ bits.
- $f_6(x)$ has a deceptive area of $\omega - 1$ bits before the optimum.
- Expectation: Algorithm performance on f_1 does not carry over to f_6 .
- Neither the $(1 + 1)$ EA, SA, nor the SGA can deal with this well.

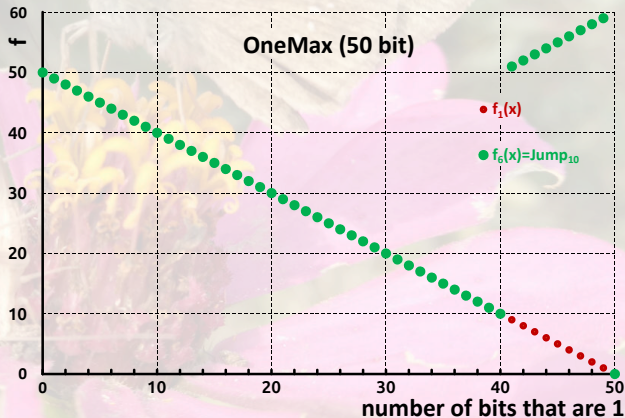

Invariance Properties: OneMax Example – Jump




- Now I create another modified variant of this problem: a jump of width $\omega = 10$ bits.
- $f_6(x)$ has a deceptive area of $\omega - 1$ bits before the optimum.
- Expectation: Algorithm performance on f_1 does not carry over to f_6 .
- Neither the $(1 + 1)$ EA, SA, nor the SGA can deal with this well.
- The $(1 + 1)$ EA has expected runtime $\Theta(n^\omega + n \ln n)$ on jumps⁶⁴.

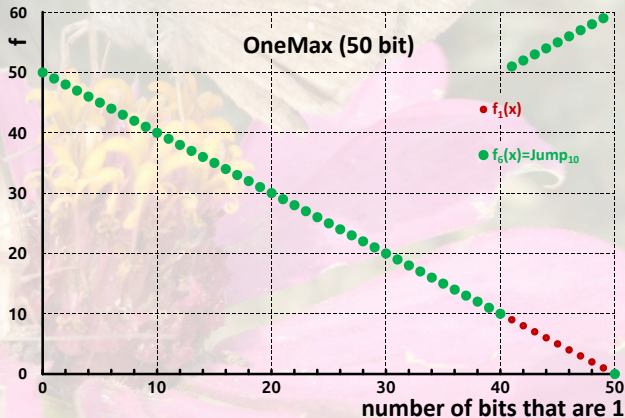

Invariance Properties: OneMax Example – Injection




- How about I apply an arbitrary injection g that preserves the location of optimum to f_1 and get $f_7(x) = g(f_1(x))$?

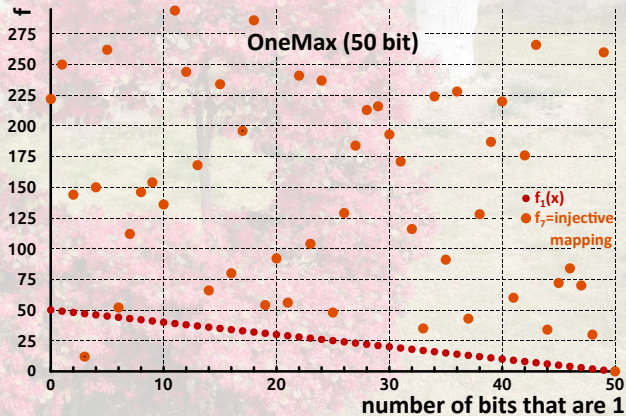

Invariance Properties: OneMax Example – Injection




- How about I apply an arbitrary injection g that preserves the location of optimum to f_1 and get $f_7(x) = g(f_1(x))$?
- Expectation: Algorithm performance on f_1 is probably unrelated to performance on f_7 .

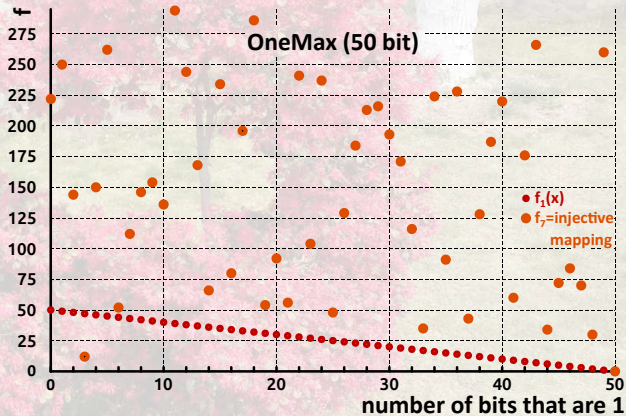

Invariance Properties: OneMax Example – Injection




- How about I apply an arbitrary injection g that preserves the location of optimum to f_1 and get $f_7(x) = g(f_1(x))$?
- Expectation: Algorithm performance on f_1 is probably unrelated to performance on f_7 .
- Neither the $(1 + 1)$ EA, SA, nor the SGA can deal with this well.

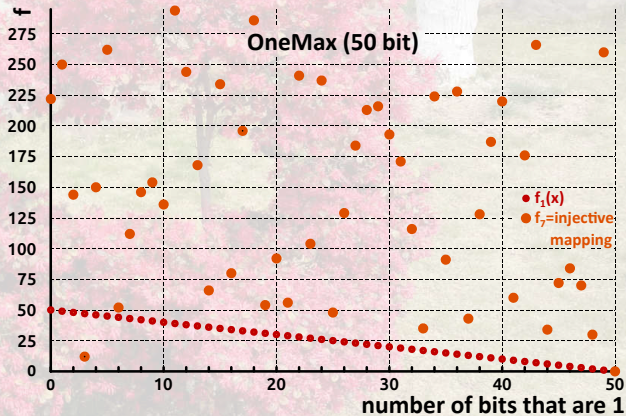

Invariance Properties: OneMax Example – Injection



- How about I apply an arbitrary injection g that preserves the location of optimum to f_1 and get $f_7(x) = g(f_1(x))$?
- Expectation: Algorithm performance on f_1 is probably unrelated to performance on f_7 .
- Neither the $(1 + 1)$ EA, SA, nor the SGA can deal with this well.
- Indeed, **no** existing algorithm can deal with this, let alone have some invariance properties with respect to *that*.

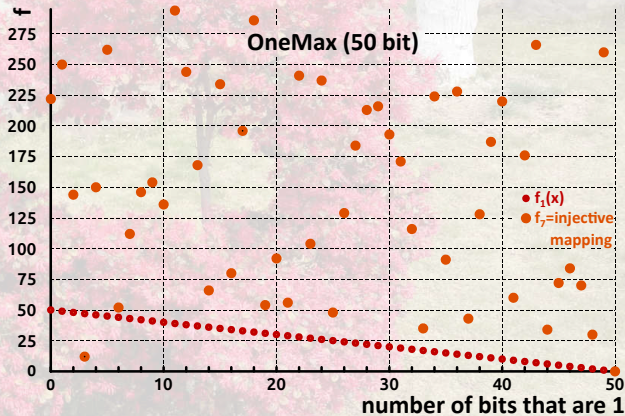



Indeed, **no** existing algorithm can deal with this, let alone have some invariance properties with respect to *that*.



Indeed, **no** existing algorithm can deal with this, let alone have some invariance properties with respect to *that*.

well...



Frequency Fitness Assignment: Making Optimization Algorithms Invariant Under Bijective Transformations of the Objective Function Value

Thomas Weise , Member, IEEE, Zhize Wu, Xinlu Li, and Yan Chen

Abstract—Under frequency fitness assignment (FFA), the fitness corresponding to an objective value is its encounter frequency in fitness assignment steps and is subject to minimization. FFA renders optimization processes invariant under bijective transformations of the objective function value. On TwoMax, Jump, and Trap functions of dimension s , the classical $(1+1)$ -EA with standard mutation at rate $1/s$ can have expected runtimes exponential in s . In our experiments, a $(1+1)$ -FEA, the same algorithm but using FFA, exhibits mean runtimes that seem to scale as $s^2 \ln s$. Since Jump and Trap are bijective transformations of OneMax, it behaves identical on all three. On OneMax, LeadingOnes, and Plateau problems, it seems to be slower than the $(1+1)$ -EA by a factor linear in s . The $(1+1)$ -FEA performs much better than the $(1+1)$ -EA on W-Model and MaxSat instances. We further verify the bijection invariance by applying the Md5 checksum computation as transformation to some of the above problems and yield the same behaviors. Finally, we show that FFA can improve the performance of a memetic algorithm for job shop scheduling.

Index Terms— $(1+1)$ -EA, evolutionary algorithm (EA), frequency fitness assignment (FFA), job shop scheduling (JSS), Jump, LeadingOnes, Plateau problems, memetic algorithm (MA), OneMax, TwoMax, Trap.

which are then the basis for selection. Frequency fitness assignment (FFA) [1], [2] was developed to enable algorithms to escape from local optima. In FFA, the fitness corresponding to an objective value is its encounter frequency so far in fitness assignment steps and is subject to minimization. As we discuss in detail in Section II, FFA turns a static optimization problem into a dynamic one where objective values that are often encountered will receive worse and worse fitness.

In this article, we uncover a so-far unexplored property of FFA: it is invariant under any bijective transformation of the objective function values. This is the strongest invariance known to us and encompasses all order-preserving mappings. Other examples for bijective transformations include the negation, permutation, or even encryption of the objective values. According to [3], invariance extends performance observed on a single function to an entire associated invariance class—that is, it generalizes from a single problem class to problem sets. Thus, it hopefully makes the presentation of the experimental results more convincing.



Frequency Fitness Assignment



FFA: Idea



- Frequency Fitness Assignment (FFA) is a module that can be plugged into different existing algorithms.

FFA: Idea



- Frequency Fitness Assignment (FFA) is a module that can be plugged into different existing algorithms.
- It changes the way the algorithm selects the interesting solutions S_{i+1} from the sets $P_i = S_i \cup N_i$.



- Frequency Fitness Assignment (FFA) is a module that can be plugged into different existing algorithms.
- It changes the way the algorithm selects the interesting solutions S_{i+1} from the sets $P_i = S_i \cup N_i$.
- It therefore maintains a table H with the encounter frequency of each objective value in the selection decisions.

FFA: Idea



- Frequency Fitness Assignment (FFA) is a module that can be plugged into different existing algorithms.
- It changes the way the algorithm selects the interesting solutions S_{i+1} from the sets $P_i = S_i \cup N_i$.
- It therefore maintains a table H with the encounter frequency of each objective value in the selection decisions.
- The table H is initially filled with zeros.

FFA: Idea



- Frequency Fitness Assignment (FFA) is a module that can be plugged into different existing algorithms.
- It changes the way the algorithm selects the interesting solutions S_{i+1} from the sets $P_i = S_i \cup N_i$.
- It therefore maintains a table H with the encounter frequency of each objective value in the selection decisions.
- The table H is initially filled with zeros.
- Before the selection step of the algorithm, $H[f(P_i[j])]$ for all $j \in 1..|P_i|$ is incremented by 1.

FFA: Idea



- Frequency Fitness Assignment (FFA) is a module that can be plugged into different existing algorithms.
- It changes the way the algorithm selects the interesting solutions S_{i+1} from the sets $P_i = S_i \cup N_i$.
- It therefore maintains a table H with the encounter frequency of each objective value in the selection decisions.
- The table H is initially filled with zeros.
- Before the selection step of the algorithm, $H[f(P_i[j])]$ for all $j \in 1..|P_i|$ is incremented by 1.
- Then, the frequencies $H[f(P_i[j])]$ replace the objective values $f(P_i[j])$ in the actual selection decisions.

FFA: (1+1) EA and (1+1) FEA



- Let's plug FFA into the (1 + 1) EA and obtain the (1 + 1) EA with FFA ((1 + 1) FEA).

```
procedure (1 + 1) EA( $f : \mathbb{X} \mapsto \mathbb{R}$ )  
  randomly sample  $x_c$  from  $\mathbb{X}$ ;  $y_c \leftarrow f(x_c)$ ;  
  while  $\neg$  terminate do  
     $x_n \leftarrow \text{move}(x_c)$ ;  $y_n \leftarrow f(x_n)$ ;  
    if  $y_n \leq y_c$  then  $x_c \leftarrow x_n$ ;  $y_c \leftarrow y_n$ ;  
  return  $x_c, y_c$ 
```


FFA: (1+1) EA and (1+1) FEA



- We start with the (1 + 1) EA.

```
procedure (1 + 1) EA( $f : \mathbb{X} \mapsto \mathbb{R}$ )  
  randomly sample  $x_c$  from  $\mathbb{X}$ ;  $y_c \leftarrow f(x_c)$ ;  
  while  $\neg$  terminate do  
     $x_n \leftarrow \text{move}(x_c)$ ;  $y_n \leftarrow f(x_n)$ ;  
    if  $y_n \leq y_c$  then  $x_c \leftarrow x_n$ ;  $y_c \leftarrow y_n$ ;  
  return  $x_c, y_c$ 
```

```
procedure (1 + 1) EA( $f : \mathbb{X} \mapsto \mathbb{N}$ )
```

```
  randomly sample  $x_c$  from  $\mathbb{X}$ ;  $y_c \leftarrow f(x_c)$ ;
```

```
  while  $\neg$  terminate do
```

```
     $x_n \leftarrow \text{move}(x_c)$ ;  $y_n \leftarrow f(x_n)$ ;
```

```
    if  $y_n \leq y_c$  then
```

```
       $x_c \leftarrow x_n$ ;  $y_c \leftarrow y_n$ ;
```

```
  return  $x_c, y_c$ 
```

FFA: (1+1) EA and (1+1) FEA



- We begin by initializing the frequency table H with all zeros.

```
procedure (1 + 1) EA( $f : \mathbb{X} \mapsto \mathbb{R}$ )  
  randomly sample  $x_c$  from  $\mathbb{X}$ ;  $y_c \leftarrow f(x_c)$ ;  
  while  $\neg$  terminate do  
     $x_n \leftarrow \text{move}(x_c)$ ;  $y_n \leftarrow f(x_n)$ ;  
    if  $y_n \leq y_c$  then  $x_c \leftarrow x_n$ ;  $y_c \leftarrow y_n$ ;  
  return  $x_c, y_c$ 
```

```
procedure (1 + 1) FEA( $f : \mathbb{X} \mapsto \mathbb{N}$ )  
   $H \leftarrow (0, 0, \dots, 0)$ ;  
  randomly sample  $x_c$  from  $\mathbb{X}$ ;  $y_c \leftarrow f(x_c)$ ;  
  
  while  $\neg$  terminate do  
     $x_n \leftarrow \text{move}(x_c)$ ;  $y_n \leftarrow f(x_n)$ ;  
  
    if  $y_n \leq y_c$  then  
       $x_c \leftarrow x_n$ ;  $y_c \leftarrow y_n$ ;  
  
  return  $x_c, y_c$ 
```

FFA: (1+1) EA and (1+1) FEA



- *Before* the selection decision, we increment the frequency values of the objective values of all current solutions.

```
procedure (1 + 1) EA( $f : \mathbb{X} \mapsto \mathbb{R}$ )  
  randomly sample  $x_c$  from  $\mathbb{X}$ ;  $y_c \leftarrow f(x_c)$ ;  
  while  $\neg$  terminate do  
     $x_n \leftarrow \text{move}(x_c)$ ;  $y_n \leftarrow f(x_n)$ ;  
    if  $y_n \leq y_c$  then  $x_c \leftarrow x_n$ ;  $y_c \leftarrow y_n$ ;  
  return  $x_c, y_c$ 
```

```
procedure (1 + 1) FEA( $f : \mathbb{X} \mapsto \mathbb{N}$ )  
   $H \leftarrow (0, 0, \dots, 0)$ ;  
  randomly sample  $x_c$  from  $\mathbb{X}$ ;  $y_c \leftarrow f(x_c)$ ;  
  
  while  $\neg$  terminate do  
     $x_n \leftarrow \text{move}(x_c)$ ;  $y_n \leftarrow f(x_n)$ ;  
     $H[y_c] \leftarrow H[y_c] + 1$ ;  $H[y_n] \leftarrow H[y_n] + 1$ ;  
    if  $y_n \leq y_c$  then  
       $x_c \leftarrow x_n$ ;  $y_c \leftarrow y_n$ ;  
  
  return  $x_c, y_c$ 
```

FFA: (1+1) EA and (1+1) FEA



- Now the frequency values replace the objective values in the selection decisions.

```
procedure (1 + 1) EA( $f : \mathbb{X} \mapsto \mathbb{R}$ )  
  randomly sample  $x_c$  from  $\mathbb{X}$ ;  $y_c \leftarrow f(x_c)$ ;  
  while  $\neg$  terminate do  
     $x_n \leftarrow \text{move}(x_c)$ ;  $y_n \leftarrow f(x_n)$ ;  
    if  $y_n \leq y_c$  then  $x_c \leftarrow x_n$ ;  $y_c \leftarrow y_n$ ;  
  return  $x_c, y_c$ 
```

```
procedure (1 + 1) FEA( $f : \mathbb{X} \mapsto \mathbb{N}$ )  
   $H \leftarrow (0, 0, \dots, 0)$ ;  
  randomly sample  $x_c$  from  $\mathbb{X}$ ;  $y_c \leftarrow f(x_c)$ ;  
  
  while  $\neg$  terminate do  
     $x_n \leftarrow \text{move}(x_c)$ ;  $y_n \leftarrow f(x_n)$ ;  
     $H[y_c] \leftarrow H[y_c] + 1$ ;  $H[y_n] \leftarrow H[y_n] + 1$ ;  
    if  $H[y_n] \leq H[y_c]$  then  
       $x_c \leftarrow x_n$ ;  $y_c \leftarrow y_n$ ;  
  
  return  $x_c, y_c$ 
```

FFA: (1+1) EA and (1+1) FEA



- Since we may now lose the best-so-far solution, we need to track it in additional variables.

```
procedure (1 + 1) EA( $f : \mathbb{X} \mapsto \mathbb{R}$ )  
  randomly sample  $x_c$  from  $\mathbb{X}$ ;  $y_c \leftarrow f(x_c)$ ;  
  while  $\neg$  terminate do  
     $x_n \leftarrow \text{move}(x_c)$ ;  $y_n \leftarrow f(x_n)$ ;  
    if  $y_n \leq y_c$  then  $x_c \leftarrow x_n$ ;  $y_c \leftarrow y_n$ ;  
  return  $x_c, y_c$ 
```

```
procedure (1 + 1) FEA( $f : \mathbb{X} \mapsto \mathbb{N}$ )  
   $H \leftarrow (0, 0, \dots, 0)$ ;  
  randomly sample  $x_c$  from  $\mathbb{X}$ ;  $y_c \leftarrow f(x_c)$ ;  
   $x_B \leftarrow x_c$ ;  $y_B \leftarrow y_c$ ;  
  while  $\neg$  terminate do  
     $x_n \leftarrow \text{move}(x_c)$ ;  $y_n \leftarrow f(x_n)$ ;  
     $H[y_c] \leftarrow H[y_c] + 1$ ;  $H[y_n] \leftarrow H[y_n] + 1$ ;  
    if  $H[y_n] \leq H[y_c]$  then  
       $x_c \leftarrow x_n$ ;  $y_c \leftarrow y_n$ ;  
  
  return  $x_c, y_c$ 
```


FFA: (1+1) EA and (1+1) FEA



- Since we may now lose the best-so-far solution, we need to track it in additional variables.

```
procedure (1 + 1) EA( $f : \mathbb{X} \mapsto \mathbb{R}$ )  
  randomly sample  $x_c$  from  $\mathbb{X}$ ;  $y_c \leftarrow f(x_c)$ ;  
  while  $\neg$  terminate do  
     $x_n \leftarrow \text{move}(x_c)$ ;  $y_n \leftarrow f(x_n)$ ;  
    if  $y_n \leq y_c$  then  $x_c \leftarrow x_n$ ;  $y_c \leftarrow y_n$ ;  
  return  $x_c, y_c$ 
```

```
procedure (1 + 1) FEA( $f : \mathbb{X} \mapsto \mathbb{N}$ )  
   $H \leftarrow (0, 0, \dots, 0)$ ;  
  randomly sample  $x_c$  from  $\mathbb{X}$ ;  $y_c \leftarrow f(x_c)$ ;  
   $x_B \leftarrow x_c$ ;  $y_B \leftarrow y_c$ ;  
  while  $\neg$  terminate do  
     $x_n \leftarrow \text{move}(x_c)$ ;  $y_n \leftarrow f(x_n)$ ;  
     $H[y_c] \leftarrow H[y_c] + 1$ ;  $H[y_n] \leftarrow H[y_n] + 1$ ;  
    if  $H[y_n] \leq H[y_c]$  then  
       $x_c \leftarrow x_n$ ;  $y_c \leftarrow y_n$ ;  
      if  $y_c < y_B$  then  $x_B \leftarrow x_c$ ;  $y_B \leftarrow y_c$ ;  
  return  $x_c, y_c$ 
```

FFA: (1+1) EA and (1+1) FEA



- Since we may now lose the best-so-far solution, we need to track it in additional variables.
- ... which are then the return values of the (1 + 1) FEA.

```
procedure (1 + 1) EA( $f : \mathbb{X} \mapsto \mathbb{R}$ )  
  randomly sample  $x_c$  from  $\mathbb{X}$ ;  $y_c \leftarrow f(x_c)$ ;  
  while  $\neg$  terminate do  
     $x_n \leftarrow \text{move}(x_c)$ ;  $y_n \leftarrow f(x_n)$ ;  
    if  $y_n \leq y_c$  then  $x_c \leftarrow x_n$ ;  $y_c \leftarrow y_n$ ;  
  return  $x_c, y_c$ 
```

```
procedure (1 + 1) FEA( $f : \mathbb{X} \mapsto \mathbb{N}$ )  
   $H \leftarrow (0, 0, \dots, 0)$ ;  
  randomly sample  $x_c$  from  $\mathbb{X}$ ;  $y_c \leftarrow f(x_c)$ ;  
   $x_B \leftarrow x_c$ ;  $y_B \leftarrow y_c$ ;  
  while  $\neg$  terminate do  
     $x_n \leftarrow \text{move}(x_c)$ ;  $y_n \leftarrow f(x_n)$ ;  
     $H[y_c] \leftarrow H[y_c] + 1$ ;  $H[y_n] \leftarrow H[y_n] + 1$ ;  
    if  $H[y_n] \leq H[y_c]$  then  
       $x_c \leftarrow x_n$ ;  $y_c \leftarrow y_n$ ;  
      if  $y_c < y_B$  then  $x_B \leftarrow x_c$ ;  $y_B \leftarrow y_c$ ;  
  return  $x_B, y_B$ 
```

FFA: What does this do?

- The rating $H[f(x)]$ of a solution x depends only on the identity of $f(x)$.



FFA: What does this do?



- The rating $H[f(x)]$ of a solution x depends only on the identity of $f(x)$.
- The rating $H[f(x)]$ of a solution x depends only on how often solutions x' with $f(x') = f(x)$ have previously been seen in the optimization process.

FFA: What does this do?



- The rating $H[f(x)]$ of a solution x depends only on the identity of $f(x)$.
- The rating $H[f(x)]$ of a solution x depends only on how often solutions x' with $f(x') = f(x)$ have previously been seen in the optimization process.
- Static optimization problems become dynamic, because frequency fitness H changes over time.

FFA: What does this do?



- The rating $H[f(x)]$ of a solution x depends only on the identity of $f(x)$.
- The rating $H[f(x)]$ of a solution x depends only on how often solutions x' with $f(x') = f(x)$ have previously been seen in the optimization process.
- Static optimization problems become dynamic, because frequency fitness H changes over time.
- Solutions get less attractive the more often their corresponding objective values have been seen. This also holds for local optima. . .

FFA: What does this do?



- The rating $H[f(x)]$ of a solution x depends only on the identity of $f(x)$.
- The rating $H[f(x)]$ of a solution x depends only on how often solutions x' with $f(x') = f(x)$ have previously been seen in the optimization process.
- Static optimization problems become dynamic, because frequency fitness H changes over time.
- Solutions get less attractive the more often their corresponding objective values have been seen. This also holds for local optima. . .
- Solutions with better objective values are no longer preferred over such with worse objective value.

FFA: What does this do?



- The rating $H[f(x)]$ of a solution x depends only on the identity of $f(x)$.
- The rating $H[f(x)]$ of a solution x depends only on how often solutions x' with $f(x') = f(x)$ have previously been seen in the optimization process.
- Static optimization problems become dynamic, because frequency fitness H changes over time.
- Solutions get less attractive the more often their corresponding objective values have been seen. This also holds for local optima. . .
- Solutions with better objective values are no longer preferred over such with worse objective value.
- Instead, solutions with less-frequent objective values are preferred.

FFA: What does this do?



- The rating $H[f(x)]$ of a solution x depends only on the identity of $f(x)$.
- The rating $H[f(x)]$ of a solution x depends only on how often solutions x' with $f(x') = f(x)$ have previously been seen in the optimization process.
- Static optimization problems become dynamic, because frequency fitness H changes over time.
- Solutions get less attractive the more often their corresponding objective values have been seen. This also holds for local optima. . .
- Solutions with better objective values are no longer preferred over such with worse objective value.
- Instead, solutions with less-frequent objective values are preferred.
- Algorithms using FFA are invariant under all injective transformations of the objective function value.

FFA: What does this do?



- The rating $H[f(x)]$ of a solution x depends only on the identity of $f(x)$.
- The rating $H[f(x)]$ of a solution x depends only on how often solutions x' with $f(x') = f(x)$ have previously been seen in the optimization process.
- Static optimization problems become dynamic, because frequency fitness H changes over time.
- Solutions get less attractive the more often their corresponding objective values have been seen. This also holds for local optima. . .
- Solutions with better objective values are no longer preferred over such with worse objective value.
- Instead, solutions with less-frequent objective values are preferred.
- Algorithms using FFA are invariant under all injective transformations of the objective function value.
- They perform identical on ALL of the OneMax-based functions from before!

Discrete Optimization Theory Benchmarks



- If we use the encounter frequency of objective values as **only** guide for optimization ... can this work?

Discrete Optimization Theory Benchmarks




- If we use the encounter frequency of objective values as **only** guide for optimization ... can this work?
- Why should this lead to anything but strange random walks?

Discrete Optimization Theory Benchmarks




- If we use the encounter frequency of objective values as **only** guide for optimization ... can this work?
- Why should this lead to anything but strange random walks?
- So we tested it on discrete optimization benchmarks.

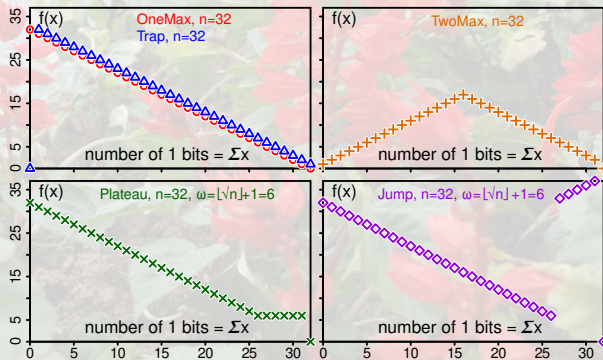

(1+1) FEA on OneMax




- As first example, we again take OneMax¹⁵⁹.

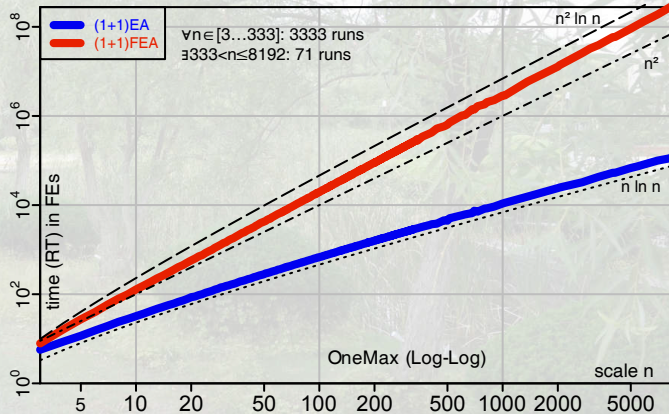

(1+1) FEA on OneMax




- As first example, we again take OneMax¹⁵⁹.
- The expected runtime of (1 + 1) EA on OneMax is in $\Theta(n \ln n)$ ^{56,159}.

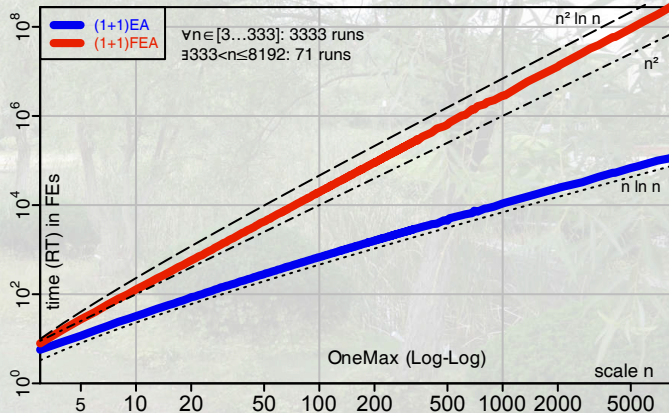

(1+1) FEA on OneMax




- As first example, we again take OneMax¹⁵⁹.
- The expected runtime of $(1+1)$ EA on OneMax is in $\Theta(n \ln n)$ ^{56,159}.
- The average runtime $(1+1)$ FEA on OneMax seems to be slower by factor proportional to n , i.e., seems to be in $\mathcal{O}(n^2 \ln n)$ ²²⁵.

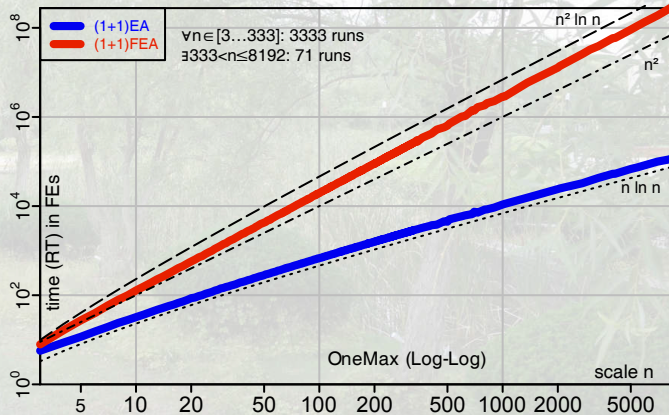

(1+1) FEA on LeadingOnes




- The LeadingOnes problem maximizes the number of leading 1 bits in a bit string^{183,228}.

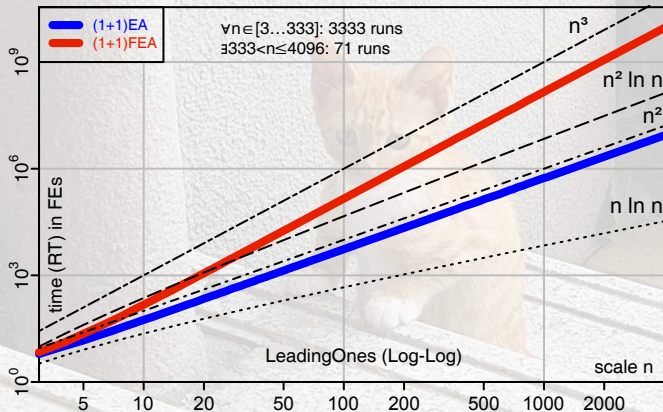

(1+1) FEA on LeadingOnes




- The LeadingOnes problem maximizes the number of leading 1 bits in a bit string^{183,228}.
- The expected runtime of (1 + 1) EA on LeadingOnes is in $\Theta(n^2)$ ⁶⁴.

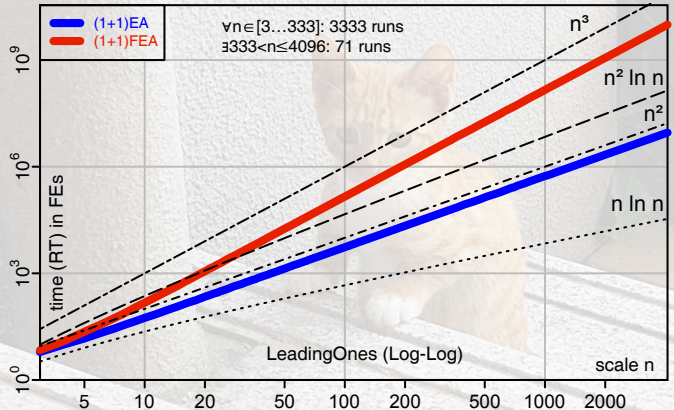

(1+1) FEA on LeadingOnes




- The LeadingOnes problem maximizes the number of leading 1 bits in a bit string^{183,228}.
- The expected runtime of (1 + 1) EA on LeadingOnes is in $\Theta(n^2)$ ⁶⁴.
- The average runtime (1 + 1) FEA on LeadingOnes seems to be slower by factor proportional to n , i.e., seems to be in $\mathcal{O}(n^3)$ ²²⁵.

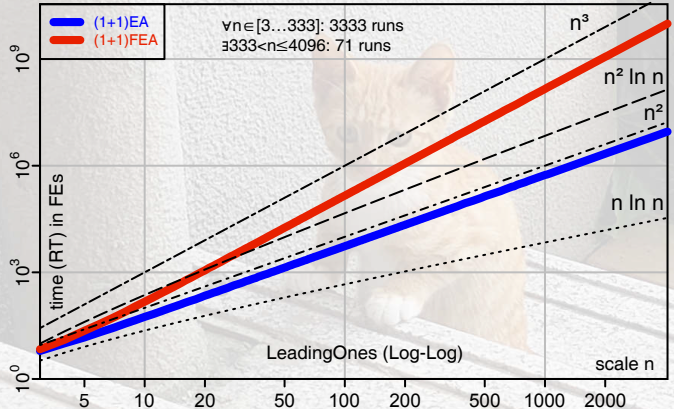

(1+1) FEA on TwoMax


- The TwoMax problem has one local opposite to a global optimum^{80,206,236}.

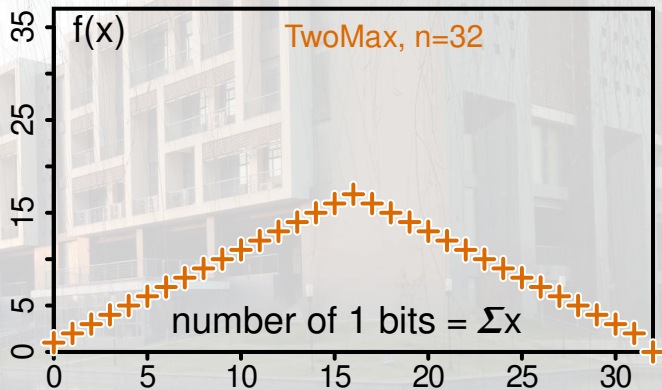



(1+1) FEA on TwoMax


- The TwoMax problem has one local opposite to a global optimum^{80,206,236}.
- An (1 + 1) EA has a 50/50 chance to converge to the local or global optimum and thus has an expected runtime in $\Theta(n^n)$.^{79,80}

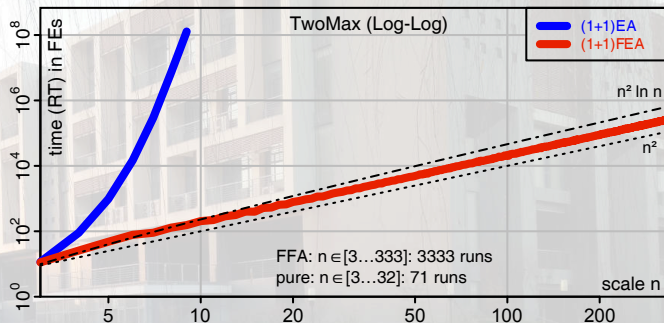



(1+1) FEA on TwoMax


- The TwoMax problem has one local opposite to a global optimum^{80,206,236}.
- An $(1 + 1)$ EA has a 50/50 chance to converge to the local or global optimum and thus has an expected runtime in $\Theta(n^n)$.^{79,80}
- The average runtime $(1 + 1)$ FEA on TwoMax seems to be in $\mathcal{O}(n^2 \ln n)$.²²⁵

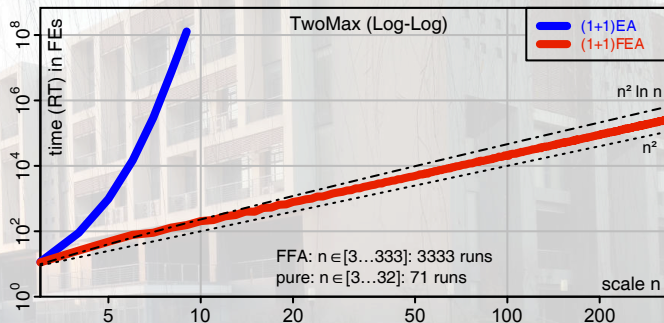

(1+1) FEA on Trap




- The Trap problem basically swaps the global optimum with the worst solution^{64,160}.

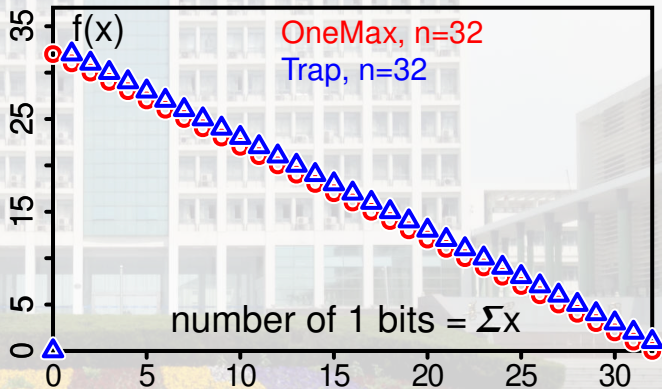

(1+1) FEA on Trap




- The Trap problem basically swaps the global optimum with the worst solution^{64,160}.
- An $(1 + 1)$ EA will converge to the resulting local optimum and thus have an expected runtime of $\Theta(n^n)$ ⁶⁴.

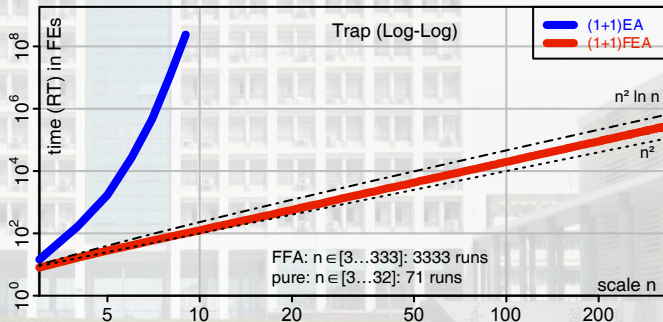

(1+1) FEA on Trap




- The Trap problem basically swaps the global optimum with the worst solution^{64,160}.
- An $(1 + 1)$ EA will converge to the resulting local optimum and thus have an expected runtime of $\Theta(n^n)$ ⁶⁴.
- The average runtime $(1 + 1)$ FEA on Trap seems to be in $\mathcal{O}(n^2 \ln n)$ ²²⁵.

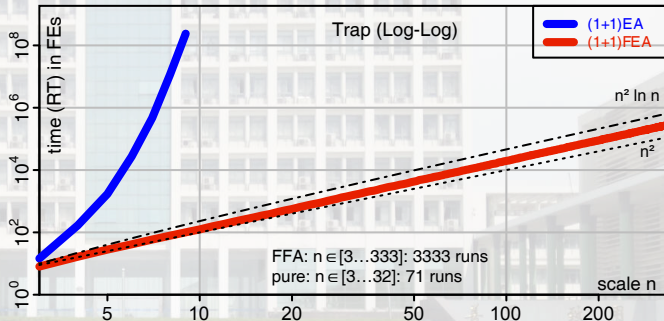

(1+1) FEA on Trap




- The Trap problem basically swaps the global optimum with the worst solution^{64,160}.
- An $(1 + 1)$ EA will converge to the resulting local optimum and thus have an expected runtime of $\Theta(n^n)$ ⁶⁴.
- The average runtime $(1 + 1)$ FEA on Trap seems to be in $\mathcal{O}(n^2 \ln n)$ ²²⁵.
- The expected runtime is the same as on OneMax, because Trap is an injective transformation of OneMax, symmetric, and FFA “converges” into both directions.

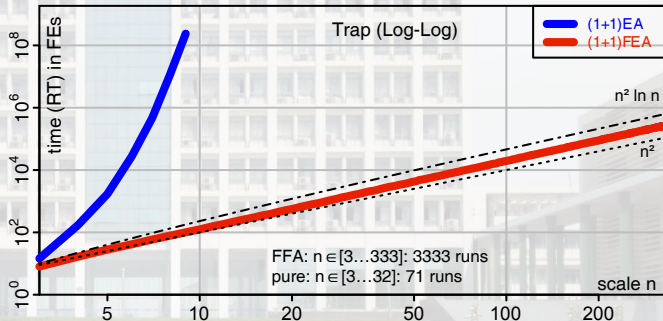

(1+1) FEA on Jumps




- The Jump problem inserts a deceptive region of $\omega - 1$ bits before the optimum, forcing the algorithm to toggle ω bits at once^{64,80}.

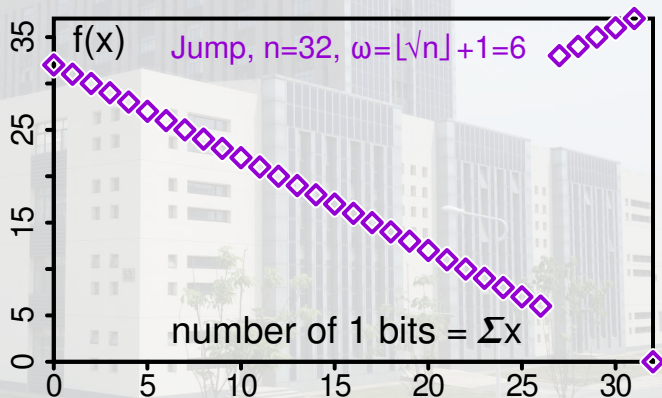

(1+1) FEA on Jumps




- The Jump problem inserts a deceptive region of $\omega - 1$ bits before the optimum, forcing the algorithm to toggle ω bits at once^{64,80}.
- An $(1 + 1)$ EA will converge to the resulting local optimum and thus have an expected runtime of $\Theta(n^\omega + n \ln n)$ ⁶⁴.

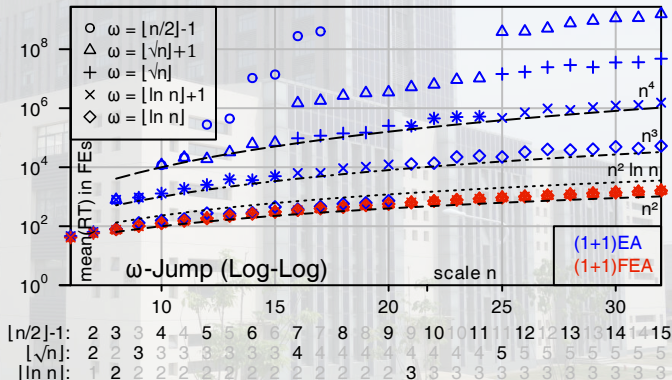


-
- Figure 1 is a log-log plot showing the mean number of function evaluations (mean(RT) in FEs) versus the problem scale n . The plot compares four ω -Jump strategies (blue symbols) and two reference strategies (black dashed lines). The x-axis represents the scale n (ranging from 10 to 35), and the y-axis represents the mean(RT) in FEs (logarithmic scale, ranging from 10^0 to 10^9).
- The legend indicates the ω values for the blue strategies:
- $\circ$ $\omega = \lfloor n/2 \rfloor - 1$
 - $\triangle$ $\omega = \lfloor \sqrt{n} \rfloor + 1$
 - $+$ $\omega = \lfloor \sqrt{n} \rfloor$
 - $\times$ $\omega = \lfloor \ln n \rfloor + 1$
 - $\diamond$ $\omega = \lfloor \ln n \rfloor$
- The reference strategies are represented by black dashed lines:
- n^4 (top dashed line)
 - n^3 (middle dashed line)
 - $n^2 \ln n$ (bottom dashed line)
 - n^2 (bottom-most dashed line)
- The plot shows that the ω -Jump strategies (blue) achieve significantly lower mean(RT) than the reference strategies (black dashed lines). The strategies with higher ω values generally perform better (lower mean(RT)). The plot is titled ω -Jump (Log-Log).

- The Jump problem inserts a deceptive region of $\omega - 1$ bits before the optimum, forcing the algorithm to toggle ω bits at once^{64,80}.
- An $(1 + 1)$ EA will converge to the resulting local optimum and thus have an expected runtime of $\Theta(n^\omega + n \ln n)$ ⁶⁴.
- The average runtime $(1 + 1)$ FEA on Jump seems to **always** be in $\mathcal{O}(n^2 \ln n)$ ²²⁵.
- It is **identical** to its performance on OneMax regardless of ω , because all Jumps are an injective transformation of OneMax!

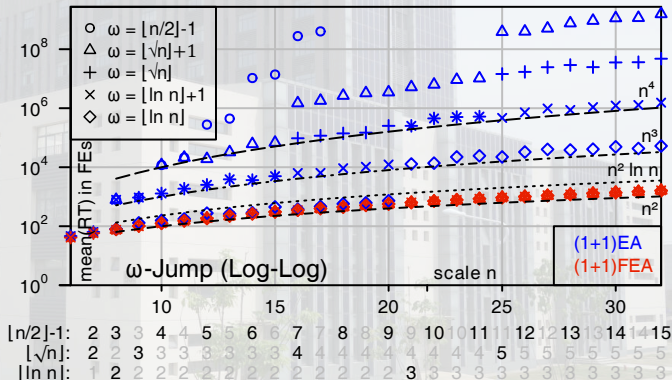


(1+1) FEA on Plateaus

- The Plateau problem inserts a neutral region of $\omega - 1$ bits before the optimum, forcing the algorithm to toggle ω bits at once⁴.

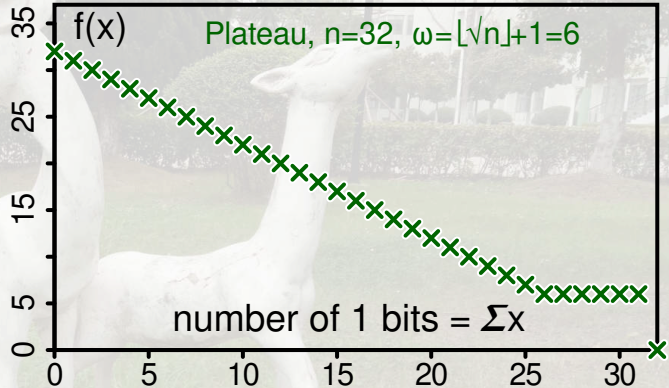

- m inserts a
 — 1 bits
 n, forcing the
 ω bits at
 an expected
 on plateaus⁴.

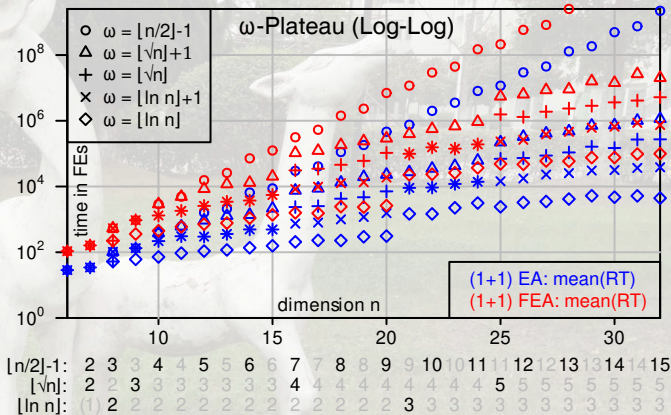

-
- ω -Plateau (Log-Log)
- time in FEs
- dimension n
- $\circ \omega = \lfloor n/2 \rfloor - 1$
 $\triangle \omega = \lfloor \sqrt{n} \rfloor + 1$
 $+ \omega = \lfloor \sqrt{n} \rfloor$
 $\times \omega = \lfloor \ln n \rfloor + 1$
 $\diamond \omega = \lfloor \ln n \rfloor$
- (1+1) EA: mean(RT)
 (1+1) FEA: mean(RT)
- | n | $\lfloor n/2 \rfloor - 1$ | $\lfloor \sqrt{n} \rfloor + 1$ | $\lfloor \sqrt{n} \rfloor$ | $\lfloor \ln n \rfloor + 1$ | $\lfloor \ln n \rfloor$ |
|----|---------------------------|--------------------------------|----------------------------|-----------------------------|-------------------------|
| 2 | 2 | 2 | 2 | 1 | 1 |
| 3 | 3 | 2 | 2 | 2 | 2 |
| 4 | 4 | 3 | 3 | 2 | 2 |
| 5 | 5 | 4 | 3 | 2 | 2 |
| 6 | 6 | 4 | 3 | 2 | 2 |
| 7 | 7 | 4 | 3 | 2 | 2 |
| 8 | 8 | 4 | 3 | 2 | 2 |
| 9 | 9 | 4 | 3 | 2 | 2 |
| 10 | 10 | 4 | 3 | 3 | 3 |
| 11 | 11 | 5 | 3 | 3 | 3 |
| 12 | 12 | 5 | 3 | 3 | 3 |
| 13 | 13 | 5 | 3 | 3 | 3 |
| 14 | 14 | 5 | 3 | 3 | 3 |
| 15 | 15 | 5 | 3 | 3 | 3 |

- [illegible]

(1+1) FEA on MaxSAT



- The Maximum Satisfiability (MaxSAT)^{42,101} problem is $\mathcal{NP}$ -complete⁴².

(1+1) FEA on MaxSAT



- The Maximum Satisfiability (MaxSAT)^{42,101} problem is $\mathcal{NP}$ -complete⁴².
- SATLIB¹⁰³ provides satisfiable benchmark instances from the phase transition region (i.e., the hardest type of instances) for different scales $n \in 20 \cup \{25i \mid i \in 2..10\}$.

(1+1) FEA on MaxSAT



- The Maximum Satisfiability (MaxSAT)^{42,101} problem is $\mathcal{NP}$ -complete⁴².
- SATLIB¹⁰³ provides satisfiable benchmark instances from the phase transition region (i.e., the hardest type of instances) for different scales $n \in 20 \cup \{25i \mid i \in 2..10\}$.
- We conducted 11 000 runs with the (1 + 1) FEA on each instance scale.

(1+1) FEA on MaxSAT



- The Maximum Satisfiability (MaxSAT)^{42,101} problem is $\mathcal{NP}$ -complete⁴².
- SATLIB¹⁰³ provides satisfiable benchmark instances from the phase transition region (i.e., the hardest type of instances) for different scales $n \in 20 \cup \{25i \mid i \in 2..10\}$.
- We conducted 11 000 runs with the $(1 + 1)$ FEA on each instance scale.
- The $(1 + 1)$ EA is very much slower than the $(1 + 1)$ FEA, so we could use it only on smaller scales.

(1+1) FEA on MaxSAT



- The Maximum Satisfiability (MaxSAT)^{42,101} problem is $\mathcal{NP}$ -complete⁴².
- SATLIB¹⁰³ provides satisfiable benchmark instances from the phase transition region (i.e., the hardest type of instances) for different scales $n \in 20 \cup \{25i \mid i \in 2..10\}$.
- We conducted 11 000 runs with the $(1 + 1)$ FEA on each instance scale.
- The $(1 + 1)$ EA is very much slower than the $(1 + 1)$ FEA, so we could use it only on smaller scales.
- Our computational budget was always 10^{10} objective function evaluations (FEs).


(1+1) FEA on MaxSAT



- The (1 + 1) FEA is better on problems with 250 variables than the (1 + 1) EA on problems with 50.

instance type	(1+1) EA			(1+1) FEA		
	success rate	ERT	mean y_c	success rate	ERT	mean y_B
uf20_*	0.985	$1.91 * 10^8$	0.015	1	3'091	0
uf50_*	0.748	$3.56 * 10^9$	0.299	1	93'459	0
uf75_*	0.583	$7.41 * 10^9$	0.528	1	490'166	0
uf100_*				1	$2.14 * 10^6$	0
uf125_*				1	$5.27 * 10^6$	0
uf150_*				1	$1.40 * 10^7$	0
uf175_*				1	$5.78 * 10^7$	0
uf200_*				0.991	$2.44 * 10^8$	0.00945
uf225_*				0.994	$2.43 * 10^8$	0.00555
uf250_*				0.992	$2.43 * 10^8$	0.00782

(1+1) FEA on MaxSAT: ERT-ECDF

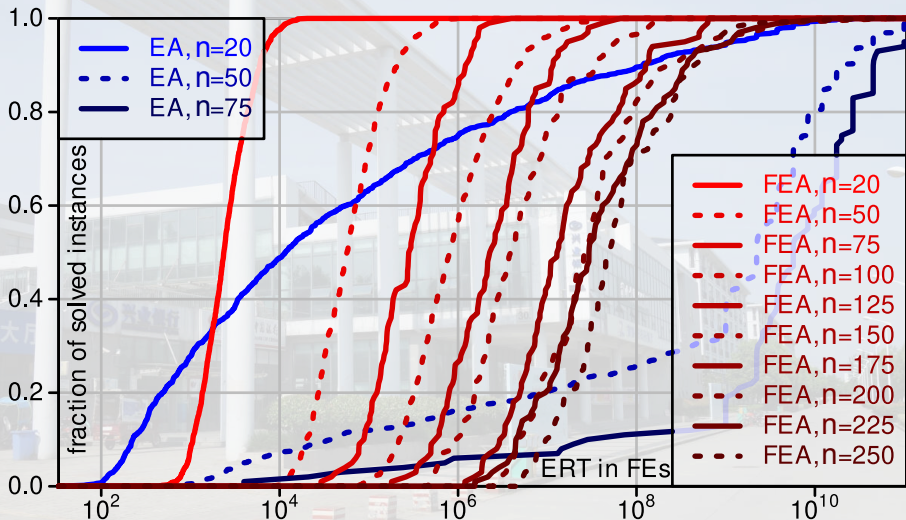

FFA: What does this do?




- So it turns out, FFA does work.



FFA: What does this do?



- So it turns out, FFA does work.
- It works because it prefers solutions with rare objective values.

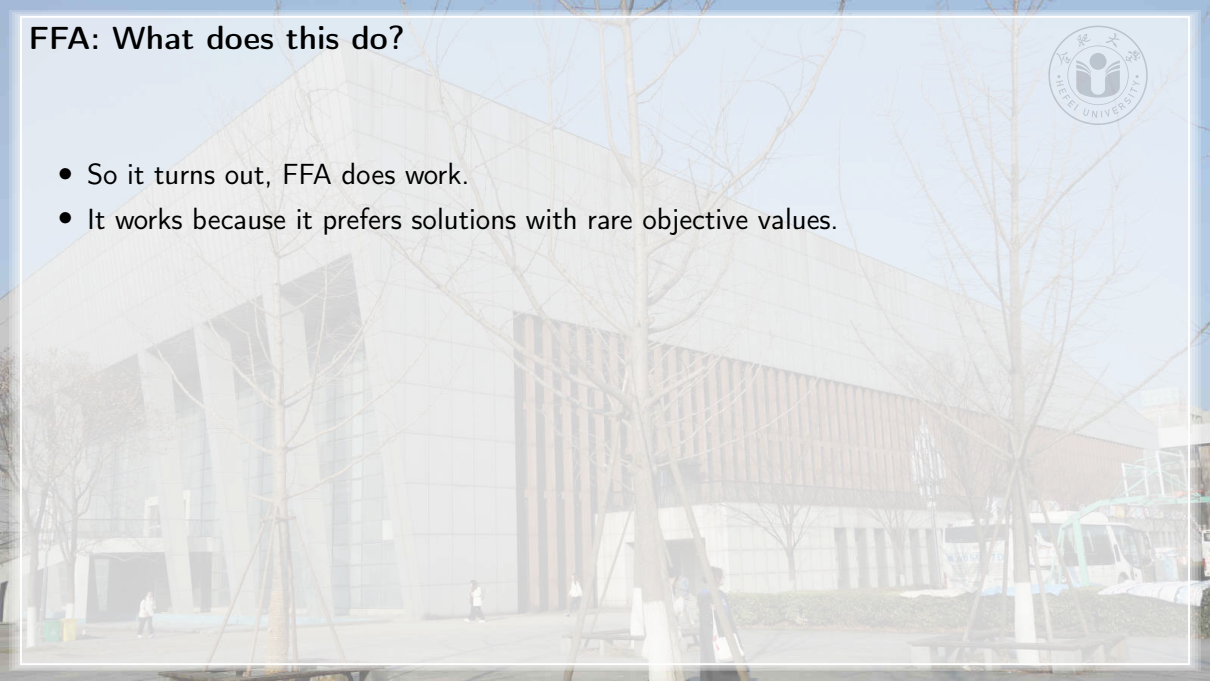

FFA: What does this do?



- So it turns out, FFA does work.
- It works because it prefers solutions with rare objective values.
- Solutions with very good objective values are also very rare on any problem worth tackling.

FFA: What does this do?



- So it turns out, FFA does work.
- It works because it prefers solutions with rare objective values.
- Solutions with very good objective values are also very rare on any problem worth tackling.
- FFA makes the simple $(1 + 1)$ EA slower on problems that it can easily solve.

FFA: What does this do?



- So it turns out, FFA does work.
- It works because it prefers solutions with rare objective values.
- Solutions with very good objective values are also very rare on any problem worth tackling.
- FFA makes the simple $(1 + 1)$ EA slower on problems that it can easily solve.
- The slowdown is roughly proportional to the number of possible different objective values.

FFA: What does this do?



- So it turns out, FFA does work.
- It works because it prefers solutions with rare objective values.
- Solutions with very good objective values are also very rare on any problem worth tackling.
- FFA makes the simple $(1 + 1)$ EA slower on problems that it can easily solve.
- The slowdown is roughly proportional to the number of possible different objective values.
- On some non- $\mathcal{NP}$ -hard problems for which the $(1 + 1)$ EA needs **exponential** runtime, the $(1 + 1)$ FEA needs **polynomial** mean runtime.

FFA: What does this do?



- So it turns out, FFA does work.
- It works because it prefers solutions with rare objective values.
- Solutions with very good objective values are also very rare on any problem worth tackling.
- FFA makes the simple $(1 + 1)$ EA slower on problems that it can easily solve.
- The slowdown is roughly proportional to the number of possible different objective values.
- On some non- $\mathcal{NP}$ -hard problems for which the $(1 + 1)$ EA needs **exponential** runtime, the $(1 + 1)$ FEA needs **polynomial** mean runtime.
- But not for all, because plateaus of the objective are still plateaus under FFA.

FFA: What does this do?



- So it turns out, FFA does work.
- It works because it prefers solutions with rare objective values.
- Solutions with very good objective values are also very rare on any problem worth tackling.
- FFA makes the simple $(1 + 1)$ EA slower on problems that it can easily solve.
- The slowdown is roughly proportional to the number of possible different objective values.
- On some non- $\mathcal{NP}$ -hard problems for which the $(1 + 1)$ EA needs **exponential** runtime, the $(1 + 1)$ FEA needs **polynomial** mean runtime.
- But not for all, because plateaus of the objective are still plateaus under FFA.
- FFA very significantly speeds up the $(1 + 1)$ EA on the $\mathcal{NP}$ -complete MaxSAT problem.

FFA: Let's get weird!



Let's get weird!



FFA: Let's get weird!



- Let's say you have an optimization problem with objective function $f(x)$.

FFA: Let's get weird!



- Let's say you have an optimization problem with objective function $f(x)$.
- You **encrypt** the objective values and do not tell them to the algorithm.

FFA: Let's get weird!



- Let's say you have an optimization problem with objective function $f(x)$.
- You **encrypt** the objective values and do not tell them to the algorithm.
- Let's say you apply AES^{2,66}, RSA^{182,235}, or the Caesar cipher^{164,235} as a function $g : \mathbb{N}_0 \mapsto \mathbb{N}_0$ to f , i.e., do $g \circ f$.

FFA: Let's get weird!



- Let's say you have an optimization problem with objective function $f(x)$.
- You **encrypt** the objective values and do not tell them to the algorithm.
- Let's say you apply AES^{2,66}, RSA^{182,235}, or the Caesar cipher^{164,235} as a function $g : \mathbb{N}_0 \mapsto \mathbb{N}_0$ to f , i.e., do $g \circ f$.
- Encryption removes any order, correlation or causality information, i.e., $g \circ f$ does not correlate with f in any way.

FFA: Let's get weird!



- Let's say you have an optimization problem with objective function $f(x)$.
- You **encrypt** the objective values and do not tell them to the algorithm.
- Let's say you apply AES^{2,66}, RSA^{182,235}, or the Caesar cipher^{164,235} as a function $g : \mathbb{N}_0 \mapsto \mathbb{N}_0$ to f , i.e., do $g \circ f$.
- Encryption removes any order, correlation or causality information, i.e., $g \circ f$ does not correlate with f in any way.
- $g(f(x))$ will be totally random.

FFA: Let's get weird!



- Let's say you have an optimization problem with objective function $f(x)$.
- You **encrypt** the objective values and do not tell them to the algorithm.
- Let's say you apply AES^{2,66}, RSA^{182,235}, or the Caesar cipher^{164,235} as a function $g : \mathbb{N}_0 \mapsto \mathbb{N}_0$ to f , i.e., do $g \circ f$.
- Encryption removes any order, correlation or causality information, i.e., $g \circ f$ does not correlate with f in any way.
- $g(f(x))$ will be totally random. No reasonable optimization algorithm could work with that.

FFA: Let's get weird!



- Let's say you have an optimization problem with objective function $f(x)$.
- You **encrypt** the objective values and do not tell them to the algorithm.
- Let's say you apply AES^{2,66}, RSA^{182,235}, or the Caesar cipher^{164,235} as a function $g : \mathbb{N}_0 \mapsto \mathbb{N}_0$ to f , i.e., do $g \circ f$.
- Encryption removes any order, correlation or causality information, i.e., $g \circ f$ does not correlate with f in any way.
- $g(f(x))$ will be totally random. No reasonable optimization algorithm could work with that.
- If the $(1 + 1)$ FEA can find the optimum of $f(x)$...

FFA: Let's get weird!



- Let's say you have an optimization problem with objective function $f(x)$.
- You **encrypt** the objective values and do not tell them to the algorithm.
- Let's say you apply AES^{2,66}, RSA^{182,235}, or the Caesar cipher^{164,235} as a function $g : \mathbb{N}_0 \mapsto \mathbb{N}_0$ to f , i.e., do $g \circ f$.
- Encryption removes any order, correlation or causality information, i.e., $g \circ f$ does not correlate with f in any way.
- $g(f(x))$ will be totally random. No reasonable optimization algorithm could work with that.
- If the $(1 + 1)$ FEA can find the optimum of $f(x)$...
- ...then it will find exactly the same solution in exactly the same runtime even if you apply it to the encrypted problem $g(f(x))$!

FFA: Let's get weird!



- Let's say you have an optimization problem with objective function $f(x)$.
- You **encrypt** the objective values and do not tell them to the algorithm.
- Let's say you apply AES^{2,66}, RSA^{182,235}, or the Caesar cipher^{164,235} as a function $g : \mathbb{N}_0 \mapsto \mathbb{N}_0$ to f , i.e., do $g \circ f$.
- Encryption removes any order, correlation or causality information, i.e., $g \circ f$ does not correlate with f in any way.
- $g(f(x))$ will be totally random. No reasonable optimization algorithm could work with that.
- If the $(1 + 1)$ FEA can find the optimum of $f(x)$...
- ...then it will find exactly the same solution in exactly the same runtime even if you apply it to the encrypted problem $g(f(x))$!
- How incredibly strange is that?



Where did we try FFA?



Applications of FFA



- Often, when some new type of algorithm is designed, one is tempted to pick some special, niche problems as application area.

Applications of FFA



- Often, when some new type of algorithm is designed, one is tempted to pick some special, niche problems as application area.
- Then, the competition is not so high and it's easier to get some good papers out.

Applications of FFA



- Often, when some new type of algorithm is designed, one is tempted to pick some special, niche problems as application area.
- Then, the competition is not so high and it's easier to get some good papers out.
- We did not do this.

Applications of FFA



- Often, when some new type of algorithm is designed, one is tempted to pick some special, niche problems as application area.
- Then, the competition is not so high and it's easier to get some good papers out.
- We did not do this.
- We picked some of the most popular $\mathcal{NP}$ -hard problems as testbeds.

Applications of FFA



- Often, when some new type of algorithm is designed, one is tempted to pick some special, niche problems as application area.
- Then, the competition is not so high and it's easier to get some good papers out.
- We did not do this.
- We picked some of the most popular $\mathcal{NP}$ -hard problems as testbeds.
- We could not (yet) win against the state-of-the-art that matured over decades.

Applications of FFA



- Often, when some new type of algorithm is designed, one is tempted to pick some special, niche problems as application area.
- Then, the competition is not so high and it's easier to get some good papers out.
- We did not do this.
- We picked some of the most popular $\mathcal{NP}$ -hard problems as testbeds.
- We could not (yet) win against the state-of-the-art that matured over decades.
- But we did get some interesting results on real, hard, and well-known problems.

Maximum Satisfiability Problem

- FFA on the Maximum Satisfiability (MaxSAT) Problem: [223, 225, 226].



Maximum Satisfiability Problem



- FFA on the Maximum Satisfiability (MaxSAT) Problem: [223, 225, 226].

From Table I, we can see that **the highest number of failed runs at scale $s = 250$ of any algorithm using FFA is lower than the lowest number of failed runs of any pure algorithm at $s = 50$.** From Table II, we find that no FFA-based algorithm has a higher ERT at scale $s = 250$ than its pure variant on $s = 50$. On the scales $s \leq 75$, the FFA-based algorithms have a mean runtime which is between three and four orders of magnitude smaller than the ERT of the pure algorithms.

- Snippet of page 10 of [226] (copyright IEEE).
- Several different EAs with and without FFA
- Budget: 10^{10} FEs

Traveling Salesperson Problem



- FFA on the Traveling Salesperson Problem (TSP): [132–134].

Traveling Salesperson Problem

- FFA on the Traveling Salesperson Problem (TSP): [132–134].
- Snippet of page 12 of [132] (copyright Springer).
- $(1 + 1)$ EA, $(1 + 1)$ FEA, SA w/o FFA, hybrids
- Budget: 10^{10} FEs

In this work, we explored both the EA and SA on 56 symmetric instances from the benchmark set TSPLib (Reinelt 1991, 1995). The EA is unsuitable for this problem, but SA can find the optimum on many small and mid-sized instances. We then plug FFA into both algorithms and obtain the FEA and the FSA, respectively, which both exhibit very similar performance. **The FEA solves 27 of the instances in all of its runs, which SA can only achieve for 19 instances.** Plugging FFA into either the EA or SA thus substantially improved the number of runs in which the algorithms can find the optimum, however, both FFA-based variants suffer when the number of unique objective values is high.

• • •

Both types of **hybridization** methods significantly improve the average result quality compared to both the objective-guided and FFA-based FEA variants. **The SAFEA_A discovers the optimal solutions in more runs than any other algorithm setup in our study.** It also finds the optimum most often in most instances and delivers the best approximation quality on most instances, compared to the other algorithms.

Quadratic Assignment Problem



- FFA on the Quadratic Assignment Problem (QAP): [38, 202].



Quadratic Assignment Problem

- FFA on the Quadratic Assignment Problem (QAP): [38, 202].
- Snippet of page 7 of [38] (copyright SciTePress).
- RLS w/o FFA
- Budget: 10^8 FEs

We find that the **FFA-based** randomized local search **FRLS does not just find better solutions than the objective-guided RLS algorithm on the vast majority of the QAPLIB instances**, it also keeps improving its current best solution for the complete computational budget of 10^8 FEs that we assigned to the runs. With this budget, **it can discover the optimal solutions of over 58% of the QAPLIB instances**. Had we assigned a larger budget – (Liang et al., 2022; Liang et al., 2024; Weise et al., 2021b; Weise et al., 2023) use 10^{10} FEs – we would likely have seen even more instances solved.

We furthermore confirm the remarkable ability of FFA to discover very diverse solutions (at least from the perspective of the objective function). It is known that on the QAP, many solutions tend to have the same objective values (Tayarani-N. and Prügell-Bennett, 2015). Yet, on some of the instances, more than half of the objective values discovered by FRLS were unique.

Job Shop Scheduling Problem



- FFA on the Job Shop Scheduling Problem (JSSP) Problem: [47, 216, 225].

Job Shop Scheduling Problem



- FFA on the Job Shop Scheduling Problem (JSSP) Problem: [47, 216, 225].

The **end result quality delivered by (1+1)-FEA is better in average on the abz*, ft*, la*, orb*, and yn4* instance sets, both in terms of *best* and *mean*.** On swv*, the average for *mean* is better for (1+1)-FEA, while (1+1)-EA has a slight lead in *best*. The (1+1)-EA performs better on the dmu* and ta* instances. Since these two sets are larger (holding 160 out of the 242 instances), the (1+1)-EA comes out ahead in the overall averages, but with no more than a 1.5% advantage.

- Snippet of page 10 of [216] (copyright ACM).
- Budget: $2^{30} \approx 10^9$ FEs

Algorithm Synthesis and Genetic Programming



- FFA for algorithm synthesis and Genetic Programming (GP): [222, 223].

Algorithm Synthesis and Genetic Programming



- FFA for algorithm synthesis and Genetic Programming (GP): [222, 223].

Fourth, we were able to confirm with great significance that **FFA** has a tremendous positive impact on the performance of GP, as it **can increase the success rate by 40%**.

- Snippet of page 7 of [222] (copyright IEEE).
- Budget: $\approx 100\,000$ FEs

Where FFA did not work



- FFA cannot work well on problems where local search already gives good results.



Where FFA did not work




- FFA cannot work well on problems where local search already gives good results.
- This includes, surprisingly, also some computationally hard problems.



Where FFA did not work



- FFA cannot work well on problems where local search already gives good results.
- This includes, surprisingly, also some computationally hard problems:
 - the Traveling Tournament Problem (TTP), where RLS can find surprisingly good results: [231].

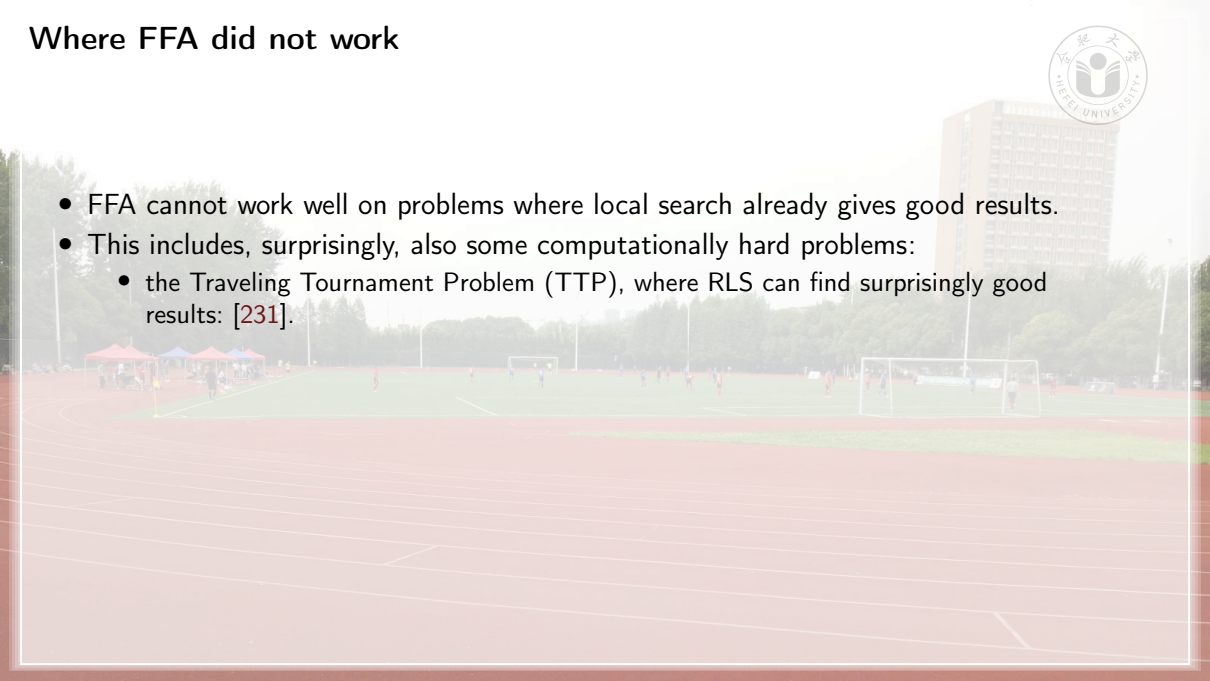

Where FFA did not work



- FFA cannot work well on problems where local search already gives good results.
- This includes, surprisingly, also some computationally hard problems:
 - the Traveling Tournament Problem (TTP), where RLS can find surprisingly good results: [231].
 - the two-dimensional bin packing problem, where RLS can actually **outperform** several complex state-of-the-art metaheuristics [238, 239].

Where FFA did not work



- FFA cannot work well on problems where local search already gives good results.
- This includes, surprisingly, also some computationally hard problems:
 - the Traveling Tournament Problem (TTP), where RLS can find surprisingly good results: [231].
 - the two-dimensional bin packing problem, where RLS can actually **outperform** several complex state-of-the-art metaheuristics [238, 239].
 - FFA can get trapped too!

Where FFA did not work



- FFA cannot work well on problems where local search already gives good results.
- This includes, surprisingly, also some computationally hard problems:
 - the Traveling Tournament Problem (TTP), where RLS can find surprisingly good results: [231].
 - the two-dimensional bin packing problem, where RLS can actually **outperform** several complex state-of-the-art metaheuristics [238, 239].
 - FFA can get trapped too: If all neighbors that can be reached with one search step around one solution all have the same objective value, then FFA-guided search may not be able to escape from that solution²³⁶.

Where FFA did not work



- FFA cannot work well on problems where local search already gives good results.
- This includes, surprisingly, also some computationally hard problems:
 - the Traveling Tournament Problem (TTP), where RLS can find surprisingly good results: [231].
 - the two-dimensional bin packing problem, where RLS can actually **outperform** several complex state-of-the-art metaheuristics [238, 239].
 - FFA can get trapped too: If all neighbors that can be reached with one search step around one solution all have the same objective value, then FFA-guided search may not be able to escape from that solution²³⁶. This can happen with 1-bit flips on OneMax²³⁶.



Summary



Summary



- Frequency Fitness Assignment (FFA) is an algorithm module that can be plugged into existing algorithms.

Summary



- Frequency Fitness Assignment (FFA) is an algorithm module that can be plugged into existing algorithms.
- It renders algorithms invariant under all injective transformations of the objective function value.

Summary



- Frequency Fitness Assignment (FFA) is an algorithm module that can be plugged into existing algorithms.
- It renders algorithms invariant under all injective transformations of the objective function value.
- It makes them optimize without bias for good solutions.

Summary



- Frequency Fitness Assignment (FFA) is an algorithm module that can be plugged into existing algorithms.
- It renders algorithms invariant under all injective transformations of the objective function value.
- It makes them optimize without bias for good solutions.
- It slows them down on easy problems.

Summary



- Frequency Fitness Assignment (FFA) is an algorithm module that can be plugged into existing algorithms.
- It renders algorithms invariant under all injective transformations of the objective function value.
- It makes them optimize without bias for good solutions.
- It slows them down on easy problems.
- It can speed them up on hard problems or lead them to solution qualities they otherwise cannot reach.

Summary



- Frequency Fitness Assignment (FFA) is an algorithm module that can be plugged into existing algorithms.
- It renders algorithms invariant under all injective transformations of the objective function value.
- It makes them optimize without bias for good solutions.
- It slows them down on easy problems.
- It can speed them up on hard problems or lead them to solution qualities they otherwise cannot reach.
- It is limited to objective functions that cannot take on too many different objective values.




Advertisement



Programming with Python



We have a freely available course book on *Programming with Python* at <https://thomasweise.github.io/programmingWithPython>, with focus on practical software development using the Python ecosystem of tools²¹⁴.

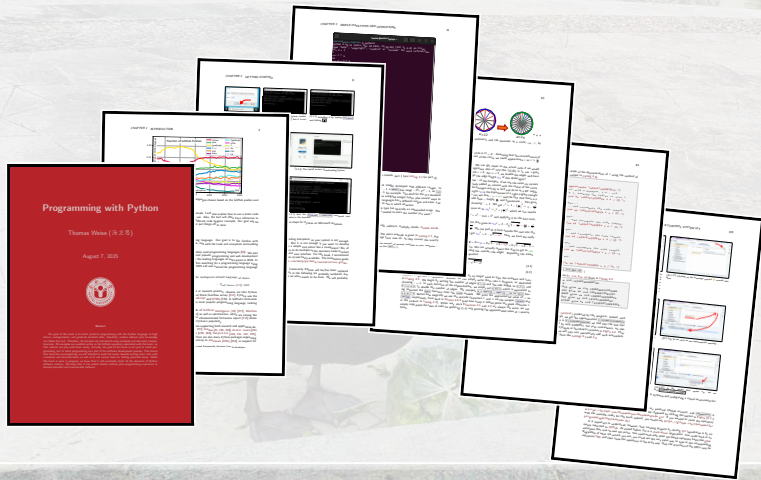

Databases



We have a freely available course book on *Databases* at <https://thomasweise.github.io/databases>, with actual practical examples using a real database management system (DBMS)²¹⁰.




Metaheuristic Optimization in Python: moptipy



We offer moptipy²²⁴, a mature open source Python package for metaheuristic optimization, which implements several algorithms, can run self-documenting experiments in parallel and in a distributed fashion, and offers statistical evaluation tools.

The collage displays various parts of the moptipy project:

- GitHub Repository:** Shows the repository page with the README, which describes moptipy as a library for metaheuristic optimization methods in Python 3.12.
- Documentation:** Shows the 'Installation' section, which provides instructions on how to install moptipy using pip or conda.
- Table of Contents:** Lists the contents of the documentation, including '1. Introduction', '2. Installation', '3. How-To', and '4. Implemented Algorithms'.
- Code Snippets:** Shows Python code for running an experiment, including setting up the search space, defining the fitness function, and running the optimization process.
- Progress Plot:** A line graph showing the progress of an optimization process. The x-axis is labeled 'Progress' and the y-axis is labeled 'Fitness'. The plot shows several lines representing different runs, with a dashed line indicating the best fitness value.





谢谢你们！
Thank you!
Vielen Dank!



References I



- [1] Joseph Adams, Egon Balas, and Daniel Zawack. "The Shifting Bottleneck Procedure for Job Shop Scheduling". *Management Science* 34(3):391–401, Mar. 1988. Catonsville, MD, USA: The Institute for Operations Research and the Management Sciences (INFORMS). ISSN: 0025-1909. doi:10.1287/mnsc.34.3.391 (cit. on p. 316).
- [2] *Advanced Encryption Standard (AES)*. Federal Information Processing Standards Publication (FIPS PUB) 197-upd1. Gaithersburg, MD, USA: U.S. Department of Commerce, National Institute of Standards and Technology (NIST), May 9, 2023. doi:10.6028/NIST.FIPS.197-upd1. URL: <https://csrc.nist.gov/pubs/fips/197/final> (visited on 2025-08-17) (cit. on pp. 230–239, 285).
- [3] Miguel F. Anjos. *The QAPLIB Challenge*. Edinburgh, Scotland, UK: Miguel F. Anjos @ University of Edinburgh, Nov. 19, 2023. URL: <https://www.miguelanjos.com/projects/2999> (visited on 2026-09-28). The document lists the 28 instances of QAPLIB ^{31,33} that had not yet been solved to optimality by the time of its writing. (Cit. on p. 320).
- [4] Denis Antipov and Benjamin Doerr. "Precise Runtime Analysis for Plateaus". In: *15th International Conference on Parallel Problem Solving from Nature (PPSN XV)*. Vol. 2. Sept. 8–12, 2018, Coimbra, Portugal. Ed. by Anne Auger, Carlos M. Fonseca, Nuno Lourenço, Penousal Machado, Luís Paquete, and L. Darrell Whitley. Vol. 11102 of Lecture Notes in Computer Science (LNCS). Cham, Switzerland: Springer, 2018, pp. 117–128. ISSN: 0302-9743. ISBN: 978-3-319-99258-7. doi:10.1007/978-3-319-99259-4_10 (cit. on pp. 211–214, 319).
- [5] David Lee Applegate, Robert E. Bixby, Vašek Chvátal, and William John Cook. *The Traveling Salesman Problem: A Computational Study*. 2nd ed. Vol. 17 of Princeton Series in Applied Mathematics. Princeton, NJ, USA: Princeton University Press, 2007. ISBN: 978-0-691-12993-8. This book also discusses the Concorde TSP solver. (Cit. on pp. 13–16, 313, 323).
- [6] David Lee Applegate and William John Cook. "A Computational Study of the Job-Shop Scheduling Problem". *ORSA Journal on Computing* 3(2):149–156, May 1991. Catonsville, MD, USA: The Institute for Operations Research and the Management Sciences (INFORMS). ISSN: 0899-1499. doi:10.1287/ijoc.3.2.149. The JSSP instances used were generated in Bonn in 1986. (Cit. on p. 316).
- [7] Paul Gustav Heinrich Bachmann. *Die Analytische Zahlentheorie / Dargestellt von Paul Bachmann*. Vol. Zweiter Theil of Zahlentheorie: Versuch einer Gesamtdarstellung dieser Wissenschaft in ihren Haupttheilen. Leipzig, Sachsen, Germany: B. G. Teubner, 1894. ISBN: 978-1-4181-6963-3. URL: <http://gallica.bnf.fr/ark:/12148/bpt6k994750> (visited on 2023-12-13) (cit. on p. 326).

References II



- [8] Thomas Bäck, David B. Fogel, and Zbigniew "Zbyszek" Michalewicz, eds. *Handbook of Evolutionary Computation*. Bristol, England, UK: IOP Publishing Ltd and Oxford, Oxfordshire, England, UK: Oxford University Press, 1997. ISBN: 978-0-7503-0392-7 (cit. on pp. 69–83, 314, 321).
- [9] Thomas Bartz-Beielstein, Carola Doerr, Daan van den Berg, Jakob Bossek, Sowmya Chandrasekaran, Tome Eftimov, Andreas Fischbach, Pascal Kerschke, William La Cava, Manuel López-Ibáñez, Katherine Mary Malan, Jason Hall Moore, Boris Naujoks, Patryk Orzechowski, Vanessa Volz, Markus Wagner, and Thomas Weise (汤卫恩). "Benchmarking in Optimization: Best Practice and Open Issues". (abs/2007.03488), Dec. 18, 2020. doi:10.48550/arXiv.2007.03488. URL: <https://arxiv.org/abs/2007.03488> (visited on 2025-07-25). arXiv:2007.03488v2 [cs.NE] 16 Dec 2020 (cit. on p. 314).
- [10] Roberto Battiti and Giampietro Tecchiolli. "Local Search with Memory: Benchmarking RTS". *OR Spectrum: Quantitative Approaches in Management. Formerly Operations-Research-Spektrum* 17:67–86, June 1995. London, England, UK: Springer Nature Limited. ISSN: 0171-6468. doi:10.1007/BF01719249 (cit. on p. 321).
- [11] Roberto Battiti and Giampietro Tecchiolli. "Simulated Annealing and Tabu Search in the Long Run: A Comparison on QAP Tasks". *Computers & Mathematics with Applications* 28(6):1–8, Sept. 1994. Amsterdam, The Netherlands: Elsevier B.V. ISSN: 0898-1221. doi:10.1016/0898-1221(94)00147-2 (cit. on pp. 321, 322).
- [12] Roberto Battiti and Giampietro Tecchiolli. "The Reactive Tabu Search". 6(2):126–140, May 1994. doi:10.1287/ijoc.6.2.126. Applications of Reactive Tabu Search (RTS) to the 0-1 Knapsack and QAP. (Cit. on pp. 321, 322).
- [13] Roberto Battiti and Giampietro Tecchiolli. "Training Neural Nets with the Reactive Tabu Search". *IEEE Transactions on Neural Networks* 6(5):1185–1200, Sept. 1995. Piscataway, NJ, USA: Institute of Electrical and Electronics Engineers (IEEE). ISSN: 1045-9227. doi:10.1109/72.410361. See also "Training Neural Nets with the Reactive Tabu Search, Technical Report UTM 421, Trento, Alto Adige/Südtirol, Italy: University of Trento, 11 1993" (cit. on p. 321).
- [14] James C. Bean. "Genetic Algorithms and Random Keys for Sequencing and Optimization". *ORSA Journal on Computing* 6(2):107–220, Spr. 1994. Catonsville, MD, USA: The Institute for Operations Research and the Management Sciences (INFORMS). ISSN: 0899-1499. doi:10.1287/ijoc.6.2.154. Applies the Random Keys encoding to scheduling and the QAP. See ¹⁵. (Cit. on pp. 278, 313, 320).

References III



- [15] James C. Bean. *Genetics and Random Keys for Sequencing and Optimization*. Tech. rep. 92-43. Ann Arbor, MI, USA: University of Michigan, Department of Industrial & Operations Engineering, June 30, 1992. URL: <https://www.math.wm.edu/~rrkinc/homework/RdmKeyGA.pdf> (visited on 2026-10-01). See ¹⁴. (Cit. on pp. 277, 313, 320).
- [16] John Edward Beasley. "OR-Library: Distributing Test Problems by Electronic Mail". *The Journal of the Operational Research Society (JORS)* 41:1069–1072, Nov. 1990. London, England, UK: Taylor and Francis Ltd. and London, England, UK: Springer Nature Limited. ISSN: 0160-5682. doi:10.1057/jors.1990.166. See the website ¹⁷ (cit. on pp. 278, 316, 319).
- [17] John Edward Beasley. *Welcome to OR-Library*. Uxbridge, Middlesex, England, UK: Brunel University of London, June 1990–Feb. 2018. URL: <https://people.brunel.ac.uk/~mastjjb/jeb/info.html> (visited on 2026-09-30). See the article ¹⁶. Contains instances of the JSSP, 1D- and 2D-Packing, Knapsack, periodic TSPs, amongst others. (Cit. on pp. 278, 316, 319).
- [18] Andreas Beham, Michael Affenzeller, and Erik Pitzer. "Metaheuristic Algorithms for the Quadratic Assignment Problem: Performance and Comparison". In: *Innovative Technologies in Management and Science*. Ed. by Ryszard Klempous and Jan Nikodem. Vol. 10 of Topics in Intelligent Engineering and Informatics (TIEI). Cham, Switzerland: Springer, 2015, pp. 171–190. ISSN: 2193-9411. ISBN: 978-3-319-12651-7. doi:10.1007/978-3-319-12652-4_10. Algorithms like SLS/iterated local search (ILS), SA, Tabu Search (TS), Variable Neighborhood Search (VNS), EAs, Memetic Algorithms (MAs) are compared and, with the exception of SA and EA, all perform best on some instance groups of QAPLIB. (Cit. on p. 320).
- [19] Bengt-Erik Bengtsson. "Packing Rectangular Pieces— A Heuristic Approach". *The Computer Journal* 25(3):353–357, Aug. 1982. Oxford, Oxfordshire, England, UK: Oxford University Press. ISSN: 0010-4620. doi:10.1093/comjnl/25.3.353 (cit. on p. 312).
- [20] Tim Berners-Lee. *Re: Qualifiers on Hypertext links...* Geneva, Switzerland: World Wide Web project, European Organization for Nuclear Research (CERN) and Newsgroups: alt.hypertext, Aug. 6, 1991. URL: <https://www.w3.org/People/Berners-Lee/1991/08/art-6484.txt> (visited on 2025-02-05) (cit. on p. 325).
- [21] Tim Berners-Lee, Larry Masinter, and Mark P. McCahill. *Uniform Resource Locators (URL)*. Request for Comments (RFC) 1738. Wilmington, DE, USA: Internet Engineering Task Force (IETF), Dec. 1994. URL: <https://www.ietf.org/rfc/rfc1738.txt> (visited on 2025-02-05) (cit. on p. 324).

References IV



- [22] Muhammed Beyaz, Tansel Dökeroğlu, and Ahmet Cosar. "Robust Hyper-Heuristic Algorithms for the Offline Oriented/Non-Oriented 2D Bin Packing Problems". *Applied Soft Computing (ASOC)* 36:236–245, Nov. 2015. Amsterdam, The Netherlands: Elsevier B.V. ISSN: **1568-4946**. doi:10.1016/j.asoc.2015.06.063 (cit. on p. 312).
- [23] Christian Bierwirth. "A Generalized Permutation Approach to Job Shop Scheduling with Genetic Algorithms". *OR Spectrum: Quantitative Approaches in Management. Formerly Operations-Research-Spektrum* 17(2–3):87–92, June 1995. London, England, UK: Springer Nature Limited. ISSN: **0171-6468**. doi:10.1007/BF01719250. URL: <https://www.researchgate.net/publication/240263036> (visited on 2026-09-30). Proposes a permutations-with-repetitions based encoding for the JSSP, see also ²⁴. (Cit. on pp. 279, 288, 316, 325).
- [24] Christian Bierwirth, Dirk C. Mattfeld, and Herbert Kopfer. "On Permutation Representations for Scheduling Problems". In: *4th International Conference on Parallel Problem Solving from Nature (PPSN IV)*. Sept. 22–24, 1996, Berlin, Germany. Ed. by Hans-Michael Voigt, Werner Ebeling, Ingo Rechenberg, and Hans-Paul Schwefel. Vol. 1141 of Lecture Notes in Computer Science (LNCS). Berlin/Heidelberg, Germany: Springer-Verlag GmbH Germany, 1996, pp. 310–318. ISSN: **0302-9743**. ISBN: **978-3-540-61723-5**. doi:10.1007/3-540-61723-X_995. URL: <https://www.researchgate.net/publication/2753293> (visited on 2026-09-30). Proposes a permutations-with-repetitions based encoding for the JSSP, see also ²³. (Cit. on pp. 279, 288, 316, 325).
- [25] Jacek Błażewicz, Wolfgang Domschke, and Erwin Pesch. "The Job Shop Scheduling Problem: Conventional and New Solution Techniques". *European Journal of Operational Research* 93(1):1–33, Aug. 1996. Amsterdam, The Netherlands: Elsevier B.V. ISSN: **0377-2217**. doi:10.1016/0377-2217(95)00362-2 (cit. on p. 316).
- [26] Joshua Bloch. *Effective Java*. Reading, MA, USA: Addison-Wesley Professional, May 2008. ISBN: **978-0-321-35668-0** (cit. on p. 316).
- [27] Christian Blum and Verena Schmid. "Solving the 2D Bin Packing Problem by Means of a Hybrid Evolutionary Algorithm". In: *International Conference on Computational Science (ICCS'2013)*. June 5–7, 2013, Barcelona, Spain. Ed. by Vassil Alexandrov, Michael Lees, Valeria V. Krzhizhanovskaya, Jack J. Dongarra, and Peter M. A. Sloot. Vol. 18 of Procedia Computer Science. Amsterdam, The Netherlands: Elsevier B.V., 2013, pp. 899–908. ISSN: **1877-0509**. doi:10.1016/j.procs.2013.05.255. An EA for the oriented two-dimensional Bin Packing Problem with free cuts (2BP|O|F) using the heuristic by Wong and Lee [230]. (Cit. on p. 312).

References V



- [28] Borko Bošković and Janez Brest. "Computational Search of Long Skew-Symmetric Binary Sequences with High Merit Factors". *MENDEL – Soft Computing Journal* 28(2):17–24, Dec. 2022. Brno, Czech Republic: Brno University of Technology (Vysoké učení technické v Brně). ISSN: 1803-3814. doi:10.13164/mendel.2022.2.017 (cit. on p. 317).
- [29] Borko Bošković, Franc Brglez, and Janez Brest. "Low-Autocorrelation Binary Sequences: On Improved Merit Factors and Runtime Predictions to Achieve Them". *Applied Soft Computing (ASOC)* 56:262–285, July 2017. Amsterdam, The Netherlands: Elsevier B.V. ISSN: 1568-4946. doi:10.1016/J.ASOC.2017.02.024 (cit. on p. 317).
- [30] Janez Brest and Borko Bošković. "A Heuristic Algorithm for a Low Autocorrelation Binary Sequence Problem with Odd Length and High Merit Factor". *IEEE Access* 6:4127–4134, Jan. 2018. Piscataway, NJ, USA: Institute of Electrical and Electronics Engineers (IEEE). ISSN: 2169-3536. doi:10.1109/ACCESS.2018.2789916 (cit. on p. 317).
- [31] Rainer E. Burkard, Eranda Çela, Stefan E. Karisch, Franz Rendl, Miguel F. Anjos, and Peter M. Hahn. *QAPLIB – A Quadratic Assignment Problem Library – Problem Instances and Solutions*. Edinburgh, Scotland, UK: University of Edinburgh, Apr. 20, 2012–Mar. 31, 2022. doi:10.7488/ds/3428. This is the 2012 status of the QAPLIB dataset from ³³ (cit. on pp. 276, 280, 320).
- [32] Rainer E. Burkard, Eranda Çela, Panos Miltiades Pardalos, and Leonidas S. Pitsoulis. "The Quadratic Assignment Problem". In: *Handbook of Combinatorial Optimization*. Ed. by Panos Miltiades Pardalos, Ding-Zhu Du, and Ronald Lewis Graham. 1st ed. Boston, MA, USA: Springer, 1998, pp. 1713–1809. ISBN: 978-1-4613-7987-4. doi:10.1007/978-1-4613-0303-9_27 (cit. on p. 320).
- [33] Rainer E. Burkard, Stefan E. Karisch, and Franz Rendl. "QAPLIB – A Quadratic Assignment Problem Library". *Journal of Global Optimization* 10(4):391–403, June 1997. London, England, UK: Springer Nature Limited. ISSN: 0925-5001. doi:10.1023/A:1008293323270. This article introduces QAPLIB, a set of benchmark problems for the QAP, now hosted at ³¹. (Cit. on pp. 276, 280, 320).
- [34] Rainer E. Burkard and Josef Offermann. "Entwurf von Schreibmaschinentastaturen mittels quadratischer Zuordnungsprobleme". *Zeitschrift für Operations Research (ZOR)*. now *Mathematical Methods of Operations Research (MMOR)* 21:B121–B132, Aug. 1977. Heidelberg, Baden-Württemberg, Germany: Physica-Verlag; now London, England, UK: Springer Nature Limited. ISSN: 0340-9422. doi:10.1007/BF01918175. Keyboard layout modeled as QAPs. (Cit. on p. 320).

References VI



- [35] Eduardo Carvalho Pinto and Carola Doerr. *Towards a More Practice-Aware Runtime Analysis of Evolutionary Algorithms*. arXiv.org: Computing Research Repository (CoRR) abs/1812.00493. Ithaca, NY, USA: Cornell University Library, Dec. 3, 2018. doi:10.48550/arXiv.1812.00493. URL: <https://arxiv.org/abs/1812.00493> (visited on 2025-08-08). arXiv:1812.00493v1 [cs.NE] 3 Dec 2018 (cit. on pp. 45–55, 311).
- [36] Vladimír Černý. “Thermodynamical Approach to the Traveling Salesman Problem: An Efficient Simulation Algorithm”. *Journal of Optimization Theory and Applications* 45(1):41–51, Jan. 1985. New York, NY, USA: Springer Science+Business Media, LLC. ISSN: 0022-3239. doi:10.1007/BF00940812 (cit. on p. 321).
- [37] Bo Chen, Chris N. Potts, and Gerhard J. Woeginger. “A Review of Machine Scheduling: Complexity, Algorithms and Approximability”. In: *Handbook of Combinatorial Optimization*. Ed. by Panos Miliotis Pardalos, Ding-Zhu Du, and Ronald Lewis Graham. 1st ed. Boston, MA, USA: Springer, 1998, pp. 1493–1641. ISBN: 978-1-4613-7987-4. doi:10.1007/978-1-4613-0303-9_25. See also pages 21–169 in volume 3/3 by Norwell, MA, USA: Kluwer Academic Publishers. Discusses, amongst others, that the JSSP is $\mathcal{NP}$ -hard. (Cit. on pp. 316, 326).
- [38] Jiayang Chen (陈嘉阳), Zhize Wu (吴志泽), Sarah Louise Thomson, and Thomas Weise (汤卫思). “Frequency Fitness Assignment: Optimization Without Bias for Good Solution Outperforms Randomized Local Search on the Quadratic Assignment Problem”. In: *16th International Joint Conference on Computational Intelligence (IJCCI'24)*. Nov. 20–22, 2024, Porto, Portugal. Ed. by Francesco Marcelloni, Kurosh Madani, Niki van Stein, and Joaquim Filipe. Porto, Portugal: SciTePress: Science and Technology Publications, Lda, 2024, pp. 27–37. ISSN: 2184-3236. ISBN: 978-989-758-721-4. doi:10.5220/0012888600003837 (cit. on pp. 251, 252, 314, 318, 320).
- [39] T. C. Edwin Cheng, Bo Peng, and Zhipeng Lü. “A Hybrid Evolutionary Algorithm to Solve the Job Shop Scheduling Problem”. *Annals of Operations Research* 242(2):223–237, July 2016. London, England, UK: Springer Nature Limited. ISSN: 0254-5330. doi:10.1007/s10479-013-1332-5. A MA utilizing TS (cit. on p. 318).
- [40] Philippe Chrétienne, Edward G. Coffman, Jan Karel Lenstra, and Zhen Liu, eds. *Scheduling Theory and Its Applications*. Chichester, West Sussex, England, UK: John Wiley and Sons Ltd., Sept. 1995. ISBN: 978-0-471-94059-3 (cit. on p. 316).

References VII



- [41] Nestor M. Cid-Garcia and Yasmin A. Rios-Solis. "Positions and Covering: A Two-Stage Methodology to Obtain Optimal Solutions for the 2D-Bin Packing Problem". *PLoS ONE* 15(4):e0229358, Apr. 2020. San Francisco, CA, USA: Public Library of Science (PLOS). ISSN: 1932-6203. doi:10.1371/journal.pone.0229358. An exact method for the two-dimensional Bin Packing Problem with free cuts and rotation (2BP|R|F) and the 2BP|O|F. (Cit. on p. 312).
- [42] Stephen Arthur Cook. "The Complexity of Theorem-Proving Procedures". In: *Third Annual ACM Symposium on Theory of Computing (STOC'1971)*. May 3–5, 1971, Shaker Heights, OH, USA. Ed. by Michael A. Harrison, Ranan B. Banerji, and Jeffrey D. Ullman. New York, NY, USA: Association for Computing Machinery (ACM), 1971, pp. 151–158. ISBN: 978-1-4503-7464-4. doi:10.1145/800157.805047 (cit. on pp. 17–25, 215–219, 318, 326).
- [43] William John Cook. *Concorde TSP Solver*. Waterloo, ON, Canada: University of Waterloo, 1997. URL: <https://math.uwaterloo.ca/tsp/concorde> (visited on 2026-09-26) (cit. on p. 313).
- [44] William John Cook. *In Pursuit of the Traveling Salesman: Mathematics at the Limits of Computation*. Princeton, NJ, USA: Princeton University Press, 2012–Nov. 9, 2014. ISBN: 978-0-691-16352-9 (cit. on pp. 313, 317).
- [45] William John Cook. *World TSP*. Waterloo, ON, Canada: University of Waterloo, 2013–Oct. 25, 2025. URL: <http://www.math.uwaterloo.ca/tsp/world> (visited on 2026-01-03) (cit. on pp. 317, 323).
- [46] Cemre Çubukçuoğlu, Pirouz Nourian, M. Fatih Tasgetiren, I. Sevil Sariyildiz, and Shervin Azadi. "Hospital Layout Design Renovation as a Quadratic Assignment Problem with Geodesic Distances". *Journal of Building Engineering* 44:102952, Dec. 2021. Amsterdam, The Netherlands: Elsevier B.V. ISSN: 2352-7102. doi:10.1016/j.jobbe.2021.102952 (cit. on p. 320).
- [47] Ege de Bruin, Sarah Louise Thomson, and Daan van den Berg. "Frequency Fitness Assignment on JSSP: A Critical Review". In: *26th European Conference on Applications of Evolutionary Computation (EvoApplications'2023), Held as Part of EvoStar'2023*. Apr. 12–14, 2023, Brno, Czech Republic. Ed. by João Correia, Stephen Smith, and Raneem Qaddoura. Vol. 13989 of Lecture Notes in Computer Science (LNCS). Cham, Switzerland: Springer, 2023, pp. 351–363. ISSN: 0302-9743. ISBN: 978-3-031-30228-2. doi:10.1007/978-3-031-30229-9_23. Independent reproduction of ²¹⁶ (cit. on pp. 253, 254).
- [48] Kenneth Alan De Jong. *Evolutionary Computation: A Unified Approach*. Vol. 4 of Complex Adaptive Systems. Cambridge, MA, USA: MIT Press, 2006. ISBN: 978-0-262-04194-2. URL: <https://www.researchgate.net/publication/220740669> (visited on 2025-08-08) (cit. on pp. 69–83, 321).

References VIII



- [49] *Definition of Operations Research*. University of Western Ontario, London, ON, Canada: International Federation of Operational Research Societies (IFORS), 2020. URL: <https://www.ifors.org/what-is-or> (visited on 2026-01-01) (cit. on p. 319).
- [50] Paul Deitel, Harvey Deitel, and Abbey Deitel. *Internet & World Wide Web: How to Program*. 5th ed. Hoboken, NJ, USA: Pearson Education, Inc., Nov. 2011. ISBN: 978-0-13-299045-5 (cit. on p. 325).
- [51] Maxence Delorme, Manuel Iori, and Silvano Martello. "Bin Packing and Cutting Stock Problems: Mathematical Models and Exact Algorithms". *European Journal of Operational Research* 255(1):1–20, Nov. 2016. Amsterdam, The Netherlands: Elsevier B.V. ISSN: 0377-2217. doi:10.1016/j.ejor.2016.04.030 (cit. on p. 313).
- [52] Ebru Demirkol, Sanjay V. Mehta, and Reha Uzsoy. "Benchmarks for Shop Scheduling Problems". *European Journal of Operational Research* 109(1):137–141, Aug. 1998. Amsterdam, The Netherlands: Elsevier B.V. ISSN: 0377-2217. doi:10.1016/S0377-2217(97)00019-2 (cit. on p. 316).
- [53] Miroslav Dimitrov. *New Classes of Binary Sequences with High Merit Factor*. arXiv.org: Computing Research Repository (CoRR). Ithaca, NY, USA: Cornell University Library, June 24, 2022. doi:10.48550/arXiv.2206.12070. URL: <https://arxiv.org/pdf/2206.12070> (visited on 2026-09-21). arXiv:2206.12070v1 [cs.IT] 24 Jun 2022 (cit. on p. 317).
- [54] Miroslav Dimitrov, Tsonka Baitcheva, and Nikolay Nikolov. "Efficient Generation of Low Autocorrelation Binary Sequences". *IEEE Signal Processing Letters* 27:341–345, 2020. Piscataway, NJ, USA: Institute of Electrical and Electronics Engineers (IEEE). ISSN: 1558-2361. doi:10.1109/LSP.2020.2972127 (cit. on p. 317).
- [55] Slobodan Dmitrović. *Modern C for Absolute Beginners: A Friendly Introduction to the C Programming Language*. New York, NY, USA: Apress Media, LLC, Mar. 2024. ISBN: 979-8-8688-0224-9 (cit. on p. 313).
- [56] Benjamin Doerr, Carola Doerr, and Franziska Ebel. "From Black-Box Complexity to Designing New Genetic Algorithms". *Theoretical Computer Science* 567:87–104, Feb. 2015. Amsterdam, The Netherlands: Elsevier B.V. ISSN: 0304-3975. doi:10.1016/J.TCS.2014.11.028 (cit. on pp. 194–196, 319).

References IX



- [57] Carola Doerr, Furong Ye, Naama Horesh, Hao Wang, and Ofer M. ShirThomas Bäck. "Benchmarking Discrete Optimization Heuristics with IOHprofiler". In: *21st Genetic and Evolutionary Computation Conference Companion (GECCO'2019)*. July 13–17, 2019, Prague, Czech Republic. Ed. by Manuel López-Ibáñez, Anne Auger, and Thomas Stützle. New York, NY, USA: Association for Computing Machinery (ACM), 2019, pp. 1798–1806. ISBN: **978-1-4503-6748-6**. doi:[10.1145/3319619.3326810](https://doi.org/10.1145/3319619.3326810). See also ^{58,59} (cit. on p. **284**).
- [58] Carola Doerr, Furong Ye, Naama Horesh, Hao Wang, and Ofer M. ShirThomas Bäck. "Benchmarking Discrete Optimization Heuristics with IOHprofiler". *Applied Soft Computing (ASOC)* 88:106027, Mar. 2020. Amsterdam, The Netherlands: Elsevier B.V. ISSN: **1568-4946**. doi:[10.1016/j.asoc.2019.106027](https://doi.org/10.1016/j.asoc.2019.106027). See also ^{57,59} (cit. on pp. **284**, **311**, **316**, **319**).
- [59] Carola Doerr, Furong Ye, Naama Horesh, Hao Wang, and Ofer M. ShirThomas Bäck. "Benchmarking Discrete Optimization Heuristics with IOHprofiler". (abs/1912.09237), Jan. 31, 2021. doi:[10.48550/arXiv.1912.09237](https://doi.org/10.48550/arXiv.1912.09237). URL: <https://arxiv.org/abs/1912.09237> (visited on 2024-06-27). arXiv:1912.09237v2 [cs.NE] 31 Jan 2021, see also ^{57,58} (cit. on p. **284**).
- [60] Marco Dorigo, Mauro Birattari, and Thomas Stützle. "Ant Colony Optimization". *IEEE Computational Intelligence Magazine (CIM)* 1(4):28–39, Nov. 2006. Piscataway, NJ, USA: Institute of Electrical and Electronics Engineers (IEEE). ISSN: **1556-603X**. doi:[10.1109/MCI.2006.329691](https://doi.org/10.1109/MCI.2006.329691). URL: <https://www.researchgate.net/publication/308953674> (visited on 2025-07-25) (cit. on p. **312**).
- [61] Marco Dorigo, Vittorio Maniezzo, and Alberto Coloni. "Ant System: Optimization by a Colony of Cooperating Agents". *IEEE Transactions on Systems, Man, and Cybernetics – Part B: Cybernetics* 26(1):29–41, Feb. 1996. Piscataway, NJ, USA: Institute of Electrical and Electronics Engineers (IEEE). ISSN: **1083-4419**. doi:[10.1109/3477.484436](https://doi.org/10.1109/3477.484436). URL: <https://www.researchgate.net/publication/5589170> (visited on 2025-07-26) (cit. on p. **312**).
- [62] Marco Dorigo and Thomas Stützle. *Ant Colony Optimization*. Cambridge, MA, USA: MIT Press, 2004. ISBN: **978-0-262-04219-2** (cit. on p. **312**).
- [63] Johann Dréo, Alain Pérowski, Patrick Siarry, and Éric D. Taillard. *Metaheuristics for Hard Optimization – Methods and Case Studies*. Berlin/Heidelberg, Germany: Springer-Verlag GmbH Germany, 2006. ISBN: **978-3-540-23022-9**. doi:[10.1007/3-540-30966-7](https://doi.org/10.1007/3-540-30966-7). Discusses SA, TS, EAs, and Ant Colony Optimization (ACO). (Cit. on p. **320**).
- [64] Stefan Droste, Thomas Jansen, and Ingo Wegener. "On the Analysis of the (1 + 1) Evolutionary Algorithm". *Theoretical Computer Science* 276(1-2):51–81, Apr. 2002. Amsterdam, The Netherlands: Elsevier B.V. ISSN: **0304-3975**. doi:[10.1016/S0304-3975\(01\)00182-7](https://doi.org/10.1016/S0304-3975(01)00182-7) (cit. on pp. **45–55**, **150–160**, **197–199**, **203–210**, **311**, **317**, **322**).

References X



- [65] Stefan Droste, Thomas Jansen, and Ingo Wegener. "Upper and Lower Bounds for Randomized Search Heuristics in Black-Box Optimization". *Theoretical Computer Science* 39(4):525–544, July 2006. Amsterdam, The Netherlands: Elsevier B.V. ISSN: 0304-3975. doi:10.1007/S00224-004-1177-Z (cit. on pp. 106–111, 319).
- [66] Morris J. Dworkin, Elaine Barker, James R. Nechvatal, James Foti, Lawrence E. Bassham, E. Roback, and James F. Dray Jr. *Advanced Encryption Standard (AES)*. Federal Information Processing Standards Publication (FIPS PUB) 197. Gaithersburg, MD, USA: U.S. Department of Commerce, National Institute of Standards and Technology (NIST), Nov. 26, 2001. doi:10.6028/NIST.FIPS.197. URL: <https://www.nist.gov/publications/advanced-encryption-standard-aes> (visited on 2025-08-17). Updated/replaced by ² (cit. on pp. 230–239).
- [67] Harald Dyckhoff and Ute Finke. *Cutting and Packing in Production and Distribution: A Typology and Bibliography*. Contributions to Management Science. Heidelberg, Baden-Württemberg, Germany: Physica-Verlag, 1992. ISSN: 1431-1941. ISBN: 978-3-642-63487-1. doi:10.1007/978-3-642-58165-6 (cit. on pp. 4–9, 313).
- [68] Kelly Easton, George L. Nemhauser, and Michael A. Trick. "The Traveling Tournament Problem Description and Benchmarks". In: *7th International Conference on Principles and Practice of Constraint Programming (CP'01)*. Nov. 26–Dec. 1, 2001, Paphos, Cyprus. Ed. by Toby Walsh. Vol. 2239 of Lecture Notes in Computer Science (LNCS). Berlin/Heidelberg, Germany: Springer-Verlag GmbH Germany, 2001, pp. 580–584. ISSN: 0302-9743. ISBN: 978-3-540-42863-3. doi:10.1007/3-540-45578-7_43 (cit. on p. 323).
- [69] Alwalid N. Elshafei. "Hospital Layout as a Quadratic Assignment Problem". *The Journal of the Operational Research Society (JORS)* 28(1):167–179, Apr. 1977. London, England, UK: Taylor and Francis Ltd. and London, England, UK: Springer Nature Limited. ISSN: 0160-5682. doi:10.1057/jors.1977.29 (cit. on p. 320).
- [70] Bernhard Eschermann and Hans-Joachim Wunderlich. "Optimized Synthesis of Self-Testable Finite State Machines". In: *20th International Symposium Fault-Tolerant Computing (FTCS'1990): Digest of Papers*. June 26–28, 1990, Newcastle Upon Tyne, England, UK. Piscataway, NJ, USA: Institute of Electrical and Electronics Engineers (IEEE), 1990. ISBN: 978-0-8186-2051-5. doi:10.1109/FTCS.1990.89393 (cit. on p. 320).

References XI



- [71] Thomas A. Feo and Mauricio G. C. Resende. "Greedy Randomized Adaptive Search Procedures". *Journal of Global Optimization* 6(2):109–133, Mar. 1995. London, England, UK: Springer Nature Limited. ISSN: 0925-5001. doi:10.1007/BF01096763. Introduces Greedy Randomized Adaptive Search Procedures (GRASPs) and applies them to the set covering problem, among others, and lists many problem domains. (Cit. on p. 315).
- [72] Luca Ferrari and Enrico Pirozzi. *Learn PostgreSQL*. 2nd ed. Birmingham, England, UK: Packt Publishing Ltd, Oct. 2023. ISBN: 978-1-83763-564-1 (cit. on p. 320).
- [73] Paola Festa and Mauricio G. C. Resende. "An Annotated Bibliography of GRASP—Part I: Algorithms". *International Transactions on Operational Research (ITOR)* 16(1):1–24, Jan. 2009. Chichester, West Sussex, England, UK: John Wiley and Sons Ltd. ISSN: 0969-6016. doi:10.1111/j.1475-3995.2009.00663.x. See also ⁷⁴ (cit. on pp. 286, 315).
- [74] Paola Festa and Mauricio G. C. Resende. "An Annotated Bibliography of GRASP—Part II: Applications". *International Transactions on Operational Research (ITOR)* 16(2):131–172, Mar. 2009. Chichester, West Sussex, England, UK: John Wiley and Sons Ltd. ISSN: 0969-6016. doi:10.1111/j.1475-3995.2009.00664.x. See also ⁷³ (cit. on pp. 286, 315).
- [75] Simon Fischer. "A Polynomial Upper Bound for a Mutation-Based Algorithm on the Two-Dimensional Ising Model". In: *6th Genetic and Evolutionary Computation Conference (GECCO'2004), Part I*. June 26–30, 2004, Seattle, WA, USA. Ed. by Kalyanmoy Deb, Riccardo Poli, Wolfgang Banzhaf, Hans-Georg Beyer, Edmund K. Burke, Paul J. Darwen, Dipankar Dasgupta, Dario Floreano, James A. Foster, Mark Harman, Owen Holland, Pier Luca Lanzi, Lee Spector, Andrea Tettamanzi, Dirk Thierens, and Andrew M. Tyrrell. Vol. 3102 of Lecture Notes in Computer Science (LNCS). Berlin/Heidelberg, Germany: Springer-Verlag GmbH Germany, 2004, pp. 1100–1112. ISSN: 0302-9743. ISBN: 978-3-540-22344-3. doi:10.1007/978-3-540-24854-5_108 (cit. on p. 316).
- [76] Simon Fischer and Ingo Wegener. "The One-Dimensional Ising Model: Mutation versus Recombination". *Theoretical Computer Science* 344(2-3):208–225, Nov. 2005. Amsterdam, The Netherlands: Elsevier B.V. ISSN: 0304-3975. doi:10.1016/J.TCS.2005.04.002 (cit. on p. 316).
- [77] Henry Fisher and Gerald L. Thompson. "Probabilistic Learning Combinations of Local Job-Shop Scheduling Rules". In: *Industrial Scheduling*. Ed. by John F. Muth and Gerald L. Thompson. Englewood Cliffs, NJ, USA: Prentice-Hall, 1963. Chap. 3.2, pp. 225–251 (cit. on p. 316).

References XII



- [78] Charles Fleurent and Jacques A. Ferland. "Genetic Hybrids for the Quadratic Assignment Problem". In: *Quadratic Assignment and Related Problems, Proceedings of a DIMACS Workshop*. May 20–21, 1993, New Brunswick, NJ, USA: Rutgers University. Ed. by Panos Miltiades Pardalos and Henry Wolkowicz. Providence, RI, USA: American Mathematical Society (AMS), 1994, pp. 173–187. ISBN: 978-0-8218-6607-8. A MA using the TS from ¹⁹⁸ as local search performs well. (Cit. on pp. 318, 320).
- [79] Tobias Friedrich, Pietro Simone Oliveto, Dirk Sudholt, and Carsten Witt. "Analysis of Diversity-Preserving Mechanisms for Global Exploration". *Evolutionary Computation* 17(4):455–476, Win. 2009. Cambridge, MA, USA: MIT Press. ISSN: 1063-6560. doi:10.1162/evco.2009.17.4.17401 (cit. on pp. 200–202, 324).
- [80] Tobias Friedrich, Francesco Quinzan, and Markus Wagner. "Escaping Large Deceptive Basins of Attraction with Heavy-Tailed Mutation Operators". In: *20th Genetic and Evolutionary Computation Conference (GECCO'2018)*. July 15–19, 2018, Kyōto, Kyōto-fu, Japan. Ed. by Hernán E. Aguirre and Keiki Takadama. New York, NY, USA: Association for Computing Machinery (ACM), 2018, pp. 293–300. ISBN: 978-1-4503-5618-3. doi:10.1145/3205455.3205515 (cit. on pp. 200–202, 207–210, 317, 324).
- [81] José E. Gallardo, Carlos Cotta, and Antonio J. Fernández. "A Memetic Algorithm for the Low Autocorrelation Binary Sequence Problem". In: *9th Genetic and Evolutionary Computation Conference (GECCO'2007)*. July 7–11, 2007, London, England, UK. Ed. by Hod Lipson. New York, NY, USA: Association for Computing Machinery (ACM), 2007, pp. 1226–1233. ISBN: 978-1-59593-697-4. doi:10.1145/1276958.1277195 (cit. on p. 317).
- [82] Michael R. Garey and David Stifler Johnson. *Computers and Intractability: A Guide to the Theory of NP-Completeness*. New York, NY, USA: W. H. Freeman and Company, 1979. ISBN: 978-0-7167-1045-5 (cit. on p. 323).
- [83] Mitsuo Gen, Yasuhiro Tsujimura, and Erika Kubota. "Solving Job-Shop Scheduling Problems by Genetic Algorithm". In: *Humans, Information and Technology: Proceedings of the 1994 IEEE International Conference on Systems, Man and Cybernetics (SMC'1994)*. Vol. 2. Oct. 2–5, 1994, San Antonio, TX, USA. Piscataway, NJ, USA: Institute of Electrical and Electronics Engineers (IEEE), 1994, pp. 1577–1582. ISBN: 978-0-7803-2129-8. doi:10.1109/ICSMC.1994.400072. Proposes a permutations-with-repetitions based encoding for the JSSP. (Cit. on pp. 288, 316, 325).
- [84] Fred Glover. "Tabu Search – Part I". *ORSA Journal on Computing* 1(3):190–206, Sum. 1989. Catonsville, MD, USA: The Institute for Operations Research and the Management Sciences (INFORMS). ISSN: 0899-1499. doi:10.1287/ijoc.1.3.190 (cit. on p. 322).

References XIII



- [85] Fred Glover. "Tabu Search – Part II". *ORSA Journal on Computing* 2(1):4–32, Win. 1990. Catonsville, MD, USA: The Institute for Operations Research and the Management Sciences (INFORMS). ISSN: 0899-1499. doi:10.1287/ijoc.2.1.4 (cit. on p. 322).
- [86] Fred Glover and Gary A. Kochenberger, eds. *Handbook of Metaheuristics*. Vol. 57 of International Series in Operations Research & Management Science (ISOR). Cham, Switzerland: Springer, 2003. ISSN: 0884-8289. ISBN: 978-0-306-48056-0. doi:10.1007/b101874 (cit. on p. 318).
- [87] Fred Glover, Éric D. Taillard, and Dominique de Werra. "A User's Guide to Tabu Search". *Annals of Operations Research* 41(1):3–28, Mar. 1993. London, England, UK: Springer Nature Limited. ISSN: 0254-5330. doi:10.1007/BF02078647. Special issue on TS. (Cit. on p. 322).
- [88] David Edward Goldberg. *Genetic Algorithms in Search, Optimization, and Machine Learning*. Redwood City, CA, USA: Addison Wesley Longman Publishing Co., Inc., 1989. ISBN: 978-0-201-15767-3 (cit. on pp. 69–83, 321).
- [89] José Fernando Gonçalves and Mauricio G. C. Resende. "A Biased Random Key Genetic Algorithm for two-dimensional Bin Packing Problem (2BP) and 3D Bin Packing Problems". *International Journal of Production Economics (IJPE)* 145(2):500–510, Oct. 2013. Amsterdam, The Netherlands: Elsevier B.V. ISSN: 0925-5273. doi:10.1016/j.ijpe.2013.04.019. Applies the Biased Random Key Genetic Algorithm (BRKGA) to the 2BP|R|F and 2BP|O|F as well as 3D packing. Continuous vectors are translated to permutations and orientation data which is then the input of a placement heuristic. (Cit. on pp. 312, 313).
- [90] José Fernando Gonçalves and Mauricio G. C. Resende. "An Extended Akers Graphical Method with a Biased Random-Key Genetic Algorithm for Job-Shop Scheduling". *International Transactions on Operational Research (ITOR)* 21(2):215–246, Mar. 2014. Chichester, West Sussex, England, UK: John Wiley and Sons Ltd. ISSN: 0969-6016. doi:10.1111/itor.12044. URL: <http://mauricio.resende.info/doc/brkga-jss2011.pdf> (visited on 2026-09-30). The BRKGA basically is a MA using a continuous encoding of permutations that are decoded to schedules using the method from ^{23,24,83,188} and then refined via a TS. (Cit. on pp. 313, 316).
- [91] José Fernando Gonçalves and Mauricio G. C. Resende. "Biased Random-Key Genetic Algorithms for Combinatorial Optimization". *Journal of Heuristics* 17:487–525, Oct. 2010. London, England, UK: Springer Nature Limited. ISSN: 1381-1231. doi:10.1007/s10732-010-9143-1 (cit. on p. 313).

References XIV



- [92] Michael T. Goodrich. *A Gentle Introduction to NP-Completeness*. Irvine, CA, USA: University of California, Irvine, Apr. 2022. URL: <https://ics.uci.edu/~goodrich/teach/cs165/notes/NPComplete.pdf> (visited on 2025-08-01) (cit. on p. 326).
- [93] Ronald Lewis Graham, Eugene Leighton Lawler, Jan Karel Lenstra, and Alexander Hendrik George Rinnooy Kan. "Optimization and Approximation in Deterministic Sequencing and Scheduling: A Survey". *Annals of Discrete Mathematics* (5):287–326. Ed. by Peter Ladislaw Hammer, Ellis Lane Johnson, and Bernhard H. Korte, 1979. ISSN: 0167-5060. doi:10.1016/S0167-5060(08)70356-X. An early review on JSSPs and FSSPs. (Cit. on pp. 314, 316).
- [94] Martin Grötschel, Michael Jünger, and Gerhard Reinelt. "Optimal Control of Plotting and Drilling Machines: A Case Study". *Zeitschrift für Operations Research (ZOR). now Mathematical Methods of Operations Research (MMOR)* 35(1):61–84, Jan. 1991. Heidelberg, Baden-Württemberg, Germany: Physica-Verlag; now London, England, UK: Springer Nature Limited. ISSN: 0340-9422. doi:10.1007/BF01415960. This paper tackles circuit board plotting and drilling problems by modelling (parts of) them as symmetric Traveling Salesperson Problems (STSPs). (Cit. on p. 323).
- [95] Gregory Z. Gutin and Abraham P. Punnen, eds. *The Traveling Salesman Problem and its Variations*. Vol. 12 of Combinatorial Optimization (COOP). New York, NY, USA: Springer New York, May 2002. ISSN: 1388-3011. doi:10.1007/b101971 (cit. on pp. 13–16, 323).
- [96] Nikolaus Hansen and Anne Auger. "Principled Design of Continuous Stochastic Search: From Theory to Practice". In: *Theory and Principled Methods for the Design of Metaheuristics*. Ed. by Yossi Borenstein and Alberto Moraglio. Natural Computing Series. Berlin/Heidelberg, Germany: Springer-Verlag GmbH Germany, 2014, pp. 145–180. ISSN: 1619-7127. ISBN: 978-3-642-33205-0. doi:10.1007/978-3-642-33206-7_8. URL: <https://inria.hal.science/hal-00808450/file/hansen2013principled.pdf> (visited on 2025-08-09) (cit. on pp. 91–96).
- [97] Pierre Hansen, Nenad Mladenović, and José Andrés Moreno Pérez. "Variable Neighbourhood Search: Methods and Applications. Invited Survey". *4OR* 6(4):319–360, Dec. 2008. ISSN: 1619-4500. doi:10.1007/s10288-008-0089-1. URL: <https://www.researchgate.net/publication/225155945> (visited on 2026-10-02) (cit. on p. 324).
- [98] Keld Helsgaun. "General k -opt Submoves for the Lin–Kernighan TSP Heuristic". *Mathematical Programming Computation* 1(2-3):119–163, July 2009. London, England, UK: Springer Nature Limited. ISSN: 1867-2949. doi:10.1007/s12532-009-0004-6. URL: <https://www2.seas.gwu.edu/~simhaweb/champalg/tsp/papers/Helsgaun2.pdf> (visited on 2026-09-26) (cit. on p. 317).

References XV



- [99] Keld Helsgaun. "An Effective Implementation of the Lin-Kernighan Traveling Salesman Heuristic". 126(1):106–130, Oct. 2000. doi:10.1016/S0377-2217(99)00284-2. URL: http://akira.ruc.dk/~keld/research/LKH/LKH-2.0/DOC/LKH_REPORT.pdf (visited on 2026-09-26) (cit. on p. 317).
- [100] André Henning. "Praktische Job-Shop Scheduling-Probleme". PhD thesis. Jena, Thüringen, Germany: Friedrich-Schiller-Universität Jena, Aug. 2002. URL: <http://www.db-thueringen.de/servlets/DocumentServlet?id=873> (visited on 2026-09-30). Alternate url: <https://nbn-resolving.org/urn:nbn:de:gbv:27-20060809-115700-4>. Applies MA-like algorithms to the JSSP. (Cit. on pp. 316, 318).
- [101] Holger H. Hoos and Thomas Stützle. *Stochastic Local Search: Foundations & Applications*. The Morgan Kaufmann Series in Artificial Intelligence. Amsterdam, The Netherlands: Elsevier B.V., 2005. ISBN: 978-1-55860-872-6. doi:10.1016/B978-1-55860-872-6.X5016-1 (cit. on pp. 17–24, 215–219, 318, 322).
- [102] Holger H. Hoos and Thomas Stützle. *SATLIB – The Satisfiability Library*. 1.4.4. Vancouver, BC, Canada: The University of British Columbia (UBC), May 11, 2001. URL: <https://www.cs.ubc.ca/~hoos/SATLIB/index-ubc.html> (visited on 2026-09-20). See paper ¹⁰³ (cit. on pp. 290, 321).
- [103] Holger H. Hoos and Thomas Stützle. "SATLIB: An Online Resource for Research on SAT". In: *SAT2000 – Highlights of Satisfiability Research in the Year 2000*. Ed. by Ian Philip Gent, Toby Walsh, and Hans van Maaren. Vol. 63 of Frontiers in Artificial Intelligence and Applications. Amsterdam, The Netherlands: IOS Press BV, Jan. 2000, pp. 283–292. ISSN: 0922-6389. ISBN: 978-1-58603-061-2. See the website ¹⁰² (cit. on pp. 215–219, 290, 321).
- [104] John Hunt. *A Beginners Guide to Python 3 Programming*. 2nd ed. Undergraduate Topics in Computer Science (UTICS). Cham, Switzerland: Springer, 2023. ISSN: 1863-7310. ISBN: 978-3-031-35121-1. doi:10.1007/978-3-031-35122-8 (cit. on p. 320).
- [105] *Information Technology – Universal Coded Character Set (UCS)*. International Standard ISO/IEC 10646:2020. Geneva, Switzerland: International Organization for Standardization (ISO) and International Electrotechnical Commission (IEC), Dec. 2020 (cit. on p. 309).
- [106] Manuel Iori, Vinícius Loti de Lima, Silvano Martello, Flávio K. Miyazaw, and Michele Monaci. "Exact Solution Techniques for Two-Dimensional Cutting and Packing". *European Journal of Operational Research* 289(2):399–415, Mar. 2021. Amsterdam, The Netherlands: Elsevier B.V. ISSN: 0377-2217. doi:10.1016/j.ejor.2020.06.050. See also arXiv:2004.12619v1 [math.OC] 27 Apr 2020 at doi:10.1016/j.ejor.2020.06.050. (Cit. on p. 312).

References XVI



- [107] Christoph Jabs, Dieter Vandesande, Jeremias Berg, Johannes Fichte, George Katsirelos, Ruben Martins, André Schidler, and Dominik Schreiber. *MaxSAT Evaluation: Complete Benchmark Collection*. 2026th ed. Geneva, Switzerland: zenodo (hosted by European Organization for Nuclear Research (CERN)), July 9, 2026. doi:[10.5281/zenodo.21283148](https://doi.org/10.5281/zenodo.21283148). All versions of this dataset can be reached directly via doi:[10.5281/zenodo.21283147](https://doi.org/10.5281/zenodo.21283147). See also <https://github.com/maxsat-evaluations/data> and <https://maxsat-evaluations.github.io>. (Cit. on p. 318).
- [108] Dean Jacobs, Jan Prins, Peter Siegel, and Kenneth Wilson. "Monte Carlo Techniques in Code Optimization". In: *15th Annual Workshop on Microprogramming (MICRO 15)*. Oct. 5–7, 1982. Ed. by Joseph Allen Fisher, William J. Tracz, and Bill Hopkins. Palo Alto, CA, USA: Piscataway, NJ, USA: Institute of Electrical and Electronics Engineers (IEEE) and New York, NY, USA: Association for Computing Machinery (ACM), Oct. 1982, pp. 143–148. doi:[10.5555/800036.800944](https://doi.org/10.5555/800036.800944). See ¹⁰⁹ (cit. on p. 291).
- [109] Dean Jacobs, Jan Prins, Peter Siegel, and Kenneth Wilson. "Monte Carlo Techniques in Code Optimization". *ACM SIGMICRO Newsletter* 13(4):143–148, Dec. 1982. New York, NY, USA: Association for Computing Machinery (ACM). ISSN: **1050-916X**. doi:[10.1145/1014194.800944](https://doi.org/10.1145/1014194.800944). See ¹⁰⁸ (cit. on pp. 291, 321).
- [110] Stefan Jakobs. "On Genetic Algorithms for the Packing of Polygons". *European Journal of Operational Research* 88(1):165–181, Jan. 1996. Amsterdam, The Netherlands: Elsevier B.V. ISSN: **0377-2217**. doi:[10.1016/0377-2217\(94\)00166-9](https://doi.org/10.1016/0377-2217(94)00166-9) (cit. on p. 315).
- [111] Wassim Jaziri, ed. *Tabu Search*. London, England, UK: IntechOpen Limited, Aug. 1, 2008. ISBN: **978-3-902613-34-9**. doi:[10.5772/65](https://doi.org/10.5772/65). URL: <https://www.intechopen.com/books/6114> (visited on 2026-09-30) (cit. on p. 322).
- [112] Mohamed Jebalia and Anne Auger. "Log-Linear Convergence of the Scale-Invariant $(\mu/\mu_w, \lambda)$ -ES and Optimal μ for Intermediate Recombination for Large Population Sizes". In: *11th International Conference on Parallel Problem Solving from Nature (PPSN XI)*. Vol. 1. Sept. 11–15, 2010, Kraków, Poland. Ed. by Robert Schaefer, Carlos Cotta, Joanna Kolodziej, and Günter Rudolph. Vol. 6238 of Lecture Notes in Computer Science (LNCS). Berlin/Heidelberg, Germany: Springer-Verlag GmbH Germany, 2010, pp. 52–62. ISSN: **0302-9743**. ISBN: **978-3-642-15843-8**. doi:[10.1007/978-3-642-15844-5_6](https://doi.org/10.1007/978-3-642-15844-5_6) (cit. on pp. 91–96).
- [113] David Stifler Johnson, Gregory Z. Gutin, Lyle Andrew McGeoch, Anders Yeo, Weixiong Zhang, and Alexei Zverovitch. *Experimental Analysis of Heuristics for the ATSP*. Ed. by Gregory Z. Gutin and Abraham P. Punnen. New York, NY, USA, May 2002. doi:[10.1007/0-306-48213-4_10](https://doi.org/10.1007/0-306-48213-4_10). URL: <https://archive.dimacs.rutgers.edu/Challenges/TSP/papers/atstpchap.pdf> (visited on 2026-09-25) (cit. on p. 323).

References XVII



- [114] David Stifler Johnson and Lyle Andrew McGeoch. *Experimental Analysis of Heuristics for the STSP*. Ed. by Gregory Z. Gutin and Abraham P. Punnen. New York, NY, USA, May 2002. doi:10.1007/0-306-48213-4_9. URL: <https://archive.dimacs.rutgers.edu/Challenges/TSP/papers/stspchap.pdf> (visited on 2026-09-25) (cit. on p. 323).
- [115] David Stifler Johnson, Lyle Andrew McGeoch, Fred Glover, and Cesar Rego. *8th DIMACS Implementation Challenge: The Traveling Salesman Problem*. June 1, 2000–Nov. 19, 2013. URL: <https://archive.dimacs.rutgers.edu/Challenges/TSP> (visited on 2026-09-25) (cit. on p. 323).
- [116] Selmer Martin Johnson. "Optimal Two- and Three-Stage Production Schedules with Setup Times Included". *Naval Research Logistics Quarterly* 1(1):61–68, Mar. 1954. Chichester, West Sussex, England, UK: John Wiley and Sons Ltd. ISSN: 0894-069X. doi:10.1002/nav.3800010110. URL: <https://www.rand.org/content/dam/rand/pubs/papers/2008/P402.pdf> (visited on 2023-12-06) (cit. on p. 314).
- [117] Scott Kirkpatrick, C. Daniel Gelatt, Jr., and Mario P. Vecchi. "Optimization by Simulated Annealing". *Science Magazine* 220(4598):671–680, May 13, 1983. Washington, D.C., USA: American Association for the Advancement of Science (AAAS). ISSN: 0036-8075. doi:10.1126/science.220.4598.671. URL: <https://www.researchgate.net/publication/6026283> (visited on 2025-08-08) (cit. on pp. 56–68, 321).
- [118] Robert Klein. *Scheduling of Resource-Constrained Projects*. Vol. 10 of Operations Research/Computer Science Interfaces Series (ORCS). New York, NY, USA: Springer New York, 2000. ISSN: 1387-666X. ISBN: 978-0-7923-8637-7. doi:10.1007/978-1-4615-4629-0 (cit. on p. 314).
- [119] Donald Ervin Knuth. "Big Omicron and Big Omega and Big Theta". *ACM SIGACT News* 8(2):18–24, Apr.–June 1976. New York, NY, USA: Association for Computing Machinery (ACM). ISSN: 0163-5700. doi:10.1145/1008328.1008329 (cit. on p. 326).
- [120] Donald Ervin Knuth. *Fundamental Algorithms*. 3rd ed. Vol. 1 of The Art of Computer Programming. Reading, MA, USA: Addison-Wesley Professional, 1997. ISBN: 978-0-201-89683-1 (cit. on p. 326).
- [121] Tjalling Charles Koopmans and Martin Beckmann. "Assignment Problems and the Location of Economic Activities". *Econometrica* 25(1):53–76, 1957. New Haven, CT, USA: The Econometric Society and Chichester, West Sussex, England, UK: John Wiley and Sons Ltd. ISSN: 0012-9682. doi:10.2307/1907742 (cit. on p. 320).

References XVIII



- [122] John R. Koza. *Genetic Programming – On the Programming of Computers by Means of Natural Selection*. Complex Adaptive Systems. Cambridge, MA, USA: MIT Press, 1993. ISBN: 978-0-262-11170-6 (cit. on p. 314).
- [123] Jakob Krarup and Peter Mark Pruzan. "Computer-aided Layout Design". In: *Mathematical Programming in Use*. Ed. by Michel Louis Balinski and Claude Lemaître. Vol. 9 of. Berlin/Heidelberg, Germany: Springer-Verlag GmbH Germany, 1978. Chap. 6, pp. 75–94. ISSN: 0303-3929. ISBN: 978-3-642-00796-5. doi:10.1007/BFb0120827. Uses QAPs as model for designing architectural layouts. (Cit. on p. 320).
- [124] Mark W. Krentel. "The Complexity of Optimization Problems". *Journal of Computer and System Sciences* 36(3):490–509, June 1988. Amsterdam, The Netherlands: Elsevier B.V. ISSN: 0022-0000. Explores the hardness (optimization) problems such TSP, Clique, and Coloring, where computing the optimal value is $\mathcal{NP}$ -complete. (Cit. on p. 323).
- [125] Edmund Landau. *Handbuch der Lehre von der Verteilung der Primzahlen*. Leipzig, Sachsen, Germany: B. G. Teubner, 1909. ISBN: 978-0-8218-2650-8 (cit. on p. 326).
- [126] Eugene Leighton Lawler, Jan Karel Lenstra, and Alexander Hendrik George Rinnooy Kan. "Recent Developments in Deterministic Sequencing and Scheduling: A Survey". In: *Deterministic and Stochastic Scheduling: Proceedings of the NATO Advanced Study and Research Institute on Theoretical Approaches to Scheduling Problems*. June 6–17, 1981, Durham, England, UK. Ed. by Michael Anthony Howe Dempster, Jan Karel Lenstra, and Alexander Hendrik George Rinnooy Kan. Vol. 84 of Nato Science Series C: Mathematical and Physical Science (ASIC). London, England, UK: Springer Nature Limited, Apr. 1982, pp. 35–73. ISBN: 978-90-277-1397-1. doi:10.1007/978-94-009-7801-0_3. The JSSP is $\mathcal{NP}$ -hard. (Cit. on p. 316).
- [127] Eugene Leighton Lawler, Jan Karel Lenstra, Alexander Hendrik George Rinnooy Kan, and David B. Shmoys. "Sequencing and Scheduling: Algorithms and Complexity". In: *Production Planning and Inventory*. Ed. by Stephen C. Graves, Alexander Hendrik George Rinnooy Kan, and Paul H. Zipkin. Vol. IV of Handbooks of Operations Research and Management Science. Amsterdam, The Netherlands: Elsevier B.V., 1993. Chap. 9, pp. 445–522. ISSN: 0927-0507. ISBN: 978-0-444-87472-6. doi:10.1016/S0927-0507(05)80189-6. URL: <http://alexandria.tue.nl/repository/books/339776.pdf> (visited on 2023-12-06). Discusses, amongst others, that the JSSP is $\mathcal{NP}$ -hard. (Cit. on pp. 316, 326).

References XIX



- [128] Eugene Leighton Lawler, Jan Karel Lenstra, Alexander Hendrik George Rinnooy Kan, and David B. Shmoys. *The Traveling Salesman Problem: A Guided Tour of Combinatorial Optimization*. Estimation, Simulation, and Control – Wiley-Interscience Series in Discrete Mathematics and Optimization. Chichester, West Sussex, England, UK: Wiley Interscience, Sept. 1985. ISSN: 0277-2698. ISBN: 978-0-471-90413-7 (cit. on pp. 13–16, 323).
- [129] Stephen R. Lawrence. "Resource Constrained Project Scheduling: An Experimental Investigation of Heuristic Scheduling Techniques". PhD thesis. Pittsburgh, PA, USA: Graduate School of Industrial Administration (GSIA), Carnegie-Mellon University, 1984 (cit. on p. 316).
- [130] Kent D. Lee and Steve Hubbard. *Data Structures and Algorithms with Python*. Undergraduate Topics in Computer Science (UTICS). Cham, Switzerland: Springer, 2015. ISSN: 1863-7310. ISBN: 978-3-319-13071-2. doi:10.1007/978-3-319-13072-9 (cit. on p. 320).
- [131] Xueping Li and Kaike Zhang. "Single Batch Processing Machine Scheduling with Two-Dimensional Bin Packing Constraints". *International Journal of Production Economics (IJPE)* 196:113–121, Feb. 2018. Amsterdam, The Netherlands: Elsevier B.V. ISSN: 0925-5273. doi:10.1016/j.ijpe.2017.11.015. Mentions some scheduling tasks of Additive Manufacturing jobs can be viewed as instance of the 2BP|R|F. (Cit. on p. 312).
- [132] Tianyu Liang (梁天宇), Zhize Wu (吴志泽), Jörg Lässig, Daan van den Berg, Sarah Louise Thomson, and Thomas Weise (汤卫思). "Addressing the Traveling Salesperson Problem with Frequency Fitness Assignment and Hybrid Algorithms". *Soft Computing* 28(17-18):9495–9508, July 2024. London, England, UK: Springer Nature Limited. ISSN: 1432-7643. doi:10.1007/S00500-024-09718-8 (cit. on pp. 13–16, 249, 250, 314, 318, 323).
- [133] Tianyu Liang (梁天宇), Zhize Wu (吴志泽), Jörg Lässig, Daan van den Berg, and Thomas Weise (汤卫思). "Solving the Traveling Salesperson Problem using Frequency Fitness Assignment". In: *IEEE Symposium Series on Computational Intelligence (SSCI'2022)*. Dec. 4–7, 2022, Singapore. Piscataway, NJ, USA: Institute of Electrical and Electronics Engineers (IEEE), 2022. ISBN: 978-1-6654-8769-6. doi:10.1109/SSCI51031.2022.10022296 (cit. on pp. 249, 250, 314, 318).

References XX



- [134] Tianyu Liang (梁天宇), Zhize Wu (吴志泽), Matthias Thüerer, Markus Wagner, and Thomas Weise (汤卫恩). "Generating Small Instances with Interesting Features for the Traveling Salesperson Problem". In: *16th International Joint Conference on Computational Intelligence (IJCCI'24)*. Nov. 20–22, 2024, Porto, Portugal. Ed. by Francesco Marcelloni, Kurosh Madani, Niki van Stein, and Joaquim Filipe. Porto, Portugal: SciTePress: Science and Technology Publications, Lda, 2024, pp. 173–180. ISSN: **2184-3236**. ISBN: **978-989-758-721-4**. doi:[10.5220/0012888800003837](https://doi.org/10.5220/0012888800003837) (cit. on pp. **249**, **250**, **318**).
- [135] Shen Lin and Brian W. Kernighan. "An Effective Heuristic Algorithm for the Traveling-Salesman Problem". *Operations Research* 21(2):498–516, Mar.–Apr. 1973. Catonsville, MD, USA: The Institute for Operations Research and the Management Sciences (INFORMS). ISSN: **0030-364X**. doi:[10.1287/opre.21.2.498](https://doi.org/10.1287/opre.21.2.498). URL: <https://www.cs.princeton.edu/~bwk/btl.mirror/tsp.pdf> (visited on 2026-09-26) (cit. on p. **317**).
- [136] Dequan Liu (刘德全) and Hongfei Teng (滕弘飞). "An Improved BL-Algorithm for EAGenetic Algorithm of the Orthogonal Packing of Rectangles". *European Journal of Operational Research* 112(2):413–420, Jan. 1999. Amsterdam, The Netherlands: Elsevier B.V. ISSN: **0377-2217**. doi:[10.1016/S0377-2217\(97\)00437-2](https://doi.org/10.1016/S0377-2217(97)00437-2) (cit. on p. **315**).
- [137] Andrea Lodi, Silvano Martello, and Michele Monaci. "Two-Dimensional Packing Problems: A Survey". *European Journal of Operational Research* 141(2):241–252, Sept. 2002. Amsterdam, The Netherlands: Elsevier B.V. ISSN: **0377-2217**. doi:[10.1016/S0377-2217\(02\)00123-6](https://doi.org/10.1016/S0377-2217(02)00123-6) (cit. on pp. **312**, **313**).
- [138] Andrea Lodi, Silvano Martello, and Daniele Vigo. "Heuristic and Metaheuristic Approaches for a Class of Two-Dimensional Bin Packing Problems". *INFORMS Journal on Computing* 11(4):345–357, Aut. 1999. Catonsville, MD, USA: The Institute for Operations Research and the Management Sciences (INFORMS). ISSN: **1091-9856**. doi:[10.1287/ijoc.11.4.345](https://doi.org/10.1287/ijoc.11.4.345) (cit. on p. **312**).
- [139] Andrea Lodi, Silvano Martello, and Daniele Vigo. "Recent Advances on Two-Dimensional Bin Packing Problems". *Discrete Applied Mathematics* 123(1–3):379–396, Nov. 2002. Amsterdam, The Netherlands: Elsevier B.V. ISSN: **0166-218X**. doi:[10.1016/S0166-218X\(01\)00347-X](https://doi.org/10.1016/S0166-218X(01)00347-X) (cit. on pp. **312**, **313**).
- [140] Eliane Maria Loiola, Nair Maria Maia de Abreu, Paulo Oswaldo Boaventura-Netto, Peter M. Hahn, and Tania Querido. "A Survey for the Quadratic Assignment Problem". *European Journal of Operational Research* 176(2):657–690, 2007. Amsterdam, The Netherlands: Elsevier B.V. ISSN: **0377-2217**. doi:[10.1016/j.ejor.2005.09.032](https://doi.org/10.1016/j.ejor.2005.09.032) (cit. on p. **320**).

References XXI



- [141] Mariana A. Londe, Luciana S. Pessoa, Carlos E. Andrade, and Mauricio G. C. Resende. *Biased Random-Key Genetic Algorithms: A Review*. arXiv.org: Computing Research Repository (CoRR) abs/2312.00961v2. Ithaca, NY, USA: Cornell University Library, Dec. 6, 2023. doi:10.48550/arXiv.2312.00961. URL: <https://arxiv.org/abs/2312.00961v2> (visited on 2024-06-27). arXiv:2312.00961v2 [cs.NE] 06 Dec 2023; See ¹⁴² (cit. on p. 296).
- [142] Mariana A. Londe, Luciana S. Pessoa, Carlos E. Andrade, and Mauricio G. C. Resende. "Biased Random-Key Genetic Algorithms: A Review". *European Journal of Operational Research* 321(1):1–22, Feb. 2025. Amsterdam, The Netherlands: Elsevier B.V. ISSN: 0377-2217. doi:10.1016/j.ejor.2024.03.030. See ¹⁴¹ (cit. on pp. 296, 313).
- [143] Marc Loy, Patrick Niemeyer, and Daniel Leuck. *Learning Java*. 5th ed. Sebastopol, CA, USA: O'Reilly Media, Inc., Mar. 2020. ISBN: 978-1-4920-5627-0 (cit. on p. 316).
- [144] Mark Lutz. *Learning Python*. 6th ed. Sebastopol, CA, USA: O'Reilly Media, Inc., Mar. 2025. ISBN: 978-1-0981-7130-8 (cit. on p. 320).
- [145] Reinhard Männer and Bernard Manderick, eds. *Parallel Problem Solving from Nature 2 (PPSN-II)*. Sept. 28–30, 1992, Brussels, Belgium. Amsterdam, The Netherlands: Elsevier B.V., 1992.
- [146] Francesco Marcelloni, Kurosh Madani, Niki van Stein, and Joaquim Filipe, eds. *16th International Joint Conference on Computational Intelligence (IJCCI'24)*. Nov. 20–22, 2024, Porto, Portugal. Porto, Portugal: SciTePress: Science and Technology Publications, Lda, 2024. ISSN: 2184-3236. ISBN: 978-989-758-721-4. doi:10.5220/0000195000003837.
- [147] Silvano Martello and Daniele Vigo. "Exact Solution of the Two-Dimensional Finite Bin Packing Problem". 44(3):388–399, Mar. 1998. doi:10.1287/mnsc.44.3.388 (cit. on p. 312).
- [148] Stephan Mertens. "Exhaustive Search for Low-Autocorrelation Binary Sequences". *Journal of Physics A: Mathematical and General* 29(18):L473, Sept. 1996. Bristol, England, UK: IOP Publishing Ltd. ISSN: 0305-4470. doi:10.1088/0305-4470/29/18/005 (cit. on p. 317).
- [149] Peter Merz and Bernd Freisleben. "A Comparison of MAMemetic Algorithms, TSTabu Search, and ACOAnt Colonies for the QAPQuadratic Assignment Problem". In: *Congress on Evolutionary Computation (CEC'1999)*. July 6–9, 1999, Washington, D.C., USA. Piscataway, NJ, USA: Institute of Electrical and Electronics Engineers (IEEE), 1999, pp. 2063–2070. doi:10.1109/CEC.1999.785529 (cit. on p. 320).

References XXII



- [150] Zbigniew "Zbyszek" Michalewicz. *Genetic Algorithms + Data Structures = Evolution Programs*. Berlin/Heidelberg, Germany: Springer-Verlag GmbH Germany, 1996. ISBN: 978-3-540-58090-4. doi:10.1007/978-3-662-03315-9 (cit. on pp. 69–83, 321).
- [151] Burkhard Militzer, Michele Zamparelli, and Dieter Beule. "Evolutionary Search for Low Autocorrelated Binary Sequences". *IEEE Transactions on Evolutionary Computation* 2(1):34–39, Apr. 1998. Los Alamitos, CA, USA: IEEE Computer Society. ISSN: 1089-778X. doi:10.1109/4235.728212 (cit. on p. 317).
- [152] Alfonsas Misevičius. "A Tabu Search Algorithm for the Quadratic Assignment Problem". *Computational Optimization and Applications* 30:95–111, Jan. 2005. London, England, UK: Springer Nature Limited. ISSN: 0926-6003. doi:10.1007/s10589-005-4562-x (cit. on p. 322).
- [153] Alfonsas Misevičius. "A Modified Simulated Annealing Algorithm for the Quadratic Assignment Problem". *Informatica* 14(4):497–514, Jan. 2003. Vilnius, Lithuania: Vilnius University, Institute of Data Science and Digital Technologies (DMSTI), Lithuanian Academy of Sciences. ISSN: 0868-4952. doi:10.15388/Informatica.2003.037 (cit. on p. 321).
- [154] Alfonsas Misevičius. *An Implementation of the Iterated Tabu Search Algorithm for the Quadratic Assignment Problem*. Working Paper. Kaunas, Lithuania: Kaunas University of Technology, 2008. See also ¹⁵⁵ (cit. on p. 297).
- [155] Alfonsas Misevičius. "An Implementation of the Iterated Tabu Search Algorithm for the Quadratic Assignment Problem". *OR Spectrum: Quantitative Approaches in Management. Formerly Operations-Research-Spektrum* 34(3):665–690, July 2012. London, England, UK: Springer Nature Limited. ISSN: 0171-6468. doi:10.1007/s00291-011-0274-z. See also ¹⁵⁴ (cit. on pp. 297, 320, 322).
- [156] Melanie Mitchell. *An Introduction to Genetic Algorithms*. Complex Adaptive Systems. Cambridge, MA, USA: MIT Press, Feb. 1998. ISBN: 978-0-262-13316-6. URL: <http://boente.eti.br/fuzzy/ebook-fuzzy-mitchell.pdf> (visited on 2025-08-08) (cit. on pp. 69–83, 321).
- [157] Nenad Mladenović and Pierre Hansen. "Variable Neighborhood Search". *Computers & Operations Research* 24(11):1097–1100, Nov. 1997. Amsterdam, The Netherlands: Elsevier B.V. ISSN: 0305-0548. doi:10.1016/S0305-0548(97)00031-2 (cit. on p. 324).
- [158] Wai Ho Mow, Ke-Lin Du, and Wei Hsiang Wu. "New Evolutionary Search for Long Low Autocorrelation Binary Sequences". *IEEE Transactions on Aerospace and Electronic Systems* 51(1):290–303, Jan. 2015. Piscataway, NJ, USA: Institute of Electrical and Electronics Engineers (IEEE). ISSN: 0018-9251. doi:10.1109/TAES.2014.130518 (cit. on p. 317).

References XXIII



- [159] Heinz Mühlenbein. "How Genetic Algorithms Really Work: Mutation and Hillclimbing". In: *Parallel Problem Solving from Nature 2 (PPSN-II)*. Sept. 28–30, 1992, Brussels, Belgium. Ed. by Reinhard Männer and Bernard Manderick. Amsterdam, The Netherlands: Elsevier B.V., 1992, pp. 15–26. URL: <https://www.researchgate.net/publication/284805798> (visited on 2025-08-15) (cit. on pp. 106–111, 194–196, 319).
- [160] Siegfried Nijssen and Thomas Bäck. "An Analysis of the Behavior of Simplified Evolutionary Algorithms on Trap Functions". *IEEE Transactions on Evolutionary Computation* 7(1):11–22, Feb. 2003. Los Alamitos, CA, USA: IEEE Computer Society. ISSN: 1089-778X. doi:10.1109/TEVC.2002.806169 (cit. on pp. 150–155, 203–206, 322).
- [161] Eugeniusz Nowicki and Czesław Smutnicki. "A Fast Taboo Search Algorithm for the Job Shop Problem". *Management Science* 42(6):783–938, June 1996. Catonsville, MD, USA: The Institute for Operations Research and the Management Sciences (INFORMS). ISSN: 0025-1909. doi:10.1287/mnsc.42.6.797 (cit. on p. 322).
- [162] Regina O. Obe and Leo S. Hsu. *PostgreSQL: Up and Running*. 3rd ed. Sebastopol, CA, USA: O'Reilly Media, Inc., Oct. 2017. ISBN: 978-1-4919-6336-4 (cit. on p. 320).
- [163] Yann Ollivier, Ludovic Arnold, Anne Auger, and Nikolaus Hansen. "Information-Geometric Optimization Algorithms: A Unifying Picture via Invariance Principles". *Journal of Machine Learning Research (JMLR)* 18(18):1–65, Apr. 2017. Cambridge, MA, USA: MIT Press. ISSN: 1532-4435. URL: <https://jmlr.org/papers/volume18/14-467/14-467.pdf> (visited on 2025-08-09) (cit. on pp. 91–96).
- [164] Richard E. Overill. "Codes and Ciphers: Julius Caesar, The Enigma, and the Internet". *Journal of Logic and Computation* 12(3):543, June 2002. Oxford, Oxfordshire, England, UK: Oxford University Press. ISSN: 0955-792X. doi:10.1093/LOGCOM/12.3.543 (cit. on pp. 230–239).
- [165] Tom Packebusch and Stephan Mertens. "Low Autocorrelation Binary Sequences". *Journal of Physics A: Mathematical and Theoretical* 49(16):165001, Mar. 2016. Bristol, England, UK: IOP Publishing Ltd. ISSN: 1751-8121. doi:10.1088/1751-8113/49/16/165001 (cit. on p. 317).
- [166] Panos Miltiades Pardalos, Ding-Zhu Du, and Ronald Lewis Graham, eds. *Handbook of Combinatorial Optimization*. 1st ed. Boston, MA, USA: Springer, 1998. ISBN: 978-1-4613-7987-4.

References XXIV



- [167] Panos Miltiades Pardalos, Oleg V. Shylo, and Alkis Vazacopoulos. "Solving Job Shop Scheduling Problems Utilizing the Properties of Backbone and "Big Valley"". *Computational Optimization and Applications* 47(1):61–76, Sept. 2010. London, England, UK: Springer Nature Limited. ISSN: 0926-6003. doi:10.1007/s10589-008-9206-5. An algorithm similar to SA. (Cit. on pp. 316, 321).
- [168] Francisco Parreño, Ramón Alvarez-Valdés, José Fernando Oliveira, and José Manuel Tamarit. "A Hybrid GRASP/VND Algorithm for Two- and Three-Dimensional Bin Packing". *Annals of Operations Research* 179(1):203–220, Sept. 2010. London, England, UK: Springer Nature Limited. ISSN: 0254-5330. doi:10.1007/s10479-008-0449-4 (cit. on pp. 312, 315, 324).
- [169] Bo Peng, Zhipeng Lü, and T. C. Edwin Cheng. "A Tabu Search/Path Relinking Algorithm to Solve the Job Shop Scheduling Problem". *Computers & Operations Research* 53:154–164, Jan. 2015. Amsterdam, The Netherlands: Elsevier B.V. ISSN: 0305-0548. doi:10.1016/j.cor.2014.08.006. URL: <http://arxiv.org/abs/1402.5613> (visited on 2026-09-30) (cit. on pp. 316, 322).
- [170] Ferdinando Pezzella and Emanuela Merelli. "A Tabu Search Method Guided by Shifting Bottleneck for the Job Shop Scheduling Problem". *European Journal of Operational Research* 120(2):297–310, Jan. 2000. Amsterdam, The Netherlands: Elsevier B.V. ISSN: 0377-2217. doi:10.1016/S0377-2217(99)00158-7. URL: [https://www2.cs.sfu.ca/CourseCentral/827/havens/papers/topic%5C%2310\(JobShop\)/Tabu%5C%20With%5C%20Shifting.pdf](https://www2.cs.sfu.ca/CourseCentral/827/havens/papers/topic%5C%2310(JobShop)/Tabu%5C%20With%5C%20Shifting.pdf) (visited on 2026-09-30) (cit. on p. 322).
- [171] Martin Pincus. "Letter to the Editor – A Monte Carlo Method for the Approximate Solution of Certain Types of Constrained Optimization Problems". *Operations Research* 18(6):1225–1228, Nov.–Dec. 1970. Catonsville, MD, USA: The Institute for Operations Research and the Management Sciences (INFORMS). ISSN: 0030-364X. doi:10.1287/opre.18.6.1225 (cit. on p. 321).
- [172] Marcelo Pinto, Cristóvão Silva, Matthias Thüerer, and Samuel Moniz. "Survey in Operations Research and Management Science. Nesting and Scheduling Optimization of Additive Manufacturing Systems: Mapping the Territory". *Computers & Operations Research* 165(106592), Feb. 2024. Amsterdam, The Netherlands: Elsevier B.V. ISSN: 0305-0548. doi:10.1016/j.cor.2024.106592. Mentions some scheduling tasks of Additive Manufacturing jobs can be viewed as instance of the 2BP|R|F. (Cit. on p. 312).

References XXV



- [173] Alexander Podlich, Thomas Weise (汤卫恩), Manfred Menze, and Christian Gorltdt. "Intelligente Wechselbrückensteuerung für die Logistik von Morgen". *Electronic Communications of the EASST (ECEASST)* 17(Communication in Distributed Systems), Feb. 27, 2009. The Netherlands: European Association of Software Science and Technology (EASST). ISSN: **1863-2122**. doi:[10.14279/tuj.eceasst.17.205](https://doi.org/10.14279/tuj.eceasst.17.205). In the proceedings of *Workshops der Wissenschaftlichen Konferenz Kommunikation in Verteilten Systemen 2009* (WowKiVS 2009), 3 6, 2009, Kassel, Hessen, Germany (cit. on pp. **4–9**).
- [174] Riccardo Poli, William B. Langdon, and Nicholas Freitag McPhee. *A Field Guide to Genetic Programming*. lulu.com, 2008. ISBN: **978-1-4092-0073-4**. URL: <https://www.researchgate.net/publication/216301261> (visited on 2025-08-18) (cit. on p. **314**).
- [175] *PostgreSQL Essentials: Leveling Up Your Data Work*. Sebastopol, CA, USA: O'Reilly Media, Inc., Mar. 2024 (cit. on p. **320**).
- [176] S. D. Prestwich. *Improved Branch-and-Bound for Low Autocorrelation Binary Sequences*. arXiv.org: Computing Research Repository (CoRR) abs/1305.6187. Ithaca, NY, USA: Cornell University Library, Apr. 3, 2024. doi:[10.48550/arXiv.1305.6187](https://doi.org/10.48550/arXiv.1305.6187). URL: <https://arxiv.org/abs/1305.6187> (visited on 2013-07-23). arXiv:1305.6187v2 [cs.AI] 23 Jul 2013 (cit. on p. **317**).
- [177] *Programming Languages – C, Working Document of SC22/WG14*. International Standard ISO/3IEC9899:2017 C17 Ballot N2176. Geneva, Switzerland: International Organization for Standardization (ISO) and International Electrotechnical Commission (IEC), Nov. 2017. URL: <https://files.lhmouse.com/standards/ISO%20C%20N2176.pdf> (visited on 2024-06-29) (cit. on p. **313**).
- [178] Sanatan Rai and George Vairaktarakis. "NP-Complete Problems and Proof Methodology". In: *Encyclopedia of Optimization*. Ed. by Christodoulos A. Floudas and Panos Miltiades Pardalos. 2nd ed. Boston, MA, USA: Springer, Sept. 2008, pp. 2675–2682. ISBN: **978-0-387-74758-3**. doi:[10.1007/978-0-387-74759-0_462](https://doi.org/10.1007/978-0-387-74759-0_462) (cit. on p. **326**).
- [179] Soraya B. Rana and L. Darrell Whitley. "Genetic Algorithm Behavior in the MAXSAT Domain". In: *5th International Conference on Parallel Problem Solving from Nature (PPSN V)*. Sept. 27–30, 1998, Amsterdam, The Netherlands. Ed. by Ágoston Endre Eiben, Thomas Bäck, Marc Schoenauer, and Hans-Paul Schwefel. Lecture Notes in Computer Science (LNCS). 1998, pp. 785–794. ISSN: **0302-9743**. ISBN: **978-3-540-65078-2**. doi:[10.1007/BFb0056920](https://doi.org/10.1007/BFb0056920) (cit. on p. **318**).
- [180] Gerhard Reinelt. "TSPLIB – A Traveling Salesman Problem Library". *ORSA Journal on Computing* 3(4):376–384, Aut. 1991. Catonsville, MD, USA: The Institute for Operations Research and the Management Sciences (INFORMS). ISSN: **0899-1499**. doi:[10.1287/ijoc.3.4.376](https://doi.org/10.1287/ijoc.3.4.376) (cit. on p. **323**).

References XXVI



- [181] Gerhard Reinelt. *TSPLIB95*. Tech. rep. Heidelberg, Baden-Württemberg, Germany: Universität Heidelberg, Institut für Angewandte Mathematik, 1995–Apr. 28, 2016. URL: <https://github.com/shredderzwj/TSPLIB> (visited on 2026-09-25). The original Uniform Resource Locator (URL) of the repository has become defunct in 2026. Therefore, we provide the repository listed as main URL which contains the data. Additionally, you may also check <https://github.com/thomasWeise/tspSuite> of our own project *TSPSuite*, which contains all the TSPLib instances as well as Java code to load them. (Cit. on p. 323).
- [182] Ronald Linn Rivest, Adi Shamir, and Leonard M. Adleman. "A Method for Obtaining Digital Signatures and Public-Key Cryptosystems". *Communications of the ACM (CACM)* 21(2):120–126, Feb. 1978. New York, NY, USA: Association for Computing Machinery (ACM). ISSN: 0001-0782. doi:10.1145/359340.359342 (cit. on pp. 230–239, 321).
- [183] Günter Rudolph. *Convergence Properties of Evolutionary Algorithms*. Vol. 35 of Forschungsergebnisse zur Informatik. Hamburg, Germany: Verlag Dr. Kovač, 1997. ISSN: 1435-6260. ISBN: 978-3-86064-554-3 (cit. on pp. 197–199, 317).
- [184] Stuart J. Russell and Peter Norvig. *Artificial Intelligence: A Modern Approach (AIMA)*. 4th ed. Hoboken, NJ, USA: Pearson Education, Inc. ISBN: 978-1-292-40113-3. URL: <https://aima.cs.berkeley.edu> (visited on 2024-06-27) (cit. on p. 312).
- [185] Sartaj Sahni and Teofilo Francisco Gonzalez Arce. "P-complete Approximation Problems". *Journal of the ACM (JACM)* 23(3):555–565, July 1976. New York, NY, USA: Association for Computing Machinery (ACM). ISSN: 0004-5411. doi:10.1145/321958.321975. URL: <https://sites.cs.ucsb.edu/~teo/papers/JACM-PCOM.pdf> (visited on 2026-02-21) (cit. on p. 320).
- [186] Guntram Scheithauer. *Introduction to Cutting and Packing Optimization: Problems, Modeling Approaches, Solution Methods*. Vol. 263 of International Series in Operations Research & Management Science (ISOR). Cham, Switzerland: Springer, 2018. ISSN: 0884-8289. ISBN: 978-3-319-64402-8. doi:10.1007/978-3-319-64403-5 (cit. on pp. 4–9, 313).
- [187] Shai Shalev-Shwartz and Shai Ben-David. *Understanding Machine Learning: From Theory to Algorithms*. Cambridge, England, UK: Cambridge University Press (CUP), July 2014. ISBN: 978-1-107-05713-5. URL: <http://www.cs.huji.ac.il/~shaish/UnderstandingMachineLearning> (visited on 2024-06-27) (cit. on p. 318).

References XXVII



- [188] Guoyong Shi, Hitoshi Imai, and Nobuo Sannomiya. "New Encoding Scheme for Solving Job Shop Problems by Genetic Algorithm". In: *35th IEEE Conference on Decision and Control (CDC'96)*. Vol. 4. Dec. 11–13, 1996. Kobe, Hyogo-ken, Japan: Institute of Electrical and Electronics Engineers (IEEE), 1997, pp. 4395–4400. ISBN: 978-0-7803-3590-5. doi:10.1109/CDC.1996.577484. URL: <https://www.researchgate.net/publication/224238934> (visited on 2026-09-30). Proposes a permutations-with-repetitions based encoding for the JSSP. (Cit. on pp. 288, 316, 325).
- [189] Oleg V. Shylo. *Job Shop Scheduling (Personal Homepage)*. Knoxville, TN, USA: Oleg V. Shylo, Aug. 2019. URL: <http://optimizer.com/jobshop.php> (visited on 2026-09-30). Contains many JSSP benchmark instances. (Cit. on pp. 302, 316).
- [190] Oleg V. Shylo and Hesam Shams. *Boosting Binary Optimization via Binary Classification: A Case Study of Job Shop Scheduling*. arXiv.org: Computing Research Repository (CoRR) abs/1808.10813. Proposes a TS using regression to adapt the tabu tenures for each variable of the solution vector of a JSSP separately. Many results are available in the GitHub repository <https://github.com/quasiquasar/gta-jobshop-data>; other results are published Shylo's website <http://optimizer.com/jobshop.php>. Ithaca, NY, USA: Cornell University Library, Aug. 31, 2018. doi:10.48550/arXiv.1808.10813. URL: <https://arxiv.org/abs/1808.10813> (visited on 2026-09-30) (cit. on pp. 316, 322).
- [191] Hossein M. Soroush. "Scheduling in Stochastic Bicriteria Single Machine Systems with Set-up Times". *International Journal of Planning and Scheduling* 1(1–2):109–145, Jan. 2011. Geneva, Switzerland: Inderscience Publishers. ISSN: 2044-494X. doi:10.1504/IJPS.2011.044605. A scheduling problem is phrased as QAP. (Cit. on p. 320).
- [192] Leon Steinberg. "The Backboard Wiring Problem: A Placement Algorithm". *SIAM Review* 3(1):37–50, Jan. 1961. Philadelphia, PA, USA: Society for Industrial and Applied Mathematics Publications (SIAM). ISSN: 0036-1445. doi:10.1137/1003003. The problem is modeled as a QAP (cit. on p. 320).
- [193] Robert H. Storer, S. David Wu, and Renzo Vaccari. "New Search Spaces for Sequencing Problems with Application to Job Shop Scheduling". *Management Science* 38(10):1495–1509, Oct. 1992. Catonsville, MD, USA: The Institute for Operations Research and the Management Sciences (INFORMS). ISSN: 0025-1909. doi:10.1287/mnsc.38.10.1495 (cit. on p. 316).

References XXVIII



- [194] Thomas Strecker and Leonhard Hennig. "Automatic Layouting of Personalized Newspaper Pages". In: *Operations Research Proceedings 2008: Selected Papers of the Annual International Conference of the German Operations Research Society (GOR)*. Sept. 3–5, 2008, Augsburg, Bayern, Germany: University of Augsburg. Ed. by Bernhard Fleischmann, Karl-Heinz Borgwardt, Robert Klein, and Axel Tuma. Vol. 2008 of Operations Research Proceedings (ORP), Gesellschaft für Operations Research e.V., (GOR). Berlin/Heidelberg, Germany: Springer-Verlag GmbH Germany, 2009, pp. 469–474. ISSN: **0721-5924**. doi:[10.1007/978-3-642-00142-0_76](https://doi.org/10.1007/978-3-642-00142-0_76) (cit. on p. **312**).
- [195] Thomas Stützle. "Iterated Local Search for the Quadratic Assignment Problem". *European Journal of Operational Research* 174(3):1519–1539, Nov. 2006. Amsterdam, The Netherlands: Elsevier B.V. ISSN: **0377-2217**. doi:[10.1016/j.ejor.2005.01.066](https://doi.org/10.1016/j.ejor.2005.01.066) (cit. on pp. **315**, **320**).
- [196] Éric D. Taillard. "Benchmarks for Basic Scheduling Problems". *European Journal of Operational Research* 64(2):278–285, Jan. 1993. Amsterdam, The Netherlands: Elsevier B.V. ISSN: **0377-2217**. doi:[10.1016/0377-2217\(93\)90182-M](https://doi.org/10.1016/0377-2217(93)90182-M). URL: <https://arodes.hes-so.ch/record/8224/files/Preprint.pdf> (visited on 2026-02-20) (cit. on p. **316**).
- [197] Éric D. Taillard. "Comparison of Iterative Searches for the Quadratic Assignment Problem". *Location Science. Now incorporated into Computers & Operations Research* 3(2):87–105, Aug. 1995. Amsterdam, The Netherlands: Elsevier B.V. doi:[10.1016/0966-8349\(95\)00008-6](https://doi.org/10.1016/0966-8349(95)00008-6) (cit. on p. **322**).
- [198] Éric D. Taillard. "Robust Taboo Search for the Quadratic Assignment Problem". *Parallel Computing* 17(4–5):443–455, July 1991. Amsterdam, The Netherlands: Elsevier B.V. ISSN: **0167-8191**. doi:[10.1016/S0167-8191\(05\)80147-4](https://doi.org/10.1016/S0167-8191(05)80147-4) (cit. on pp. **287**, **303**, **320**, **322**).
- [199] Éric D. Taillard and Luca M. Gambardella. *Adaptive Memories for the Quadratic Assignment Problem*. Tech. rep. IDSIA-87-97. Lugano, Switzerland: Istituto Dalle Molle Di Studi Sull Intelligenza Artificiale (IDSIA), Sept. 10, 1997. URL: <https://mistic.iict-heig-vd.ch/taillard/articles.dir/TaillardGambardella1997.pdf> (visited on 2026-09-28). A MA using TS from ¹⁹⁸ as well as a ACO-based approach refining its solutions with a very simple SLS are presented. (Cit. on p. **320**).
- [200] Alkin Tezuysal and Ibrar Ahmed. *Database Design and Modeling with PostgreSQL and MySQL*. Birmingham, England, UK: Packt Publishing Ltd, July 2024. ISBN: **978-1-80323-347-5** (cit. on p. **320**).
- [201] Dirk Thierens, David Edward Goldberg, and Angela Guimarães Pereira. "Domino Convergence, Drift, and the Temporal-Salience Structure of Problems". In: pp. 535–540. doi:[10.1109/ICEC.1998.700085](https://doi.org/10.1109/ICEC.1998.700085) (cit. on p. **311**).

References XXIX



- [202] Sarah Louise Thomson, Gabriela Ochoa, Daan van den Berg, Tianyu Liang (梁天宇), and Thomas Weise (汤卫恩). "Entropy, Search Trajectories, and Explainability for Frequency Fitness Assignment". In: *Parallel Problem Solving from Nature (PPSN XVIII)*. Vol. 1. Sept. 14–18, 2024, Hagenberg, Mühlkreis, Austria. Ed. by Michael Affenzeller, Stephan M. Winkler, Anna V. Kononova, Heike Trautmann, Tea Tušar, Penousal Machado, and Thomas Bäck. Vol. 15148 of Lecture Notes in Computer Science (LNCS). Cham, Switzerland: Springer. ISSN: 0302-9743. ISBN: 978-3-031-70054-5. doi:10.1007/978-3-031-70055-2_23. Explores RLS, RLS with FFA (FRLS), and SA on the QAP. (Cit. on pp. 251, 252, 314, 318).
- [203] Ulrich Wilhelm Thonemann and Andreas Bölte. *An Improved Simulated Annealing Algorithm for the Quadratic Assignment Problem*. Working Paper. Paderborn, Nordrhein-Westfalen, Germany: School of Business, Department of Production and Operations Research, University of Paderborn, 1994 (cit. on p. 321).
- [204] Marco Tomassini. "Complex Networks Analysis of the Energy Landscape of the Low Autocorrelation Binary Sequences Problem". *Physica A: Statistical Mechanics and its Applications* 577:126089, Sept. 1, 2021. Amsterdam, The Netherlands: Elsevier B.V. ISSN: 0378-4371. doi:10.1016/j.physa.2021.126089. Lists the LABS as $\mathcal{NP}$ -hard. (Cit. on p. 317).
- [205] Daan van den Berg, Florian Braam, Mark Moes, Emiel Suilen, and Sandjai Bhulai. "Almost Squares in Almost Squares: Solving the Final Instance". In: *5th International Conference on Data Analytics (DATA ANALYTICS'2016)*. Oct. 9–13, 2016, Venice, Venezia, Veneto, Italy. Ed. by Sandjai Bhulai and Ivana Semanjski. Wilmington, DE, USA: International Academy, Research, and Industry Association (IARIA), 2016, pp. 69–74. ISSN: 2308-4464. ISBN: 978-1-61208-510-4. URL: https://math.vu.nl/~sbhulai/publications/data_analytics2016b.pdf (visited on 2026-10-01). This poses a very interesting 2BP|R|F problem, where "almost squares," i.e., rectangles with sizes $(i, i + 1)$, must be placed in an almost square. (Cit. on pp. 312, 313).
- [206] Clarissa Van Hoyweghen, David Edward Goldberg, and Bart Naudts. "From Twomax To The Ising Model: Easy And Hard Symmetrical Problems". In: *4th Genetic and Evolutionary Computation Conference (GECCO'2002)*. July 9–13, 2002, New York, NY, USA. Ed. by William B. Langdon, Erick Cantú-Paz, Keith E. Mathias, Rajkumar Roy, David Davis, Riccardo Poli, Karthik Balakrishnan, Vasant G. Honavar, Günter Rudolph, Joachim Wegener, Larry Bull, Mitchell A. Potter, Alan C. Schultz, Julian F. Miller, Edmund K. Burke, and Natasa Jonoska. Burlington, MA, USA/San Mateo, CA, USA: Morgan Kaufmann Publishers, 2002, pp. 626–633. ISBN: 978-1-55860-878-8 (cit. on pp. 200–202, 324).

References XXX



- [207] Dieter Vandesande, Christoph Jabs, Jeremias Berg, Johannes Fichte, George Katsirelos, Ruben Martins, André Schidler, and Dominik Schreiber. *MaxSAT Evaluation 2026: Solvers, Benchmarks & Results*. v1. Geneva, Switzerland: zenodo (hosted by European Organization for Nuclear Research (CERN)), July 14, 2026. doi:[10.5281/zenodo.21358014](https://doi.org/10.5281/zenodo.21358014). See also <https://maxsat-evaluations.github.io>. (Cit. on p. 318).
- [208] Kristian Verduin, Sarah Louise Thomson, and Daan van den Berg. "Too Constrained for Genetic Algorithms. Too Hard for Evolutionary Computing. The Traveling Tournament Problem". In: *15th International Joint Conference on Computational Intelligence (IJCCI'23)*. Nov. 13–15, 2023, Rome, Italy. Ed. by Niki van Stein, Francesco Marcelloni, H. K. Lam, Marie Cottrell, and Joaquim Filipe. Porto, Portugal: SciTePress: Science and Technology Publications, Lda, 2023, pp. 246–257. ISSN: 2184-3236. ISBN: 978-989-758-674-3. doi:[10.5220/0012192100003595](https://doi.org/10.5220/0012192100003595) (cit. on p. 323).
- [209] Petr Vilím, Philippe Laborie, and Paul Shaw. "Failure-Directed Search for Constraint-Based Scheduling". In: *12th International Conference on the Integration of AI and OR Techniques in Constraint Programming (CPAIOR'2015)*. Ed. by Laurent Michel. Vol. 9075 of Theoretical Computer Science and General Issues (LNTCS), sub-series of Lecture Notes in Computer Science (LNCS). Barcelona, Spain: Springer, 2015, pp. 437–453. ISSN: 2512-2010. ISBN: 978-3-319-18007-6. doi:[10.1007/978-3-319-18008-3_30](https://doi.org/10.1007/978-3-319-18008-3_30). URL: <https://www.researchgate.net/publication/280223626> (visited on 2026-09-30) (cit. on p. 316).
- [210] Thomas Weise (汤卫思). *Databases*. Hefei, Anhui, China (中国安徽省合肥市): Hefei University (合肥大学), School of Artificial Intelligence and Big Data (人工智能与大数据学院), 2025. URL: <https://thomasweise.github.io/databases> (visited on 2025-01-05) (cit. on pp. 273, 313).
- [211] Thomas Weise (汤卫思). *Global Optimization Algorithms – Theory and Application*. self-published, 2009. URL: <https://www.researchgate.net/publication/200622167> (visited on 2025-07-25) (cit. on pp. 69–83, 314, 318, 321).
- [212] Thomas Weise (汤卫思). *jssplInstancesAndResults: Results, Data, and Instances of the Job Shop Scheduling Problem*. San Francisco, CA, USA: GitHub Inc, 2019–2020. URL: <https://github.com/thomasWeise/jssplInstancesAndResults> (visited on 2025-08-20) (cit. on p. 316).
- [213] Thomas Weise (汤卫思). *Programming with C*. Hefei, Anhui, China (中国安徽省合肥市): Hefei University (合肥大学), School of Artificial Intelligence and Big Data (人工智能与大数据学院), 2026. URL: <https://thomasweise.github.io/programmingWithC> (visited on 2026-05-10) (cit. on p. 313).

References XXXI



- [214] Thomas Weise (汤卫思). *Programming with Python*. Hefei, Anhui, China (中国安徽省合肥市): Hefei University (合肥大学), School of Artificial Intelligence and Big Data (人工智能与大数据学院), 2024–2026. URL: <https://thomasweise.github.io/programmingWithPython> (visited on 2025-01-05) (cit. on pp. 272, 320).
- [215] Thomas Weise (汤卫思), Raymond Chiong, Jörg Lässig, Ke Tang (唐珂), Shigeyoshi Tsutsui, Wenxiang Chen (陈文祥), Zbigniew "Zbyszek" Michalewicz, and Xin Yao (姚新). "Benchmarking Optimization Algorithms: An Open Source Framework for the Traveling Salesman Problem". *IEEE Computational Intelligence Magazine (CIM)* 9(3):40–52, Aug. 2014. Piscataway, NJ, USA: Institute of Electrical and Electronics Engineers (IEEE). ISSN: 1556-603X. doi:10.1109/MCI.2014.2326101. Applies a multitude of algorithms including SLSES, EAs, MAs, ACO, and EDAs to the TSPLib instances. (Cit. on pp. 13–16, 314, 323, 324).
- [216] Thomas Weise (汤卫思), Xinlu Li (李新路), Yan Chen (陈岩), and Zhize Wu (吴志泽). "Solving Job Shop Scheduling Problems without using a Bias for Good Solutions". In: *23rd Genetic and Evolutionary Computation Conference (GECCO'2021), Companion Volume*. July 10–14, 2021, Lille, France. Ed. by Krzysztof Krawiec. New York, NY, USA: Association for Computing Machinery (ACM), 2021, pp. 1459–1466. ISBN: 978-1-4503-8351-6. doi:10.1145/3449726.3463124. Applies FFA to the JSSP. (Cit. on pp. 253, 254, 282, 325).
- [217] Thomas Weise (汤卫思), Li Niu (牛力), and Ke Tang (唐珂). "AOAB – Automated Optimization Algorithm Benchmarking". In: *12th Annual Conference Companion on Genetic and Evolutionary Computation (GECCO'2010)*. July 7–11, 2010, Portland, OR, USA. Ed. by Martin Pelikan and Jürgen Branke. New York, NY, USA: Association for Computing Machinery (ACM), 2010, pp. 1479–1486. ISBN: 978-1-4503-0073-5. doi:10.1145/1830761.1830763 (cit. on p. 314).
- [218] Thomas Weise (汤卫思), Alexander Podlich, and Christian Gorltdt. "Solving Real-World Vehicle Routing Problems with Evolutionary Algorithms". In: *Natural Intelligence for Scheduling, Planning and Packing Problems*. Ed. by Raymond Chiong and Sandeep Dhakal. Vol. 250 of *Studies in Computational Intelligence (SCI)*. Berlin/Heidelberg, Germany: Springer-Verlag GmbH Germany, Sept. 2009. Chap. 2, pp. 29–53. ISSN: 1860-949X. ISBN: 978-3-642-04038-2. doi:10.1007/978-3-642-04039-9_2 (cit. on pp. 4–9).
- [219] Thomas Weise (汤卫思), Alexander Podlich, Manfred Menze, and Christian Gorltdt. "Optimierte Güterverkehrsplanung mit Evolutionären Algorithmen". *Industrie Management – Zeitschrift für industrielle Geschäftsprozesse* 10(3):37–40, June 2009. Berlin, Germany: GITO mbH Verlag (cit. on pp. 4–9).

References XXXII



- [220] Thomas Weise (汤卫思), Alexander Podlich, Kai Reinhard, Christian Gorltdt, and Kurt Geihs. "Evolutionary Freight Transportation Planning". In: *Applications of Evolutionary Computing (EvoWorkshops 2009): Proceedings of EvoCOMNET, EvoENVIRONMENT, EvoFIN, EvoGAMES, EvoHOT, EvoIASP, EvoINTERACTION, EvoMUSART, EvoNUM, EvoSTOC, EvoTRANSLOG*. Apr. 15–17, 2009, Tübingen, Baden-Württemberg, Germany. Ed. by Mario Giacobini, Anthony Brabazon, Stefano Cagnoni, Gianni A. Caro, Anikó Ekárt, Anna Isabel Esparcia-Alcázar, Muddassar Farooq, Andreas Fink, and Penousal Machado. Vol. 5484 of Theoretical Computer Science and General Issues (LNTCS), sub-series of Lecture Notes in Computer Science (LNCS). Berlin/Heidelberg, Germany: Springer-Verlag GmbH Germany, Apr. 2009, pp. 768–777. ISSN: 2512-2010. doi:10.1007/978-3-642-01129-0_87 (cit. on pp. 4–9).
- [221] Thomas Weise (汤卫思) and Ke Tang (唐珂). "Evolving Distributed Algorithms with Genetic Programming". *IEEE Transactions on Evolutionary Computation* 16(2):242–265, Apr. 2012. Los Alamitos, CA, USA: IEEE Computer Society. ISSN: 1089-778X. doi:10.1109/TEVC.2011.2112666 (cit. on p. 314).
- [222] Thomas Weise (汤卫思), Mingxu Wan (万明绪), Ke Tang (唐珂), and Xin Yao (姚新). "Evolving Exact Integer Algorithms with GPGenetic Programming". In: *IEEE Congress on Evolutionary Computation (CEC'2014)*. July 6–11, 2014, China, Beijing (中国北京市). Piscataway, NJ, USA: Institute of Electrical and Electronics Engineers (IEEE), 2014, pp. 1816–1823. ISBN: 978-1-4799-1488-3. doi:10.1109/CEC.2014.6900292 (cit. on pp. 255, 256).
- [223] Thomas Weise (汤卫思), Mingxu Wan (万明绪), Pu Wang (王璞), Ke Tang (唐珂), Alexandre Devert, and Xin Yao (姚新). "Frequency Fitness Assignment". *IEEE Transactions on Evolutionary Computation* 18(2):226–243, Apr. 2014. Los Alamitos, CA, USA: IEEE Computer Society. ISSN: 1089-778X. doi:10.1109/TEVC.2013.2251885. The article introducing FFA. (Cit. on pp. 247, 248, 255, 256, 314).
- [224] Thomas Weise (汤卫思) and Zhize Wu (吴志泽). "Replicable Self-Documenting Experiments with Arbitrary Search Spaces and Algorithms". In: *25th Conference on Genetic and Evolutionary Computation (GECCO'2023), Companion Volume*. July 15–19, 2023, Lisbon, Portugal. Ed. by Sara Silva and Luís Paquete. New York, NY, USA: Association for Computing Machinery (ACM), 2023, pp. 1891–1899. ISBN: 979-8-4007-0120-7. doi:10.1145/3583133.3596306. Introduces the experiment execution and data collection facilities of moptipy. (Cit. on pp. 274, 314, 318).

References XXXIII



- [225] Thomas Weise (汤卫恩), Zhize Wu (吴志泽), Xinlu Li (李新路), and Yan Chen (陈岩). "Frequency Fitness Assignment: Making Optimization Algorithms Invariant under Bijective Transformations of the Objective Function Value". *IEEE Transactions on Evolutionary Computation* 25(2):307–319, Apr. 2021. Los Alamitos, CA, USA: IEEE Computer Society. ISSN: 1089-778X. doi:10.1109/TEVC.2020.3032090 (cit. on pp. 167, 194–210, 221, 247, 248, 253, 254, 311, 314, 316, 317, 319, 322, 324).
- [226] Thomas Weise (汤卫恩), Zhize Wu (吴志泽), Xinlu Li (李新路), Yan Chen (陈岩), and Jörg Lässig. "Frequency Fitness Assignment: Optimization without Bias for Good Solutions can be Efficient". *IEEE Transactions on Evolutionary Computation* 27(4):980–992, 2023. Los Alamitos, CA, USA: IEEE Computer Society. ISSN: 1089-778X. doi:10.1109/TEVC.2022.3191698. Applies many FFA-based algorithm variants to problems such as OneMax, LeadingOnes, Linear Harmonic Function (LinHarm), TwoMax, Trap, Jump, Plateau, Ising Model, and N-Queens. (Cit. on pp. 247, 248, 311, 314, 317, 322, 324).
- [227] Thomas Weise (汤卫恩), Yuezhong Wu (吴越钟), Raymond Chiong, Ke Tang (唐珂), and Jörg Lässig. "Global versus Local Search: The Impact of Population Sizes on Evolutionary Algorithm Performance". *Journal of Global Optimization* 66(3):511–534, Feb. 2016. London, England, UK: Springer Nature Limited. ISSN: 0925-5001. doi:10.1007/s10898-016-0417-5 (cit. on pp. 13–16, 323).
- [228] L. Darrell Whitley. "The GENITOR Algorithm and Selection Pressure: Why Rank-Based Allocation of Reproductive Trials is Best". In: *3rd International Conference on Genetic Algorithms (ICGA'1989)*. June 1989, Fairfax, VA, USA: George Mason University. Ed. by J. David Schaffer. Burlington, MA, USA/San Mateo, CA, USA: Morgan Kaufmann Publishers, 1989, pp. 116–123. ISBN: 978-1-55860-066-9. URL: <https://www.researchgate.net/publication/2527551> (visited on 2025-08-08) (cit. on pp. 197–199, 317, 321).
- [229] James M. Wilson. "Gantt Charts: A Centenary Appreciation". *European Journal of Operational Research* 149(2):430–437, Sept. 2003. Amsterdam, The Netherlands: Elsevier B.V. ISSN: 0377-2217. doi:10.1016/S0377-2217(02)00769-5 (cit. on p. 314).
- [230] L. Wong and Lai-Soon Lee. "Heuristic Placement Routines for Two-Dimensional Bin Packing Problem". 5(4):334–341, Dec. 2009. doi:10.3844/jmssp.2009.334.341. URL: <https://www.thescipub.com/pdf/jmssp.2009.334.341> (visited on 2026-10-02). A heuristic for the 2BP|R|F and the 2BP|O|F (cit. on p. 279).

References XXXIV




- [231] CAO Xiang (曹翔), Zhize Wu (吴志泽), Daan van den Berg, and Thomas Weise (汤卫思). "Randomized Local Search vs. NSGA-II vs. Frequency Fitness Assignment on The Traveling Tournament Problem". In: *16th International Joint Conference on Computational Intelligence (IJCCI'24)*. Nov. 20–22, 2024, Porto, Portugal. Ed. by Francesco Marcelloni, Kurosh Madani, Niki van Stein, and Joaquim Filipe. Porto, Portugal: SciTePress: Science and Technology Publications, Lda, 2024, pp. 38–49. ISSN: **2184-3236**. ISBN: **978-989-758-721-4**. doi:[10.5220/0012891500003837](https://doi.org/10.5220/0012891500003837) (cit. on pp. **257–263**, **318**, **323**, **325**).
- [232] Takeshi Yamada and Ryohei Nakano. "A Genetic Algorithm Applicable to Large-Scale Job-Shop Instances". In: *Parallel Problem Solving from Nature 2 (PPSN-II)*. Sept. 28–30, 1992, Brussels, Belgium. Ed. by Reinhard Männer and Bernard Manderick. Amsterdam, The Netherlands: Elsevier B.V., 1992, pp. 281–290. URL: <https://www.researchgate.net/publication/220701684> (visited on 2026-09-30) (cit. on p. **316**).
- [233] Kinza Yasar and Craig S. Mullins. *Definition: Database Management System (DBMS)*. Newton, MA, USA: TechTarget, Inc., June 2024. URL: <https://www.techtarget.com/searchdatamanagement/definition/database-management-system> (visited on 2025-01-11) (cit. on p. **314**).
- [234] François Yergeau. *UTF-8, A Transformation Format of ISO 10646*. Request for Comments (RFC) 3629. Wilmington, DE, USA: Internet Engineering Task Force (IETF), Nov. 2003. URL: <https://www.ietf.org/rfc/rfc3629.txt> (visited on 2025-02-05). See Unicode and ¹⁰⁵ (cit. on p. **324**).
- [235] Anne L. Young. *Mathematical Ciphers: From Caesar to RSA*. Vol. 25 of Mathematical World. Providence, RI, USA: American Mathematical Society (AMS), 2006. ISSN: **1055-9426**. ISBN: **978-0-8218-3730-6** (cit. on pp. **230–239**, **321**).
- [236] Jiazheng Zeng (曾嘉政), Thomas Weise (汤卫思), Zhize Wu (吴志泽), and Markus Wagner. "When Frequency Fitness Assignment Fails: Trapped States in Frequency-Guided Local Search". In: *28th Genetic and Evolutionary Computation Conference (GECCO'2026)*. July 13–17, 2026, San José, Costa Rica. Ed. by Leonardo Trujillo and Ting Hu. New York, NY, USA: Association for Computing Machinery (ACM), 2026, pp. 233–242. ISBN: **979-8-4007-2487-9**. doi:[10.1145/3795095.3805098](https://doi.org/10.1145/3795095.3805098). Explores (1 + 1) EA, (1 + 1) FEA, RLS, and FRLS as well as hybrid algorithms on a variety of discrete benchmarks such as OneMax, LeadingOnes, LinHarm, Binary Integer (BinInt), TwoMax, Trap, Jump, Plateau, Ising Model, N-Queens and also applies them to the search for Low-Autocorrelation Binary Sequences (LABS). (Cit. on pp. **106–111**, **200–202**, **257–263**, **311**, **314**, **316**, **317**, **319**, **321**, **322**, **324**).

References XXXV




- [237] Chaoyong Zhang, Xinyu Shao, Yunqing Rao, and Haobo Qiu. "Some New Results on Tabu Search Algorithm Applied to the Job-Shop Scheduling Problem". In: *Tabu Search*. Ed. by Wassim Jaziri. London, England, UK: IntechOpen Limited, Aug. 1, 2008. Chap. 8. ISBN: 978-3-902613-34-9. doi:10.5772/5593. URL: <https://www.intechopen.com/chapters/4596> (visited on 2026-09-30) (cit. on pp. 316, 322).
- [238] Rui Zhao (赵睿), Tianyu Liang (梁天宇), Zhize Wu (吴志泽), Daan van den Berg, Matthias Thüerer, and Thomas Weise (汤卫思). "Randomized Local Search on the 2D Rectangular Bin Packing Problem with Item Rotation". In: *26th Genetic and Evolutionary Computation Conference (GECCO'2024)*. July 14–18, 2024, Melbourne, VIC, Australia. Ed. by Xiaodong Li and Julia Handl. New York, NY, USA: Association for Computing Machinery (ACM), 2024, pp. 235–238. ISBN: 979-8-4007-0494-9. doi:10.1145/3638530.3654139 (cit. on pp. 4–9, 26–29, 257–263, 312, 315, 318).
- [239] Rui Zhao (赵睿), Zhize Wu (吴志泽), Daan van den Berg, Matthias Thüerer, Tianyu Liang (梁天宇), Ming Tan (檀明), and Thomas Weise (汤卫思). "Randomized Local Search for Two-Dimensional Bin Packing and a Negative Result for Frequency Fitness Assignment". In: *16th International Joint Conference on Computational Intelligence (IJCCI'24)*. Nov. 20–22, 2024, Porto, Portugal. Ed. by Francesco Marcelloni, Kurosh Madani, Niki van Stein, and Joaquim Filipe. Porto, Portugal: SciTePress: Science and Technology Publications, Lda, 2024, pp. 15–26. ISSN: 2184-3236. ISBN: 978-989-758-721-4. doi:10.5220/0012888500003837 (cit. on pp. 4–9, 26–29, 257–263, 312, 313, 315, 318).

Glossary I



- (1 + 1) EA** The (1 + 1) EA is a local search algorithm that retains the best solution x_c discovered so far during the search^{35,64}. In each step, it applies a unary search operator to this best-so-far solution x_c and derives a new solution x_n . If the new solution x_n is *better or equally good* when compared with x_c , i.e., not worse, then it replaces it, i.e., is stored as the new x_c . If the search space are bit strings of length n , then the (1 + 1) EA uses a unary search operator that flips each bit independently with probability m/n , where usually $m = 1$. This operator is the main difference to randomized local search (RLS). The (1 + 1) EA is a special case of the $(\mu + \lambda)$ evolutionary algorithm $((\mu + \lambda)$ EA) where $\mu = \lambda = 1$.
- (1 + 1) FEA** The (1 + 1) EA with FFA plugged in^{225,226,236}. On the discrete bit-string domains, this algorithm has a very specific structure: Its unary search operator flips each bit with probability $1/n$, where n is the dimension of the search space, distinguishing it from the unary operator in FRLS which flips exactly one bit. On other domains, such as permutations, the term is used synonymously with FRLS.
- $(\mu + \lambda)$ EA** The $(\mu + \lambda)$ EA is an evolutionary algorithm (EA) where, in each generation, λ offspring solutions are generated from the current population of μ parent solutions. The offspring and parent populations are merged, yielding $\mu + \lambda$ solutions, from which then the best μ solutions are retained to form the parent population of the next generation. If the search space is the bit strings of length n , then this algorithm usually applies a mutation operator flipping each bit independently with probability $1/n$.
- BinInt** The *Binary Integer Problem* is a benchmark problem for bit-string based black-box search^{201,236}. It is very similar to OneMax: It tries to maximize the number of 1 bits in the bit string of a chosen dimension n . Different from OneMax, where each bit has the same weight in the objective function, the bits of BinInt have a exponentially increasing weight: The bit string is treated as a binary-encoded integer whose value should be maximized. The objective function $f(x)$ of the minimization variant of this problem can be defined as $f(x) = 2^n - 1 - \sum_{i=1}^n 2^{i-1} \cdot x_i$. The problem is unimodal, i.e., has only a single global optimum and no local optimum. It is fully separable, i.e., we can optimize each variable separately.
- LinHarm** The Linear Harmonic Function is a benchmark problem for bit-string based black-box search^{58,64,236}. It is very similar to OneMax: It tries to maximize the number of 1 bits in the bit string of a chosen dimension n . Different from OneMax, where each bit has the same weight in the objective function, the bits of LinHarm have a linear increasing weight. The objective function $f(x)$ of the minimization variant of this problem can be defined as $f(x) = \frac{1}{2}n(n+1) - \sum_{i=1}^n i \cdot x_i$. The problem is unimodal, i.e., has only a single global optimum and no local optimum. It is fully separable, i.e., we can optimize each variable separately. The (1 + 1) EA can solve this problem with an expected runtime in $\Theta(n \ln n)$ ^{58,64}.

Glossary II



- 2BP** In the two-dimensional Bin Packing Problem (BP), the goal is to pack rectangles into rectangular bins without overlap and such that their edges are parallel to the edges of the bins^{106,137,139}. The 2BP is strongly $\mathcal{NP}$ -hard¹³⁹. The variants of this problem include the 2BP|O|F, 2BP|R|F, 2BP|O|G, and 2BP|R|G^{138,139}. Different objective function for the 2BP|O|F and 2BP|R|F are presented in²³⁸. 2BPs have many practical applications, including cutting (wood, glass)¹³⁹, packing (transportation, warehouse)¹³⁹, and newspaper page layout¹⁹⁴.
- 2BP|O|F** In the oriented 2BP with free cuts, the rectangles to pack have fixed orientations, i.e., cannot be rotated, but can otherwise be arranged freely^{138,139,147,239}. Permutation-based search spaces can be used for this problem by using the Improved Bottom Left (IBL) encoding. The state-of-the-art (SOTA) for this problem comprises^{22,27,41,89,168,239}.
- 2BP|O|G** In the oriented 2BP with guillotine cuts, the rectangles to pack have fixed orientations, i.e., cannot be rotated, and must be arranged such that they can be extracted by edge-to-edge cuts^{138,139}.
- 2BP|R|F** In this variant of the 2BP with free cuts, the rectangles to pack can be rotated by 90° if need be and can freely be arranged^{19,138,139,238,239}. Besides packing and cutting, this problem also occurs in scheduling and build formation in additive manufacturing^{131,172}. The almost-squares-in-almost-squares (Asqas) problem²⁰⁵ is also a 2BP|R|F. Search spaces based on signed permutations can be used for this problem by using the IBL encoding. The SOTA for this problem comprises^{22,41,89,238,239}.
- 2BP|R|G** In this variant of the 2BP with guillotine cuts, the rectangles to pack can be rotated by 90° if need be, but must be arranged such that they can be extracted by edge-to-edge cuts^{138,139}.
- ACO** *Ant Colony Optimization* is a nature-inspired optimization method for combinatorial problems where solutions are generated by “ants” that move from node to node in a graph choosing edges based on (1) the simulated pheromone on the edges and (2) a per-edge heuristic value^{60–62}. If an ant produced a good solution, “pheromone” is distributed over the edges it visited, making it more likely to be re-visited by other ants.
- AI** Artificial Intelligence, see, e.g.,¹⁸⁴

Glossary III



Asqas An “almost-square” be a rectangle with size $i \times (i + 1)$ with $i \in \mathbb{N}_1$. The *almost-squares-in-almost-squares problem*²⁰⁵ is a special case of the 2BP|R|F. Here, almost-square rectangles of sizes $1 \times 2, 2 \times 3, \dots, n \times (n + 1)$ must be placed into an almost-square bin without waste. This requires that there exists a natural number $p \in \mathbb{N}_1$ such that $p(p + 1) = \sum_{i=1}^n i(i + 1)$ ²⁰⁵. There are exactly five Asqas instances²⁰⁵, namely with bin sizes 1×2 for $n = 1, p = 1, 5 \times 4$ for $n = 3, p = 4, 15 \times 16$ for $n = 8, p = 15, 55 \times 56$ for $n = 20, p = 55$, and 119×120 for $n = 34, p = 119$.

ATSP The general case for TSPs are *asymmetric Traveling Salesperson Problems*, where the $n \times n$ distance matrix A does not need to be symmetric. In other words, it is possible that $\exists a, b \in 1..n$ with $A[a, b] \neq A[b, a]$. Notice that while such index tuple may exist, this is not always or necessarily the case. In this case, one may consider the STSP as a special case of the ATSP, while ATSPs may be considered as synonymous to TSPs.

BP The *Bin Packing Problem*^{67,186} is one of the classical problems from Operations Research (OR). The goal is to pack a set of objects into containers, using as few containers as possible. Different flavors of BPs can be distinguished, e.g., by the number of dimensions^{51,137} that the objects and containers have (see, e.g., the 2BP), and/or whether the objects can be rotated²³⁹, as well as other constraints and limitations. Both the one- and two-dimensional BP are strongly $\mathcal{NP}$ -hard¹³⁹.

BRKGA The *Biased Random Key Genetic Algorithm* is a EA with a continuous search space $\mathbb{X} \subset [0, 1]^n$ and a decoding function γ translating this space to something else and biased, uniform, and elitist mating strategies^{91,142}. The *bias* comes from the fact that one of the parents used for the binary operation is biased to be of higher fitness than the other parent⁹¹. Often, γ is the Random Keys encoding^{14,15} procedure translating $\mathbb{X}$ to permutations of the first n natural numbers⁹⁰. Sometimes, it is actually a MA further refining the translation result with a local search (LS)⁹⁰. Sometimes the permutations are then further translated to more complex data structures, such as Gantt charts for the JSSP⁹⁰, or packing plans for 2BP 3D packing⁸⁹.

C is a programming language, which is very successful in system programming situations^{55,177,213}.

Concorde is an exact solver for the TSP^{5,43,44}, which could even solve the largest instance of TSPLib (with 85 900 cities) to optimality.

DB A *database* is an organized collection of structured information or data, typically stored electronically in a computer system. Databases are discussed in our book *Databases*²¹⁰.

Glossary IV




- DBMS** A *database management system* is the software layer located between the user or application and the database (DB). The DBMS allows the user/application to create, read, write, update, delete, and otherwise manipulate the data in the DB²³³.
- EA** An *evolutionary algorithm* is a metaheuristic optimization method that maintains a population of candidate solutions, which undergo selection (where better solutions are chosen with higher probability) and reproduction (where mutation and recombination create a new candidate solution from one or two existing ones, respectively)^{8,211}.
- FE** *Objective function evaluations* are an implementation-independent measure of runtime for optimization algorithms^{9,215,217,224}. 1 FE equals to one evaluated candidate solution during the optimization process.
- FFA** *Frequency Fitness Assignment* (中文: 频率适应度分配) is a algorithm plugin for optimization methods applied to discrete or combinatorial problems with not-too-many different possible objective values^{223,225,226}. It replaces the objective values in all comparisons with their absolute encounter frequency so far during the search. FFA has successfully been applied to the MaxSAT^{225,226}, the TSP^{132,133}, and the QAP^{38,202}, amongst others. Its properties have been intensely researched on discrete benchmark functions such as OneMax, LeadingOnes, Trap, TwoMax, Jump, and Plateau^{225,226,236}. The most common realizations of FFA so far are the (1 + 1) FEA and FRLS.
- FSSP** The *Flow Shop Scheduling Problem* is a variant of a JSSP where all products go through the same sequence of machines^{93,116}.
- Gantt chart** Gantt charts are two-dimensional diagrams illustrating the steps of a process^{118,229}. Their horizontal axis represents the time, the vertical axis represents work packages, machines, or workers. In the diagram area, bars located at certain vertical locations indicate that the work package, machine, or worker is processed or works at the time range covered by the bar as projected to the horizontal axis.
- GP** *Genetic Programming*^{122,174,211,221} is the application of metaheuristic optimization, usually in form of an EAs, to a search space comprised of tree datastructures. These tree datastructures often represent programs or mathematical expressions.

Glossary V



- GRASP A *Greedy Randomized Adaptive Search Procedure* is a metaheuristic where each cycle consists of two main components^{71,73,74}: First, a starting point is generated using a heuristic method (as opposed to being randomly sampled). Then, a LS is applied to refine the solution. Then, another cycle starts and proceeds in the same way. The overall best solution is retained as result. Many examples for applications of GRASPs are listed in⁷⁴. GRASP in combination with VND has been applied to the 2BP|O|F in¹⁶⁸.
- IBL The *improved bottom left* heuristic is a one-shot algorithm constructing a solution for 2BP¹³⁶. For the 2BP|O|F problem variant, the input of the IBL algorithm is a permutation of the first n natural numbers, each number identifying one rectangle to be packed. For the 2BP|R|F problem flavor, the permutation elements are signed, where a negative sign indicates a rotation by 90° ¹³⁶. In^{238,239} it is adapted to a multi-bin situation as follows: The algorithm iterates over the (potentially signed) permutation x and places the rectangles into the packing plan in the prescribed order. It first places the rectangle outside on top of the current bin b , with its bottom-right corner onto the top-right corner of the current bin b . It then moves the rectangle downwards and leftwards as far as possible, prioritizing the downward movement whenever possible. If the rectangle cannot be moved any further, it checks if it is completely contained in the bin b . If yes, it can remain there. Otherwise, a new bin is opened ($b \leftarrow b + 1$) and the rectangle is placed at its bottom-left corner. Once a new bin is opened, this bin is used for all further insertions. IBL is suitable as a decoding function γ inside an EA¹³⁶. Historically, it improves upon the BL algorithm¹¹⁰: That algorithm cannot represent all possible optimal packings using a permutation, but the IBL can¹³⁶.
- ILS An *iterated local search* is a variant of the LS which applies cycles of local search and perturbation¹⁹⁵. First, an initial solution is generated and refined by the local search. Then the cycle begins: A perturbation, i.e., a large search move that likely destroys a good part of the solution, is applied. The resulting new solution is refined by local search. Then, an acceptance criterion decides whether we should use this or the previous solution to continue in the next cycle. ILS has successfully been applied to the QAP.

Glossary VI



- Ising Model** The Ising models are benchmark problems for bit-string based black-box search ^{58,75,76,236}. Here, a neighborhood is defined around each bit. The bit needs to have the same value as all bits in the neighborhood structure T . Thus, we try to achieve that all bits have the same value. The objective function $f(x)$ of the minimization variant of this problem family can be defined as $f(x, T) = \sum_{(i,j) \in T} |x_i - x_j|$, where T contains the index pairs of neighboring bits and is defined differently for the Ising model instances Ising 1D and Ising 2D. The problems are highly epistatic, as all variables interact with some other variables.
- Ising 1D** The 1D is a benchmark problem for bit-string based black-box search ^{58,76,236}. The bits are arranged in a one-dimensional ring and we try to minimize the number of bits that have different values than their neighbors. Hence, the neighborhood structure T is defined as $T_{1D} = \{(i+1, (i+1 \bmod n) + 1) \mid i \in [0..n-1]\}$. The problems are highly epistatic, as all variables interact with some other variables. The $(1+1)$ EA has an expected runtime in $\mathcal{O}(n^3)$ on 1-Dimensional Ising Model (Ising 1D) ⁷⁶.
- Ising 2D** The 2D is a benchmark problem for bit-string based black-box search ^{58,75,236}. The bits are arranged in a two-dimensional torus and we try to minimize the number of bits that have different values than their neighbors. Hence, the neighborhood structure $T = T_{2D}$ is defined as the set of all $\{(\alpha + \beta N, \gamma + \delta N)\}$ pairs with $\alpha, \beta, \gamma, \delta \in [0..N-1]$ and either $(\gamma = (\alpha + 1) \bmod N \text{ and } \delta = \beta) \text{ or } (\gamma = \alpha \text{ and } \delta = (\beta + 1) \bmod N)$ with $n = N^2$. The problems are highly epistatic, as all variables interact with some other variables. On a similar class of problems, the $(1+1)$ EA has an exponential expected runtime ⁷⁵.
- Java** is another very successful programming language, with roots in the C family of languages ^{26,143}.
- JSSP** The *Job Shop Scheduling Problem* ^{25,40,93,127} is one of the most prominent and well-studied scheduling tasks. In a JSSP instance, there are m machines and k jobs ¹⁹⁶. Each job must be processed once by each machine in a job-specific sequence and has a job-specific processing time on each machine. The goal is to find an assignment of jobs to machines that results in an overall shortest makespan, i.e., the schedule (Gantt chart) which can complete all the jobs in the shortest time. The JSSP is $\mathcal{NP}$ -complete ^{37,126,127}. The 8 most common sets of JSSP benchmark instances are abz ¹, dmu ⁵², ft ⁷⁷, la ¹²⁹, orb ⁶, swv ¹⁹³, ta ¹⁹⁶, and yn ²³². Their data can be found (sometimes partially) in several repositories, such as the OR-Library ^{16,17}, ¹⁸⁹, and ²¹², the latter of which also contains many results from existing works. Encodings based on permutations with repetition are proposed in ^{23,24,83,188} and used in ²²⁵. The SOTA of the JSSP includes ^{90,100,167,169,190,209,237}.

Glossary VII



Jump The Jump problem is a benchmark problem for bit-string based black-box search ^{64,80,236}. Like the OneMax, it tries to maximize the number of 1 bits in a bit string of chosen length n . However, the solutions representing the last ω bits around the optimum to flip are deceptive, meaning that they are actually worse and getting worse than surrounding solutions. The objective function $f(x)$ of the minimization variant is $n - \|x\|_1$ if $\|x\|_1 = n$ or $\|x\|_1 \leq n - \omega$ hold, and $\omega + \|x\|_1$ otherwise, where $\|x\|_1 = \sum_{i=1}^n x_i$. This means that, the larger ω , the larger the deceptive basin around the optimum that an algorithm needs to cross. An $(1+1)$ EA will converge to the resulting local optimum and thus have an expected runtime of $\Theta(n^\omega + n \ln n)$ ⁶⁴. In experiments, the $(1+1)$ FEA achieves polynomial runtime on Jump, seemingly in $\mathcal{O}(n^2 \ln n)$ ^{225,226,236}.

LABS *Low-Autocorrelation Binary Sequences* are bit strings of length n whose autocorrelation is as low as possible ^{28-30,53,54,81,148,151,158,165,176}. This means that sub-sequences of any length $1 \leq k < n$ should ideally never repeat. The objective function $f : \{0, 1\}^n \mapsto \mathbb{N}_0$ represents the energy of a bit string x and is subject to minimization. We can define it as $f(x) = \sum_{k=1}^{n-1} \left(\sum_{i=0}^{n-1-k} s_i \cdot s_{i+k} \right)^2$ with $s_j = 2x_j - 1$. Such sequences are needed for communication engineering ^{29,30,158}, cryptography ^{53,158}, as well as modulation pulses in radar and sonar ranging ¹⁶⁵. The LABS is $\mathcal{NP}$ -hard ²⁰⁴. The SOTA on LABS contains ^{28,30,53,54,158}.

LeadingOnes The LeadingOnes problem is a benchmark problem for bit-string based black-box search ^{183,228,236}. It tries to maximize the number of *leading* 1 bits in the bit string of a chosen dimension n . The objective function $f(x)$ of the minimization variant of this problem can be defined as $f(x) = n - \sum_{i=1}^n \prod_{j=1}^i x_j$. Different from OneMax, the contribution to the objective value of the bit at index i thus depends on the state of all the bits *before* this index. The problem is unimodal, i.e., has only a single global optimum and no local optimum. Different from OneMax, it is not separable, i.e., we can optimize each variable separately. The expected runtime of $(1+1)$ EA on LeadingOnes is in $\Theta(n^2)$ ⁶⁴. The average runtime $(1+1)$ FEA on LeadingOnes seems to be slower by factor proportional to n , i.e., seems to be in $\mathcal{O}(n^3)$ ²²⁵.

LK The *Lin-Kernighan* (LK) algorithm ¹³⁵ is a SLS method for the TSP. The LK algorithm performs iterative k -opt moves, i.e., in each step, it constructs the two sets X and Y of k edges such that removing the edges in X from the current tour T and then adding the edges from Y to T results in a better tour. The LK algorithm is one of the most classical approaches to the TSP.

LKH The *Lin-Kernighan-Helsgaun* algorithm ^{44,98,99} is a SLS method for the TSP based on the Lin-Kernighan (LK) algorithm ¹³⁵. LKH-1 was proposed in ⁹⁹ and LKH-2 in ⁹⁸. It holds the record in the *World TSP* ⁴⁵ as of 2025.

Glossary VIII



LS A *local search* is an algorithm where a single “current” candidate solution is maintained and new solutions are selected from its neighborhood in each step. Most LSEs are randomized, i.e., stochastic local search (SLS).

MA A *Memetic Algorithm* is an EA where each new solution is refined by a LS before it enters the population²¹¹. As LS, we can use, e.g., RLS, but TS^{39,78} is maybe a better choice. Some SOTA algorithms in some domains may be classified as MAs, e.g., Lin-Kernighan Helsgaun (LKH) basically uses a population that is refined via a local search. MAs also worked well on the JSSP^{39,100} and the TSP⁷⁸.

MaxSAT The goal of satisfiability problems is to find an assignment for n Boolean variables that make a given Boolean formula $F : \{0, 1\}^n \mapsto \{0, 1\}$ become true. In the *Maximum Satisfiability* problem (MaxSAT)¹⁰¹, F is given in conjunctive normal form, i.e., the variables appear either directly or negated in m “or” clauses, which are all combined into one “and.” The objective function $f(x)$, subject to minimization, computes the number of clauses which are false under the variable setting x . If $f(x) = 0$, then all clauses of F are true, which solves the problem. The MaxSAT problem is $\mathcal{NP}$ -complete⁴² and exhibits low epistasis but deceptiveness¹⁷⁹, making it hard for local searches. Typical benchmark instances can be found in SATLIB, which contains smaller-scale instances, and the up-to-date MaxSAT Evaluation (MSE), providing SOTA benchmarks, algorithms, and results.

metaheuristic A *metaheuristic* is an optimization algorithm which performs a cycle of trial and error during which candidate solutions are sampled from the solution space $\mathbb{Y}$ and evaluated using an objective function $f : \mathbb{Y} \mapsto \mathbb{R}$ ^{86,211}. The results of the objective function are used to decide which solution is promising. The neighborhoods around promising solutions or similarly-structured solutions are then sampled in the next cycle. Prominent metaheuristics are SLSes, SA, TS, and EAs.

ML Machine Learning, see, e.g.,¹⁸⁷

moptipy is the *Metaheuristic Optimization in Python* library²²⁴. It has been used in several different research works, including^{38,132–134,202,231,238,239}. Algorithms implemented by moptipy include EAs, (1 + 1) EA, RLS, SA, and the (1 + 1) FEA, amongst others. Learn more at <https://thomasweise.github.io/moptipy> and <https://thomasweise.github.io/moptipyapps>.

MSE The *MaxSAT Evaluation* is a regularly updated set of benchmark instances for the MaxSAT¹⁰⁷. It also includes solver software and benchmark results²⁰⁷.

Glossary IX



- N-Queens** The N-Queens Problem is a benchmark problem for bit-string based black-box search^{58,236}. The goal is to arrange N queens on an $N \times N$ chessboard so that none can attack the other. The search space has thus dimension $n = N^2$, with each bit standing for a field and encoding whether or not a queen is placed there. The objective function $f(x)$ of the minimization variant is $N - (\sum_{i=1}^n x_i) - N \sum_{\xi} \max \{0, Q_{\xi}(x) - 1\}$ where $Q_{\xi}(x)$ is the number of queens in the horizontal, vertical, or diagonale ξ . The problem is quite epistatic.
- OneMax** OneMax is the simplest possible benchmark problem for bit-string based black-box search^{65,159,236}. The goal is to maximize the number of 1 bits in the bit string of a chosen dimension n . The objective function $f(x)$ of the minimization variant of this problem can be defined as $f(x) = n - \sum_{i=1}^n x_i$. The problem is unimodal, i.e., has only a single global optimum and no local optimum. It is fully separable, i.e., we can optimize each variable separately. The expected runtime of $(1 + 1)$ EA on OneMax is in $\Theta(n \ln n)$ ^{56,159}. The average runtime $(1 + 1)$ FEA on OneMax seems to be slower by factor proportional to n , i.e., seems to be in $\mathcal{O}(n^2 \ln n)$ ²²⁵.
- OR** Operations Research (or Operational Research) is the application of sciences such as mathematics and computer science to the management and organization of systems, organizations, enterprises, factories, or projects. It encompasses the development and application of problem-solving methods and techniques (such as mathematical optimization, simulation, queueing theory and other stochastic models) with the goal to improve decision-making and efficiency⁴⁹.
- OR-Library** is a library of benchmark instances for various OR problems^{16,17} located at <https://people.brunel.ac.uk/~mastjjb/jeb/info.html>. It contains instances of the JSSP, 1D- and 2D-Packing, Knapsack, periodic TSPs, amongst others.
- Plateau** The Plateau problem is a benchmark problem for bit-string based black-box search^{4,236}. It is structured exactly like Jump, but instead of being deceptive, the last ω bits to flip around the optimum are neutral. The objective function $f(x)$ of the minimization variant is $n - \|x\|_1$ if $\|x\|_1 = n$ or $\|x\|_1 \leq n - \omega$ hold, and ω otherwise, where $\|x\|_1 = \sum_{i=1}^n x_i$. This means that, the larger ω , the larger the neutral plane around the optimum that an algorithm needs to cross. An $(1 + 1)$ EA has an expected runtime of $\Theta(n^{\omega})$ on plateaus⁴. The average runtime of the $(1 + 1)$ FEA on Plateaus is slower by a factor seemingly proportional in n .

Glossary X



PostgreSQL An open source object-relational DBMS ^{72,162,175,200}. See <https://postgresql.org> for more information.

Python The Python programming language ^{104,130,144,214}, i.e., what you will learn about in our book ²¹⁴. Learn more at <https://python.org>.

QAP The *Quadratic Assignment Problem* is an optimization problem where the goal is to assign a set of n facilities to a set of n locations ^{32,38,121,140}. Such an assignment can be represented as a permutation x of the first n natural numbers, where x_i specifies the location where facility i should be placed. For each QAP instance, a distance matrix A is given, where $A[a, b]$ specifies the distance from location a to location b , as well as a flow matrix B , where $B[i, j]$ is the amount of material flowing (e.g., daily) from facility i to facility j . The objective function $f(x)$ then rates a permutation x as $f(x) = \sum_{i=1}^n \sum_{j=1}^n A[x_i, x_j] * B[i, j]$. The QAP is $\mathcal{NP}$ -complete ^{63,185} and even among this problem class, is considered as particularly hard for metaheuristics ^{18,32,140,195}. The QAP has applications such as building layout ^{46,69,123}, keyboard layout ³⁴, circuit design ⁷⁰, wiring ¹⁹², and scheduling ¹⁹¹. Typical benchmark instances can be found in QAPLIB. SOTA algorithms for the QAP include ^{18,78,149,155,198,199}.

QAPLIB is a library of 136 benchmark instances for the Quadratic Assignment Problem (QAP) ^{31,33}, 28 of which have not yet been solved to optimality ³ (at least by 2023).


Random Keys encoding is a decoding procedure $\gamma : \mathbb{X} \mapsto \mathbb{Y}$ that maps a continuous search space $\mathbb{X} \subset [0, 1]^n$ which is a subset of the n -dimensional real numbers to the space $\mathbb{Y}$ of permutations of the first n natural numbers ^{14,15}. For example, on $n = 5$, the vector $x = (0.49, 0.91, 0.33, 0.75, 0.51)$ is translated to the permutation $y = (3, 1, 5, 4, 2)$, because $x_3 = 0.33$ has the smallest value, putting 3 at the beginning, $x_1 = 0.49$ the second-smallest, placing 1 second, $\dots$, and $x_2 = 0.91$ being the largest value meaning that the last number in y will be 2 ¹⁵. The advantage of the encoding is that we can search in $\mathbb{X}$ applying arbitrary mathematical operators, crossover, and mutation procedures, but will always get correct permutations. The disadvantage is that $|\mathbb{X}| \gg |\mathbb{Y}|$ and that there actually is no meaning underpinning moves in $\mathbb{X}$ in relation to their projected result in $\mathbb{Y}$.

Glossary XI



- RLS Randomized local search retains the best solution x_c discovered so far during the search and, in each step, it applies a unary search operator to this best-so-far solution x_c and derives a new solution x_n . If the new solution x_n is *better or equally good* when compared with x_c , i.e., not worse, then it replaces it, i.e., is stored as the new x_c . If the search space are bit strings of length n , then RLS uses a unary search operator that flips exactly one bit. This operator is the main difference to $(1 + 1)$ EA.
- FRLS The RLS with FFA plugged in ²³⁶. On the discrete bit-string domains, this algorithm has a very specific structure: Its unary search operator flips exactly one bit, distinguishing it from the unary operator in the $(1 + 1)$ FEA, which flips each bit with probability $1/n$. On other domains, such as permutations, we use the term synonymously with $(1 + 1)$ FEA.
- RSA The RSA algorithm ^{182,235}, named after its inventors Rivest, Shamir, and Adleman, is a widely used asymmetric cryptographic technique for digital signatures, key exchange, and encryption. In the latter case, it uses a public key for encryption and a private key for decryption. It is based on the mathematical complexity of factorizing large integers.
- RTS *Reactive Tabu Search* is a variant of TS where the length of the tabu list is adapted to the problem and to the current evolution of the search, and an escape strategy for diversifying the search is used when that is not sufficient ¹⁰⁻¹³. It has successfully been applied to a wide range of problems, from the QAP ^{11,12}, to Knapsack problems ^{10,12}, the N-K landscape ¹⁰ to the training of neural networks ¹³.
- SA *Simulated Annealing* is a SLS that sometimes accepts a worse solution ^{36,109,117,171,211}. The probability to do so decreases over time and with the difference in objective values, i.e., is the lower the worse the new solution is. SA performed well on a variety of problems, including the QAP ^{153,203} and the JSSP ¹⁶⁷.
- SATLIB is a library of benchmark instances for the Maximum Satisfiability (MaxSAT) available at <https://www.cs.ubc.ca/~hoos/SATLIB/index-ubc.html> ^{102,103}.
- SGA The Standard Genetic Algorithm ^{8,48,88,150,156,211} was the first EA. It maintains a population of solutions and applies mutation and crossover to generate offspring solutions. It uses fitness proportionate selection to choose which solutions should “survive” into the next generation, which today is considered a very bad design choice, see, e.g., ²²⁸.

Glossary XII



SLS *Stochastic local search* is a local search (LS), one of the simplest metaheuristic search paradigms¹⁰¹: A single “current” candidate solution is maintained and new solutions are *stochastically* sampled from its neighborhood, i.e., in a way that involves random numbers. If these solutions are deemed interesting based on their objective value, they replace the “current”. The cycle continues. Basic examples are RLS and $(1 + 1)$ EA. More complex examples that add mechanisms to escape local optima on top of the SLS paradigm are TS and SA.

SOTA State-of-the-Art, i.e., the best-performing methods for a field or problem type

STSP A *symmetric Traveling Salesperson Problem* is a special case of the TSP, where the $n \times n$ distance matrix A is symmetric, i.e., $A[a, b] = A[b, a] \forall a, b \in 1..n$.

Trap The Trap problem is a benchmark problem for bit-string based black-box search^{64,160,236}. It is structured exactly like OneMax, however the worst and the best solution are swapped. This makes the problem highly deceptive, as following the “gradient” in the search space leads the search away from the global optimum. For bit strings of length n , the objective function $f(x)$ of the minimization variant is 0 if $\|x\|_1 = 0$ and $n - \|x\|_1 - 1$ otherwise, where $\|x\|_1 = \sum_{i=1}^n x_i$. An $(1 + 1)$ EA will converge to the resulting local optimum and thus have an expected runtime of $\Theta(n^n)$ ⁶⁴. In experiments, the $(1 + 1)$ FEA achieves polynomial runtime on Trap, seemingly in $\mathcal{O}(n^2 \ln n)$ ^{225,226,236}.

TS *Tabu Search* is one of the most successful SLSes^{84,85,87,111}. In order to avoid returning to previous solutions, it declares certain solutions or search moves as “tabu.” For example, if a bit in a discrete problem has been flipped by the search operator, it may be forbidden to flip the bit again for some time, thus preventing the algorithm from getting trapped in a cycle. This rule may be overridden if a new best-so-far solution is discovered that outperforms all previous solutions, in which case it would be accepted (this is the so-called aspiration criterion). TS has performed well on the QAP^{11,12,152,155,197,198} and on the JSSP^{161,169,170,190,237}.

Glossary XIII



TSP In an instance of the *Traveling Salesperson Problem*, also known as *Traveling Salesman Problem*, a set of n cities or locations as well as the distances between them are given^{5,95,128,132,215,227}. The goal is to find the shortest round-trip tour that starts at one city, visits all the other cities one time each, and returns to the origin. The TSP is one of the most well-known $\mathcal{NP}$ -hard combinatorial optimization problems^{82,95,124}. The TSP has many applications⁵, including in transportation, logistics, (circuit) plotting and drilling problems⁹⁴, telescope aiming, and genome sequencing. Solutions are often encoded as permutations x of the first n natural numbers, where each city gets a number and the order of numbers in the permutation corresponds to the order of cities in the tour. The distances between the n cities are usually given in a $n \times n$ distance matrix A , where $A[a, b]$ is the distance from city a to city b with $a, b \in 1..n$. Then, the objective function subject to minimization is $f(x) = A[x_n, x_1] + \sum_{i=1}^{n-1} A[x_i, x_{i+1}]$. Typical benchmark instances can be found in TSPLib^{180,181}, the 8th DIMACS challenge^{113–115}, and the *World TSP* repository⁴⁵.

TSPLib is a library of benchmark instances for the Traveling Salesperson Problem (TSP)^{180,181}. Its original URL was available until 2025 and then became defunct. The repository <https://github.com/shredderzjw/TSPLIB> contains the data. Additionally, you may also check <https://github.com/thomasWeise/tspSuite>, which contains all the TSPLib instances as well as Java code to load them. The TSPLib contains 110 instances of the symmetric Traveling Salesperson Problems (STSPs) with scales n ranging from 14 to 85 900, but 93 instances have less than 2000 nodes. There also are 19 asymmetric Traveling Salesperson Problems (ATSPs) with scales $n \in 17..443$.

TTP The *Traveling Tournament Problem* is the combinatorial optimization problem of both efficiently and fairly organizing a tournament of n teams that play against each other in a pairwise fashion^{68,231}. The efficient part boils down to arranging the games such that the total travel length is short, which is somewhat similar to the classical TSP. Initially, each team is at its home location. On each day, a team needs to travel if its scheduled game is not at its present location. On the last day, each team may need to travel back home unless their last game is a home game. The total travel length sums up the lengths of all travels over all teams. The fair part is represented in several constraints, such as doubleRoundRobin, compactness, maxStreak, and noRepeat. The TTP is $\mathcal{NP}$ -hard²⁰⁸.

Glossary XIV



- TwoMax** The TwoMax problem is a benchmark problem for bit-string based black-box search^{80,206,236}. It has a global and a local optimum, both of about the same size, at opposite ends of the search space. For bit strings of length n , the objective function $f(x)$ of the minimization variant is 0 if $\|x\|_1 = n$ and $1 + n - \max\{\|x\|_1, n - \|x\|_1\}$ otherwise, where $\|x\|_1 = \sum_{i=1}^n x_i$. An $(1 + 1)$ EA has a 50/50 chance to converge to the local or global optimum and thus has an expected runtime in $\Theta(n^n)$ ^{79,80}. In experiments, the $(1 + 1)$ FEA achieves polynomial runtime seemingly in $\mathcal{O}(n^2 \ln n)$ on TwoMax^{225,226,236}.
- URI** A *Uniform Resource Identifier* is an identifier for an abstract or physical resource in the internet²³⁴. It can be a URL, a name, or both. URIs are supersets of URLs. The connection strings of the PostgreSQL DBMS are examples for URIs.
- URL** A *Uniform Resource Locator* identifies a resource in the World Wide Web (WWW) and a way to obtain it by describing a network access mechanism. The most notable example of URLs is the text you write into web browsers to visit websites²¹. URLs are subsets of Uniform Resource Identifiers (URIs).
- VND** *Variable Neighborhood Descend*; see VNS. VND in combination with GRASP has been applied to the 2BP|O|F in¹⁶⁸.
- VNS** *Variable Neighborhood Search* is a metaheuristic framework combining a systematic change of neighborhood with LS^{97,157}. A *neighborhood* structure in LS defines which solutions can be reached from a given solution within one search step. Usually, one uses a single unary operator and, hence, has a single neighborhood structure. However, for many problems, we can easily design many operators. For permutations, for example, one operator may swap two elements, another one may reverse a section of the permutation, and yet another one, while yet another one may rotate a subsequence one step to the left or right²¹⁵. In the VNS framework, a multiple neighborhoods are investigated in a systematic fashion. Assume that we have a list of neighborhood structures. Variable Neighborhood Descend (VND) works in a deterministic fashion. It finds the best solution that can be reached in one step from the current solution under the current neighborhood. If this is better than the current solution, we accept it and continue with the first neighborhood. Otherwise, we continue with the next neighborhood in the list. In Basic VNS, instead of picking the best move from the current neighborhood, the first improving move is used. Also, at the beginning of each cycle, a random point from the current neighborhood around the current solution is chosen as starting point.

Glossary XV



WWW World Wide Web ^{20,50}

$\circ^*$ the superscript $\star$ symbol denotes that $\circ$ is a global optimum, i.e., there is no better solution than $\circ$.

$i..j$ with $i, j \in \mathbb{Z}$ and $i \leq j$ is the set that contains all integer numbers in the inclusive range from i to j . For example, $5..9$ is equivalent to $\{5, 6, 7, 8, 9\}$

A the $n \times n$ distance matrix. $A[a, b]$ indicates the distance between locations a and b with $a, b \in 1..n$. A distance matrix can be symmetric, in which case $A[a, b] = A[b, a] \forall a, b \in 1..n$. Distance matrices represent the problem instance data in TSPs and part of the instance data of QAPs.

B the $n \times n$ flow matrix. $B[a, b]$ is the flow of goods between locations a and b with $a, b \in 1..n$. Flow matrices are one half of the problem instance data of QAPs.

$f(y)$ The *objective function* $f : \mathbb{Y} \mapsto \mathbb{R}$ can compute a cost or rating for each candidate solution y in the solution space $\mathbb{Y}$. The smaller this value, the better the solution, i.e., in the context of this work, objective functions are subject to minimization. Objective functions are not necessarily continuous and it is also quite common that they have integer or natural numbers as results, e.g., we often have $f : \mathbb{Y} \mapsto \mathbb{N}_0$ instead of $f : \mathbb{Y} \mapsto \mathbb{R}$.

$\gamma(x)$ The decoding function $\gamma : \mathbb{X} \mapsto \mathbb{Y}$ translates point from the search space $\mathbb{X}$ to one point y in the solution space $\mathbb{Y}$. It is a very common case that $\mathbb{X} = \mathbb{Y}$ and that the decoding function γ is the identity mapping. Examples for encodings that translate from a simple search space $\mathbb{X}$ to a complex solution data structure $\mathbb{Y}$ are the IBL algorithm that translates (potentially signed) permutations to two-dimensional packings on the 2BP, the permutation-based encoding of Gantt charts for the JSSP from ^{23,24,83,188,216}, or the permutation-based encoding of game plans for the TTP from ²³¹. Encodings can also translate between types of search spaces. The Random Keys encoding, for example, translates from $[0, 1]^n$ to permutations of the first n natural numbers..

k the number of jobs in an instance of the JSSP.

Glossary XVI



m the number of machines in an instance of the JSSP.

n We usually use n to denote the scale, i.e., the size of the problem to solve. For example, in a TSP, this may be the number of cities, in a discrete benchmark problem such as OneMax or Trap, this may be the number of bits over which the problem is defined, in a QAP, this may be the number of facilities and locations, and in a MaxSAT problem, this may be the number of variables that are input to the Boolean formula that we want to become true. There are also problems where the scale is not defined straightforwardly like this. For example, in a JSSP, we have a number of machines and a number of jobs, which together define the size of the problem. But even then, the scale n relates to the size of the solution space $\mathbb{Y}$, and, hence, also of the search space $\mathbb{X}$, which usually grow exponentially with n . And this is already the main issue: The larger n , the (exponentially) larger the number of possible solutions and thus, the larger the runtime of algorithms..

$\mathbb{N}_0$ the set of the natural numbers *including* 0, i.e., 0, 1, 2, 3, and so on. It holds that $\mathbb{N}_0 \subset \mathbb{Z}$.

$\mathbb{N}_1$ the set of the natural numbers *excluding* 0, i.e., 1, 2, 3, 4, and so on. It holds that $\mathbb{N}_1 \subset \mathbb{Z}$.

$\mathcal{NP}$ is the class of computational problems that can be solved in polynomial time by a non-deterministic machine and can be verified in polynomial time by a deterministic machine (such as a normal computer) ⁹².

$\mathcal{NP}$ -complete A decision problem is $\mathcal{NP}$ -complete if it is in $\mathcal{NP}$ and all problems in $\mathcal{NP}$ are reducible to it in polynomial time ^{92,178}. A problem is $\mathcal{NP}$ -complete if it is $\mathcal{NP}$ -hard and if it is in $\mathcal{NP}$.

$\mathcal{NP}$ -hard A problem is $\mathcal{NP}$ -hard if all problems in $\mathcal{NP}$ are reducible to it in polynomial time ⁹². Algorithms that guarantee to find the correct solutions of $\mathcal{NP}$ -hard problems ^{37,42,127} have a worst-case runtime that grows exponentially with the problem scale.

$\Omega(g(x))$ If $f(x) = \Omega(g(x))$, then there exist positive numbers $x_0 \in \mathbb{R}^+$ and $c \in \mathbb{R}^+$ such that $f(x) \geq c * g(x) \geq 0 \forall x \geq x_0$ ^{119,120}. In other words, $\Omega(g(x))$ describes a lower bound for function growth.

$\mathcal{O}(g(x))$ If $f(x) = \mathcal{O}(g(x))$, then there exist positive numbers $x_0 \in \mathbb{R}^+$ and $c \in \mathbb{R}^+$ such that $0 \leq f(x) \leq c * g(x) \forall x \geq x_0$ ^{7,119,120,125}. In other words, $\mathcal{O}(g(x))$ describes an upper bound for function growth.

$\Theta(g(x))$ If $f(x) = \Theta(g(x))$, then $f(x) = \mathcal{O}(g(x))$ and $f(x) = \Omega(g(x))$ ^{119,120}. In other words, $\Theta(g(x))$ describes an exact order of function growth.

Glossary XVII



- $\mathbb{R}$ the set of the real numbers.
- $\mathbb{R}^+$ the set of the positive real numbers, i.e., $\mathbb{R}^+ = \{x \in \mathbb{R} : x > 0\}$.
- $\mathbb{X}$ The search space $\mathbb{X}$ is the space through which an optimization algorithm navigates in order to find good solutions. The search operators of metaheuristics are used to sample points $x \in \mathbb{X}$, for example. On many benchmark problems, the objective functions f directly evaluate the elements $x \in \mathbb{X}$, i.e., are defined as $f : \mathbb{X} \mapsto \mathbb{R}$. However, very often these elements x are not the same data structures that the user is interested in and/or that the objective functions evaluate: It is common that the search space $\mathbb{X}$ is a simple and plain data structure that can be tackled with standard operations or mathematical tools, such as real vectors $\mathbb{R}^n$, permutations, or bit strings, whereas the solution space $\mathbb{Y}$ can be something more complicated. Then, the user only cares about the solutions $y \in \mathbb{Y}$ and not about the search space $\mathbb{X}$. A decoding $\gamma : \mathbb{X} \mapsto \mathbb{Y}$ is employed to translate the $x \in \mathbb{X}$ to $y = \gamma(x)$ with $y \in \mathbb{Y}$.
- x a point in the search space $\mathbb{X}$.
- $\mathbb{Y}$ the set of candidate solutions of an optimization problem is called the *solution space* $\mathbb{Y}$. The solution space corresponds to the data structure holding the candidate solutions y . These are the elements that are passed to the user after the optimization process is completed. They are also the parameters of the objective function(s) $f : \mathbb{Y} \mapsto \mathbb{R}$.
- y a candidate solution $y \in \mathbb{Y}$ is one possible solution to an optimization problem. After the optimization process is completed, one or multiple such solutions are passed to the user.
- $\mathbb{Z}$ the set of the integers numbers including positive and negative numbers and 0, i.e., $\dots, -3, -2, -1, 0, 1, 2, 3, \dots$, and so on. It holds that $\mathbb{Z} \subset \mathbb{R}$.