
# COMPRESSION TEE

15mm (1/2") Compression all ends, copper olive, Le

PRODUCT DATA SHEET

Thomas Gooden
Foundry Services

Part number **55070LF**

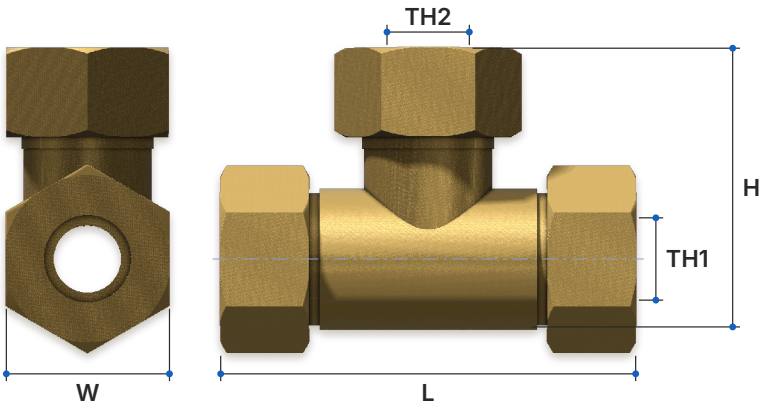




## SIZING CHART (MM)

| Part No. | L | H | W | TH1 | TH2 |
|---|---|---|---|---|---|
| 55070LF | | | 25.0 | 1/2" copper tube | 1/2" copper tube |

L = overall length across the run, assembled. H = bottom of run body to branch nut face, assembled. W2 = compression nut across flats. TH1 = run (tube). TH2 = branch (tube). All dimensions in millimetres.

## STANDARDS & APPROVALS

Lead Free

WaterMark Licence **WM-002387**
Certified to **AS 3688**
Lead Free

## SPECIFICATIONS

Connection **1/2" copper tube x 1/2" copper tube**

Maximum Pressure Rating **1600 kPa**

Working Temperature **1°C to 95°C**

## FEATURES

WaterMark Lead Free Approved

DR Lead Free Brass (CW511L) to AS 2345

Copper olive included

Tested and certified to AS 3688

## MATERIAL CHART

| Part | Material |
|---|---|
| Body | DR Lead Free Brass (CW511L) |
| Compression nut | DR Lead Free Brass (CW511L) |
| Olive | Copper |


For more information on **Thomas Gooden** products, contact:
Thomas Gooden Foundry Services
12 Stonny Batter Road, Minto NSW 2566 Australia
P. (02) 9603 9988 E. sales@thomasgooden.com.au
thomasgooden.com.au


ISO 9001 Certified
Quality Management System


Thomas Gooden Foundry Services Pty Ltd. All rights reserved 2026.
Specifications subject to change without notice. Drawing not to scale.