

# Git

The Git workflow as a first-class citizen, without a terminal.

## Branch switcher

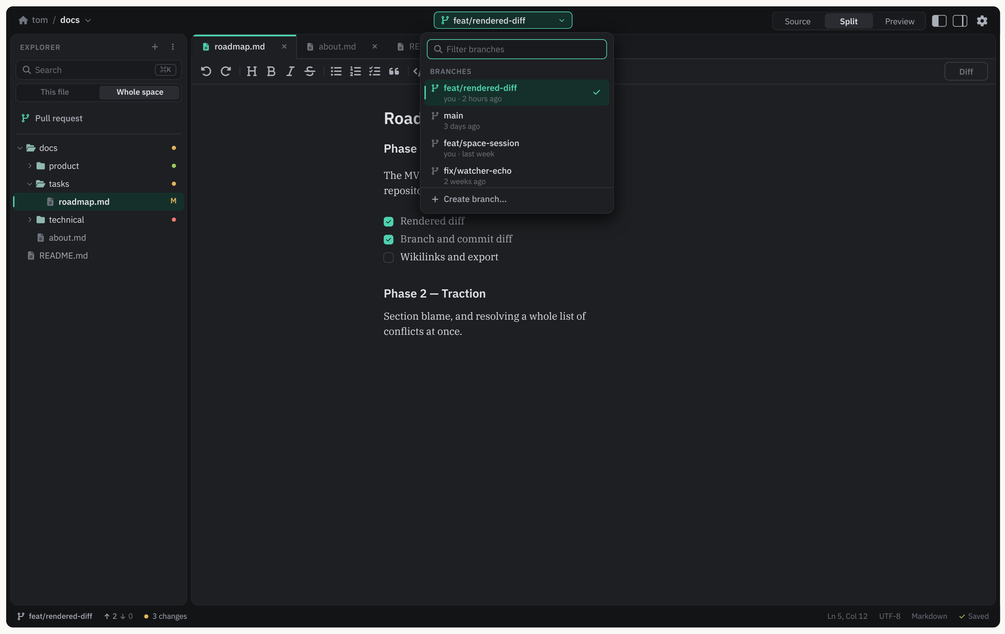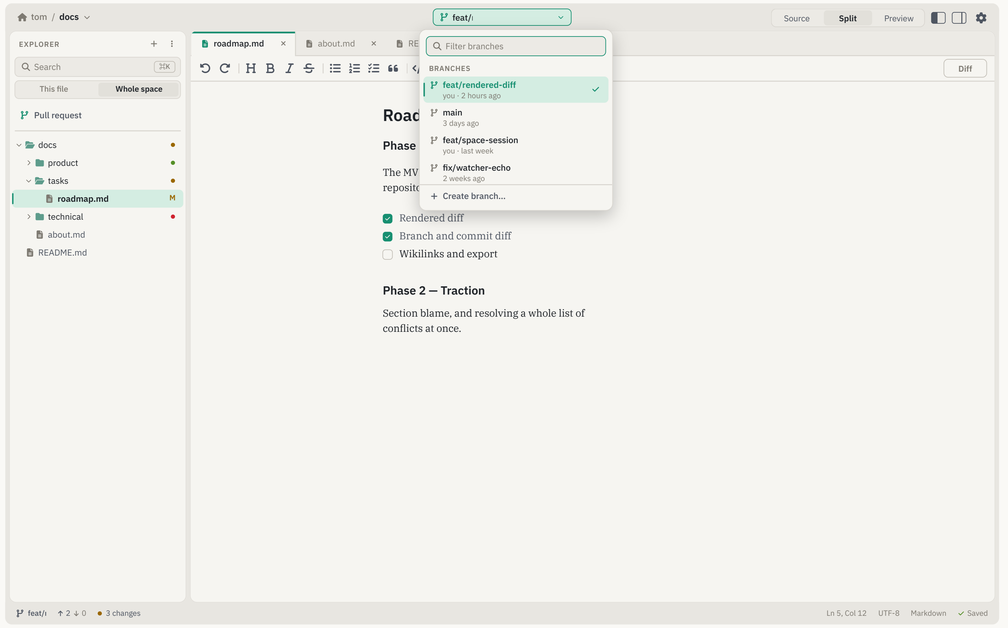


### Branch switcher


**The branch is always visible**
From the moment a space is open, and a detached HEAD is named as that.


**Switching updates every document**
Each open document is re-read at the version the new branch holds.

**Unsaved work blocks it**
The question names the document and offers staying as the third answer.

**Asked where it was raised**
In the switcher itself, not in a dialog over the window.

## Branch switcher · naming a new branch

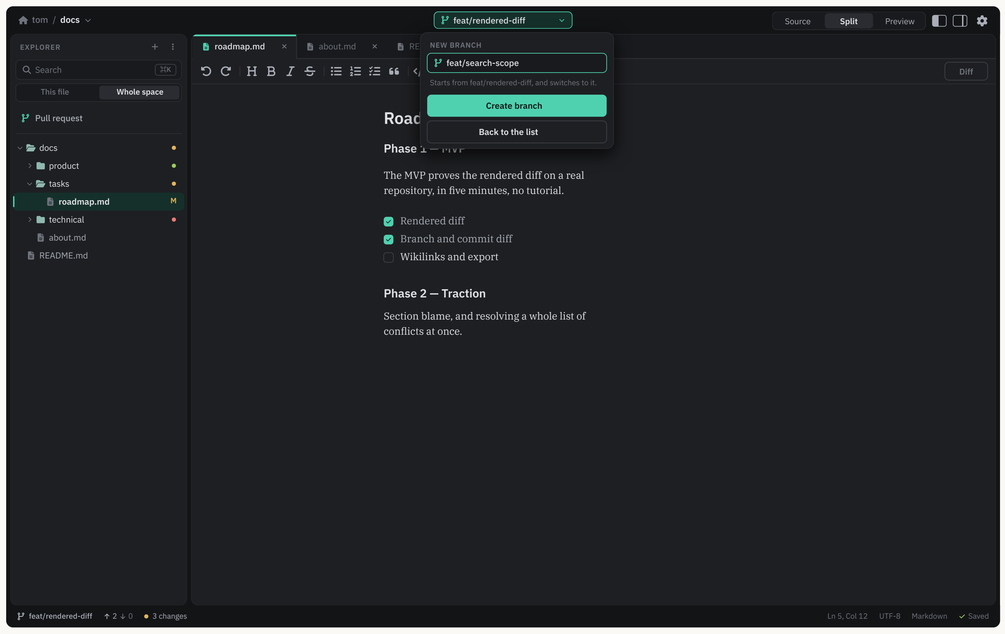

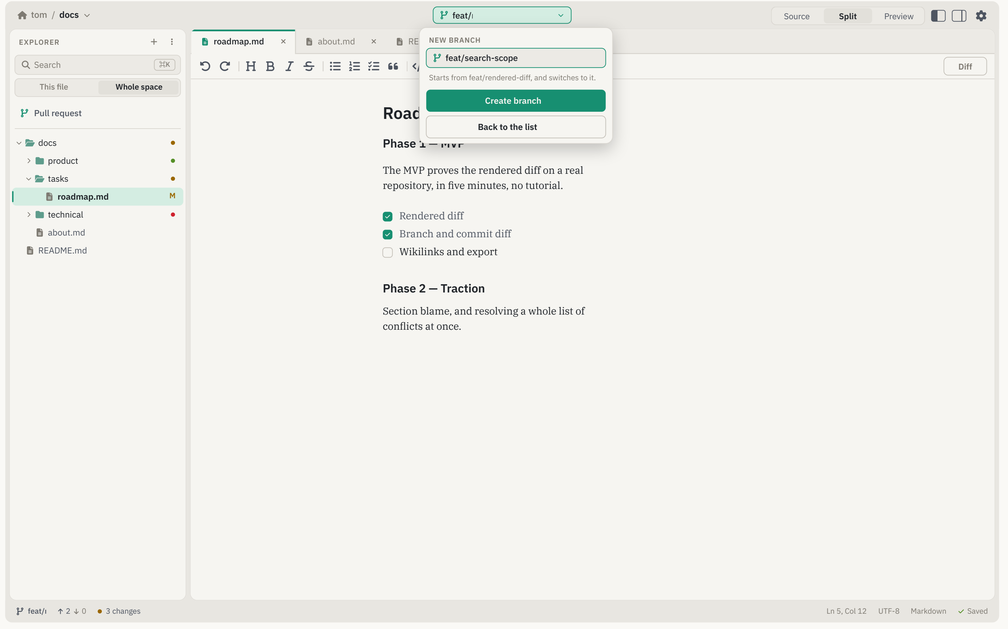



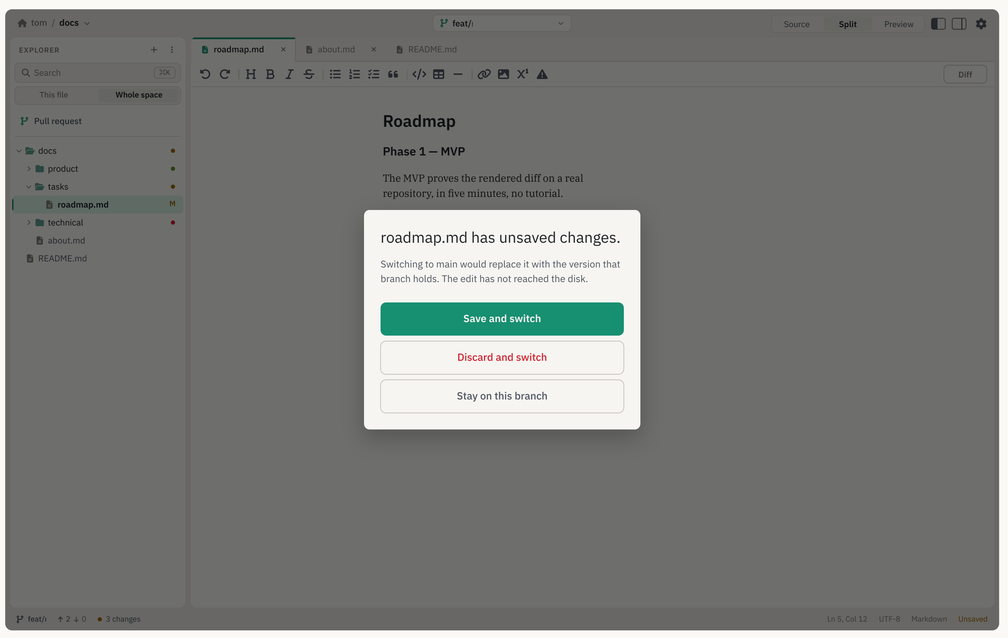

### Branch switcher · naming a new branch

**Starts where you are**
A new branch begins at the current HEAD, and the app moves onto it at once.

**No state in between**
There is never a branch that exists while HEAD is still somewhere else.

## Branch switcher · unsaved work

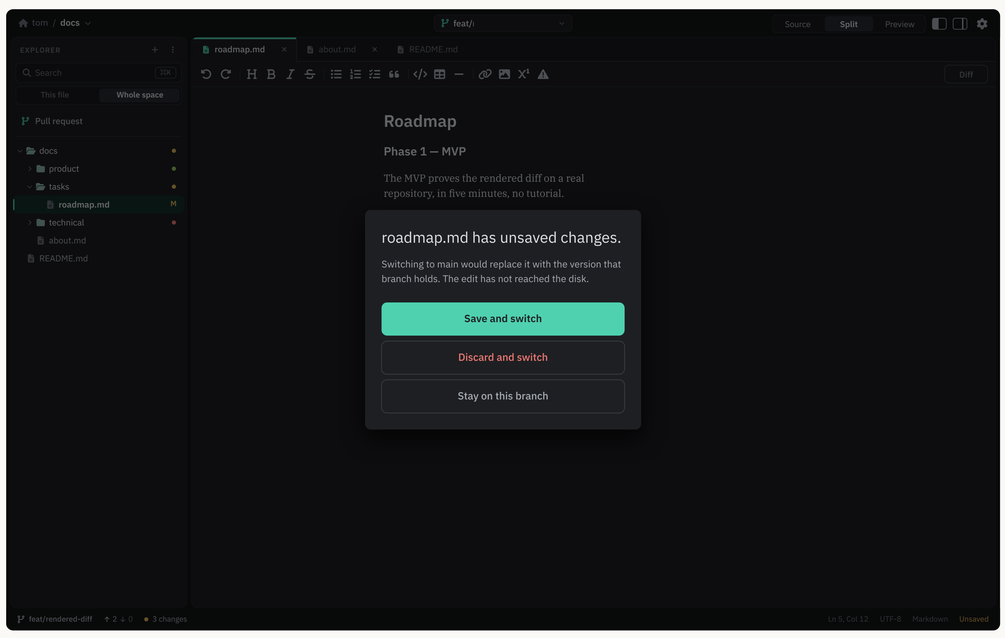



### Branch switcher · unsaved work


**The app's block, not git's**
An edit that never reached the disk is invisible to git, so the app is what protects it.

**Staying is an answer**
Save, discard, or stay. Closing the surface counts as staying.

**It names the document**
Which file, and which branch would replace it.

## Branch switcher · git refused

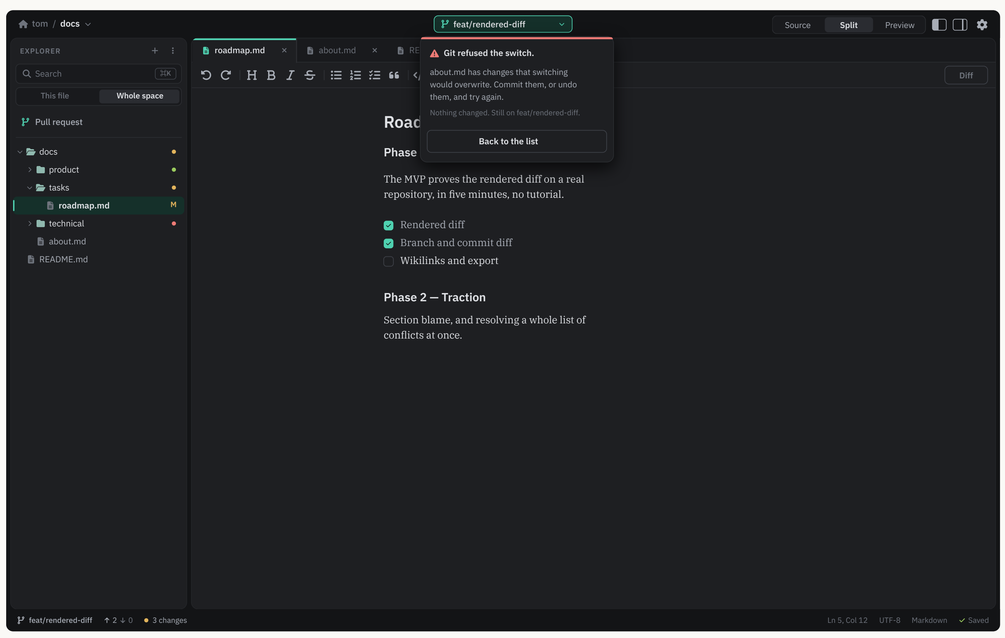

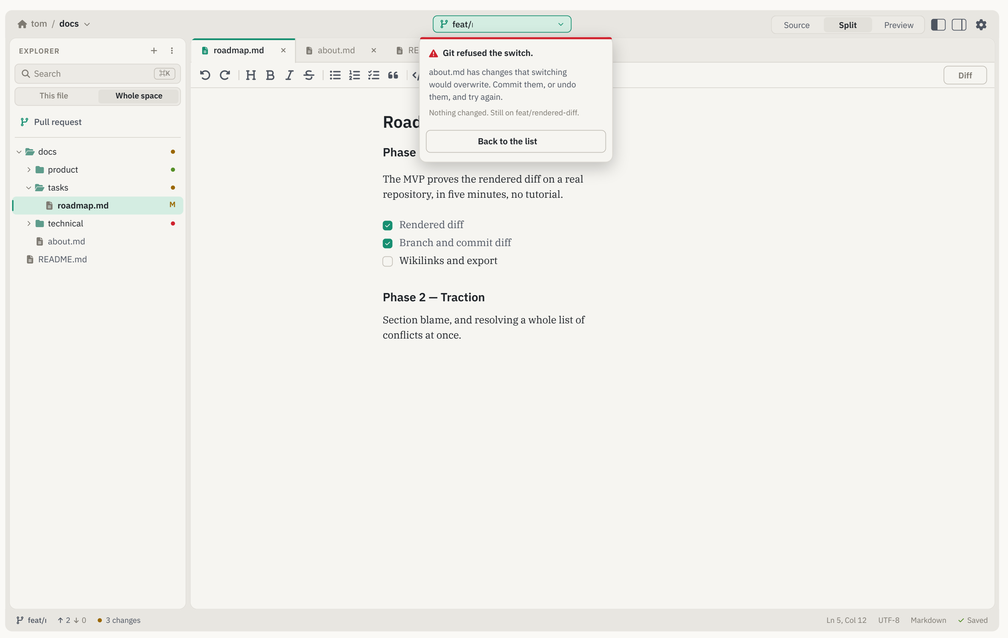
### Branch switcher · git refused

**Git decides, the app reports**
A working tree that would be overwritten is git's refusal, passed through rather than dressed up.

**Nothing has changed**
The wording says so, because that is the question somebody has at that moment.