KAPPLER Thomas BTS2

Déployer la stack WordPress/MariaDB/PHPMyAdmin avec Docker Compose.

Crée le répertoire de travail :

```
docker@docker:~$ mkdir -v wordpress-compose
mkdir: created directory 'wordpress-compose'
```

Crée le fichier de composition dans le répertoire créé :

```
root@docker:/home/docker/wordpress-compose# nano compose.yaml
```

Le remplir avec :

```yaml
#compose.yaml
services:
  # MariaDB
  mariadb:
    image: mariadb:latest
    volumes:
      - blog-db-volume:/var/lib/mysql
    environment:
      MYSQL_RANDOM_ROOT_PASSWORD: 1
      MYSQL_DATABASE: wp
      MYSQL_USER: wpuser
      MYSQL_PASSWORD: motdepasse
    restart: always

  # PHPMyAdmin
  phpmyadmin:
    image: phpmyadmin:latest
    environment:
      PMA_HOST: mariadb
    ports:
      - "8080:80"
    restart: always

  # WordPress
  wordpress:
    image: wordpress:latest
    volumes:
      - blog-wp-volume:/var/www/html/wp-content
    ports:
      - "80:80"
    environment:
      WORDPRESS_DB_HOST: mariadb
      WORDPRESS_DB_USER: wpuser
      WORDPRESS_DB_NAME: wp
      WORDPRESS_DB_PASSWORD: motdepasse
    restart: always

volumes:
  blog-db-volume:
  blog-wp-volume:
```

Démarrer le compose en restant dans le repertoire avec docker compose up -d :

```
 ✔ Image mariadb:latest      Pulled                                    62.9s
 ✔ Image phpmyadmin:latest   Pulled                                   100.6s
 ✔ Image wordpress:latest    Pulled                                   108.9s
 ✔ Network wordpress-compose_default Created                            0.2s
 ✔ Volume wordpress-compose_blog-db-volume Created                      0.0s
 ✔ Volume wordpress-compose_blog-wp-volume Created                      0.0s
 ✔ Container wordpress-compose-phpmyadmin-1 Created                     0.9s
 ✔ Container wordpress-compose-mariadb-1 Created                        0.9s
 ✔ Container wordpress-compose-wordpress-1 Created                      0.9s
```

Vérifier que tout a bien démarré avec la commande docker ps:

```
root@docker:/home/docker/wordpress-compose# docker ps
CONTAINER ID   IMAGE              COMMAND                  CREATED         STAT
US         PORTS                                       NAMES
c04069a6dd2c   wordpress:latest   "docker-entrypoint.s…"   6 minutes ago   Up 6
 minutes   0.0.0.0:80->80/tcp, [::]:80->80/tcp       wordpress-compose-wordpress
-1
ba8ed7788022   phpmyadmin:latest  "/docker-entrypoint.…"   6 minutes ago   Up 6
 minutes   0.0.0.0:8080->80/tcp, [::]:8080->80/tcp   wordpress-compose-phpmyadmi
n-1
a7c374a3e1cd   mariadb:latest     "docker-entrypoint.s…"   6 minutes ago   Up 6
 minutes   3306/tcp                                    wordpress-compose-mariadb-1
```

Maintenant vérifier la connexion à wordpress en faisant http://ip_de_la_machine :

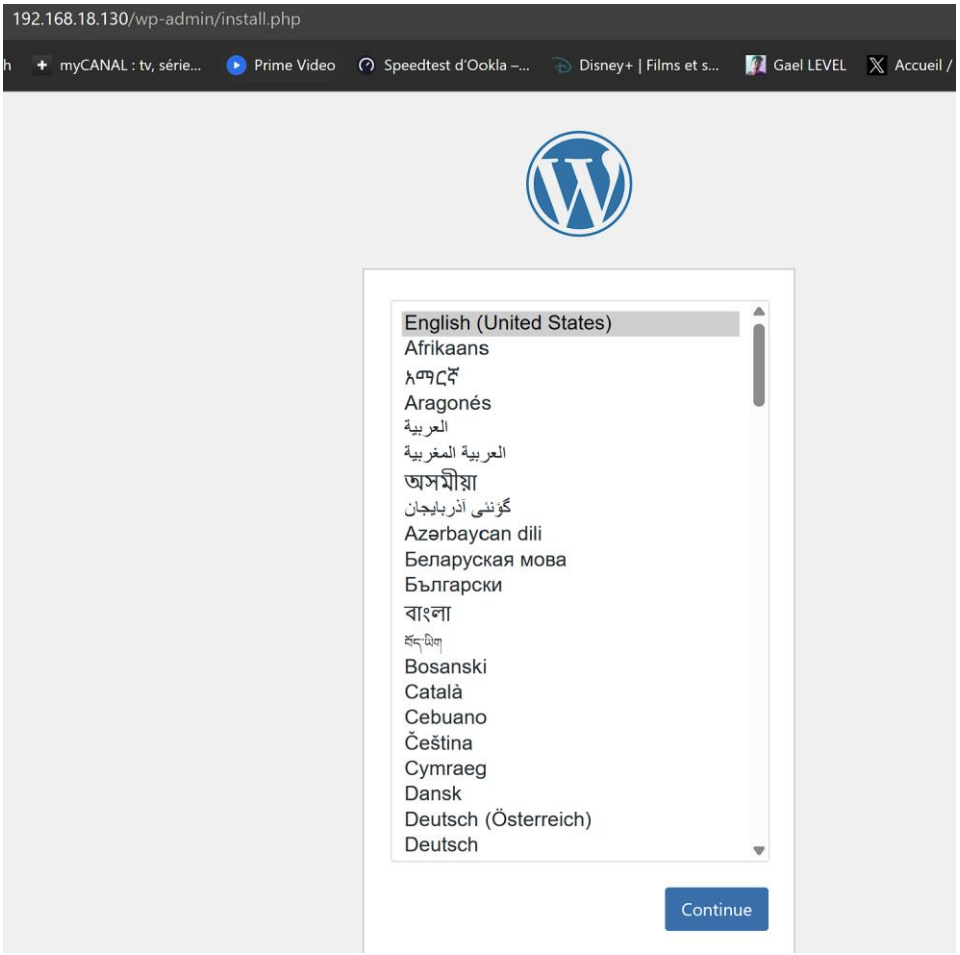

Installation de Wordpress :

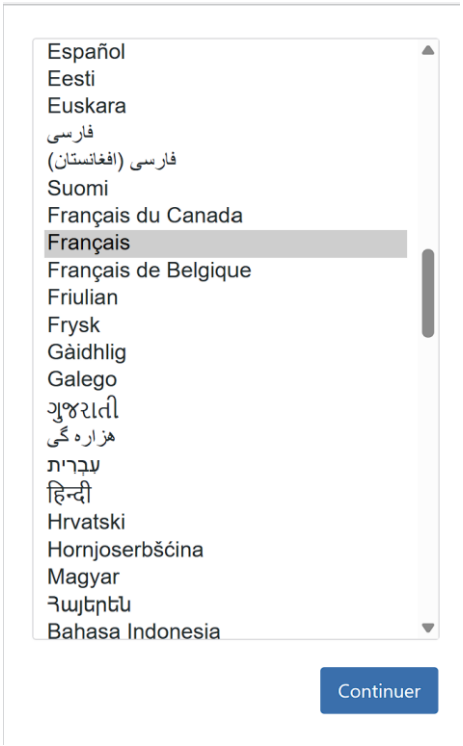

Création du site :

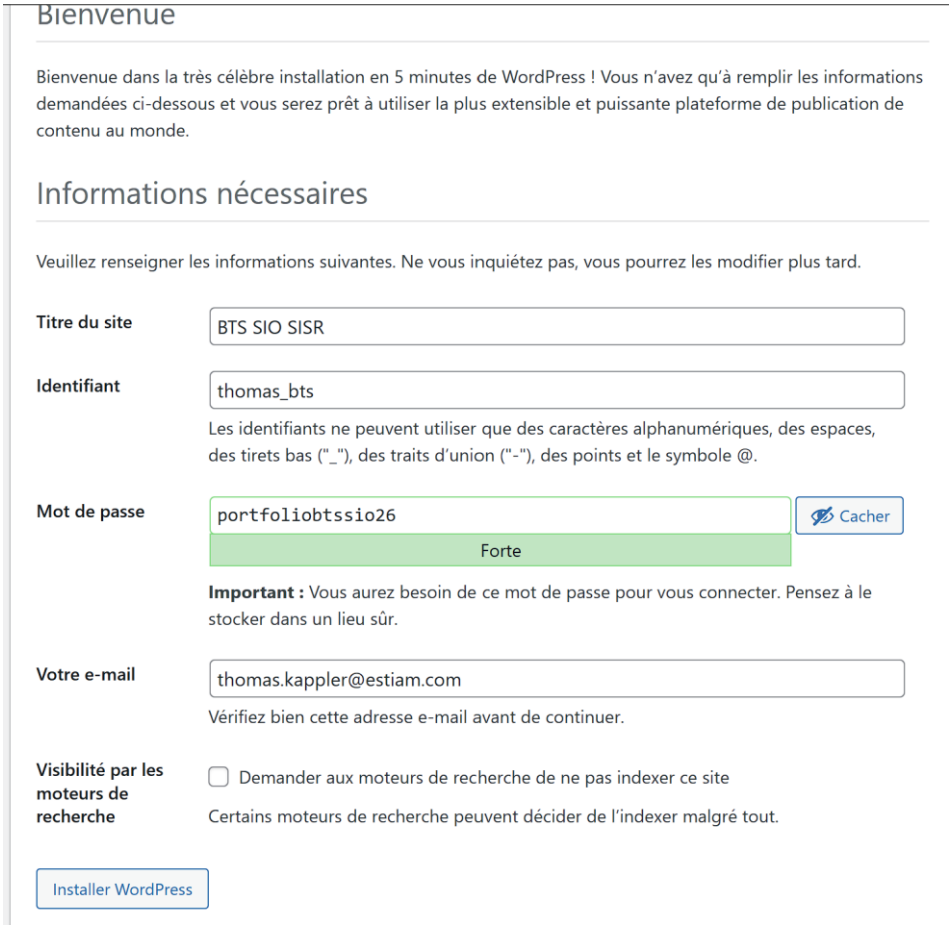

Installation de wordpress et creation du site avec succès :

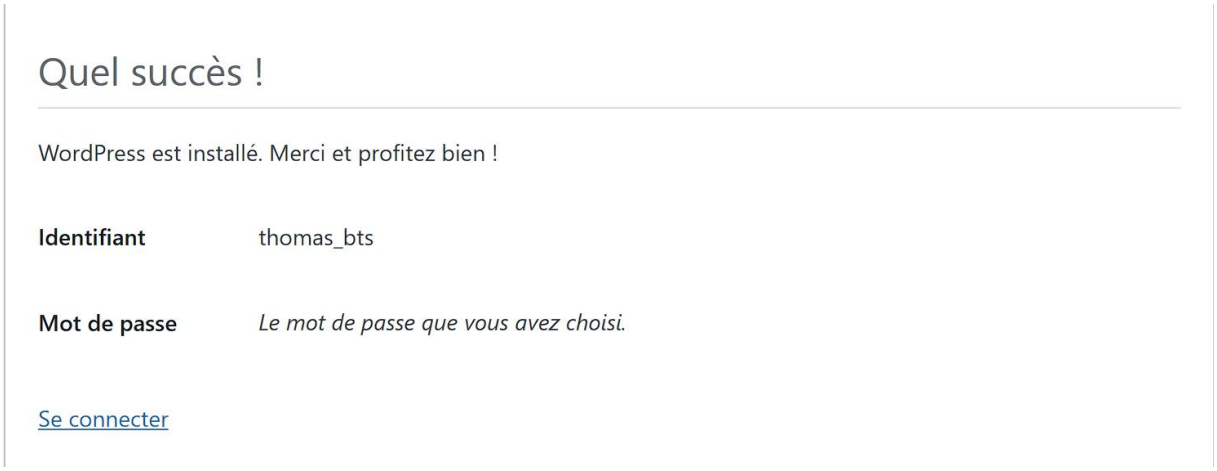

Tout est bon, nous pouvons maintenant configurer a notre guise :

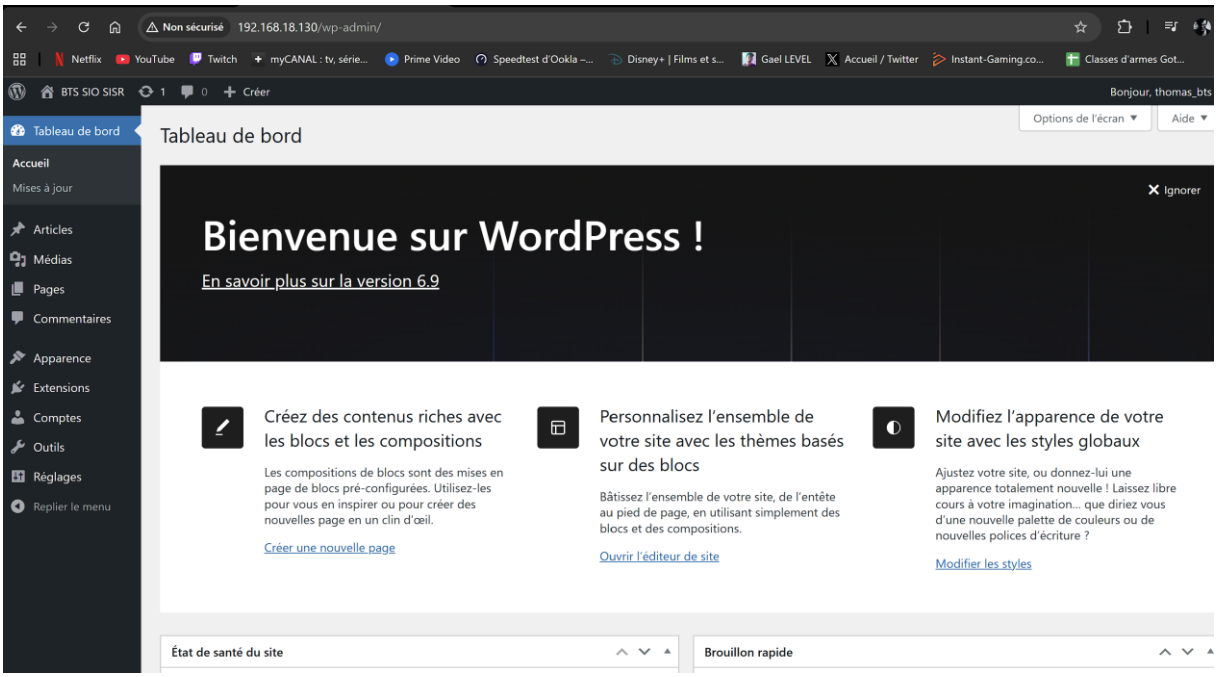

Vérifier la connexion à php http://ip_de_la_machine:8080 :

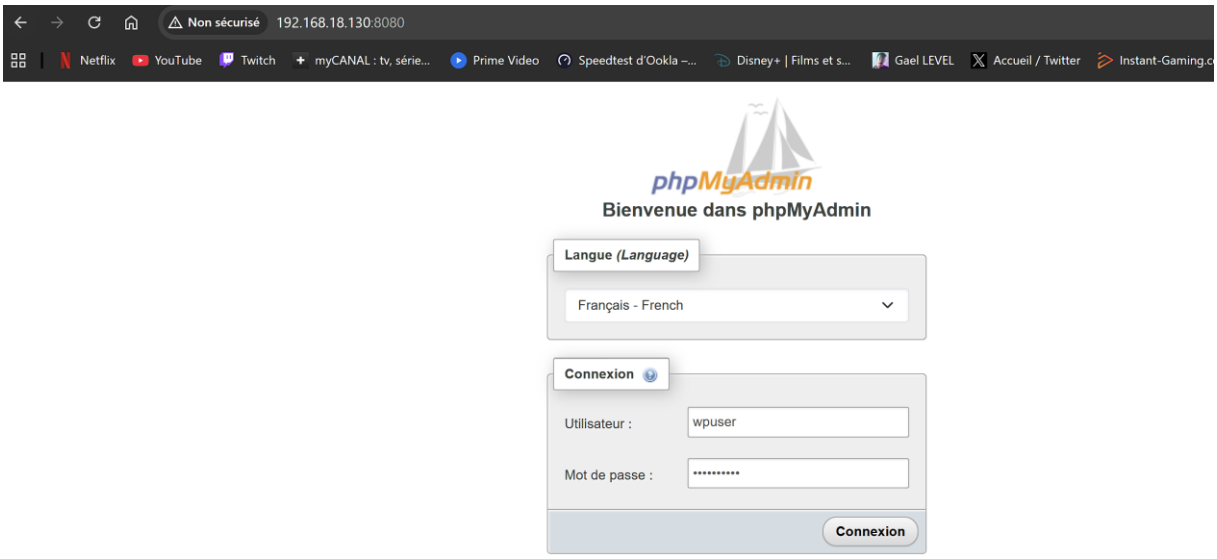
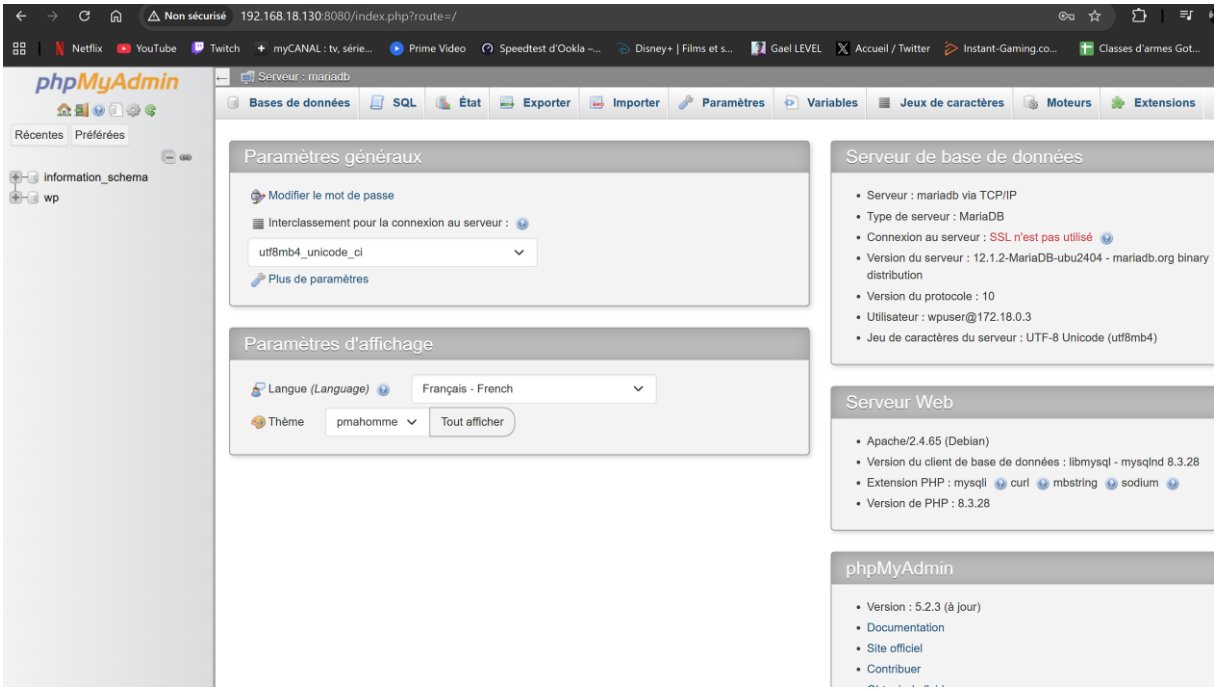
On voit bien qu'avec les identifiants utilisateur = wpuser et Mot de passe = motdepasse :