
Getting Started with Git

Thomas K Oyaro

3/16/2021

 ${\rm My} \; {\it first} \; {\rm version} \; {\rm controlled} \; {\rm project} \; {\rm in} \; {\rm RStudio} \\ {\rm Getting} \; {\rm started} \; {\rm using} \; {\rm cars} \; {\rm data} \; {\rm as} \; {\rm test} \\$

```
plot(cars, col = "blue", xlab = "Speed (mph)", ylab = "Distance (miles)")
```

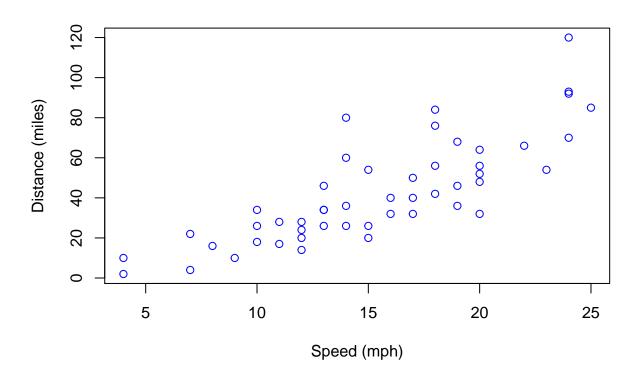

A summary of the data frame is given below

```
library(knitr)
kable(summary(cars))
```

| speed | dist |
|----------------|----------------|
| Min.: 4.0 | Min.: 2.00 |
| 1st Qu.:12.0 | 1st Qu.: 26.00 |
| Median $:15.0$ | Median: 36.00 |
| Mean:15.4 | Mean: 42.98 |
| 3rd Qu.:19.0 | 3rd Qu.: 56.00 |
| Max. $:25.0$ | Max. :120.00 |