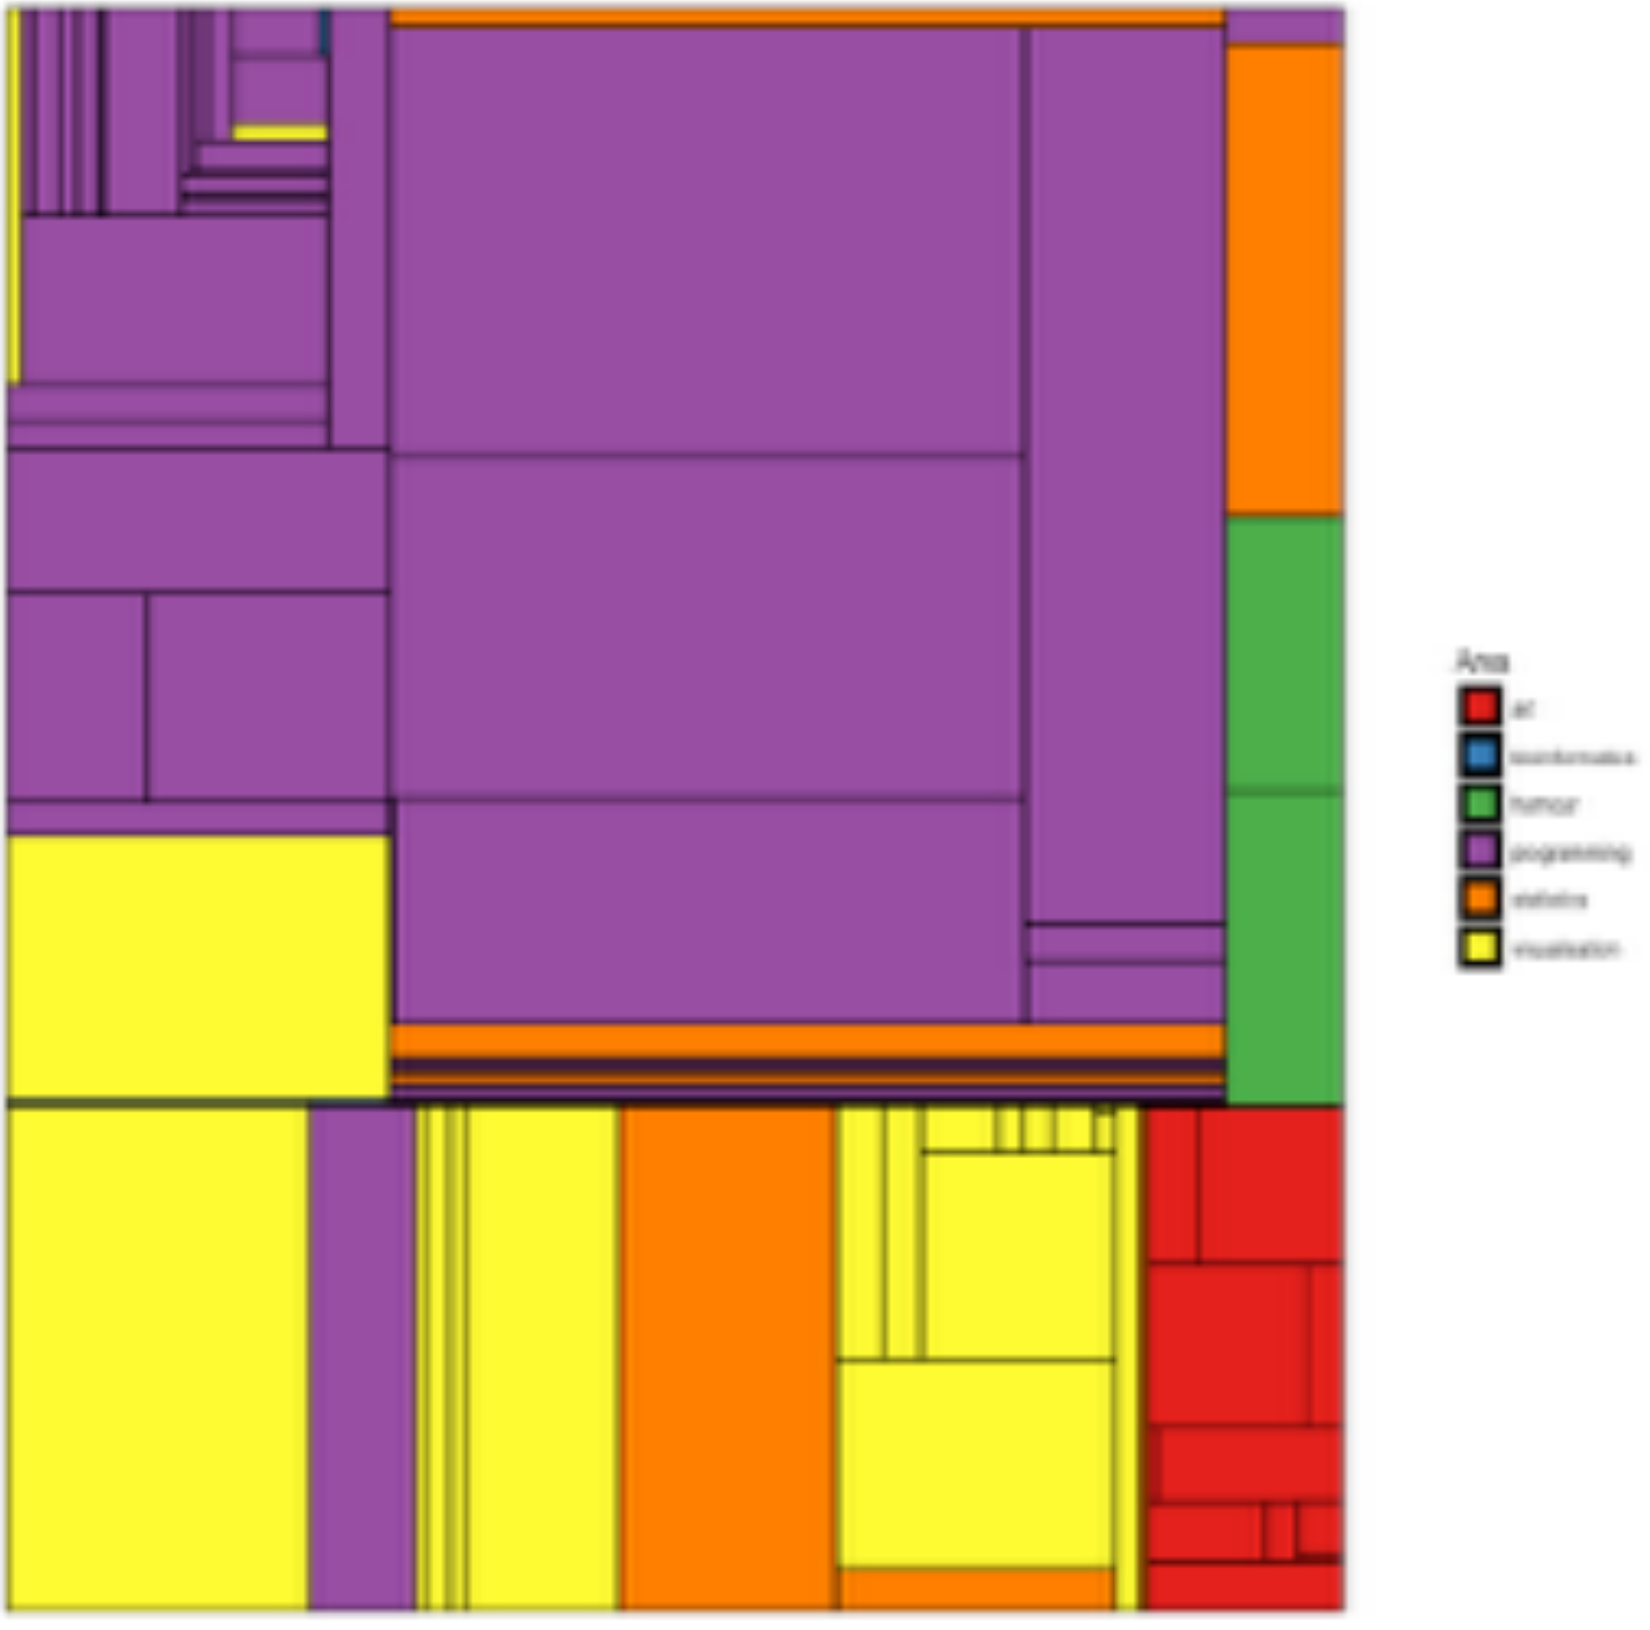
Area
art
misinformation
humor
programming
statistics
visualization

```
ggraph(layout = 'treemap') +
  geom_node_tile(...) +
  scale_fill_brewer(...) +
  theme_graph()
```

Exploring layouts

Exploring layouts

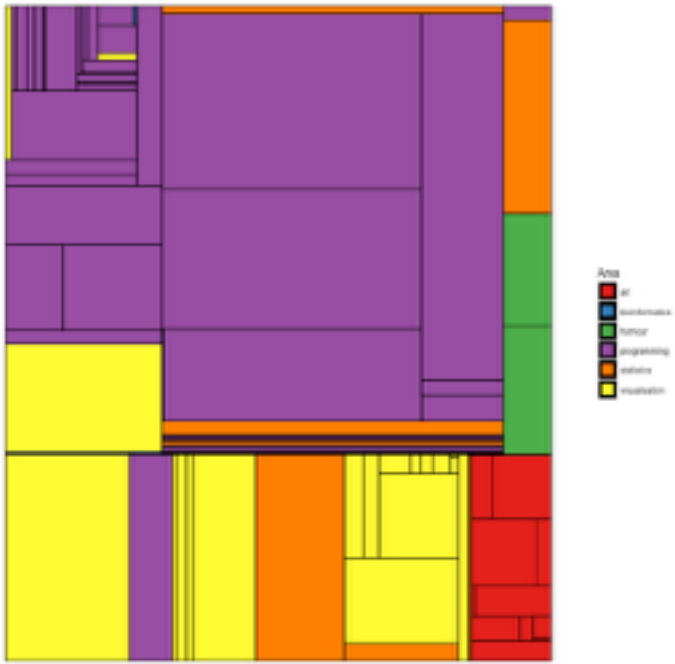

```
ggraph(layout = 'treemap') +
  geom_node_tile(...) +
  scale_fill_brewer(...) +
  theme_graph()
```

Roadmap

- For an API to be unifying it needs to cover all bases
    - More layouts, edge-, and node type, e.g.:
        - Matrix
        - Edge routing and bundling
        - Textbox nodes
    - Node annotation
    - Composed layouts
- tidygraph and Plotly integration
- Follow along at GitHub

by Tang Yau Hong