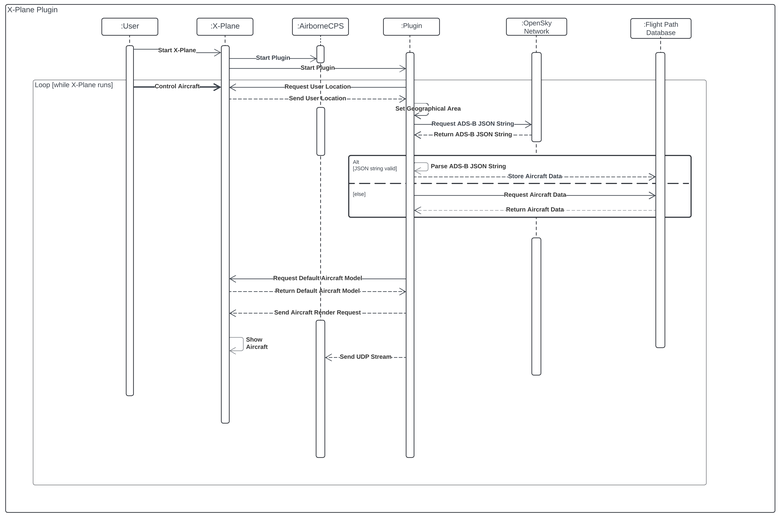
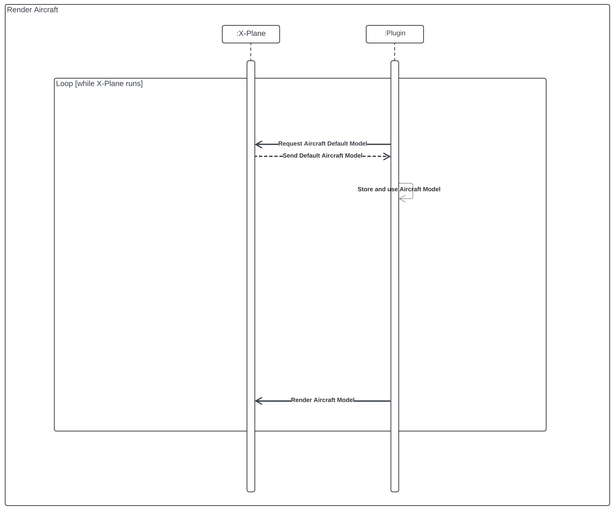
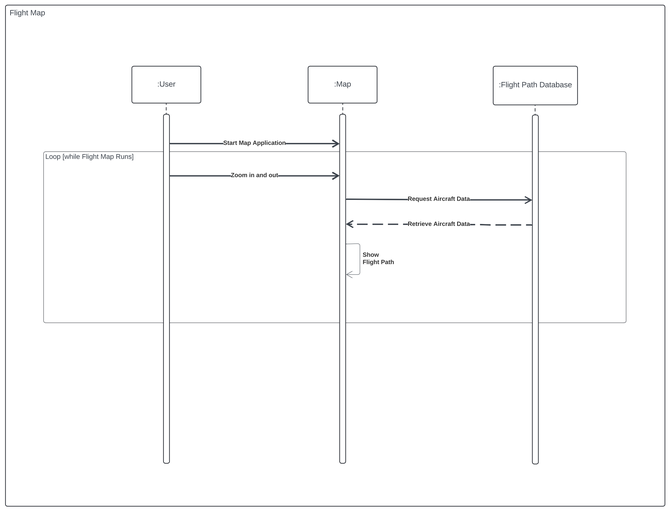
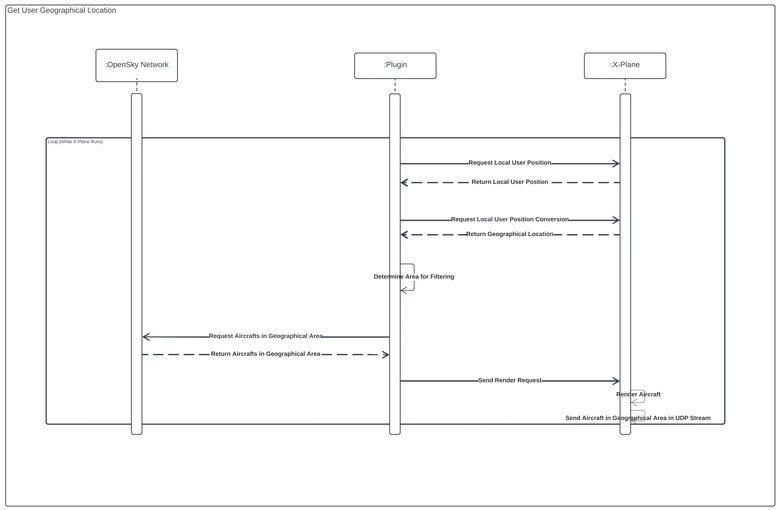

X-Plane Plugin
:User
:X-Plane
:AirborneCPS
:Plugin
:OpenSky Network
:Flight Path Database
Start X-Plane
Start Plugin
Start Plugin
Loop [while X-Plane runs]
Control Aircraft
Request User Location
Send User Location
Set Geographical Area
Request ADS-B JSON String
Return ADS-B JSON String
Alt
[JSON string valid]
Parse ADS-B JSON String
Store Aircraft Data
[else]
Request Aircraft Data
Return Aircraft Data
Request Default Aircraft Model
Return Default Aircraft Model
Send Aircraft Render Request
Show Aircraft
Send UDP Stream


Render Aircraft
:X-Plane
:Plugin
Loop [while X-Plane runs]
Request Aircraft Default Model
Send Default Aircraft Model
Store and use Aircraft Model
Render Aircraft Model


Flight Map
:User
:Map
:Flight Path Database
Loop [while Flight Map Runs]
Start Map Application
Zoom in and out
Request Aircraft Data
Retrieve Aircraft Data
Show Flight Path


Get User Geographical Location
:OpenSky Network
:Plugin
:X-Plane
Loop [While X-Plane Runs]
Request Local User Position
Return Local User Postion
Request Local User Position Conversion
Return Geographical Location
Determine Area for Filtering
Request Aircrafts in Geographical Area
Return Aircrafts in Geographical Area
Send Render Request
Render Aircraft
Send Aircraft in Geographical Area in UDP Stream