

AUTO- UNSEAL OPENBAO


Transit seal against a second OpenBao and seal
"pkcs11" with a Nitrokey HSM 2 – migration, way back,
failure behaviour.

Two ways to get rid of manual unsealing: transit seal against a second OpenBao, and seal "pkcs11" with a USB HSM – migration, way back, failure behaviour

This guide is in progress. Planned: Seal mechanisms: Shamir, transit, PKCS#11; Transit seal: the VM OpenBao unseals the cluster OpenBao; Nitrokey HSM 2: OpenSC, PKCS#11 slot, generating the key; seal "pkcs11" on the VM; Migrating Shamir → auto-unseal and back (seal migrate); What happens when the unsealer is gone; Operation: recovery keys, rotation, monitoring.

Prerequisites: Nitrokey HSM 2 on the VM via USB, SSH to the VM, a token on the VM OpenBao.

-- draft
Published once everything has been run on the cluster.

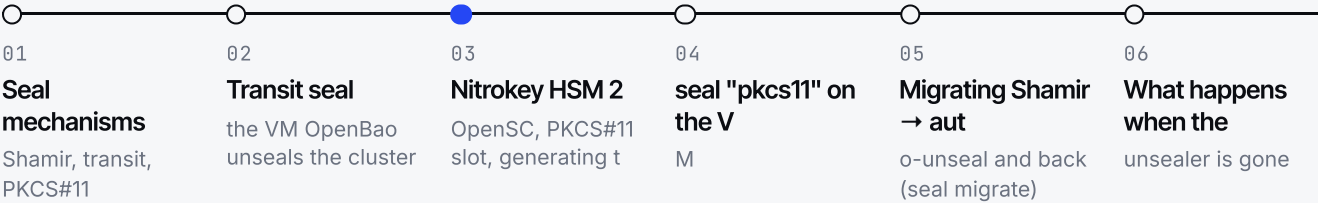

status	draft
series	OpenBao Field Notes · N° 6 of 9
topics	OpenBao · Transit · PKCS#11

Draft – not yet published