Selected 50 benchmarks

Article evidence atlas

Selected 2 November 2026. 50 benchmark families; 54 benchmark-version entries; 4,094 source observations; 391 separate conditions. Source cutoff: 31 October 2026.

Reading this supplement

Each family chapter gives its benchmark APA references, workflow mapping, scope limits and complete condition inventory. The following vector figures retain the reviewed native scores and release dates. Every figure carries its benchmark-version APA reference; result-source IDs resolve in the final bibliography and the HTML observation table.

Each figure uses the full eligible release-date range of its own condition, with a small margin. All 1,716 eligible points from 40 families are visible, including older models. Time spans differ; compare the calendar labels rather than apparent slopes across figures. Undated observations remain in the linked tables. Families without eligible points have an explicit gap panel.

Versions, metrics, scales, languages, tool settings, reasoning modes, context lengths and frozen source cohorts are separate. The 29 definition-held values are retained as raw data without time points or mean curves.

A component benchmark does not demonstrate complete extraction quality. The original study measured agreement and did not independently establish human accuracy. Disagreement alone therefore does not establish that LLMs performed worse than humans.

Machine-readable article tables

data/article_benchmark_register.csv: 50 family rows. data/article_conditions.csv: all 391 conditions and their inclusion/curve status. data/article_observations.csv: all 4,094 source observations, joined once to their release evidence, benchmark APA and result-source APA. The accompanying HTML supplement gives every exact table/cell/page locator and preserves the original values.

Trend method and interpretation

The dashed gold line is Nadaraya-Watson Gaussian-kernel regression, fitted separately within a source, metric and test condition, using a 180-day bandwidth. Repeated values for the same configuration and release are averaged first. At least five configurations, four release dates and 90 days of coverage are required. Approximate readings, human references, undated and definition-held values do not enter the fit. No extrapolation or unsupported temporal gaps. Sensitivity grids at 90 and 365 days remain in the CSV data.

94 source-condition series meet the full fitting criteria and have supported segments on their chart-specific time axes. These are descriptive means of selected reported configurations, without a confidence interval. They do not estimate a representative model population, causal progress, a pooled cross-benchmark ability, or end-to-end extraction success.

Source status

The 1,085 appended observations are exact published model-card/report numbers, including provider-reported baseline comparisons. These are not new evaluations or independent replications. Unknown release snapshots are not dated from another benchmark crosswalk. Native units are retained; OCRBench scores are not rescaled without a source basis. Unspecified uncertainty terms remain in source text without invented error bars.

Coverage and overlap

A family may support several workflow steps and commentary requirements. Those mappings overlap and must not be summed as independent evidence. The collection is a source-bound landscape assembled for this article, not an exhaustive systematic review of every available benchmark.

Benchmark index

F001 OmniDocBench | 250 source values | 114 time points | 46 conditions | 1 visible mean curves

F002 READoc | 34 source values | 5 time points | 3 conditions | 0 visible mean curves

F003 olmOCR-bench | 120 source values | 36 time points | 11 conditions | 1 visible mean curves

F004 OCRBench | 39 source values | 20 time points | 14 conditions | 0 visible mean curves

F005 MDPBench | 46 source values | 16 time points | 2 conditions | 2 visible mean curves

F006 PureDocBench | 174 source values | 174 time points | 3 conditions | 3 visible mean curves

F007 Dr. DocBench | 24 source values | 6 time points | 2 conditions | 0 visible mean curves

F008 DocVQA | 17 source values | 3 time points | 7 conditions | 0 visible mean curves

F010 ChartQA | 16 source values | 3 time points | 6 conditions | 0 visible mean curves

F011 ChartQAPro | 64 source values | 3 time points | 3 conditions | 0 visible mean curves

F012 HiTab | 9 source values | 0 time points | 1 conditions | 0 visible mean curves

F013 MultiHiertt | 11 source values | 0 time points | 1 conditions | 0 visible mean curves

F014 TAT-QA | 11 source values | 0 time points | 3 conditions | 0 visible mean curves

F015 FinQA | 25 source values | 0 time points | 2 conditions | 0 visible mean curves

F018 DocMath-Eval | 384 source values | 176 time points | 8 conditions | 8 visible mean curves

F019 MMLongBench-Doc | 38 source values | 13 time points | 6 conditions | 0 visible mean curves

F020 LongBench | 440 source values | 278 time points | 30 conditions | 13 visible mean curves

F021 RULER | 373 source values | 218 time points | 30 conditions | 6 visible mean curves

F022 HELMET | 6 source values | 6 time points | 1 conditions | 0 visible mean curves

F023 NoLiMa | 138 source values | 50 time points | 8 conditions | 6 visible mean curves

F024 InfiniteBench | 12 source values | 3 time points | 3 conditions | 0 visible mean curves

F026 MRCR | 28 source values | 28 time points | 17 conditions | 0 visible mean curves

F031 GSM-Symbolic | 50 source values | 36 time points | 2 conditions | 2 visible mean curves

F033 DROP | 24 source values | 17 time points | 6 conditions | 1 visible mean curves

F034 FRAMES | 8 source values | 8 time points | 3 conditions | 1 visible mean curves

F035 MuSiQue | 14 source values | 0 time points | 2 conditions | 0 visible mean curves

F036 HotpotQA | 9 source values | 0 time points | 3 conditions | 0 visible mean curves

F038 QASPER | 12 source values | 0 time points | 2 conditions | 0 visible mean curves

F040 SciAssess | 22 source values | 2 time points | 2 conditions | 0 visible mean curves

F041 LAB-Bench | 104 source values | 64 time points | 16 conditions | 12 visible mean curves

F044 CORE-Bench | 12 source values | 12 time points | 6 conditions | 0 visible mean curves

F046 GAIA | 18 source values | 0 time points | 3 conditions | 0 visible mean curves

F047 BFCL | 752 source values | 196 time points | 65 conditions | 12 visible mean curves

F051 ComplexBench | 15 source values | 3 time points | 1 conditions | 0 visible mean curves

F059 ALCE | 26 source values | 4 time points | 2 conditions | 0 visible mean curves

F065 RoBBR | 17 source values | 6 time points | 3 conditions | 0 visible mean curves

F066 TrialReviewBench | 12 source values | 4 time points | 4 conditions | 0 visible mean curves

F067 Manalyzer | 152 source values | 56 time points | 13 conditions | 4 visible mean curves

F068 DTBench | 24 source values | 21 time points | 3 conditions | 3 visible mean curves

F069 UNIKIE-BENCH | 30 source values | 4 time points | 2 conditions | 0 visible mean curves

F073 TableBench | 336 source values | 40 time points | 13 conditions | 4 visible mean curves

F074 SUC | 10 source values | 0 time points | 2 conditions | 0 visible mean curves

F075 NUPA | 12 source values | 12 time points | 4 conditions | 0 visible mean curves

F076 Symbolic manipulation | 5 source values | 1 time points | 1 conditions | 0 visible mean curves

F077 ProcessBench | 25 source values | 13 time points | 1 conditions | 1 visible mean curves

F078 NIAH | 6 source values | 6 time points | 1 conditions | 0 visible mean curves

F079 LooGLE | 26 source values | 5 time points | 2 conditions | 1 visible mean curves

F080 MM-NIAH | 18 source values | 6 time points | 2 conditions | 0 visible mean curves

F081 VaxScope | 24 source values | 0 time points | 8 conditions | 0 visible mean curves

F082 CONSORT diagrams | 72 source values | 48 time points | 12 conditions | 0 visible mean curves

F001 OmniDocBench

Full-page parsing: text, tables, formulas and reading order

250 source values; 238 new; 46 separate conditions; 114 visible time points; 4 definition-held values; 1 visible mean curves.

Benchmark references (APA)

Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

Workflow and article scope

Challenges: A

Prepare and read source documents; Bind values to the correct unit

Parsing score is not systematic-review extraction accuracy.

Manuscript anchors: Lu and Wang, Challenges A–B; manuscript paragraphs 15–18; Wrong-subgroup example, manuscript paragraph 29

Result-source references: S002; MC014; MC033; MC042; MC083; MC084; MC091; MC095; MC099; MC044; MC038; MC100. Full references appear in the final bibliography.

Complete condition inventory

01. Overall document-parsing score | OmniDocBench v1.5
12 values; 12 time points; visible mean curve. Sources: S002.

02. Reported overall composite score | Mode not specified; MC014 H2; OmniDocBench v1.5
4 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC014.

03. Reported overall composite score | Thinking; MC033 H1; OmniDocBench v1.5
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC033.

04. Reported overall composite score | Mode not specified; effort xhigh; MC033 H1; OmniDocBench v1.5
1 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC033.

05. Reported overall composite score | Thinking; effort high; MC033 H1; OmniDocBench v1.5
1 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC033.

06. Overall edit distance | Mode not specified; MC042 H1; OmniDocBench v1.0 schema (scoring commit unpinned); EN
11 values; 4 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC042.

07. Overall edit distance | Mode not specified; MC042 H1; OmniDocBench v1.0 schema (scoring commit unpinned); ZH
11 values; 4 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC042.

08. Text edit distance | Mode not specified; MC042 H1; OmniDocBench v1.0 schema (scoring commit unpinned); EN
11 values; 4 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC042.

09. Text edit distance | Mode not specified; MC042 H1; OmniDocBench v1.0 schema (scoring commit unpinned); ZH
11 values; 4 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC042.

10. Formula edit distance | Mode not specified; MC042 H1; OmniDocBench v1.0 schema (scoring commit unpinned); EN
11 values; 4 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC042.

11. Formula edit distance | Mode not specified; MC042 H1; OmniDocBench v1.0 schema (scoring commit unpinned); ZH
11 values; 4 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC042.

12. Table TEDS similarity | Mode not specified; MC042 H1; OmniDocBench v1.0 schema (scoring commit unpinned); EN
11 values; 4 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC042.

13. Table TEDS similarity | Mode not specified; MC042 H1; OmniDocBench v1.0 schema (scoring commit unpinned); ZH
11 values; 4 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC042.

14. Table edit distance | Mode not specified; MC042 H1; OmniDocBench v1.0 schema (scoring commit unpinned); EN
11 values; 4 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC042.

15. Table edit distance | Mode not specified; MC042 H1; OmniDocBench v1.0 schema (scoring commit unpinned); ZH
11 values; 4 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC042.

16. Read Order edit distance | Mode not specified; MC042 H1; OmniDocBench v1.0 schema (scoring commit unpinned); EN
11 values; 4 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC042.

17. Read Order edit distance | Mode not specified; MC042 H1; OmniDocBench v1.0 schema (scoring commit unpinned); ZH
11 values; 4 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC042.

18. Text edit distance | Mode not specified; MC042 H2; OmniDocBench v1.0 schema (scoring commit unpinned); Book
7 values; 3 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC042.

19. Text edit distance | Mode not specified; MC042 H2; OmniDocBench v1.0 schema (scoring commit unpinned); Slides
7 values; 3 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC042.

20. Text edit distance | Mode not specified; MC042 H2; OmniDocBench v1.0 schema (scoring commit unpinned); FinancialReport
7 values; 3 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC042.

21. Text edit distance | Mode not specified; MC042 H2; OmniDocBench v1.0 schema (scoring commit unpinned); Textbook
7 values; 3 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC042.

22. Text edit distance | Mode not specified; MC042 H2; OmniDocBench v1.0 schema (scoring commit unpinned); ExamPaper
7 values; 3 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC042.

23. Text edit distance | Mode not specified; MC042 H2; OmniDocBench v1.0 schema (scoring commit unpinned); Magazine
7 values; 3 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC042.

24. Text edit distance | Mode not specified; MC042 H2; OmniDocBench v1.0 schema (scoring commit unpinned); AcademicPapers
7 values; 3 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC042.

25. Text edit distance | Mode not specified; MC042 H2; OmniDocBench v1.0 schema (scoring commit unpinned); Notes
7 values; 3 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC042.

26. Text edit distance | Mode not specified; MC042 H2; OmniDocBench v1.0 schema (scoring commit unpinned); Newspaper
7 values; 3 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC042.

27. Text edit distance | Mode not specified; MC042 H2; OmniDocBench v1.0 schema (scoring commit unpinned); Overall
7 values; 3 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC042.

28. Reported overall composite score | Mode not specified; MC083 H2; OmniDocBench v1.5
5 values; 3 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC083.

29. Reported overall composite score | Mode not specified; MC084 H2; OmniDocBench v1.5
4 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC084.

30. Reported overall composite score | Mode not specified; MC091 H2; OmniDocBench v1.5
2 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC091.

31. Reported overall composite score | Mode not specified; effort max; MC095 H2; OmniDocBench (version as reported)
3 values; 0 time points; definition unresolved; raw data only. Sources: MC095.

32. Reported overall composite score | Mode not specified; effort xhigh; MC095 H2; OmniDocBench (version as reported)
1 values; 0 time points; definition unresolved; raw data only. Sources: MC095.

33. Reported overall composite score | Mode not specified; MC099 H2; OmniDocBench v1.5
1 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC099.

34. Reported overall composite score | Mode not specified; MC044 Model-card highlights, README line 40; OmniDocBench v1.5
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC044.

35. Overall score (%) | Mode not specified; MC038 Model-card evaluation table image; OmniDocBench v1.5
1 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC038.

36. Text edit distance (lower is better) | Mode not specified; MC038 Model-card evaluation table image; OmniDocBench v1.5
1 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC038.

37. Formula CDM (%) | Mode not specified; MC038 Model-card evaluation table image; OmniDocBench v1.5
1 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC038.

38. Table TEDS (%) | Mode not specified; MC038 Model-card evaluation table image; OmniDocBench v1.5
1 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC038.

39. Table TEDS-S (%) | Mode not specified; MC038 Model-card evaluation table image; OmniDocBench v1.5
1 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC038.

40. Reading-order edit distance (lower is better) | Mode not specified; MC038 Model-card evaluation table image; OmniDocBench v1.5
1 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC038.

41. Overall score (%) | Mode not specified; MC100 Model-card evaluation table image; OmniDocBench v1.5
1 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC100.

42. Text edit distance (lower is better) | Mode not specified; MC100 Model-card evaluation table image; OmniDocBench v1.5
1 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC100.

43. Formula CDM (%) | Mode not specified; MC100 Model-card evaluation table image; OmniDocBench v1.5
1 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC100.


44. Table TEDS (%) | Mode not specified; MC100 Model-card evaluation table image; OmniDocBench v1.5
1 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC100.

45. Table TEDS-S (%) | Mode not specified; MC100 Model-card evaluation table image; OmniDocBench v1.5
1 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC100.

46. Reading-order edit distance (lower is better) | Mode not specified; MC100 Model-card evaluation table image; OmniDocBench v1.5
1 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC100.

OmniDocBench: Overall document-parsing score

OmniDocBench v1.5

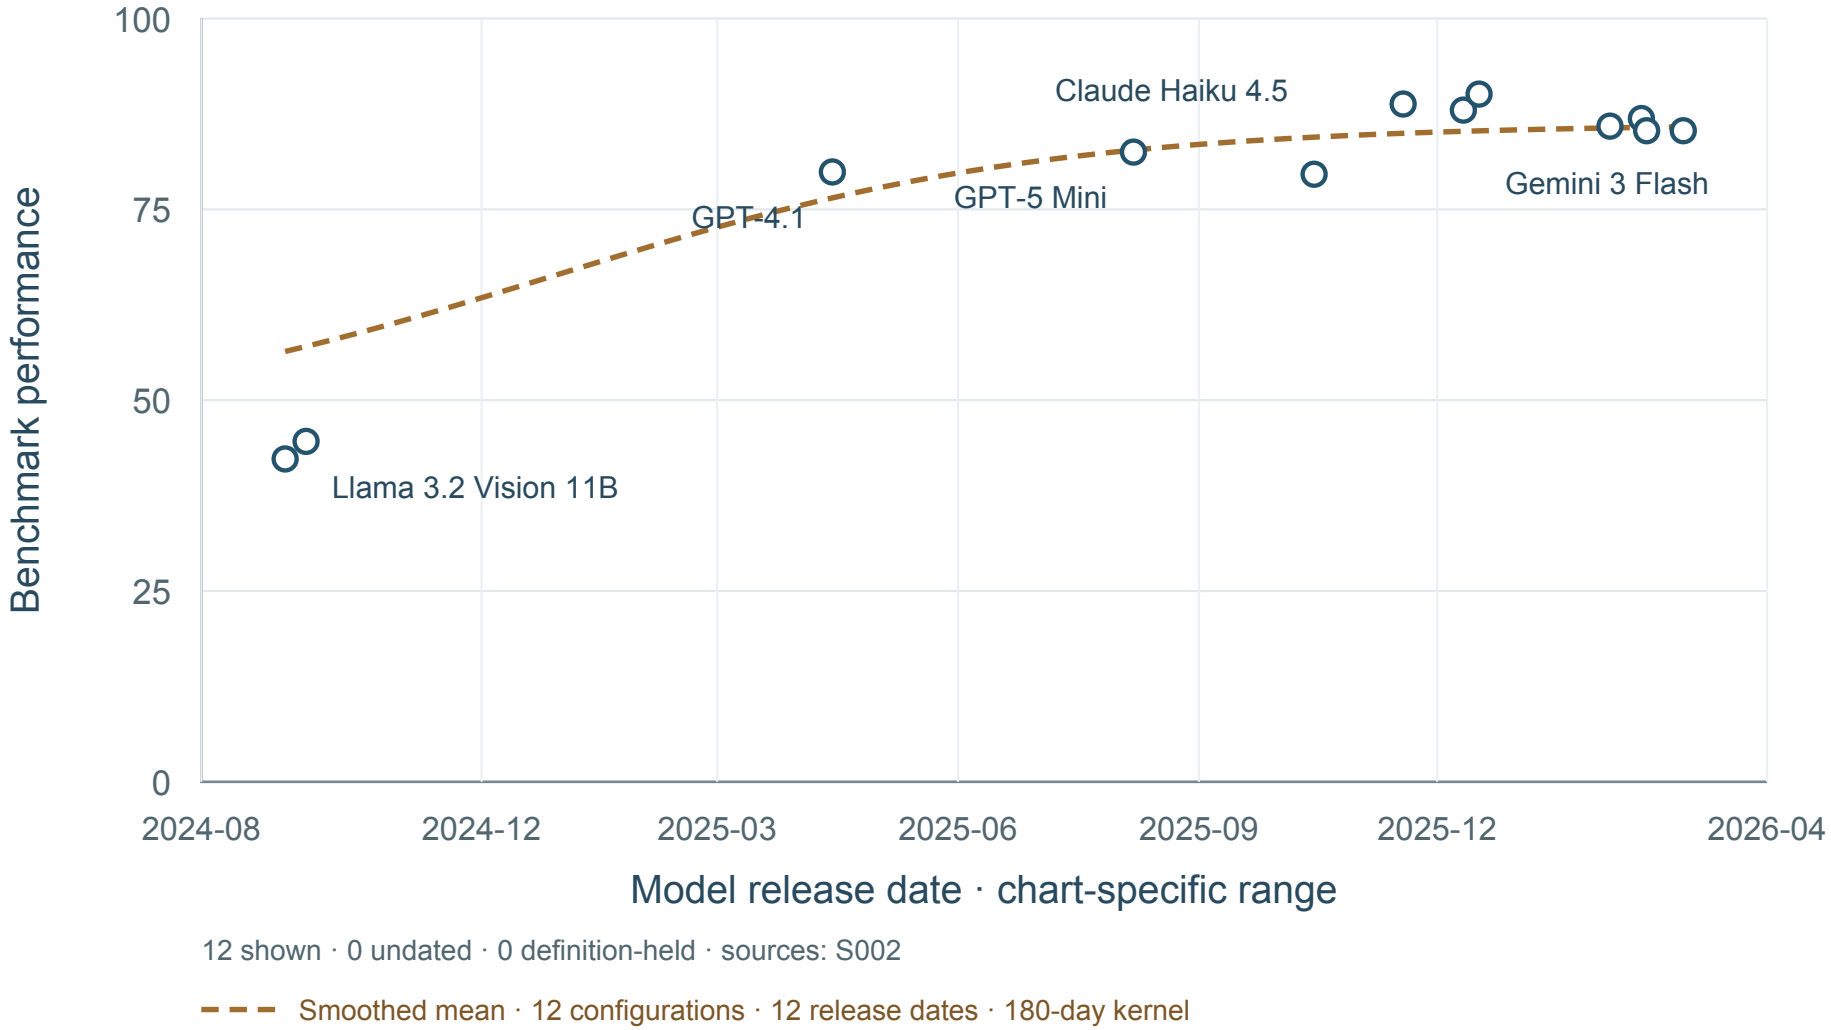

12 shown · 0 undated · 0 definition-held · sources: S002


Smoothed mean · 12 configurations · 12 release dates · 180-day kernel

Result-source references: S002. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Reported overall composite score

Mode not specified; MC014 H2; OmniDocBench v1.5

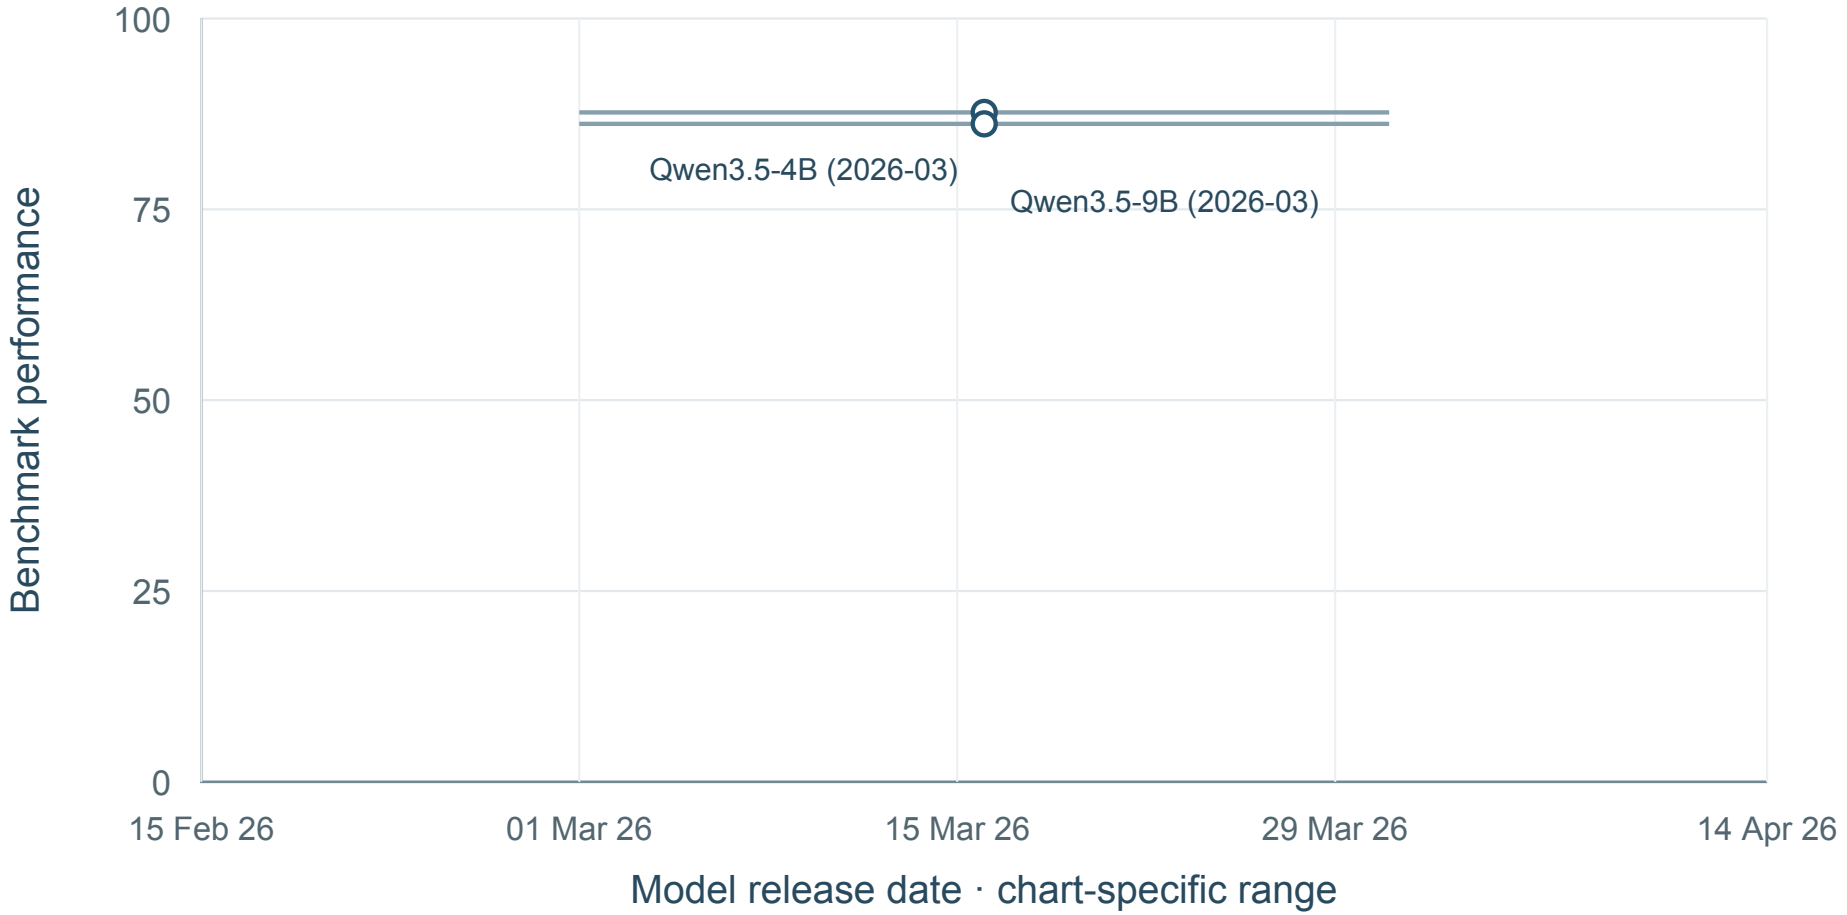

2 shown · 2 undated · 0 definition-held · sources: MC014


No mean curve: Fewer than five dated model configurations.

Result-source references: MC014. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Reported overall composite score

Mode not specified; effort xhigh; MC033 H1; OmniDocBench v1.5

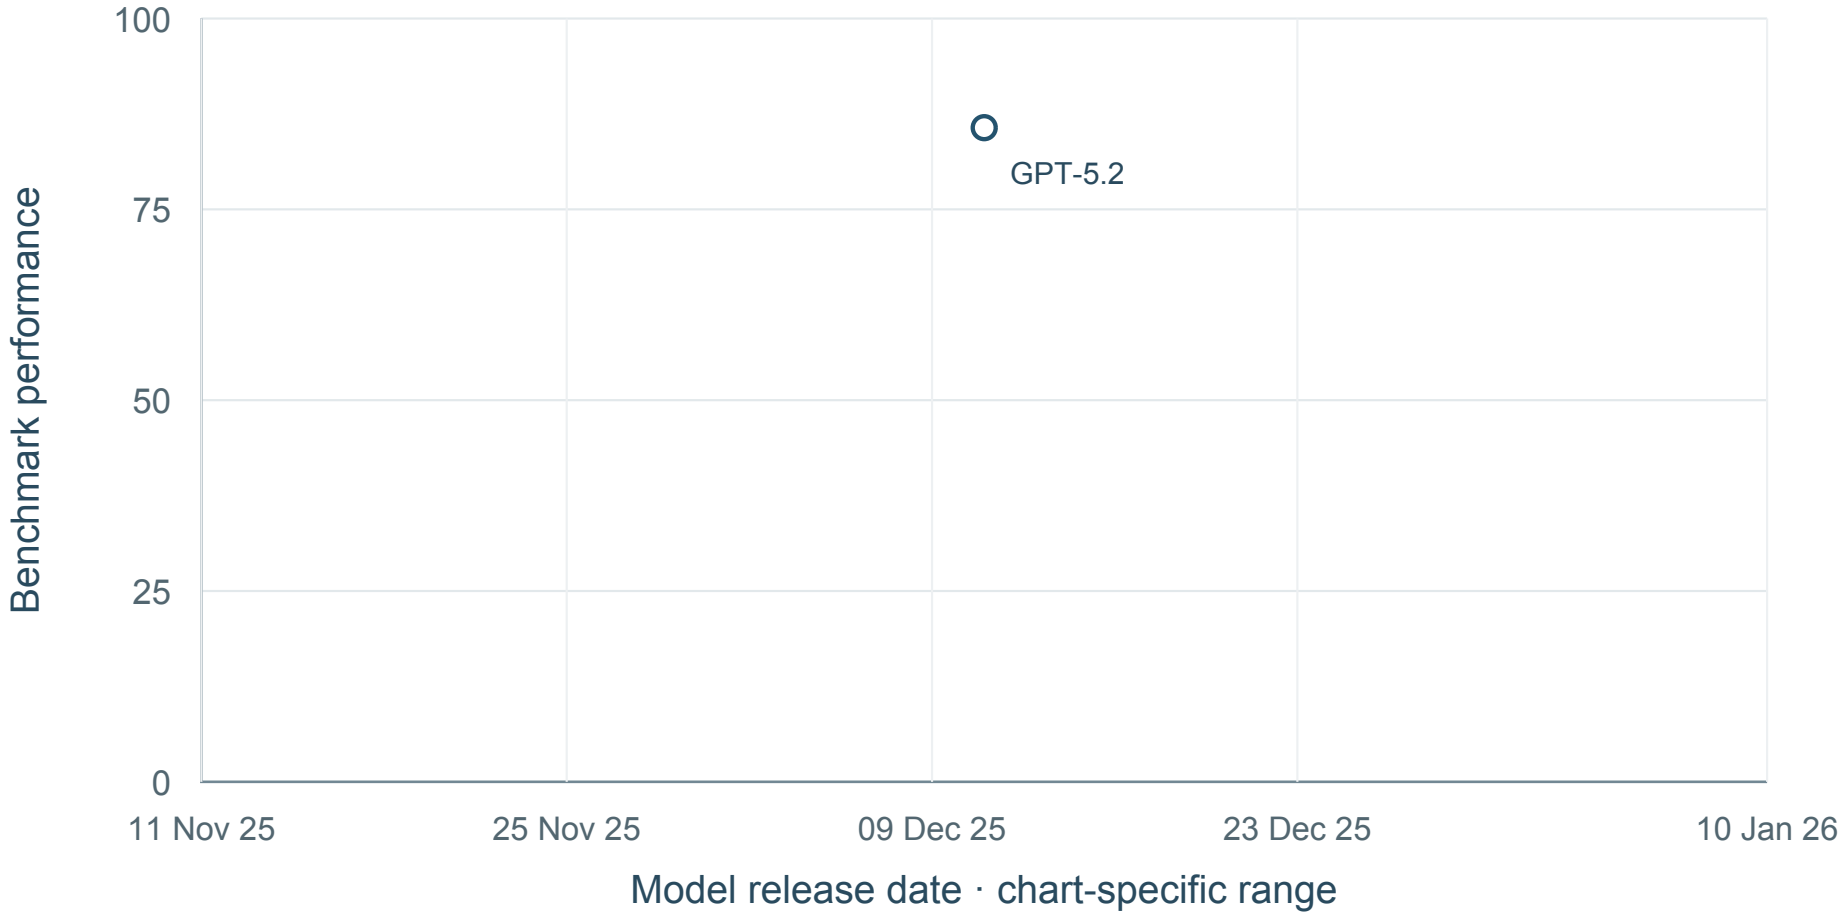

1 shown · 0 undated · 0 definition-held · sources: MC033


No mean curve: Fewer than five dated model configurations.

Result-source references: MC033. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Reported overall composite score

Thinking; effort high; MC033 H1; OmniDocBench v1.5

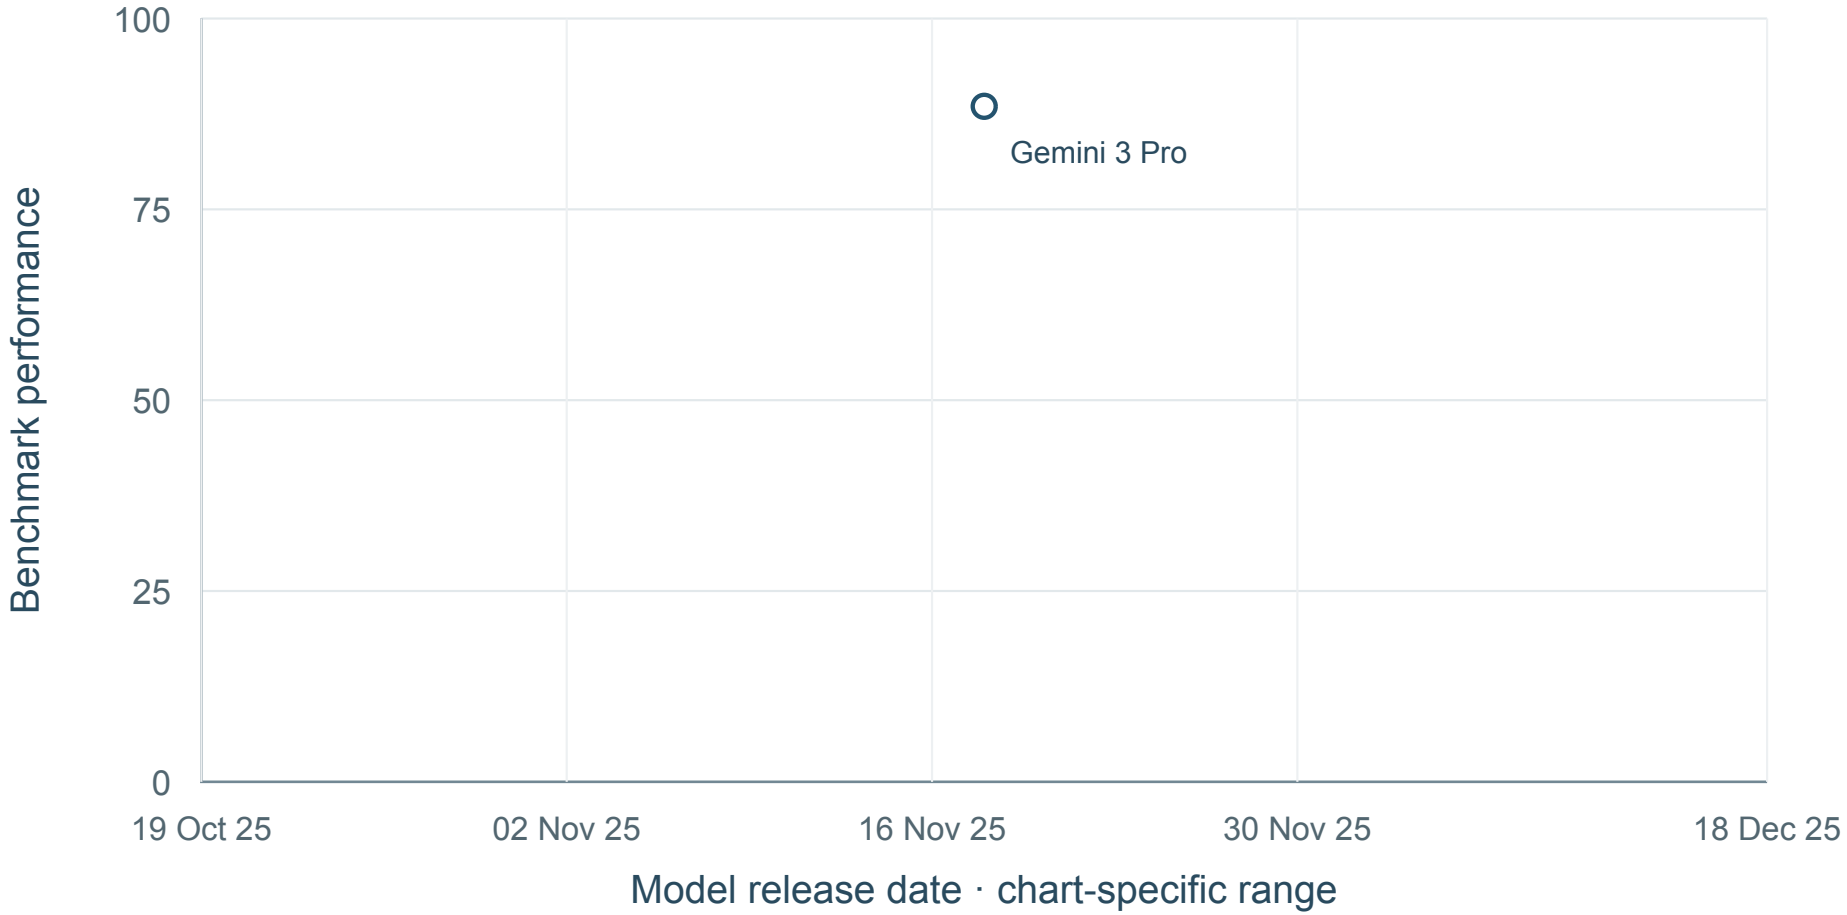

1 shown · 0 undated · 0 definition-held · sources: MC033


No mean curve: Fewer than five dated model configurations.

Result-source references: MC033. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Overall edit distance (lower is better)

Mode not specified; MC042 H1; OmniDocBench v1.0 schema (scoring commit unpinned); EN

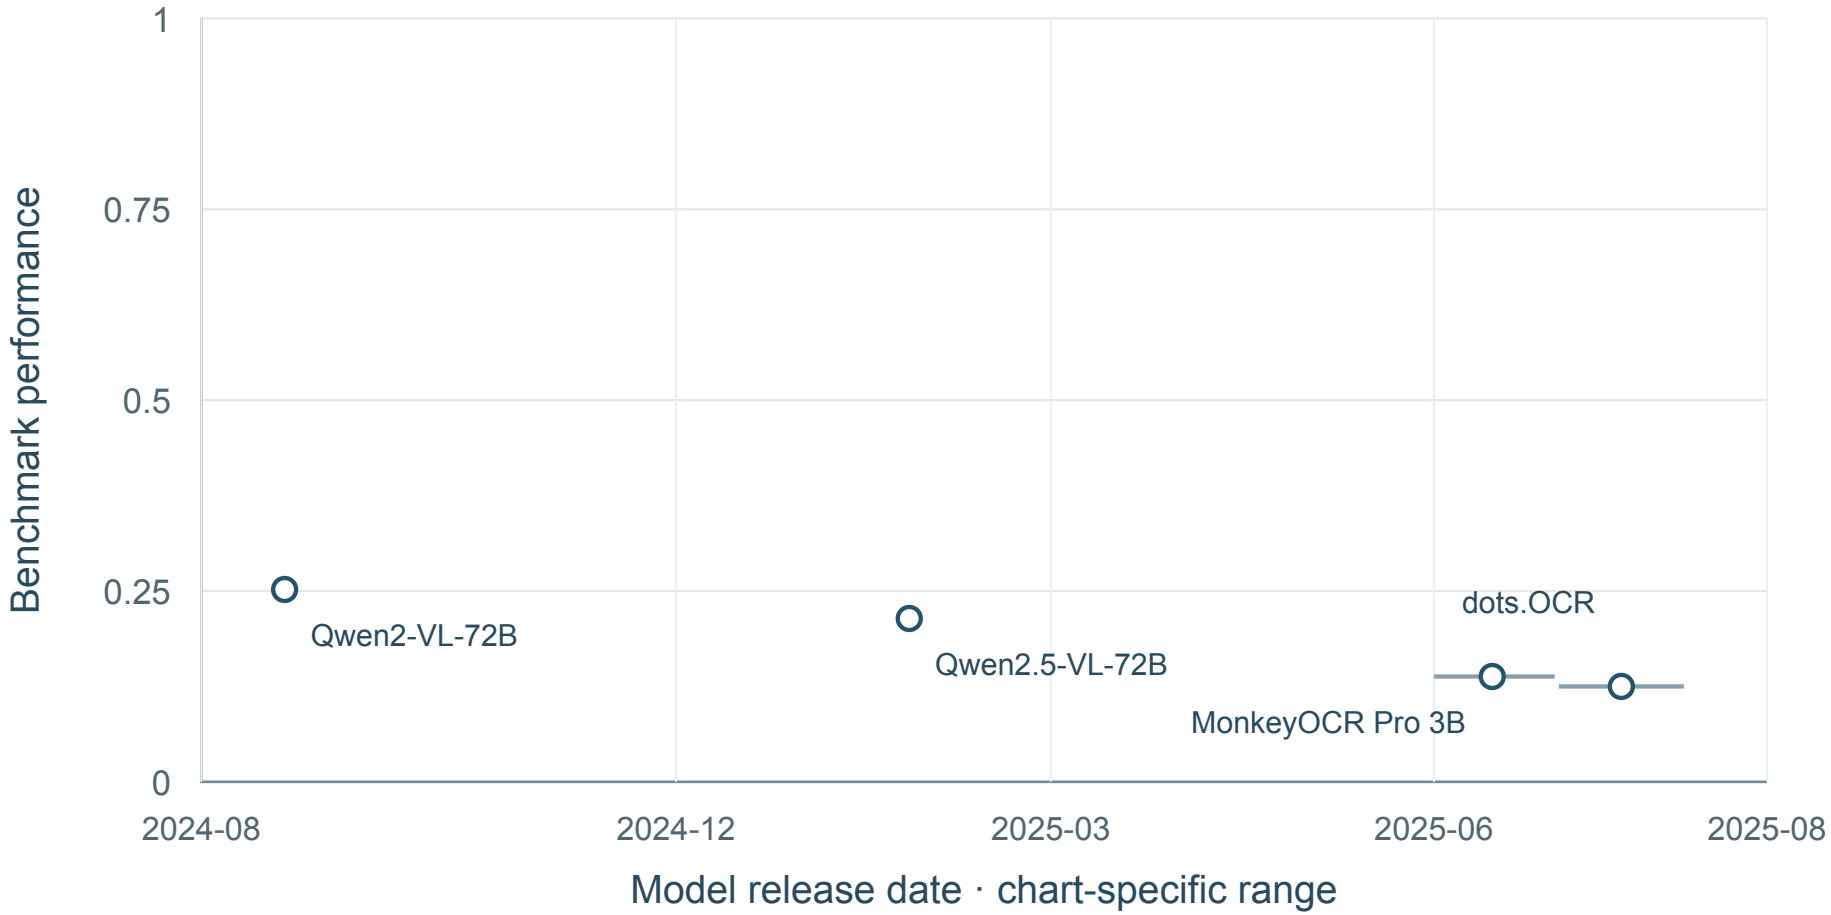

4 shown · 7 undated · 0 definition-held · sources: MC042


No mean curve: Fewer than five dated model configurations.

Result-source references: MC042. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Overall edit distance (lower is better)

Mode not specified; MC042 H1; OmniDocBench v1.0 schema (scoring commit unpinned); ZH

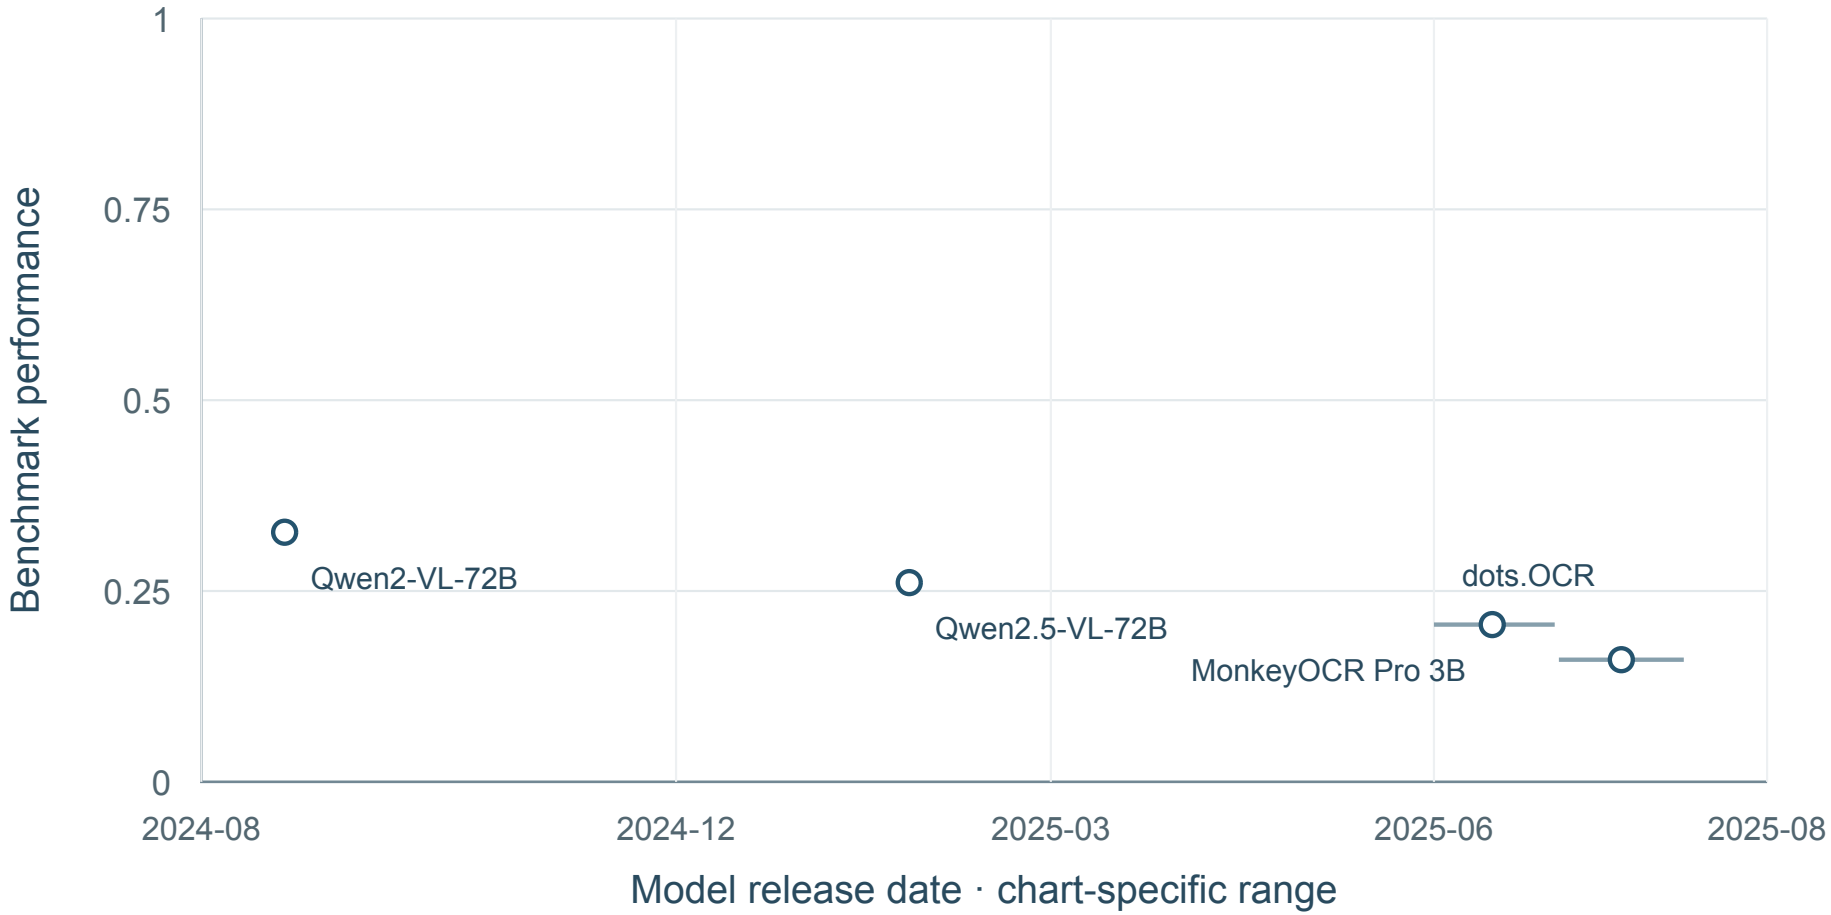

4 shown · 7 undated · 0 definition-held · sources: MC042


No mean curve: Fewer than five dated model configurations.

Result-source references: MC042. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Text edit distance (lower is better)

Mode not specified; MC042 H1; OmniDocBench v1.0 schema (scoring commit unpinned); EN

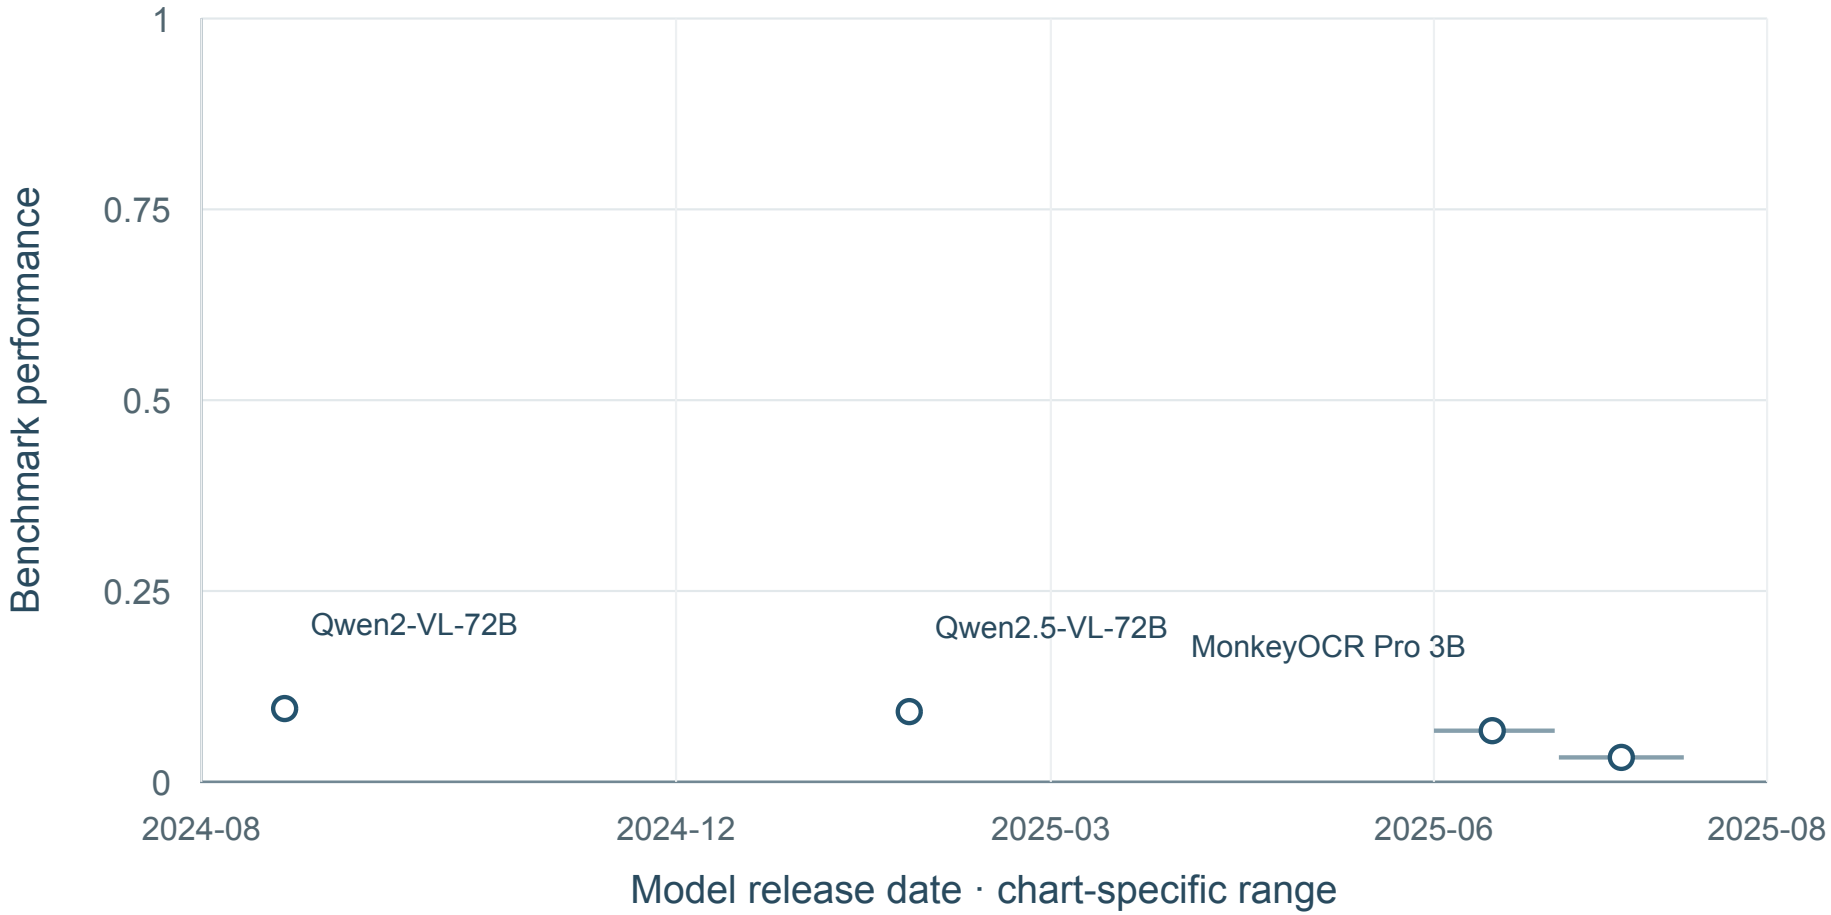

4 shown · 7 undated · 0 definition-held · sources: MC042


No mean curve: Fewer than five dated model configurations.

Result-source references: MC042. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Text edit distance (lower is better)

Mode not specified; MC042 H1; OmniDocBench v1.0 schema (scoring commit unpinned); ZH

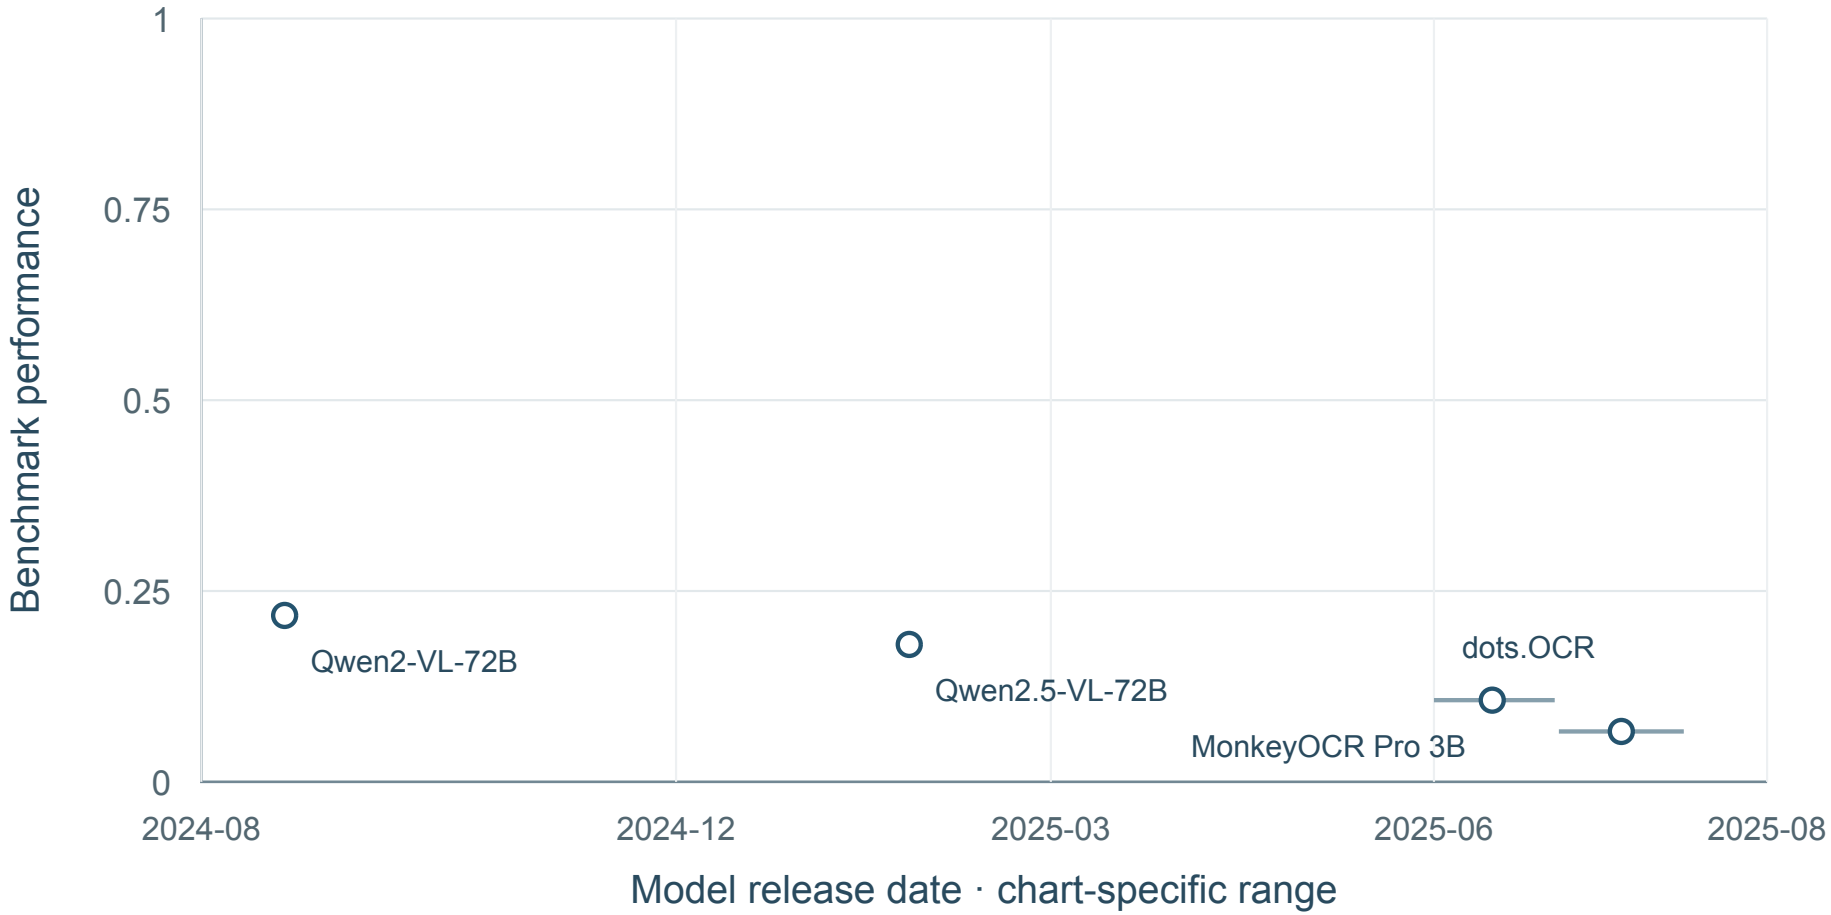

4 shown · 7 undated · 0 definition-held · sources: MC042


No mean curve: Fewer than five dated model configurations.

Result-source references: MC042. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Formula edit distance (lower is better)

Mode not specified; MC042 H1; OmniDocBench v1.0 schema (scoring commit unpinned); EN

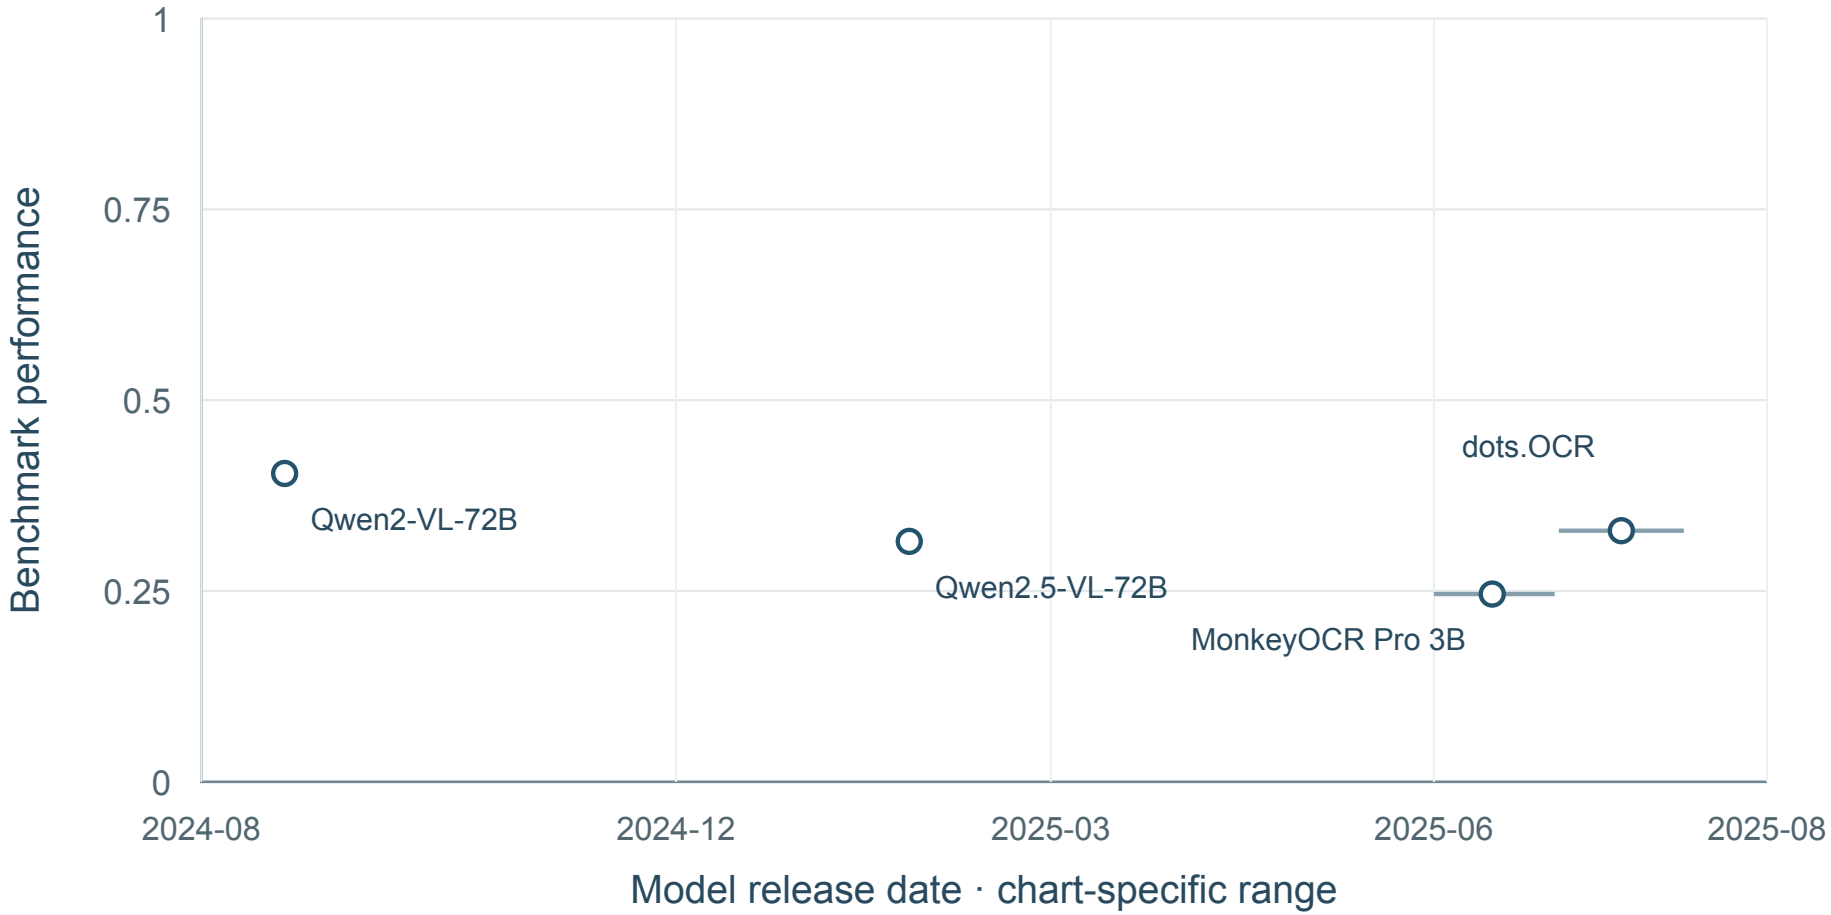

4 shown · 7 undated · 0 definition-held · sources: MC042


No mean curve: Fewer than five dated model configurations.

Result-source references: MC042. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Formula edit distance (lower is better)

Mode not specified; MC042 H1; OmniDocBench v1.0 schema (scoring commit unpinned); ZH

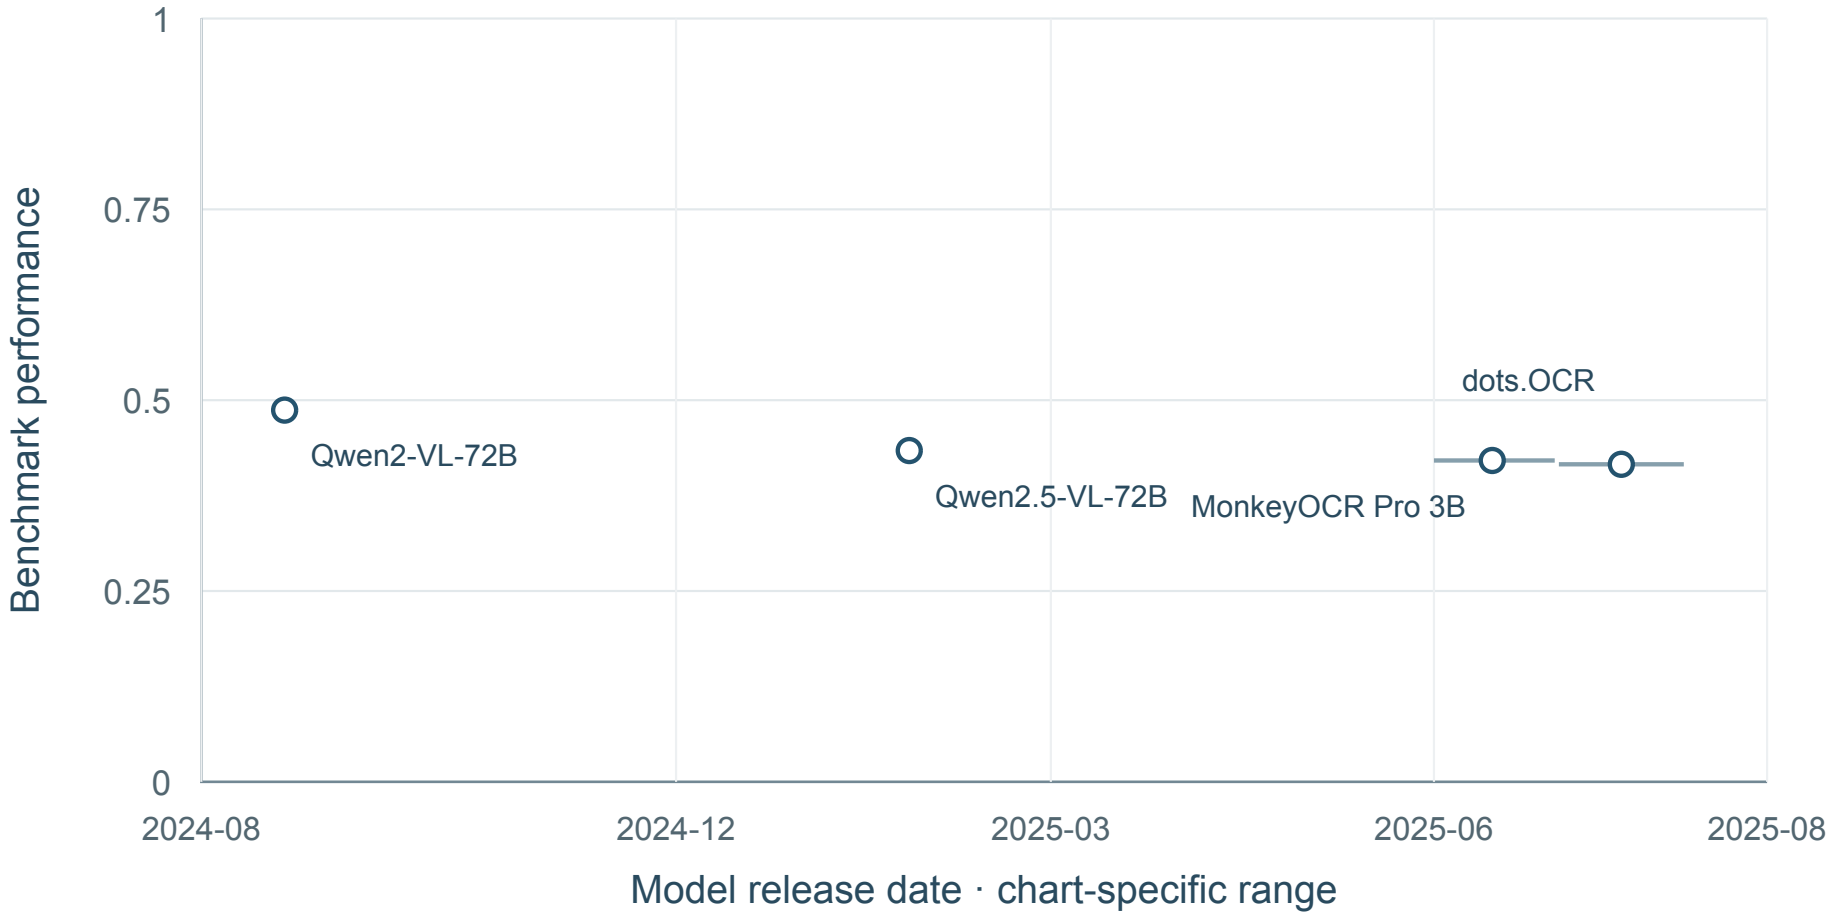

4 shown · 7 undated · 0 definition-held · sources: MC042


No mean curve: Fewer than five dated model configurations.

Result-source references: MC042. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Table TEDS similarity

Mode not specified; MC042 H1; OmniDocBench v1.0 schema (scoring commit unpinned); EN

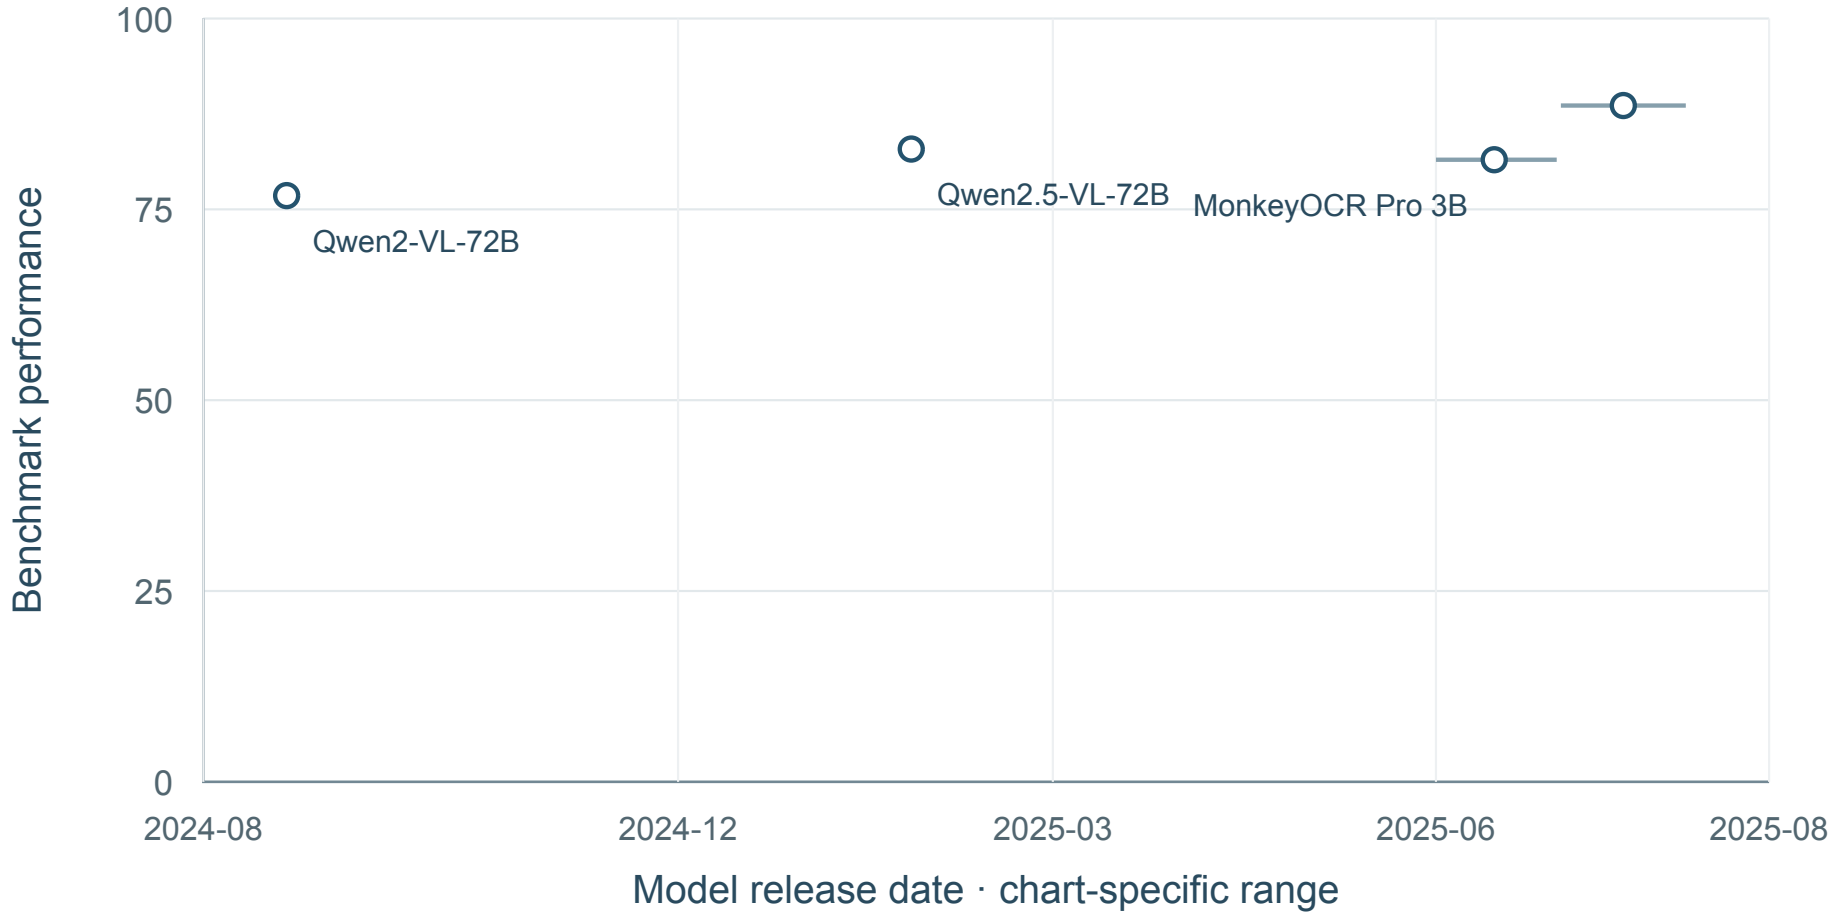

4 shown · 7 undated · 0 definition-held · sources: MC042


No mean curve: Fewer than five dated model configurations.

Result-source references: MC042. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Table TEDS similarity

Mode not specified; MC042 H1; OmniDocBench v1.0 schema (scoring commit unpinned); ZH

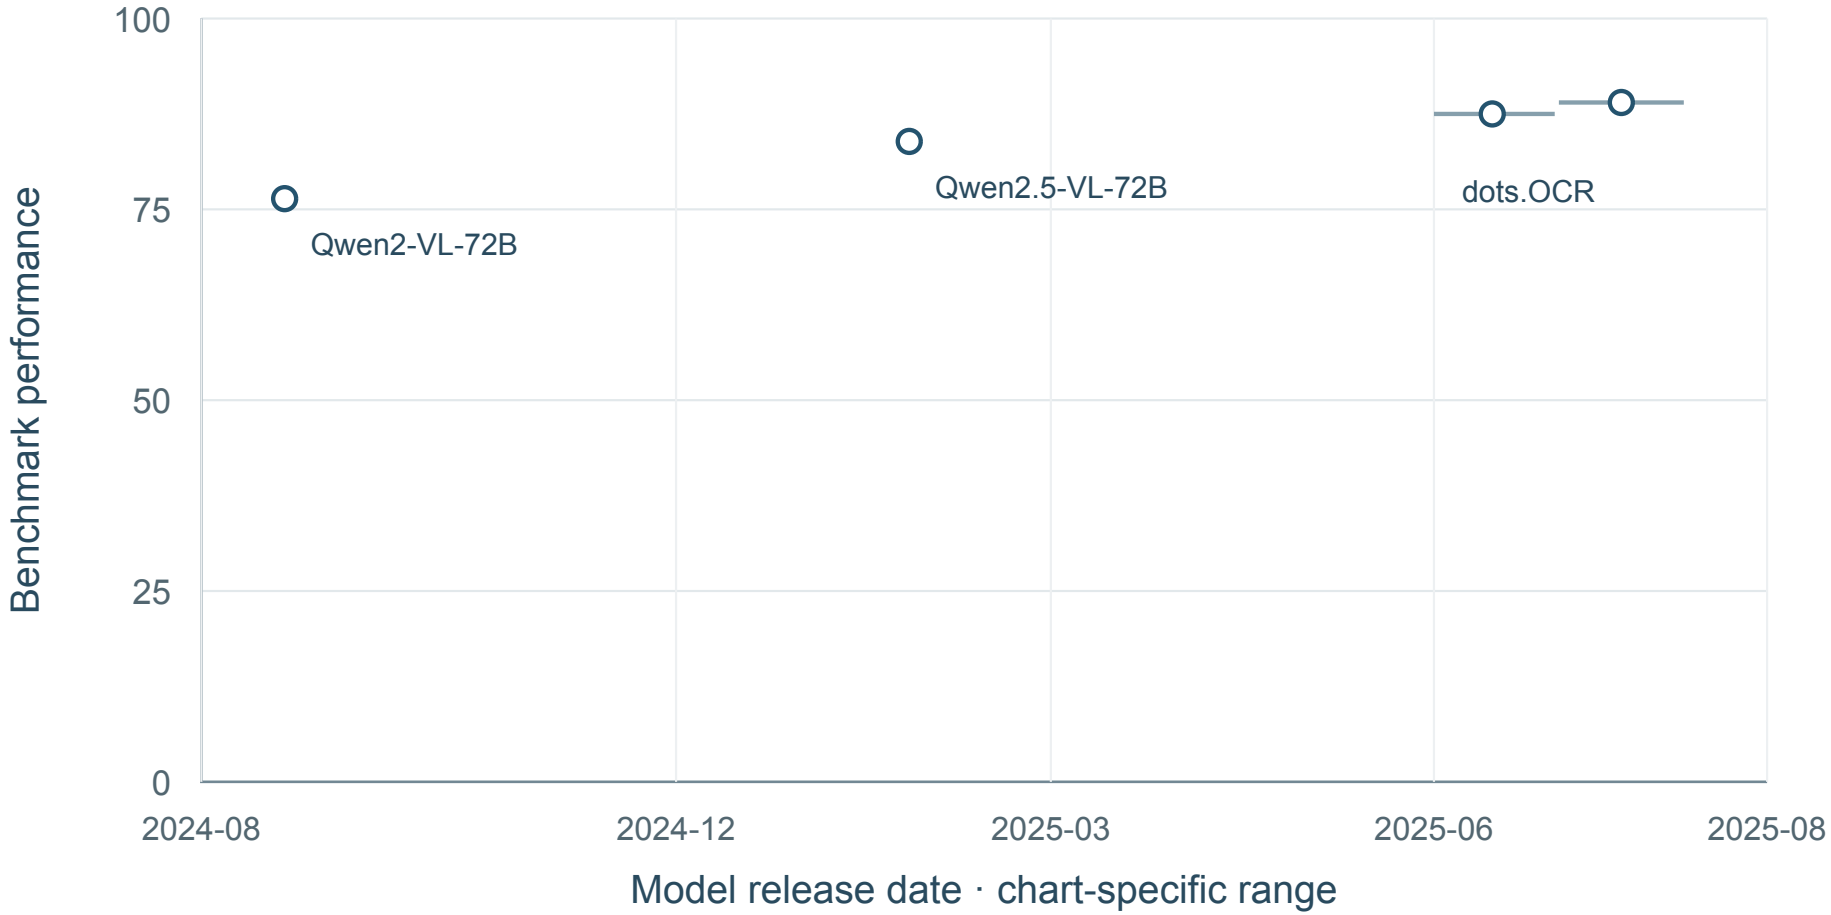

4 shown · 7 undated · 0 definition-held · sources: MC042


No mean curve: Fewer than five dated model configurations.

Result-source references: MC042. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Table edit distance (lower is better)

Mode not specified; MC042 H1; OmniDocBench v1.0 schema (scoring commit unpinned); EN

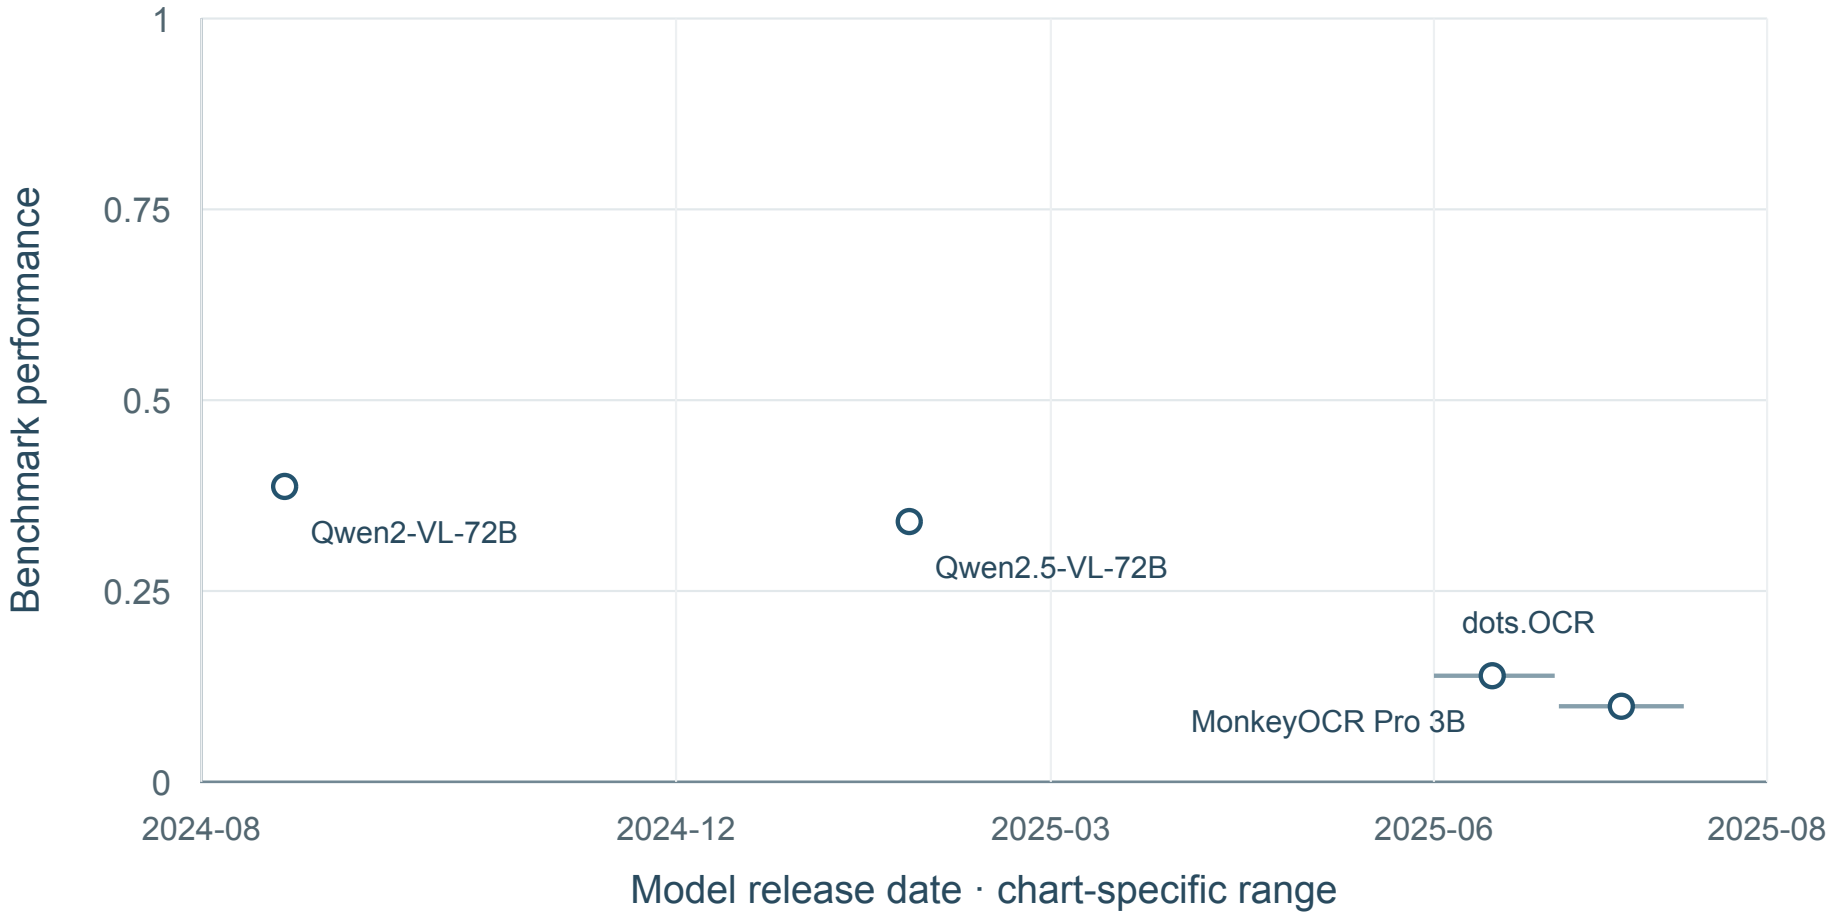

4 shown · 7 undated · 0 definition-held · sources: MC042


No mean curve: Fewer than five dated model configurations.

Result-source references: MC042. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Table edit distance (lower is better)

Mode not specified; MC042 H1; OmniDocBench v1.0 schema (scoring commit unpinned); ZH

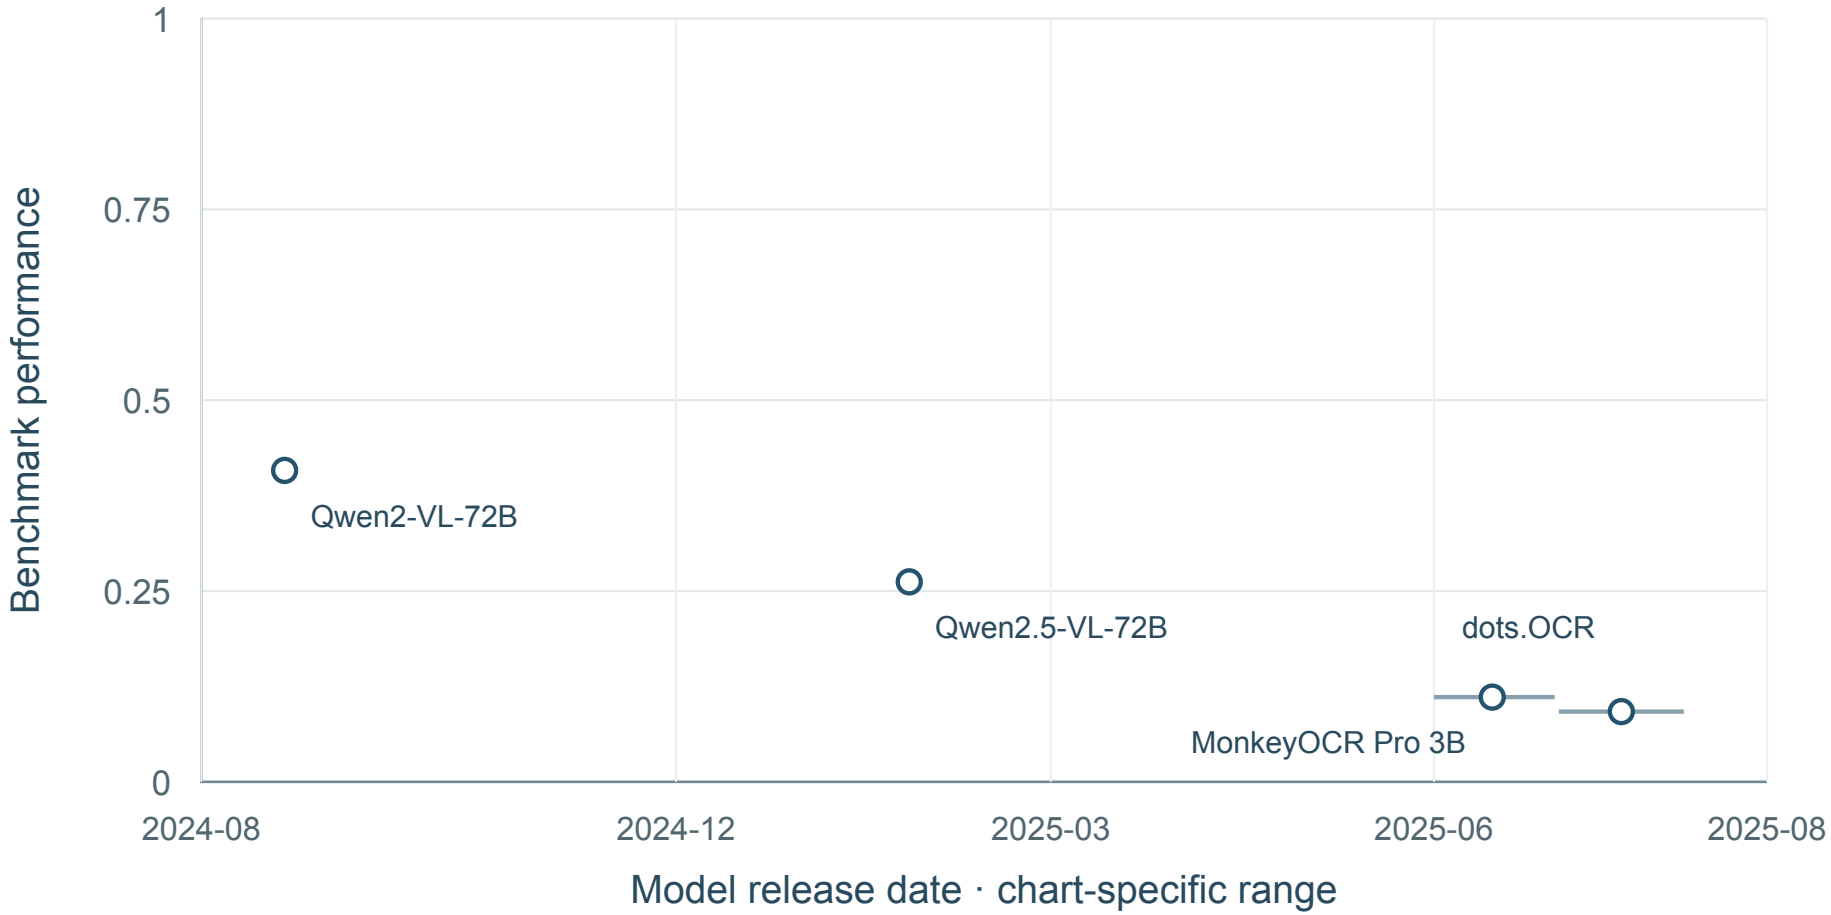

4 shown · 7 undated · 0 definition-held · sources: MC042


No mean curve: Fewer than five dated model configurations.

Result-source references: MC042. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Read Order edit distance (lower is better)

Mode not specified; MC042 H1; OmniDocBench v1.0 schema (scoring commit unpinned); EN

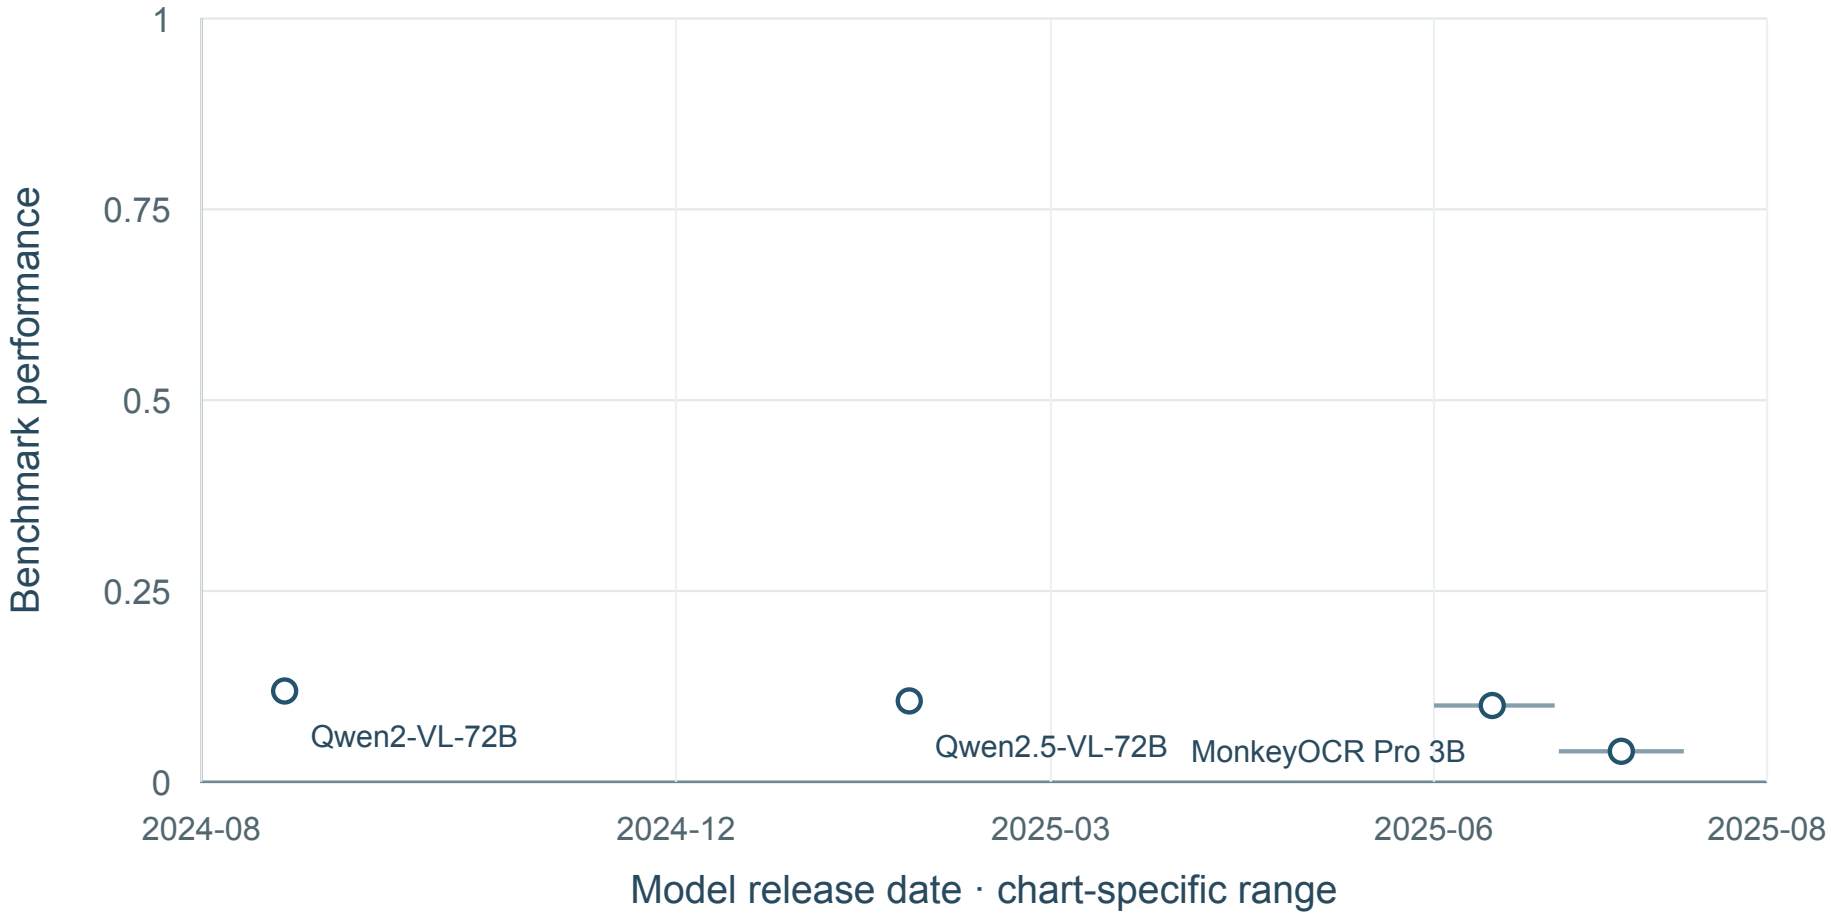

4 shown · 7 undated · 0 definition-held · sources: MC042


No mean curve: Fewer than five dated model configurations.

Result-source references: MC042. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Read Order edit distance (lower is better)

Mode not specified; MC042 H1; OmniDocBench v1.0 schema (scoring commit unpinned); ZH

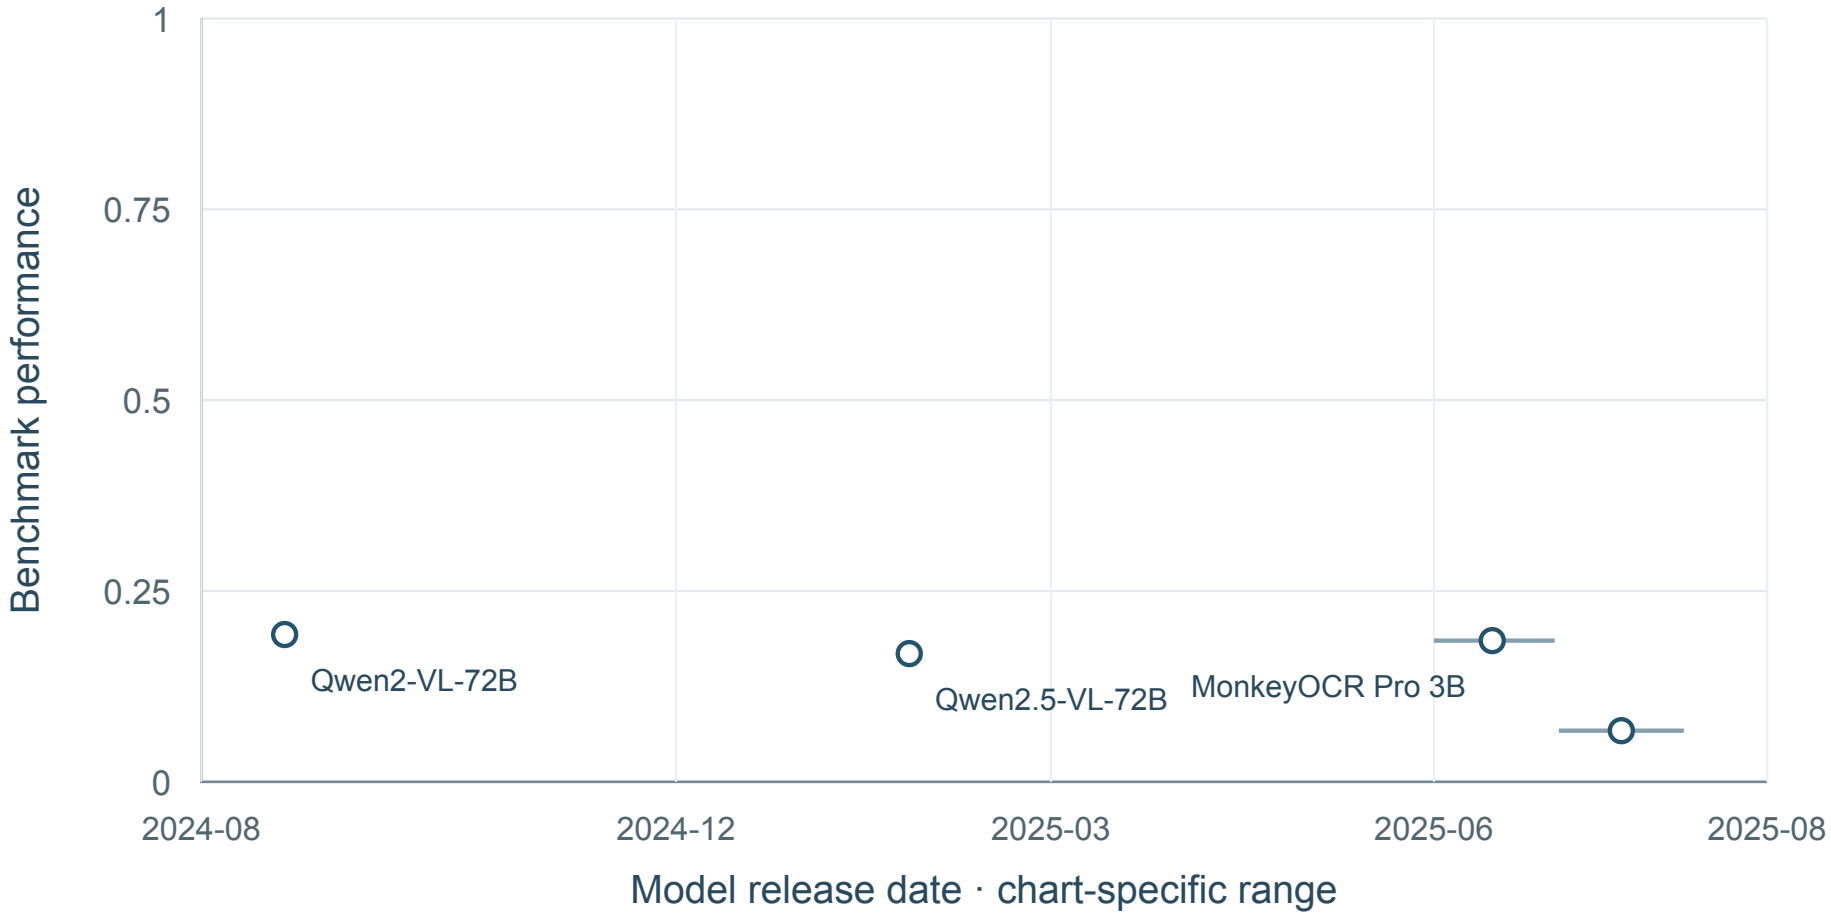

4 shown · 7 undated · 0 definition-held · sources: MC042


No mean curve: Fewer than five dated model configurations.

Result-source references: MC042. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Text edit distance (lower is better)

Mode not specified; MC042 H2; OmniDocBench v1.0 schema (scoring commit unpinned); Book

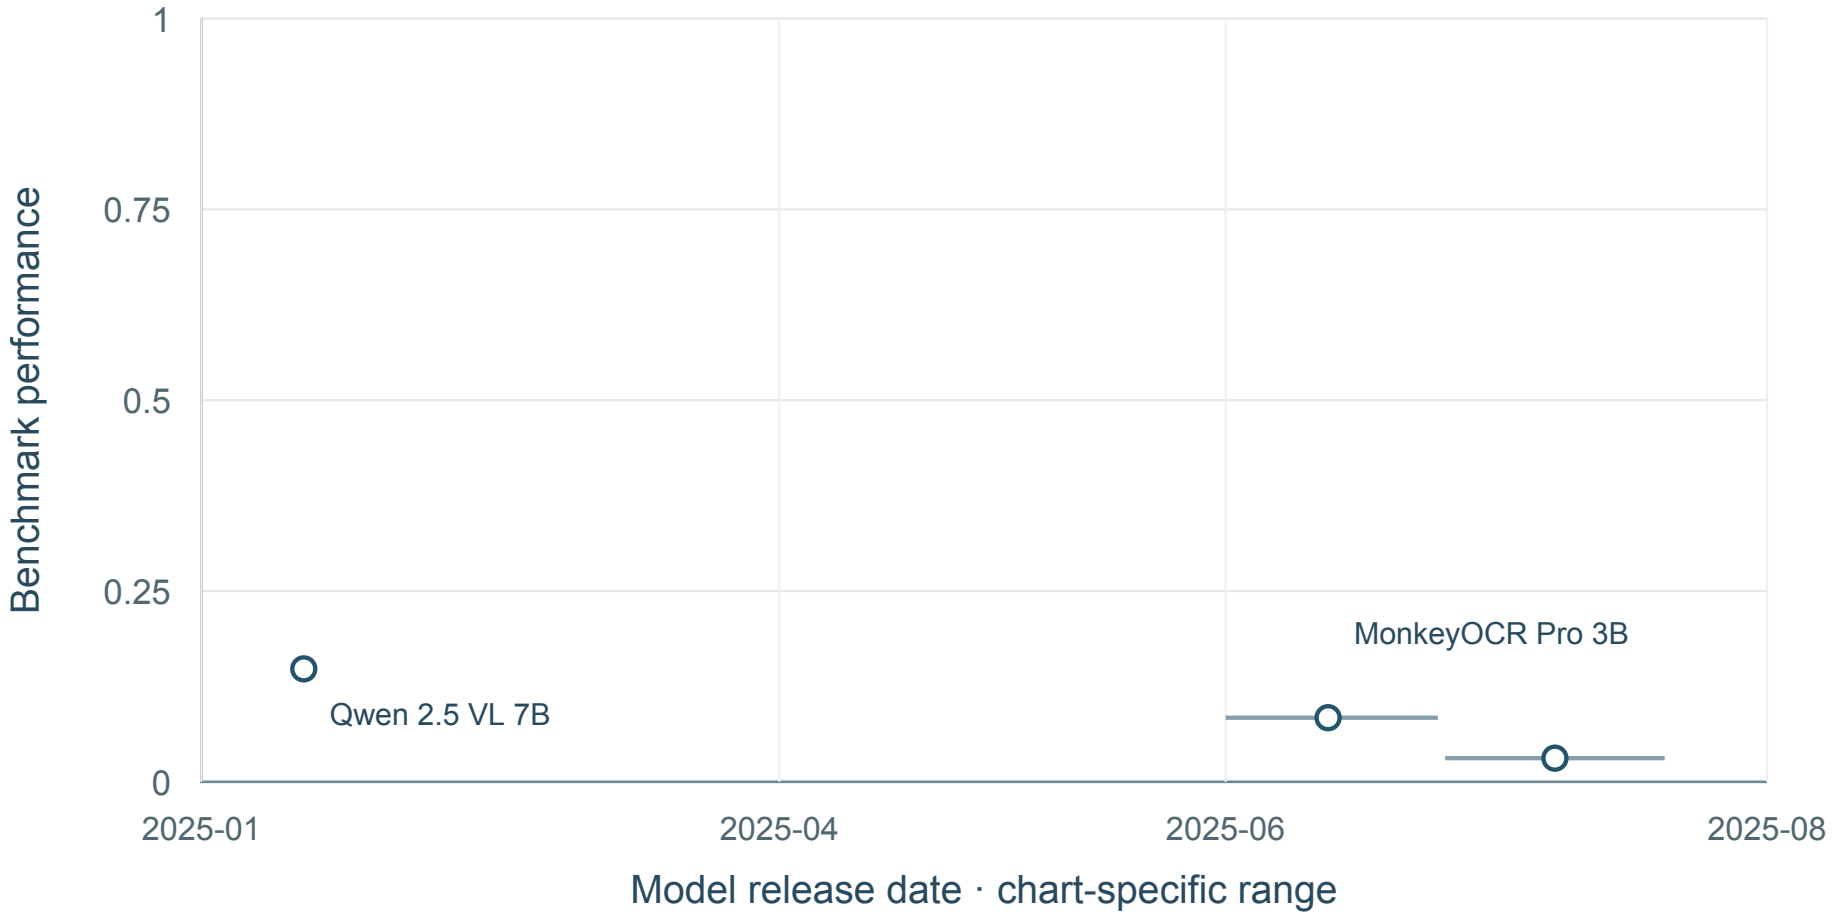

3 shown · 4 undated · 0 definition-held · sources: MC042


No mean curve: Fewer than five dated model configurations.

Result-source references: MC042. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Text edit distance (lower is better)

Mode not specified; MC042 H2; OmniDocBench v1.0 schema (scoring commit unpinned); Slides

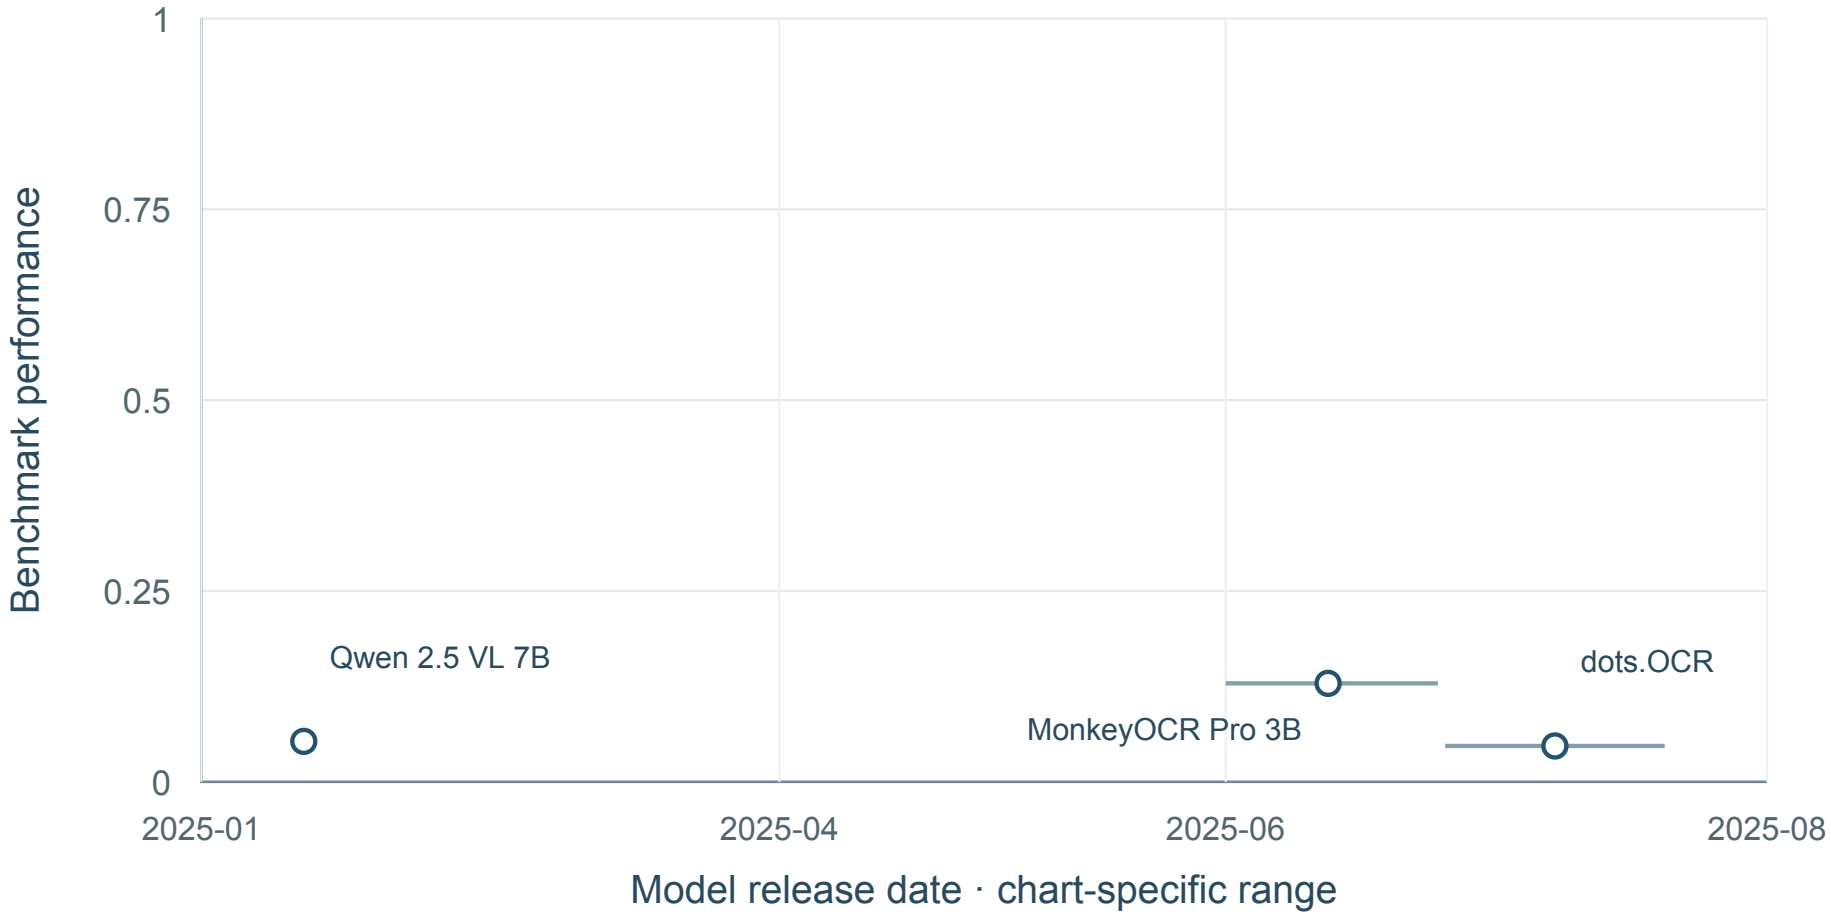

3 shown · 4 undated · 0 definition-held · sources: MC042


No mean curve: Fewer than five dated model configurations.

Result-source references: MC042. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Text edit distance (lower is better)

Mode not specified; MC042 H2; OmniDocBench v1.0 schema (scoring commit unpinned); FinancialReport

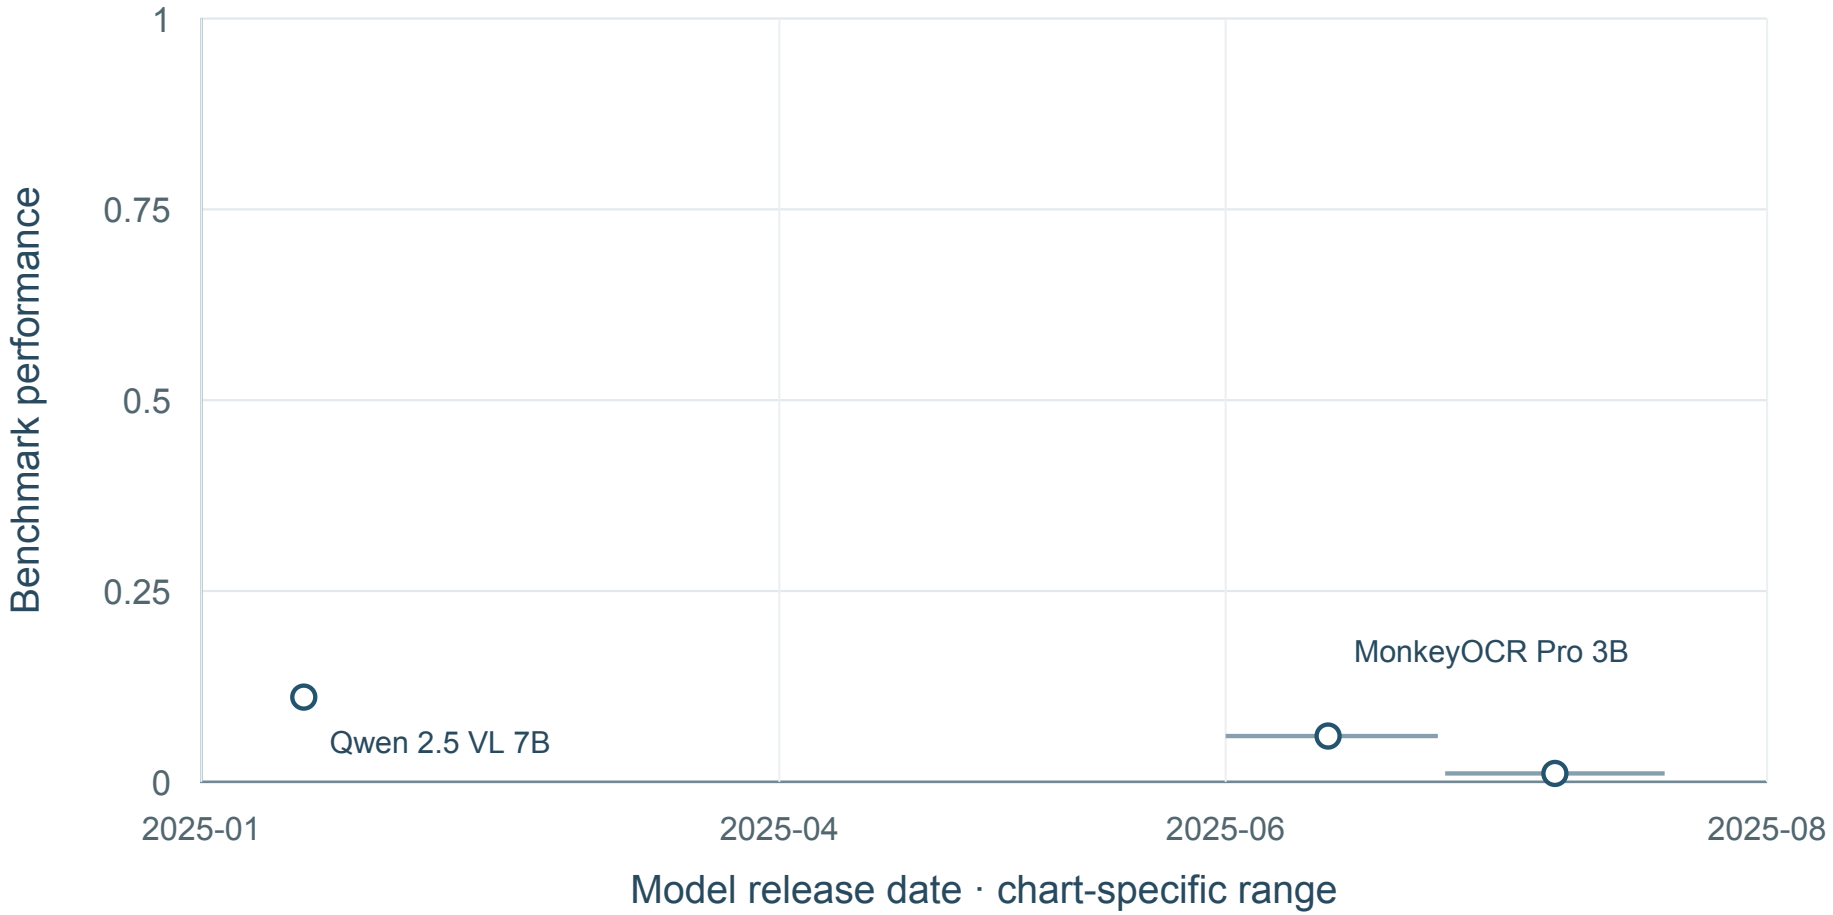

3 shown · 4 undated · 0 definition-held · sources: MC042


No mean curve: Fewer than five dated model configurations.

Result-source references: MC042. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Text edit distance (lower is better)

Mode not specified; MC042 H2; OmniDocBench v1.0 schema (scoring commit unpinned); Textbook

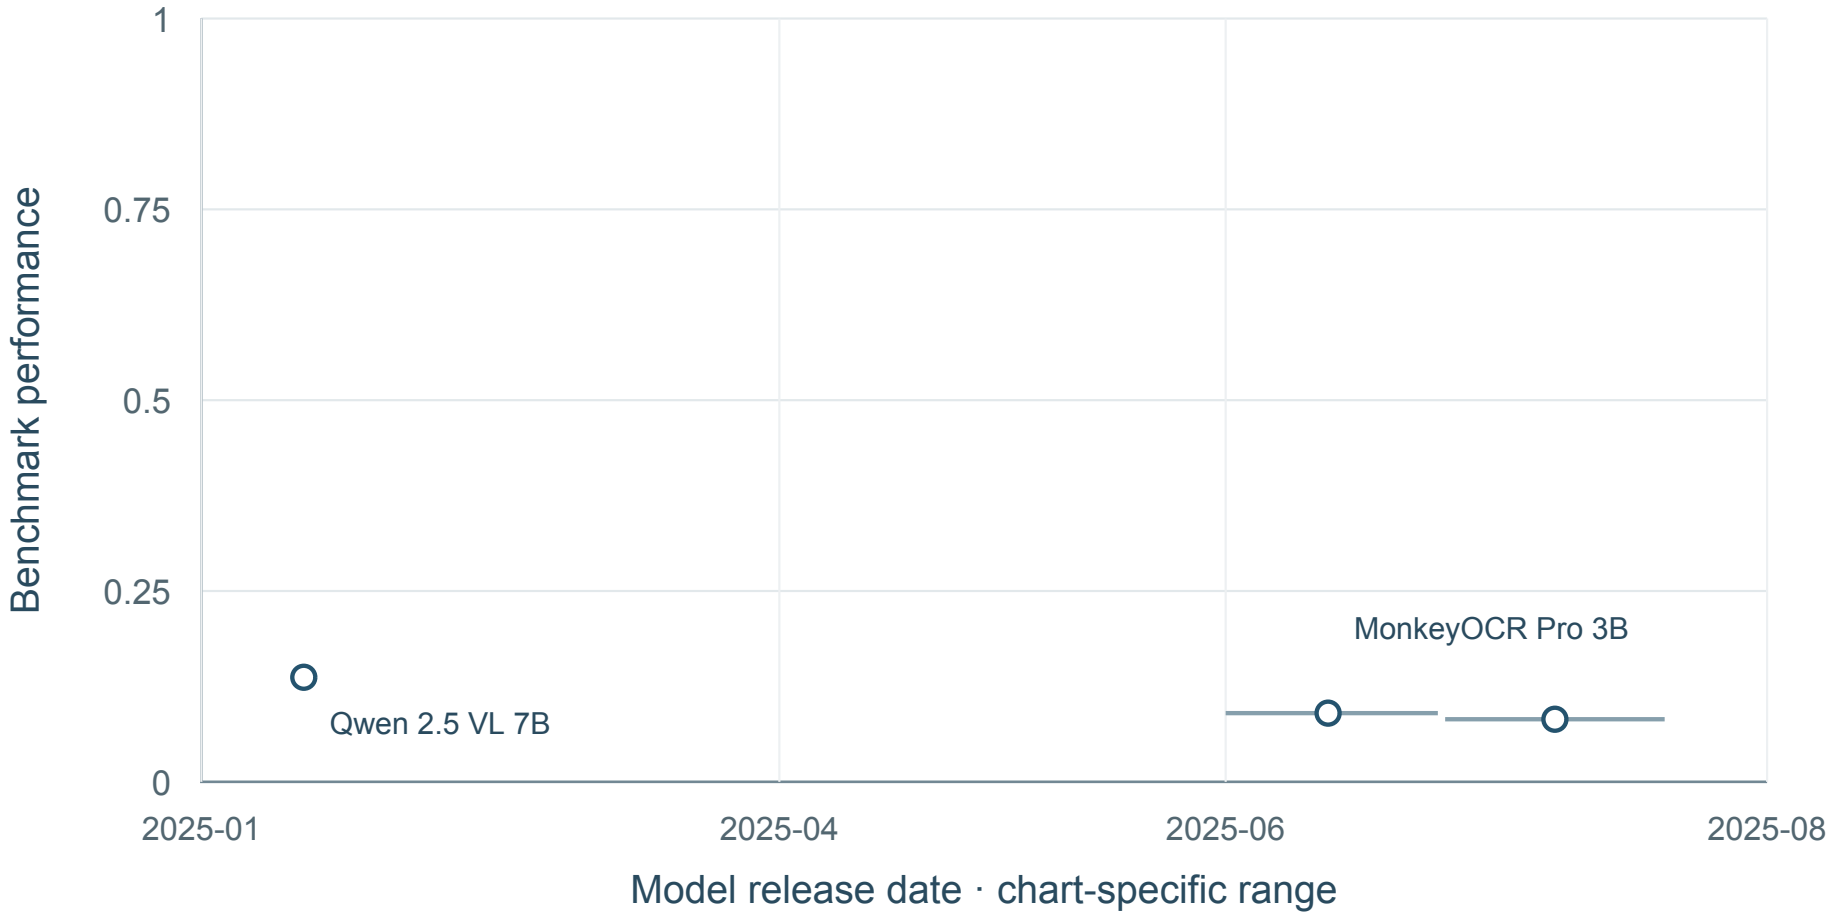

3 shown · 4 undated · 0 definition-held · sources: MC042


No mean curve: Fewer than five dated model configurations.

Result-source references: MC042. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Text edit distance (lower is better)

Mode not specified; MC042 H2; OmniDocBench v1.0 schema (scoring commit unpinned); ExamPaper

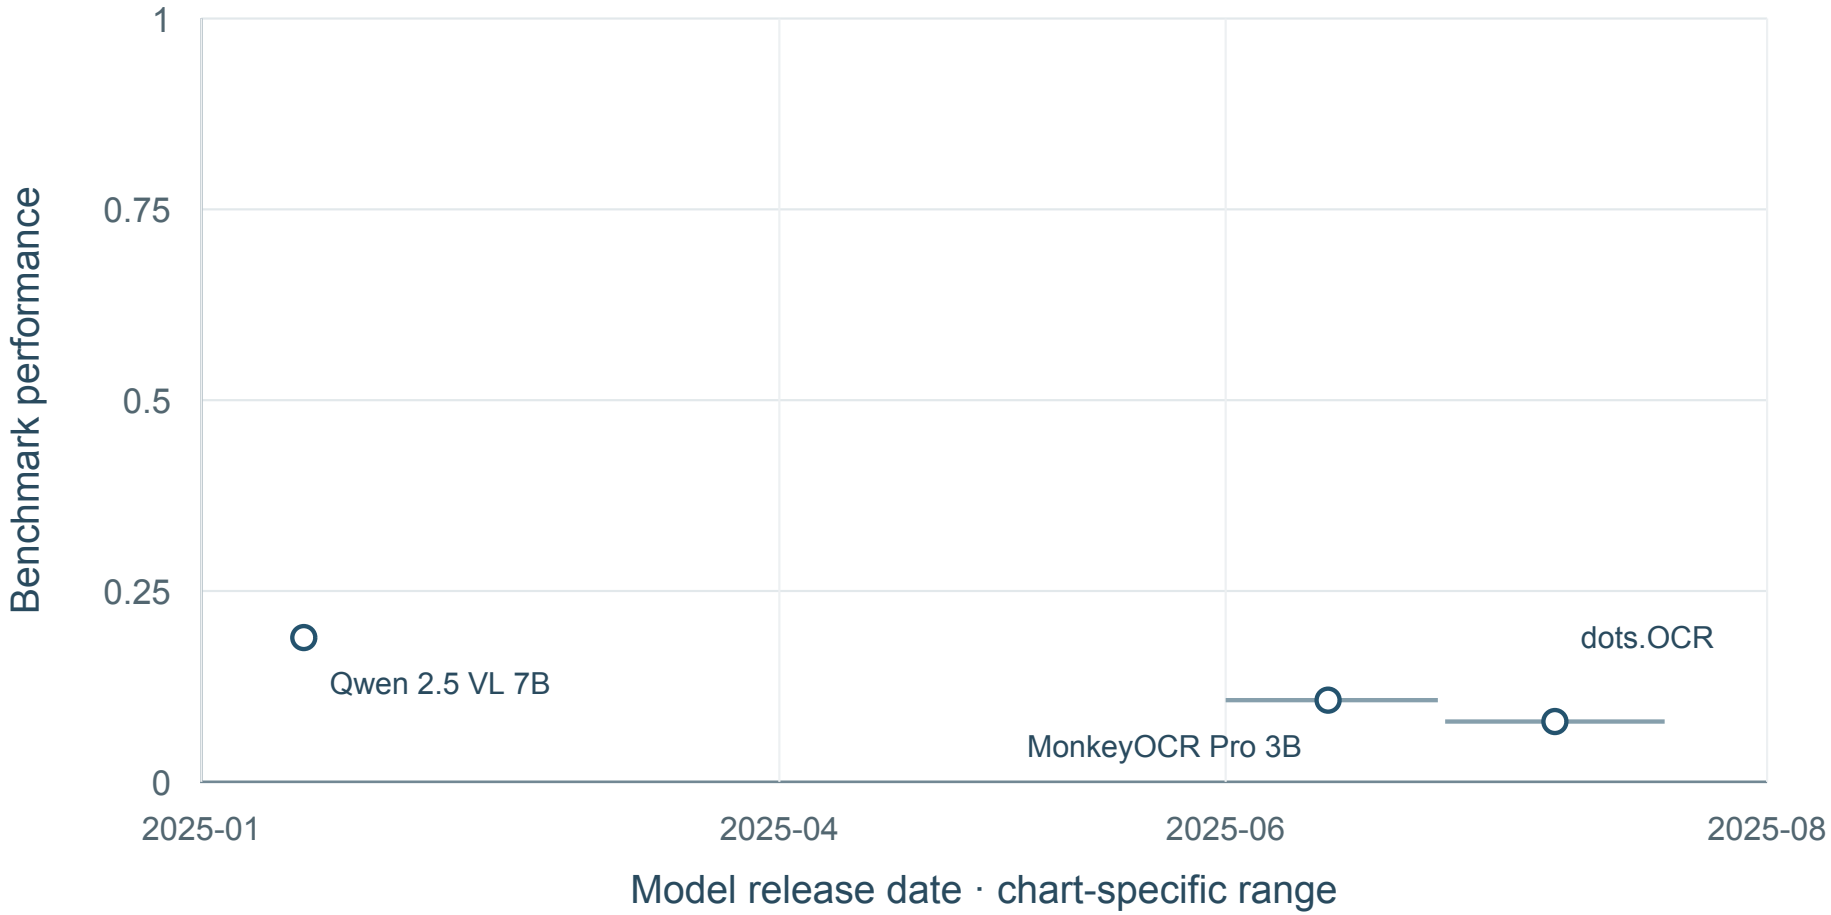

3 shown · 4 undated · 0 definition-held · sources: MC042


No mean curve: Fewer than five dated model configurations.

Result-source references: MC042. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Text edit distance (lower is better)

Mode not specified; MC042 H2; OmniDocBench v1.0 schema (scoring commit unpinned); Magazine

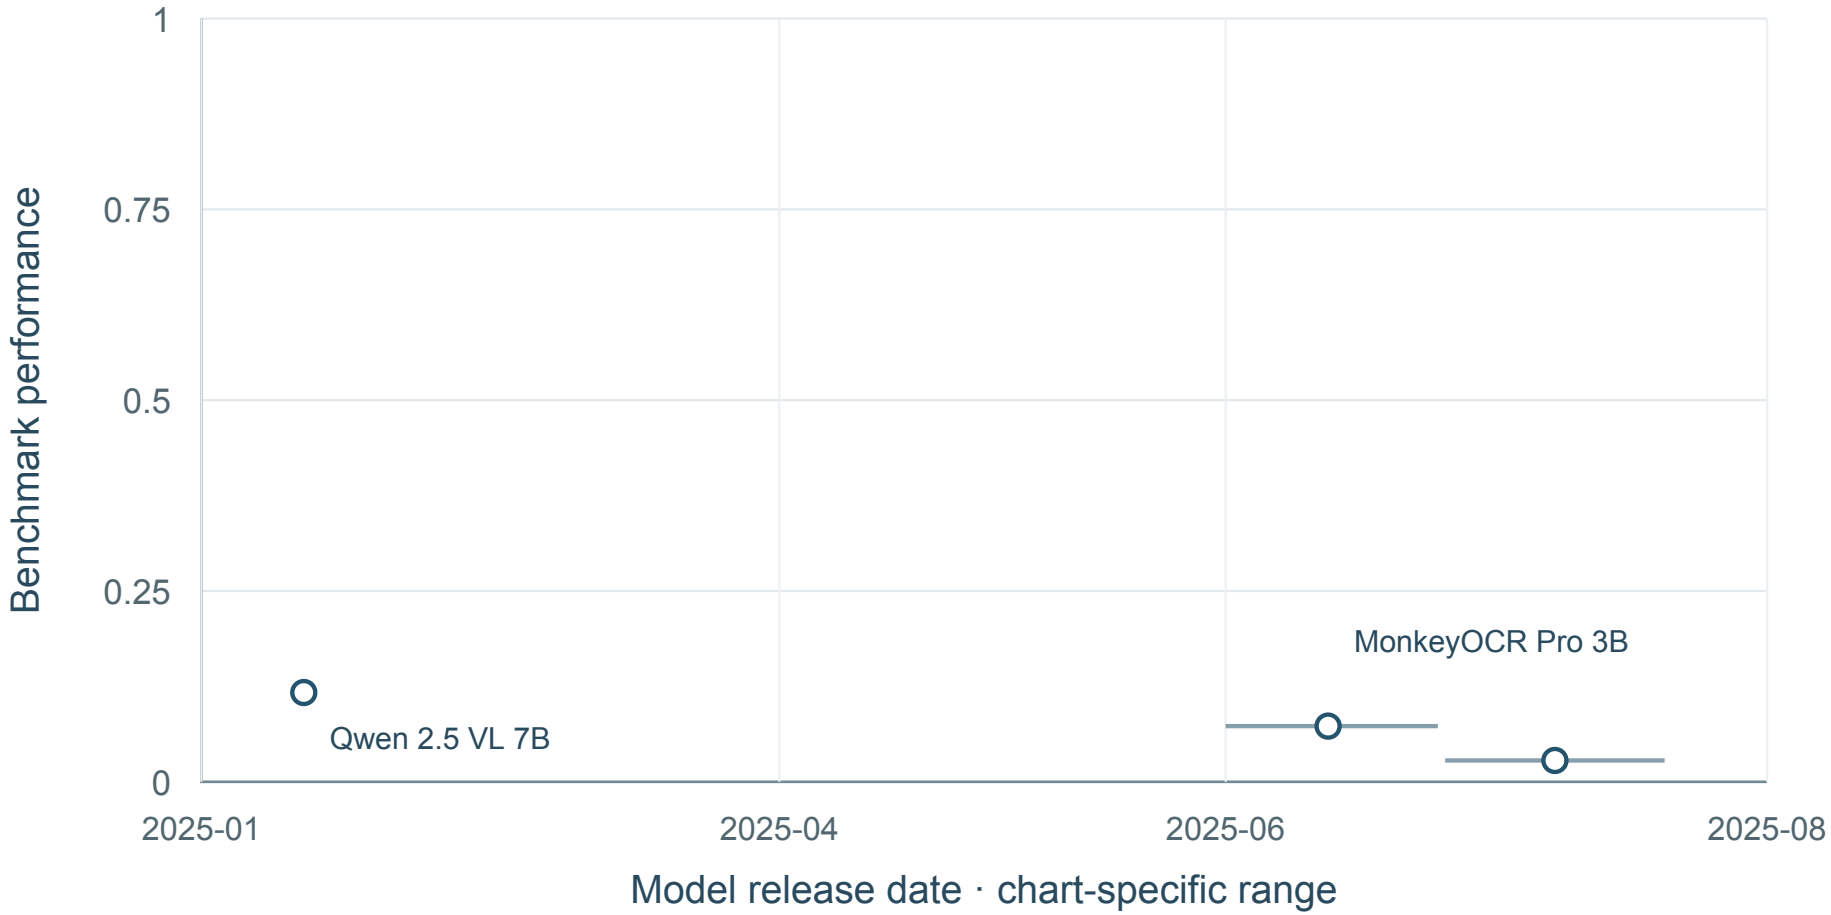

3 shown · 4 undated · 0 definition-held · sources: MC042


No mean curve: Fewer than five dated model configurations.

Result-source references: MC042. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Text edit distance (lower is better)

Mode not specified; MC042 H2; OmniDocBench v1.0 schema (scoring commit unpinned); AcademicPapers

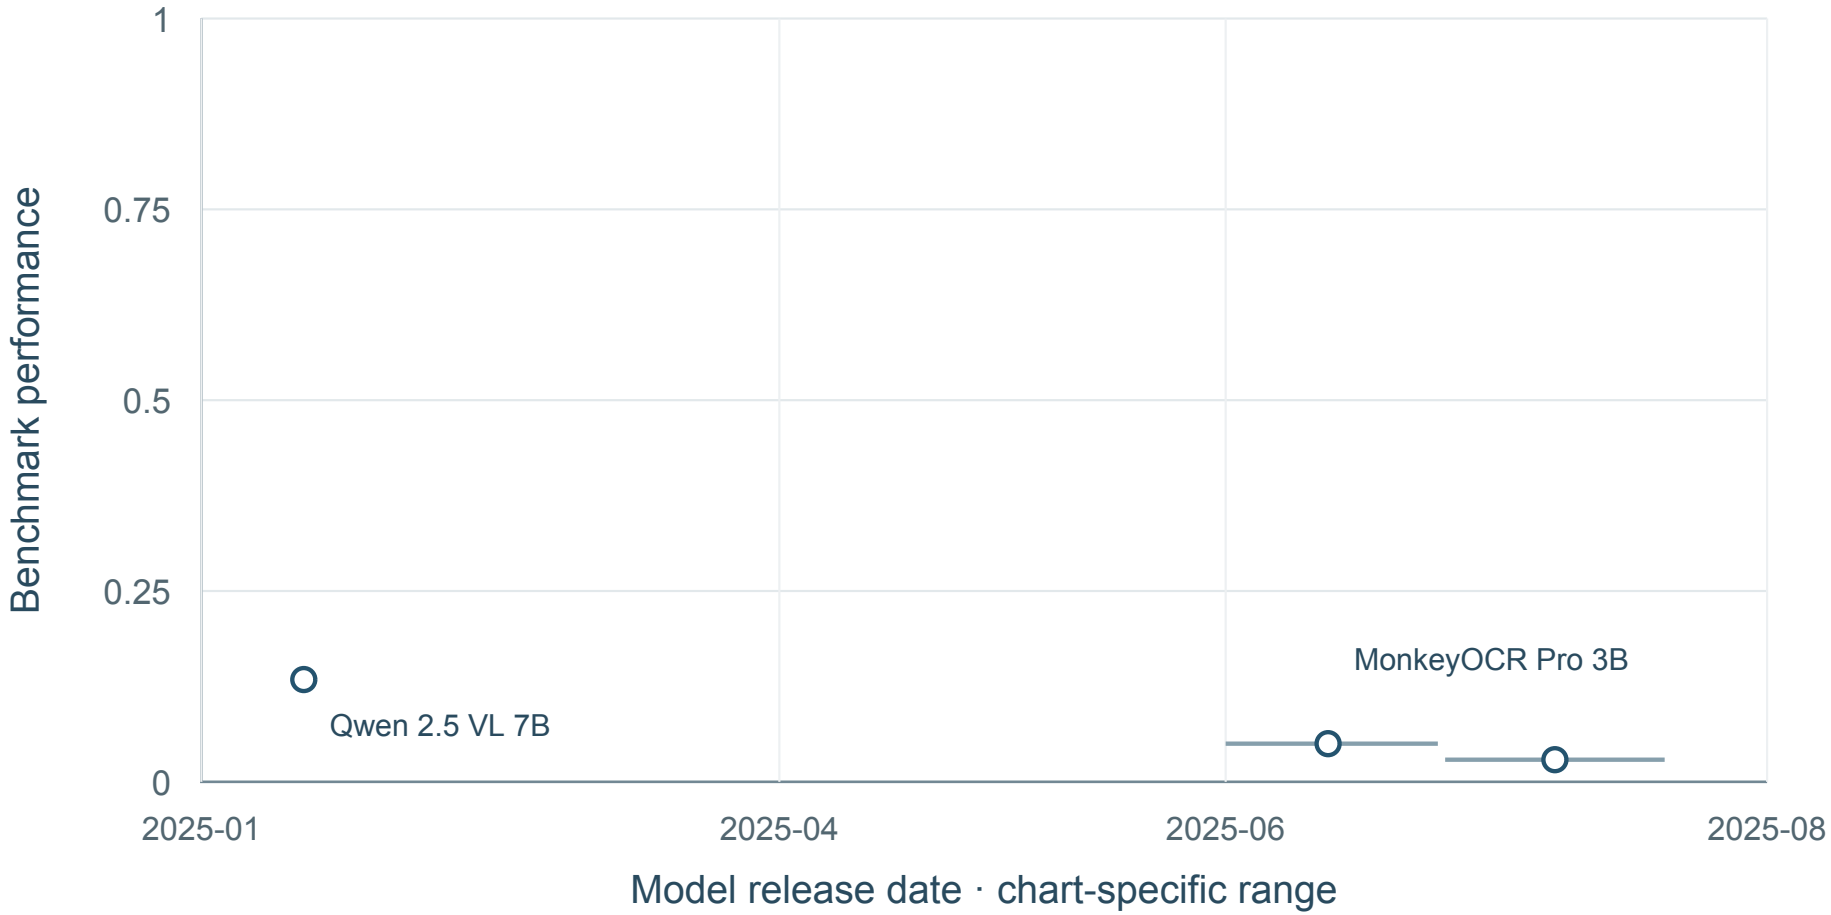

3 shown · 4 undated · 0 definition-held · sources: MC042


No mean curve: Fewer than five dated model configurations.

Result-source references: MC042. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Text edit distance (lower is better)

Mode not specified; MC042 H2; OmniDocBench v1.0 schema (scoring commit unpinned); Notes

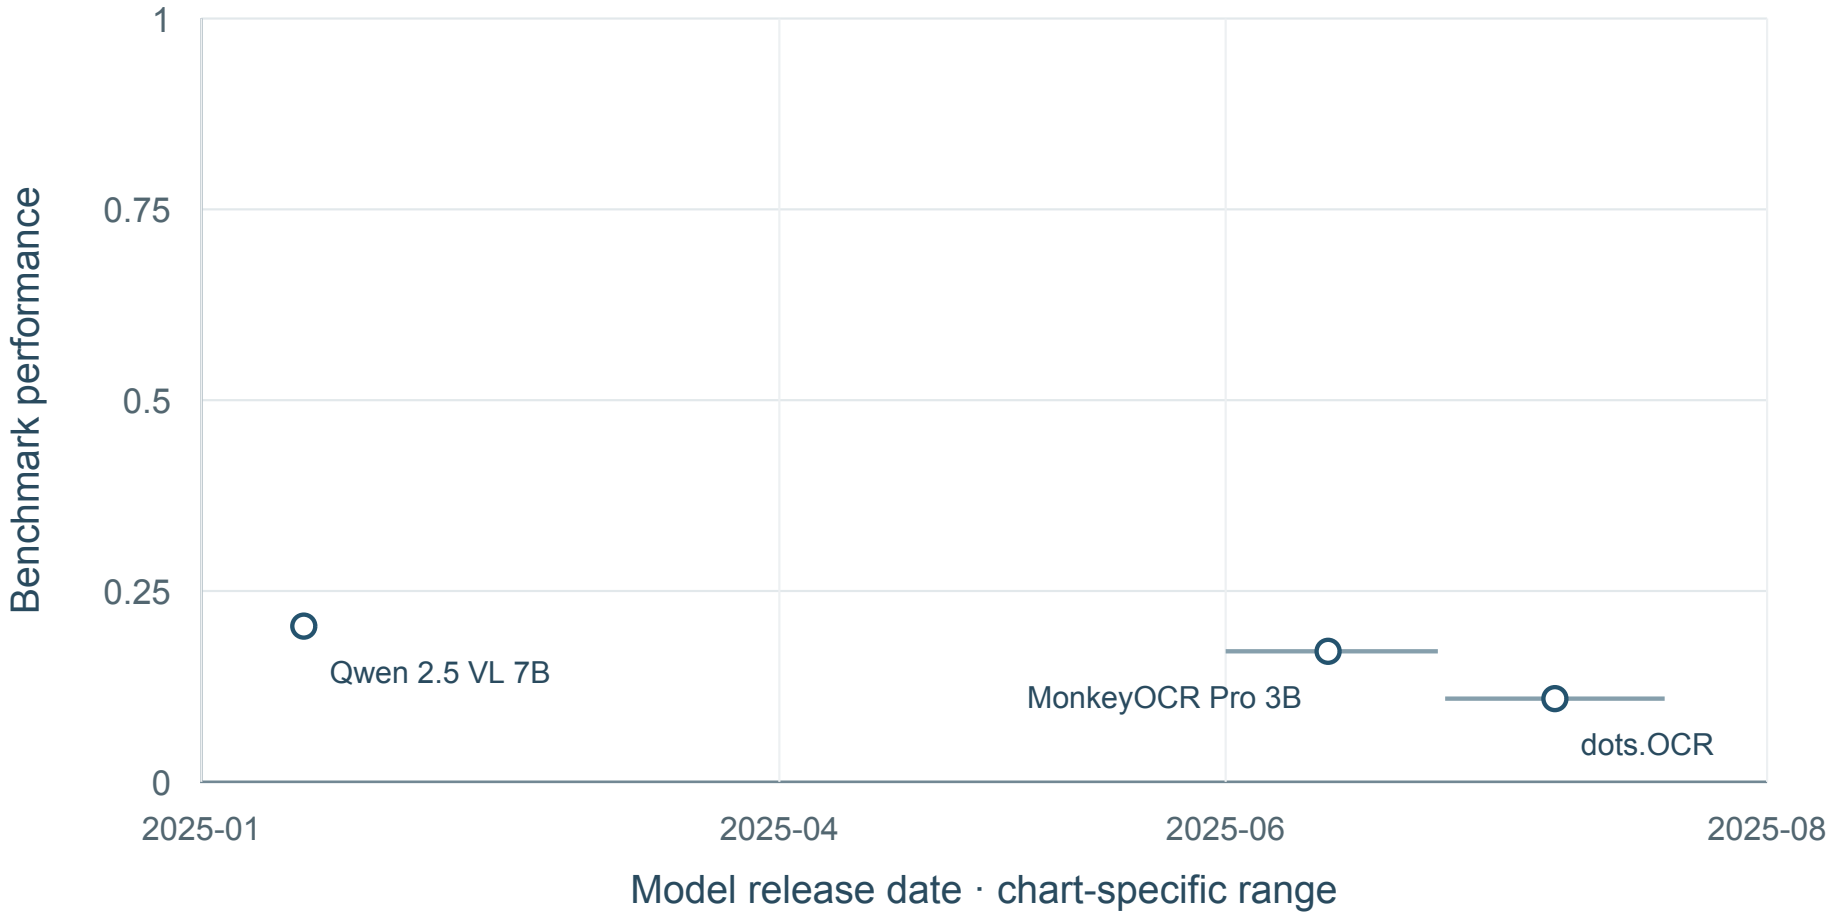

3 shown · 4 undated · 0 definition-held · sources: MC042


No mean curve: Fewer than five dated model configurations.

Result-source references: MC042. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Text edit distance (lower is better)

Mode not specified; MC042 H2; OmniDocBench v1.0 schema (scoring commit unpinned); Newspaper

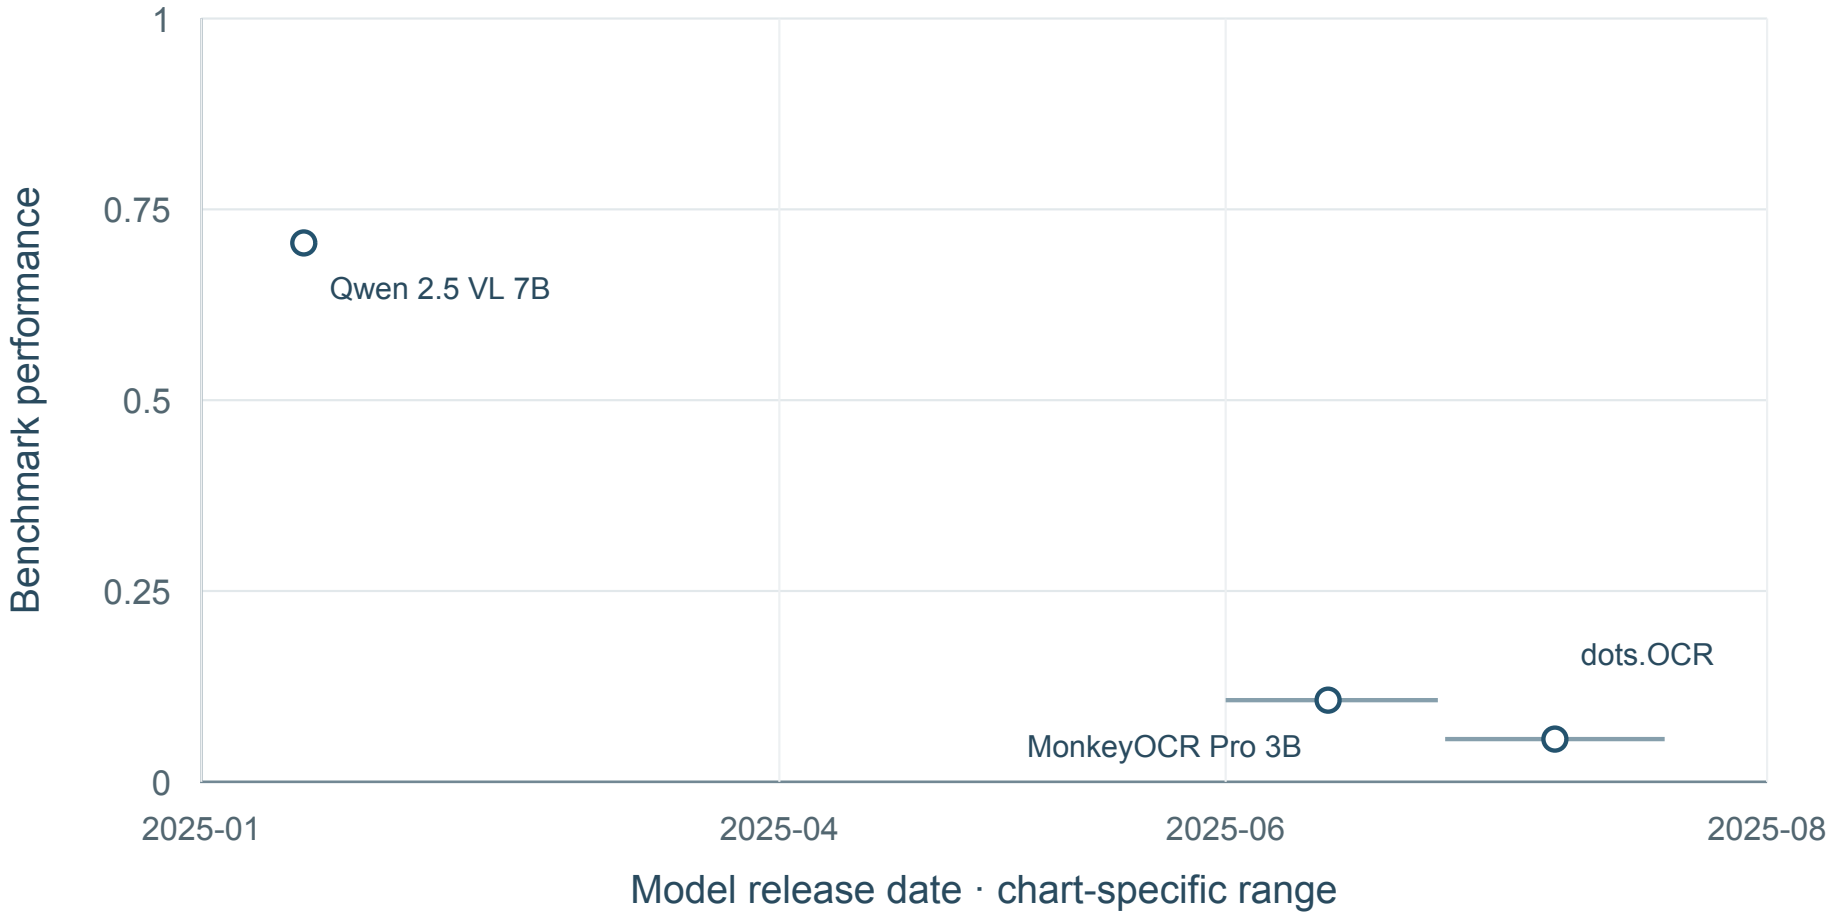

3 shown · 4 undated · 0 definition-held · sources: MC042


No mean curve: Fewer than five dated model configurations.

Result-source references: MC042. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Text edit distance (lower is better)

Mode not specified; MC042 H2; OmniDocBench v1.0 schema (scoring commit unpinned); Overall

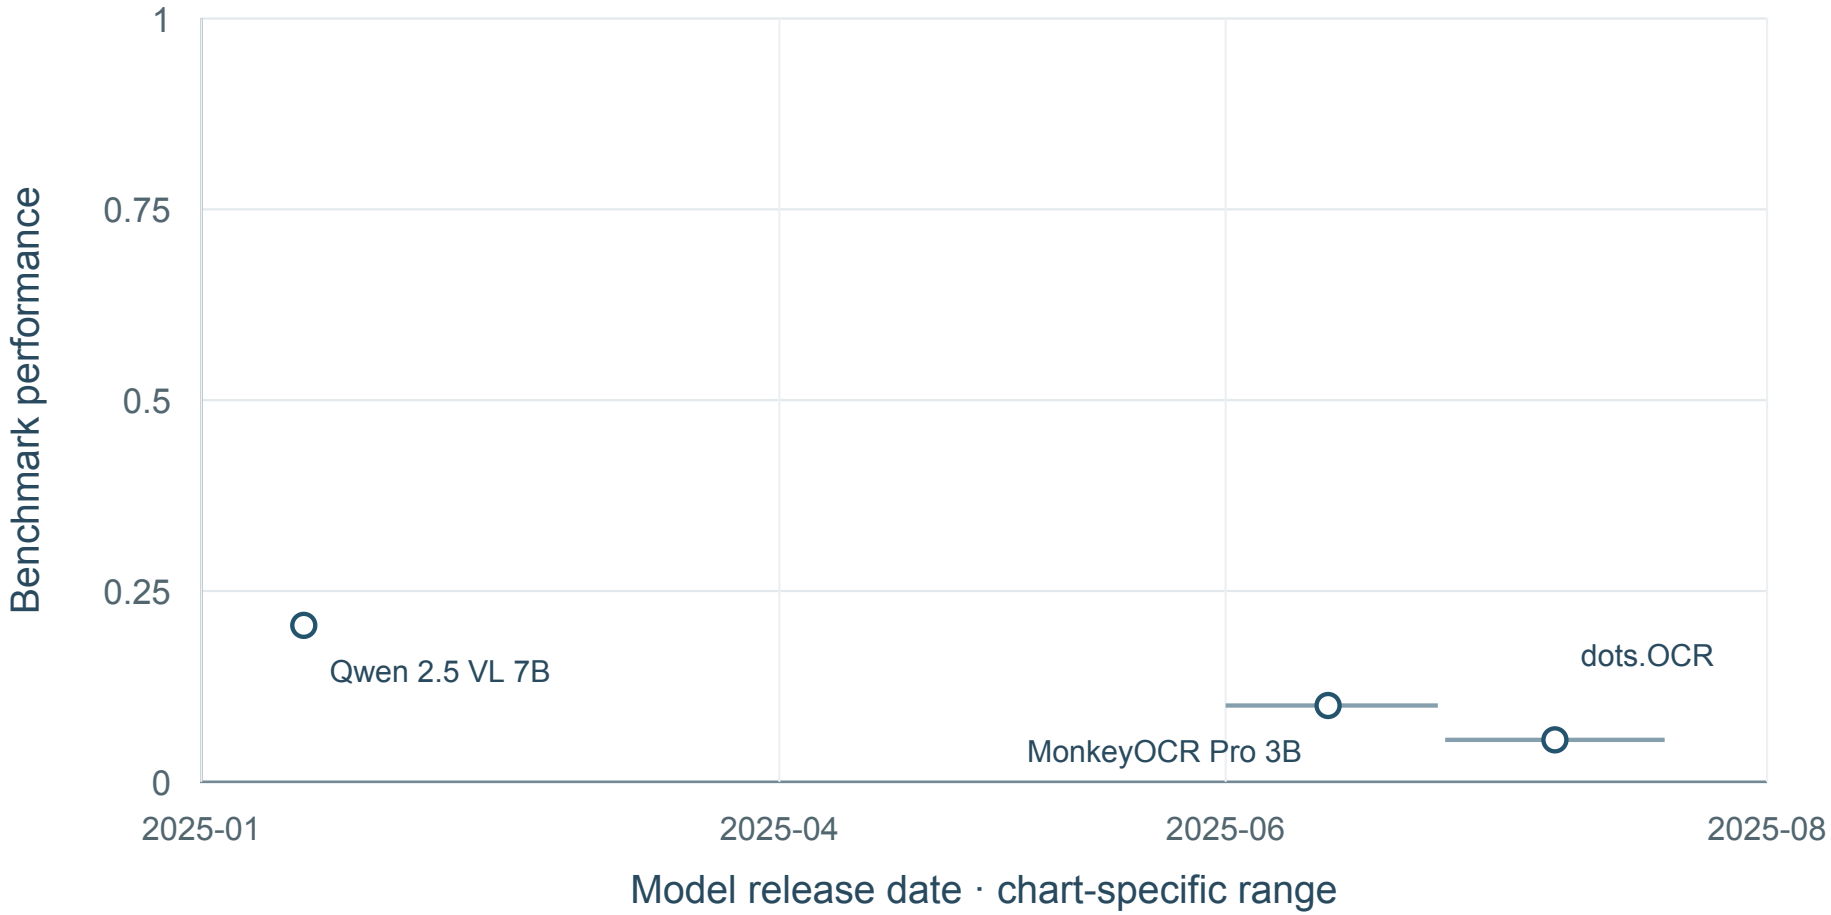

3 shown · 4 undated · 0 definition-held · sources: MC042


No mean curve: Fewer than five dated model configurations.

Result-source references: MC042. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Reported overall composite score

Mode not specified; MC083 H2; OmniDocBench v1.5

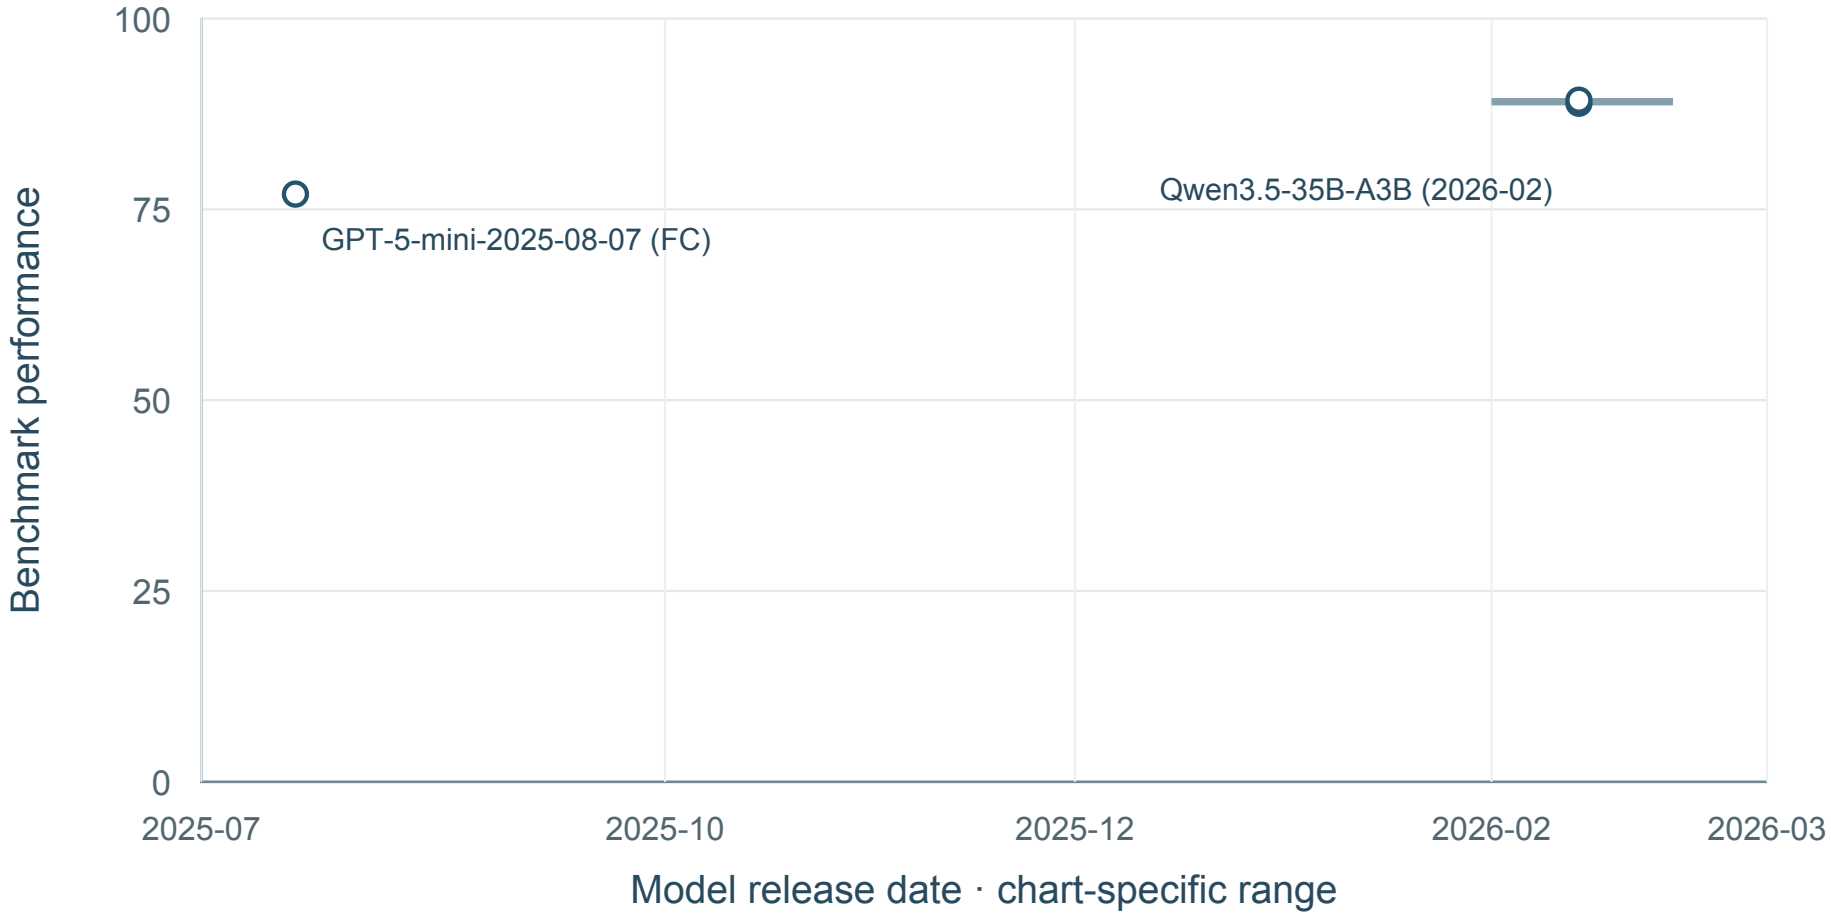

3 shown · 2 undated · 0 definition-held · sources: MC083


No mean curve: Fewer than five dated model configurations.

Result-source references: MC083. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Reported overall composite score

Mode not specified; MC084 H2; OmniDocBench v1.5

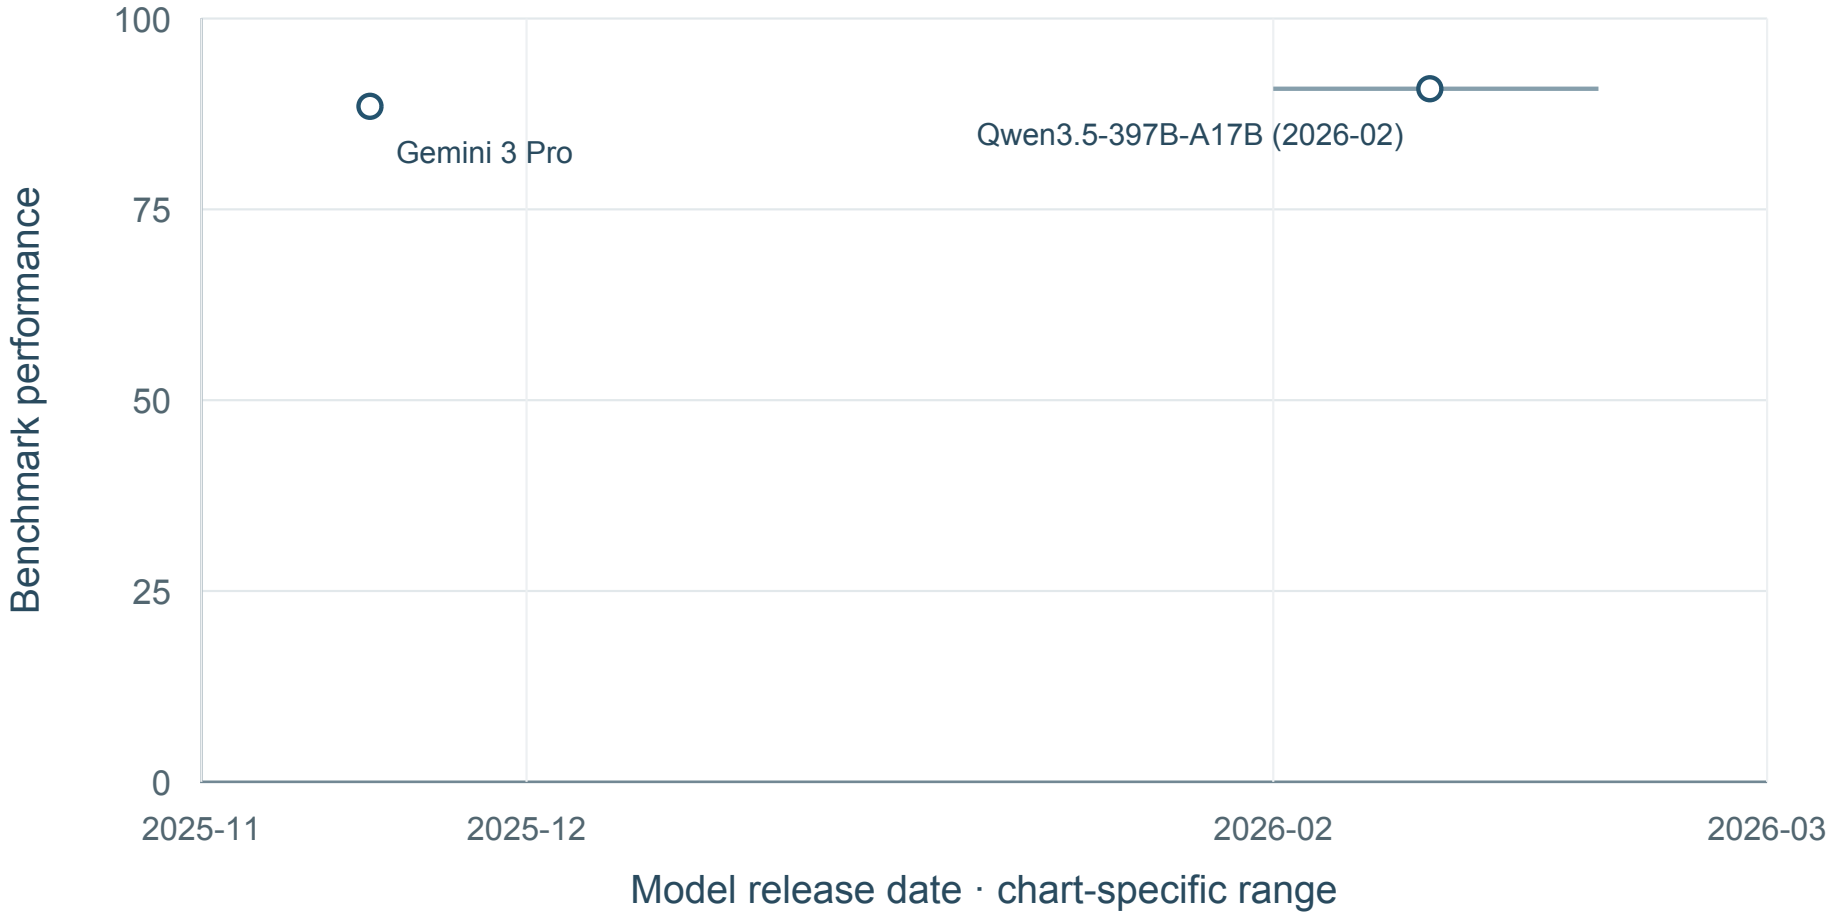

2 shown · 2 undated · 0 definition-held · sources: MC084


No mean curve: Fewer than five dated model configurations.

Result-source references: MC084. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Reported overall composite score

Mode not specified; MC091 H2; OmniDocBench v1.5

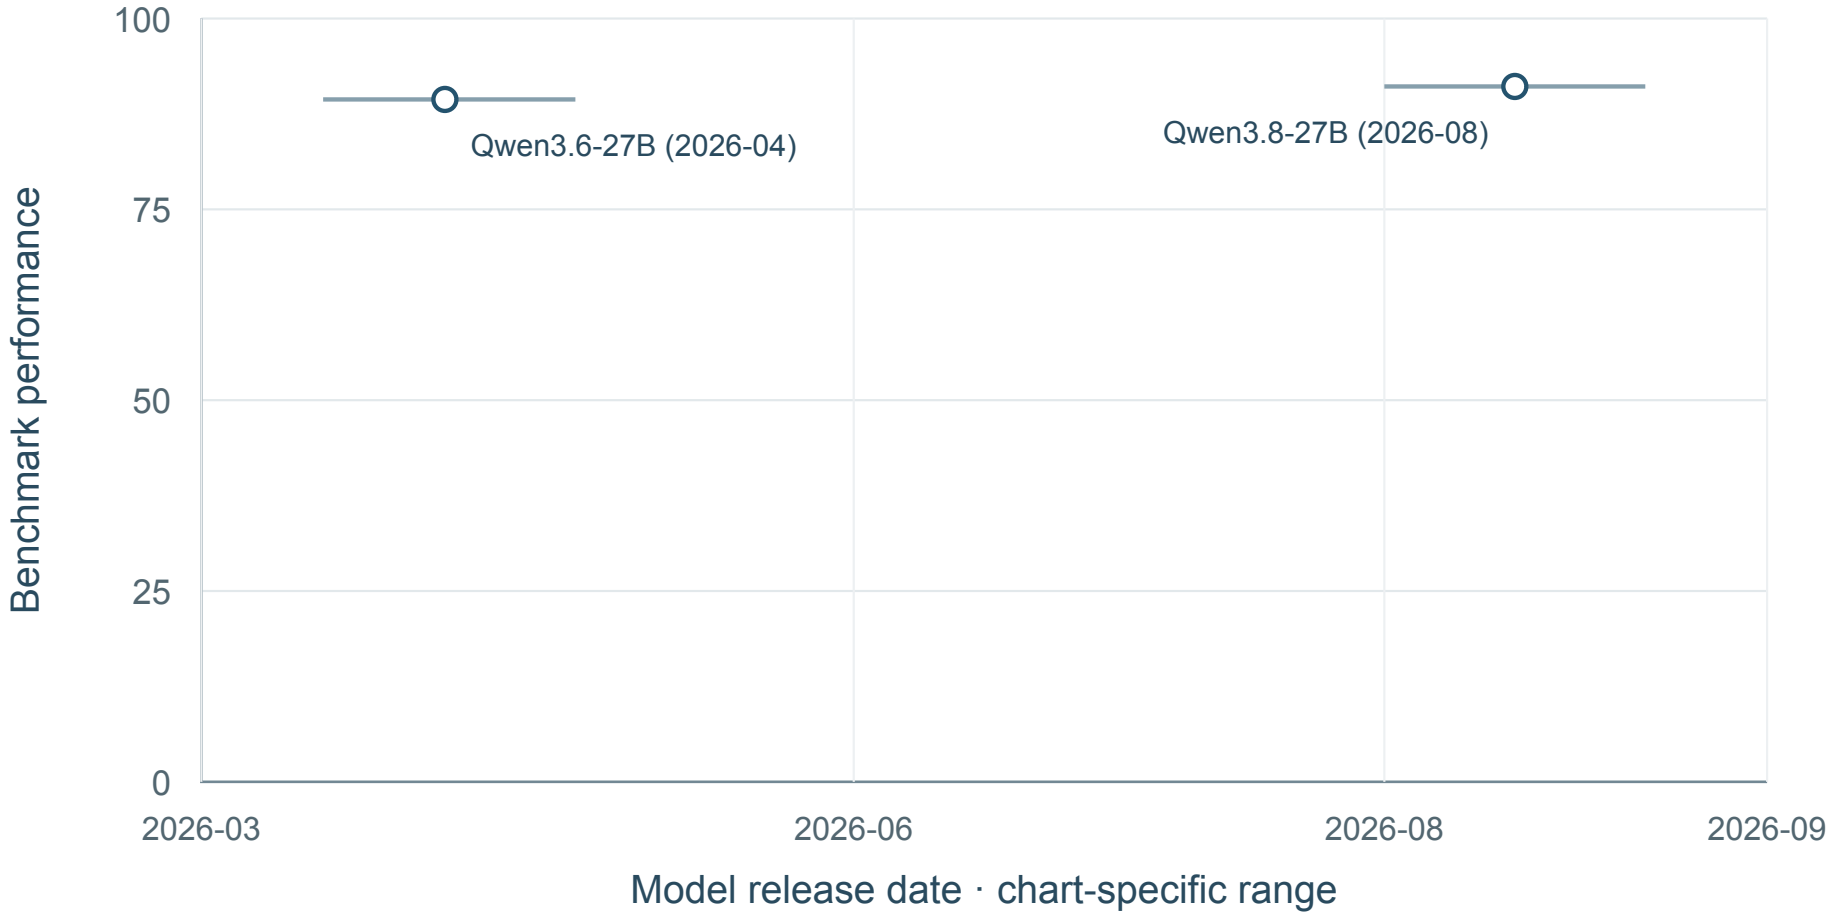

2 shown · 0 undated · 0 definition-held · sources: MC091


No mean curve: Fewer than five dated model configurations.

Result-source references: MC091. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Reported overall composite score

Mode not specified; MC099 H2; OmniDocBench v1.5

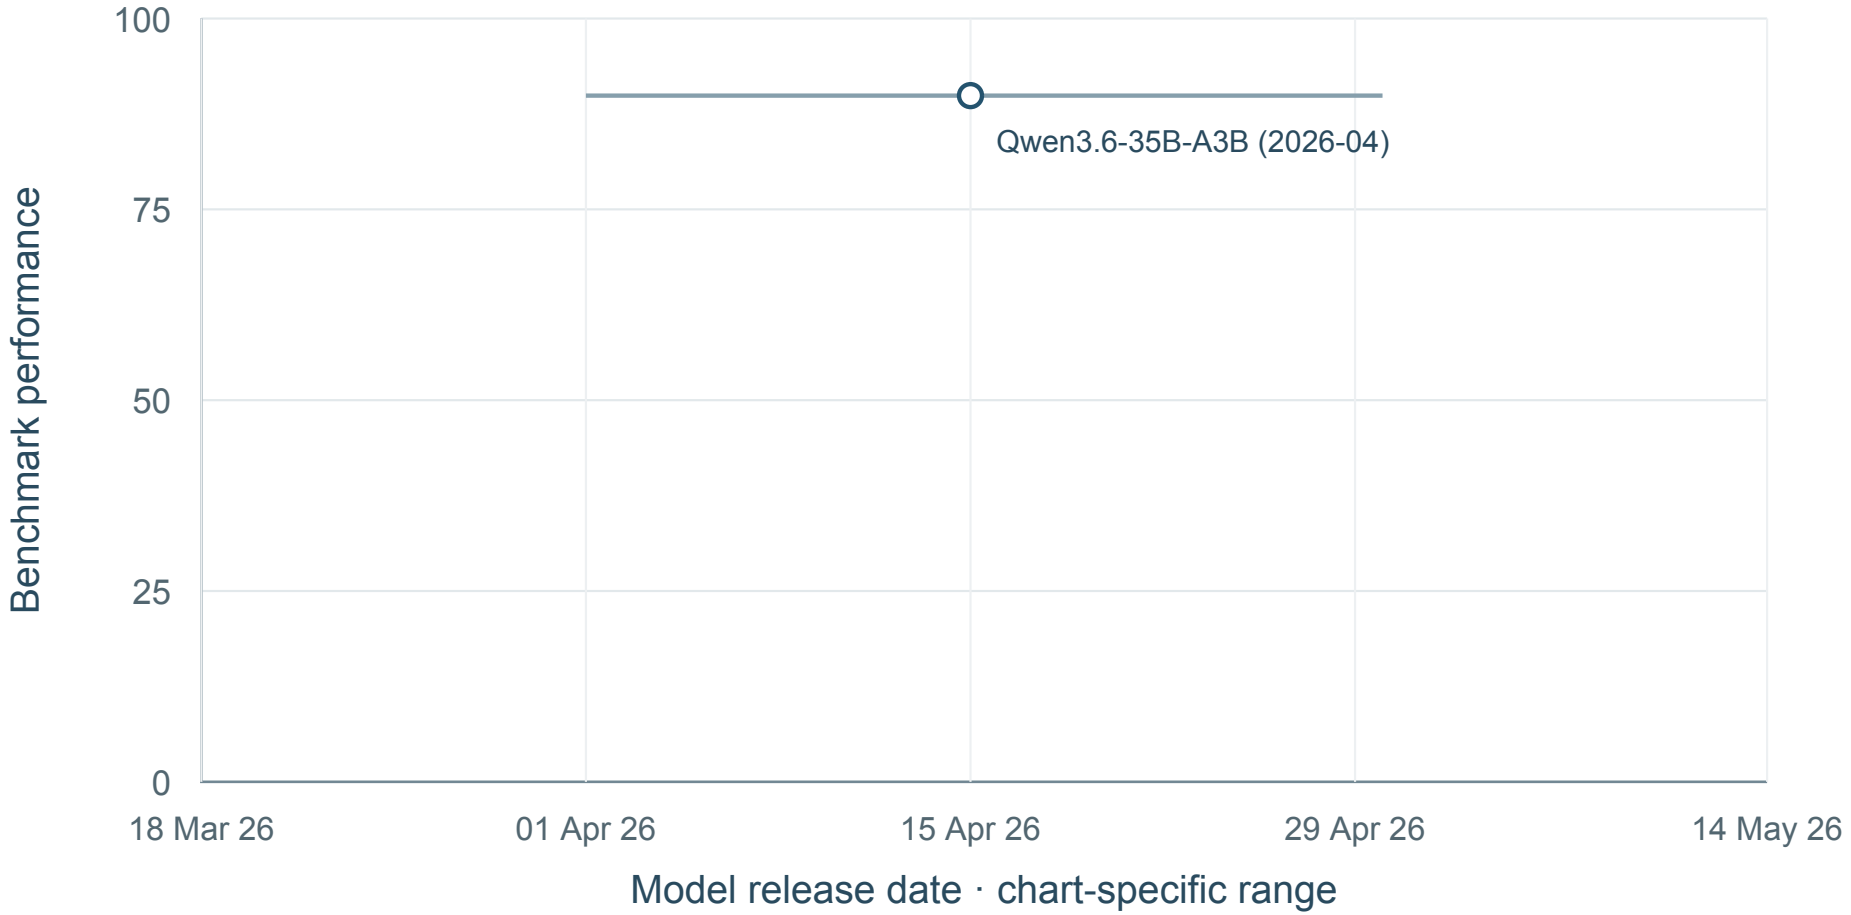

1 shown · 0 undated · 0 definition-held · sources: MC099


No mean curve: Fewer than five dated model configurations.

Result-source references: MC099. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Overall score (%)

Mode not specified; MC038 Model-card evaluation table image; OmniDocBench v1.5

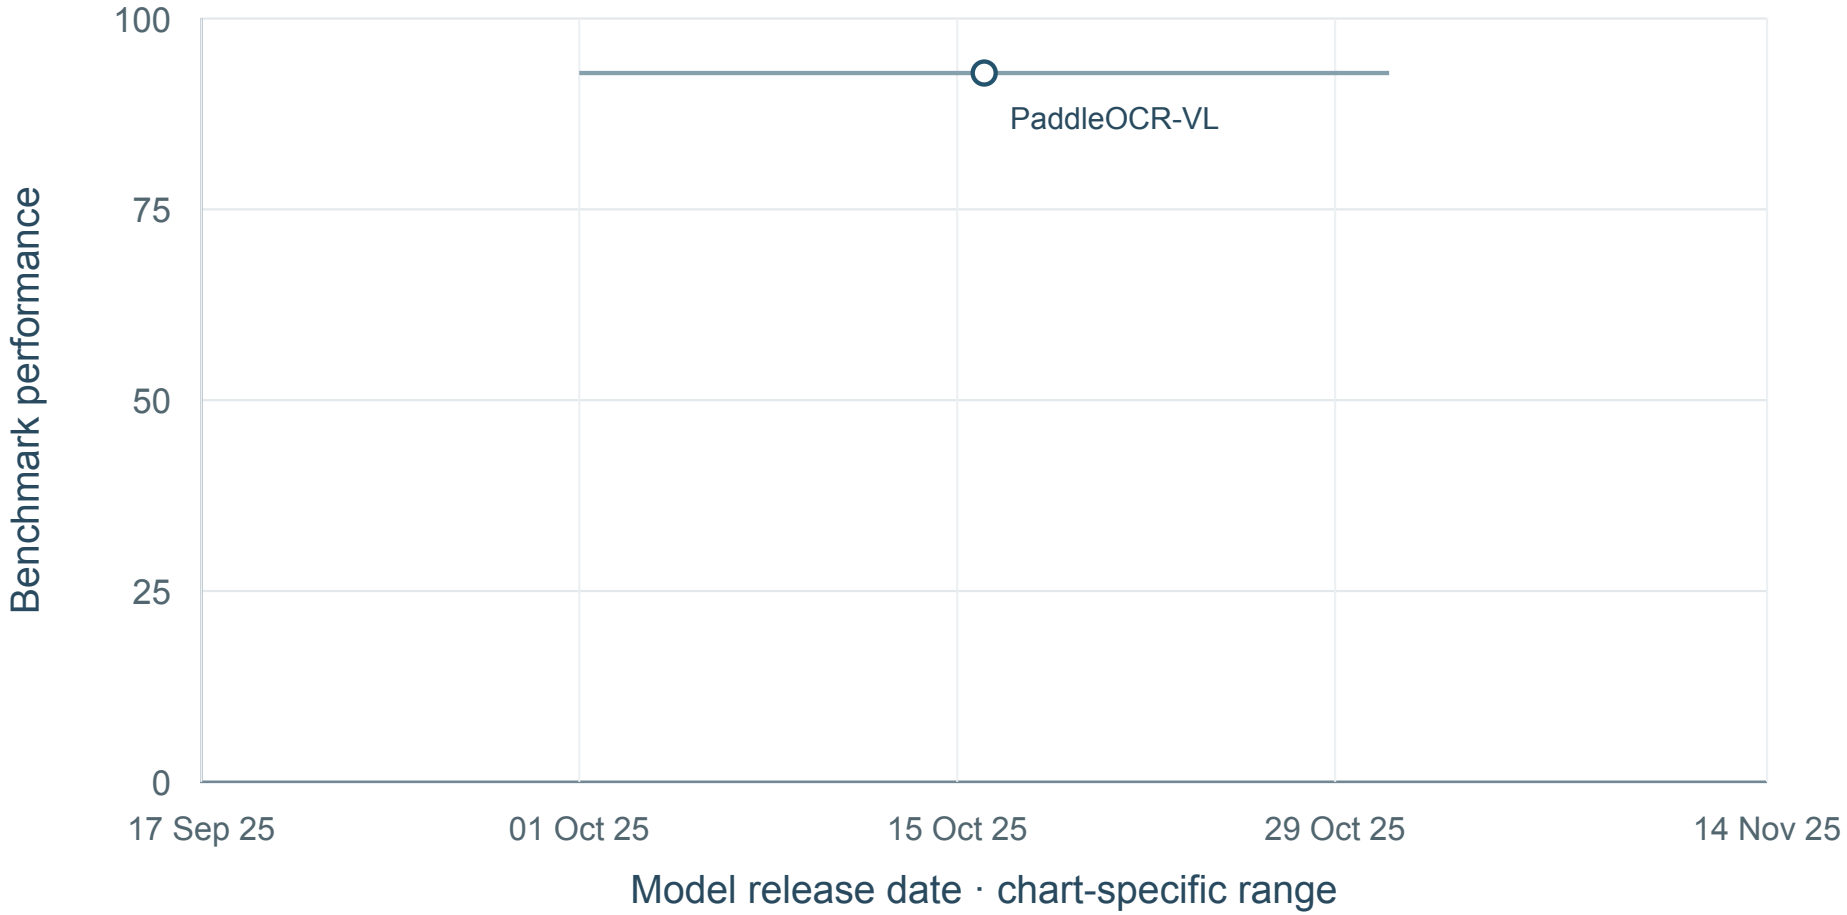

1 shown · 0 undated · 0 definition-held · sources: MC038


No mean curve: Fewer than five dated model configurations.

Result-source references: MC038. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Text edit distance (lower is better) (lower is better)

Mode not specified; MC038 Model-card evaluation table image; OmniDocBench v1.5

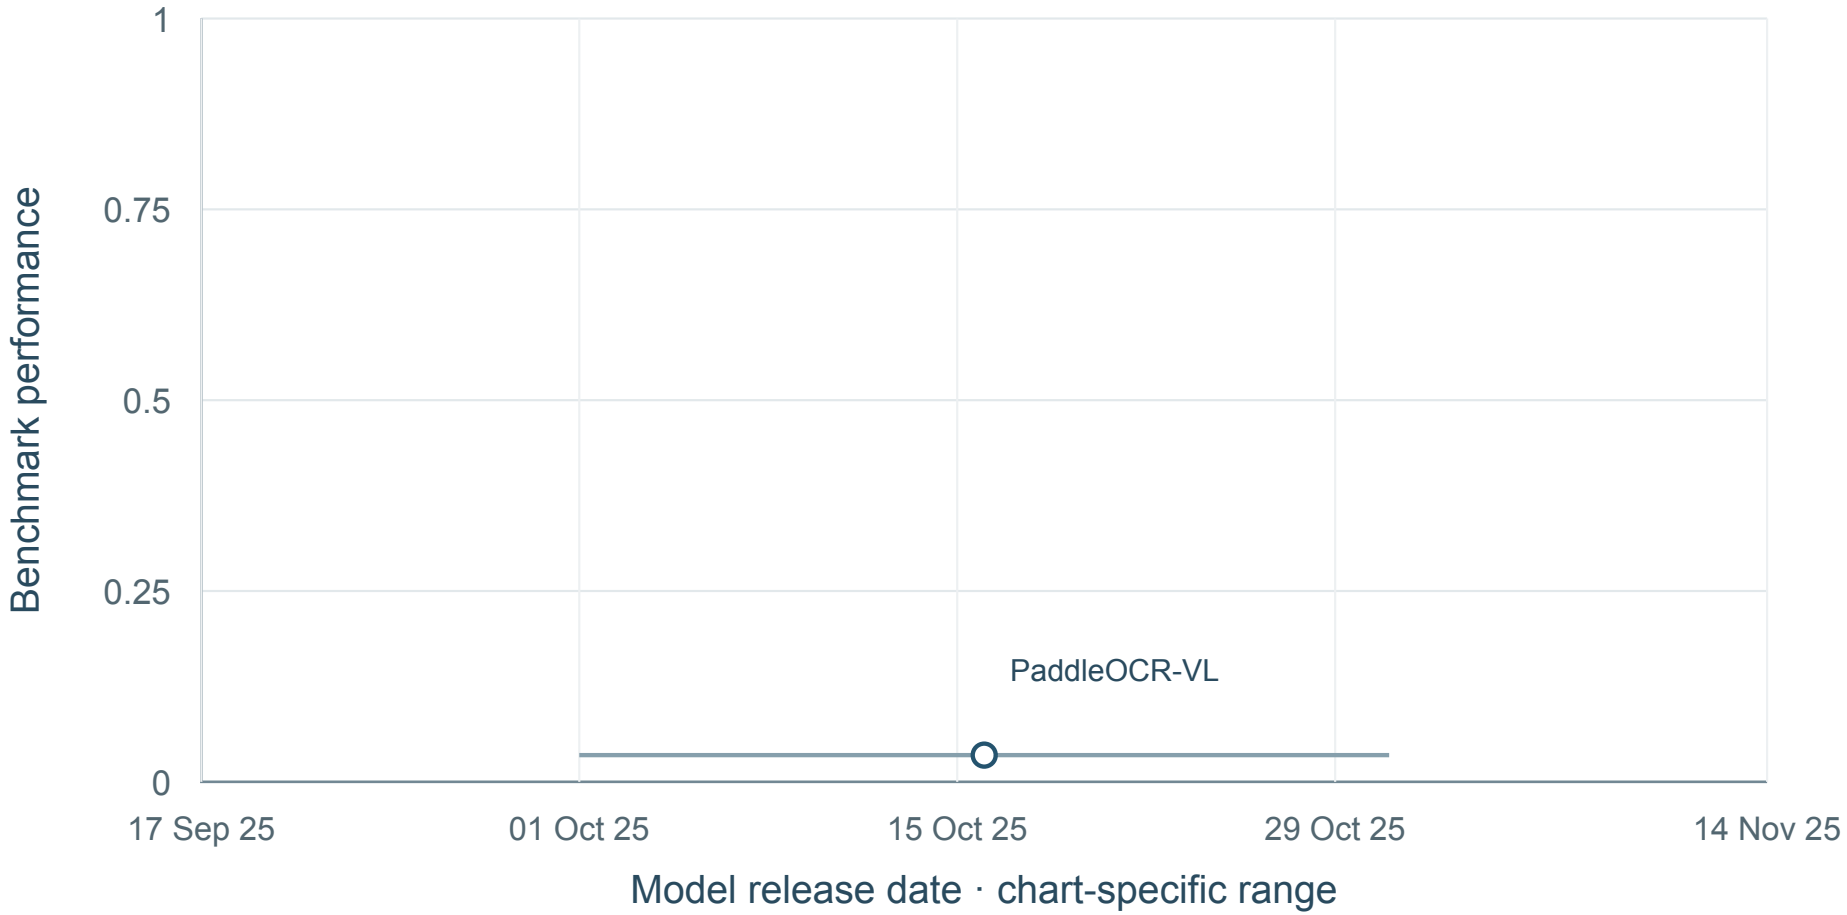

1 shown · 0 undated · 0 definition-held · sources: MC038


No mean curve: Fewer than five dated model configurations.

Result-source references: MC038. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Formula CDM (%)

Mode not specified; MC038 Model-card evaluation table image; OmniDocBench v1.5

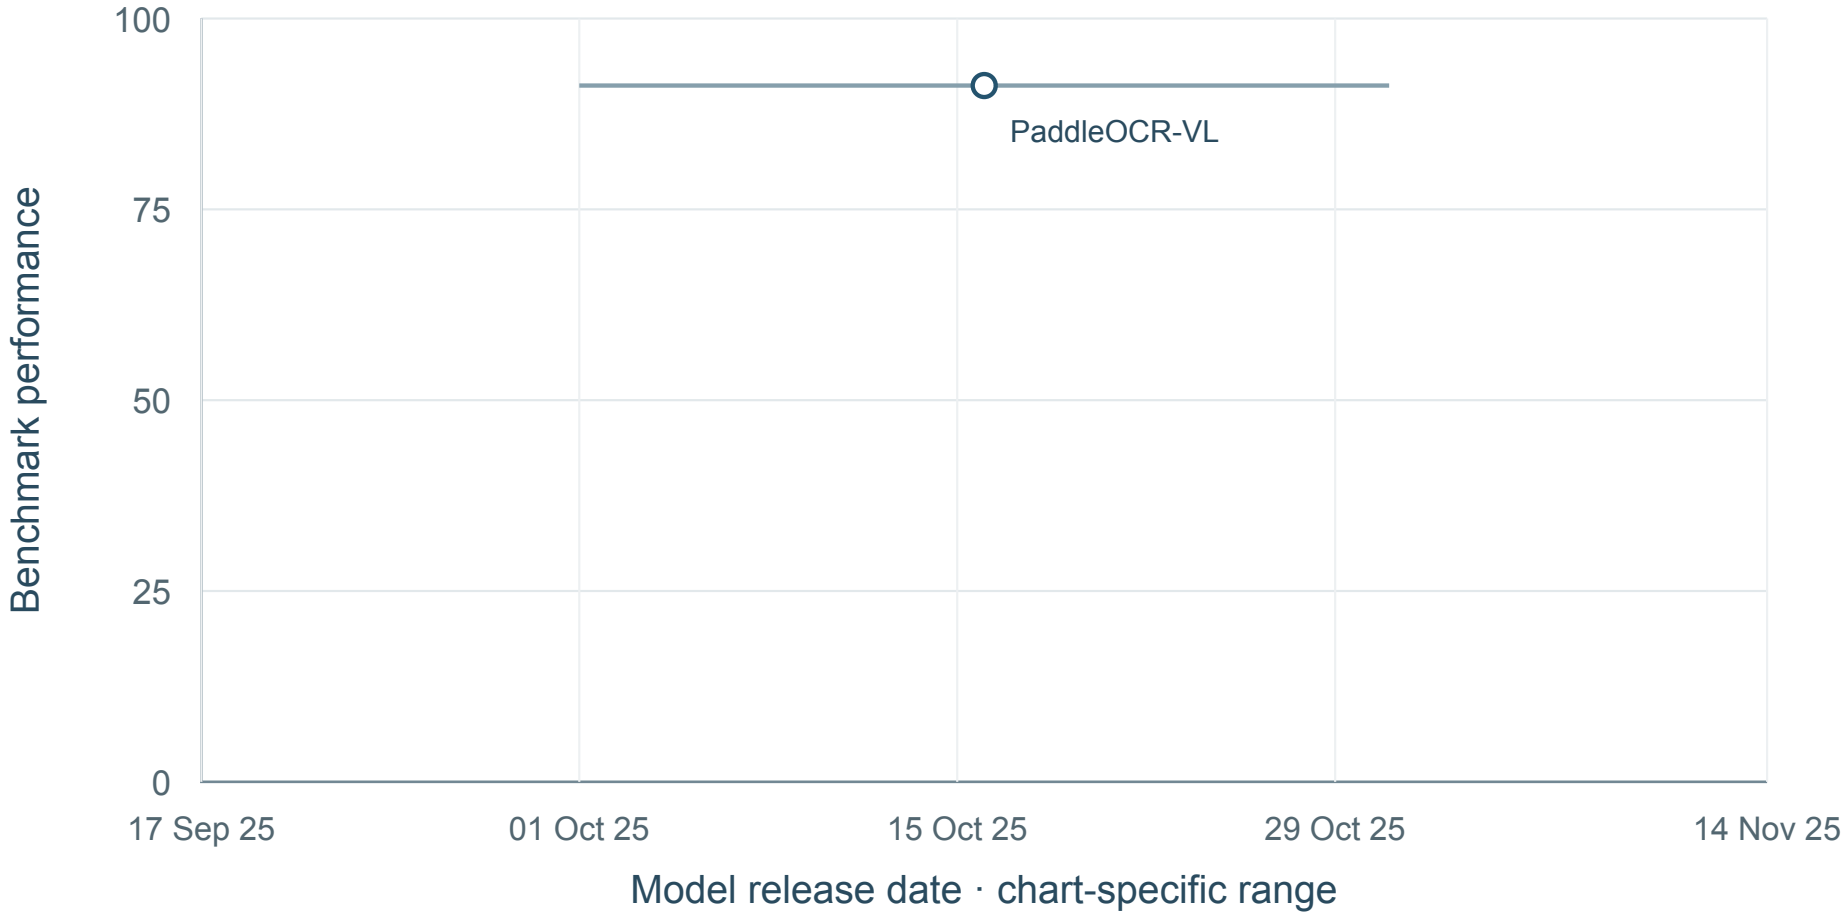

1 shown · 0 undated · 0 definition-held · sources: MC038


No mean curve: Fewer than five dated model configurations.

Result-source references: MC038. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Table TEDS (%)

Mode not specified; MC038 Model-card evaluation table image; OmniDocBench v1.5

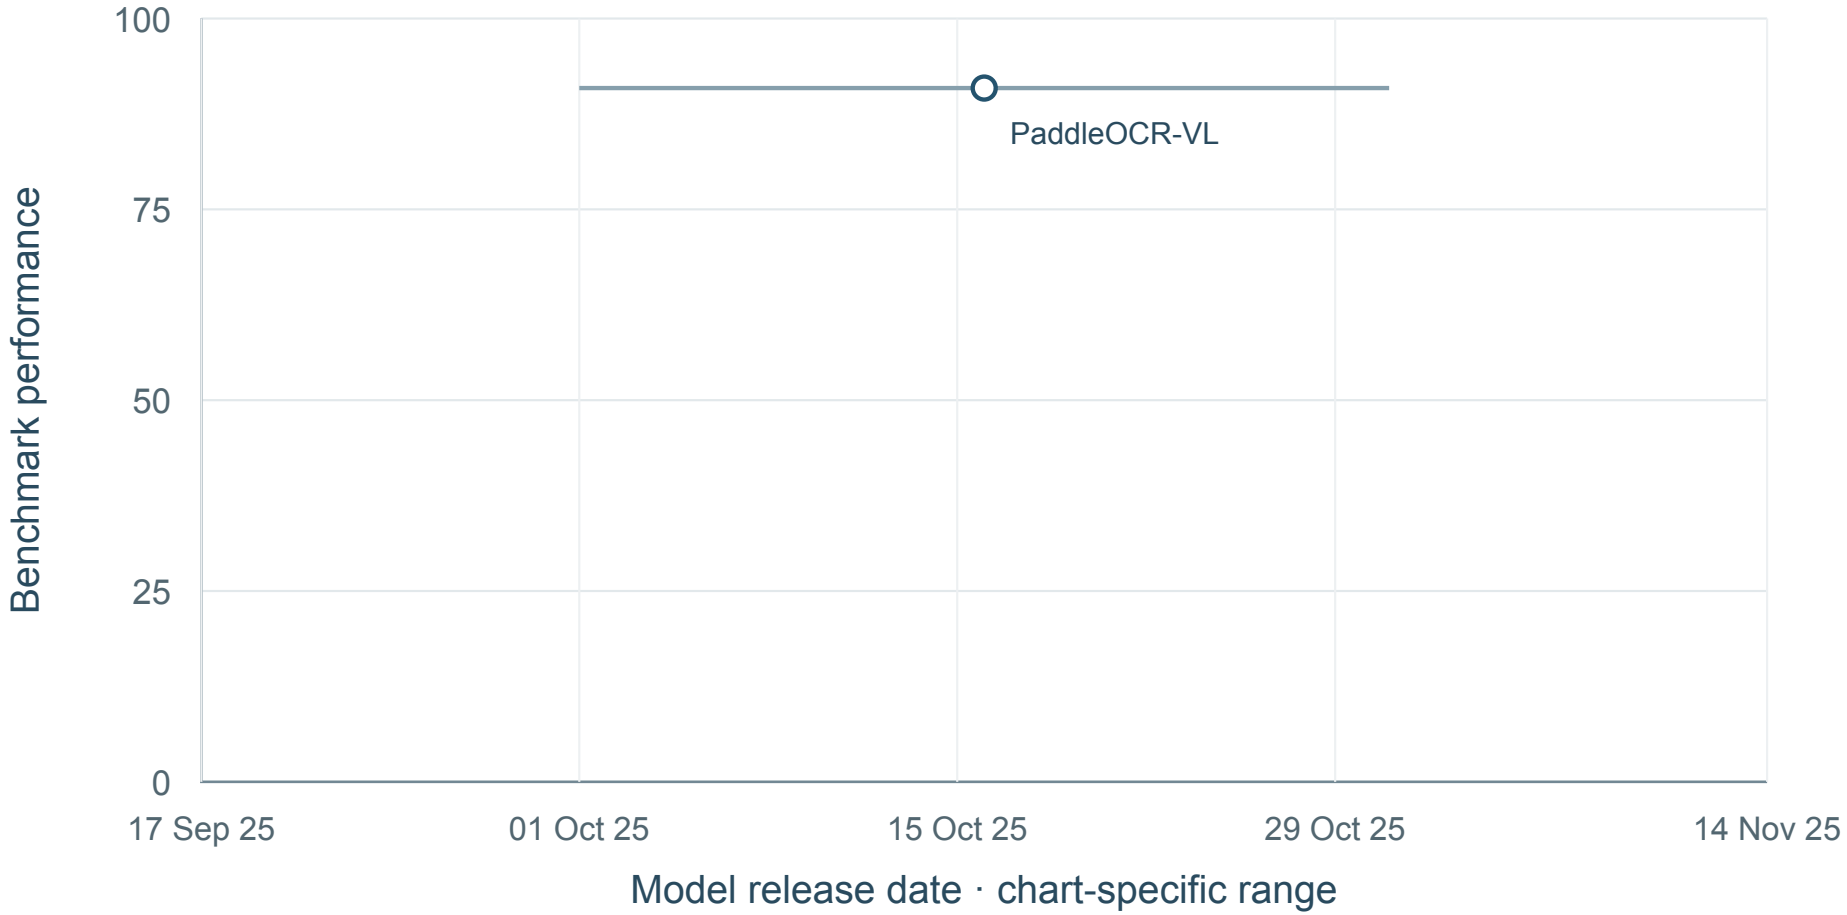

1 shown · 0 undated · 0 definition-held · sources: MC038


No mean curve: Fewer than five dated model configurations.

Result-source references: MC038. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Table TEDS-S (%)

Mode not specified; MC038 Model-card evaluation table image; OmniDocBench v1.5

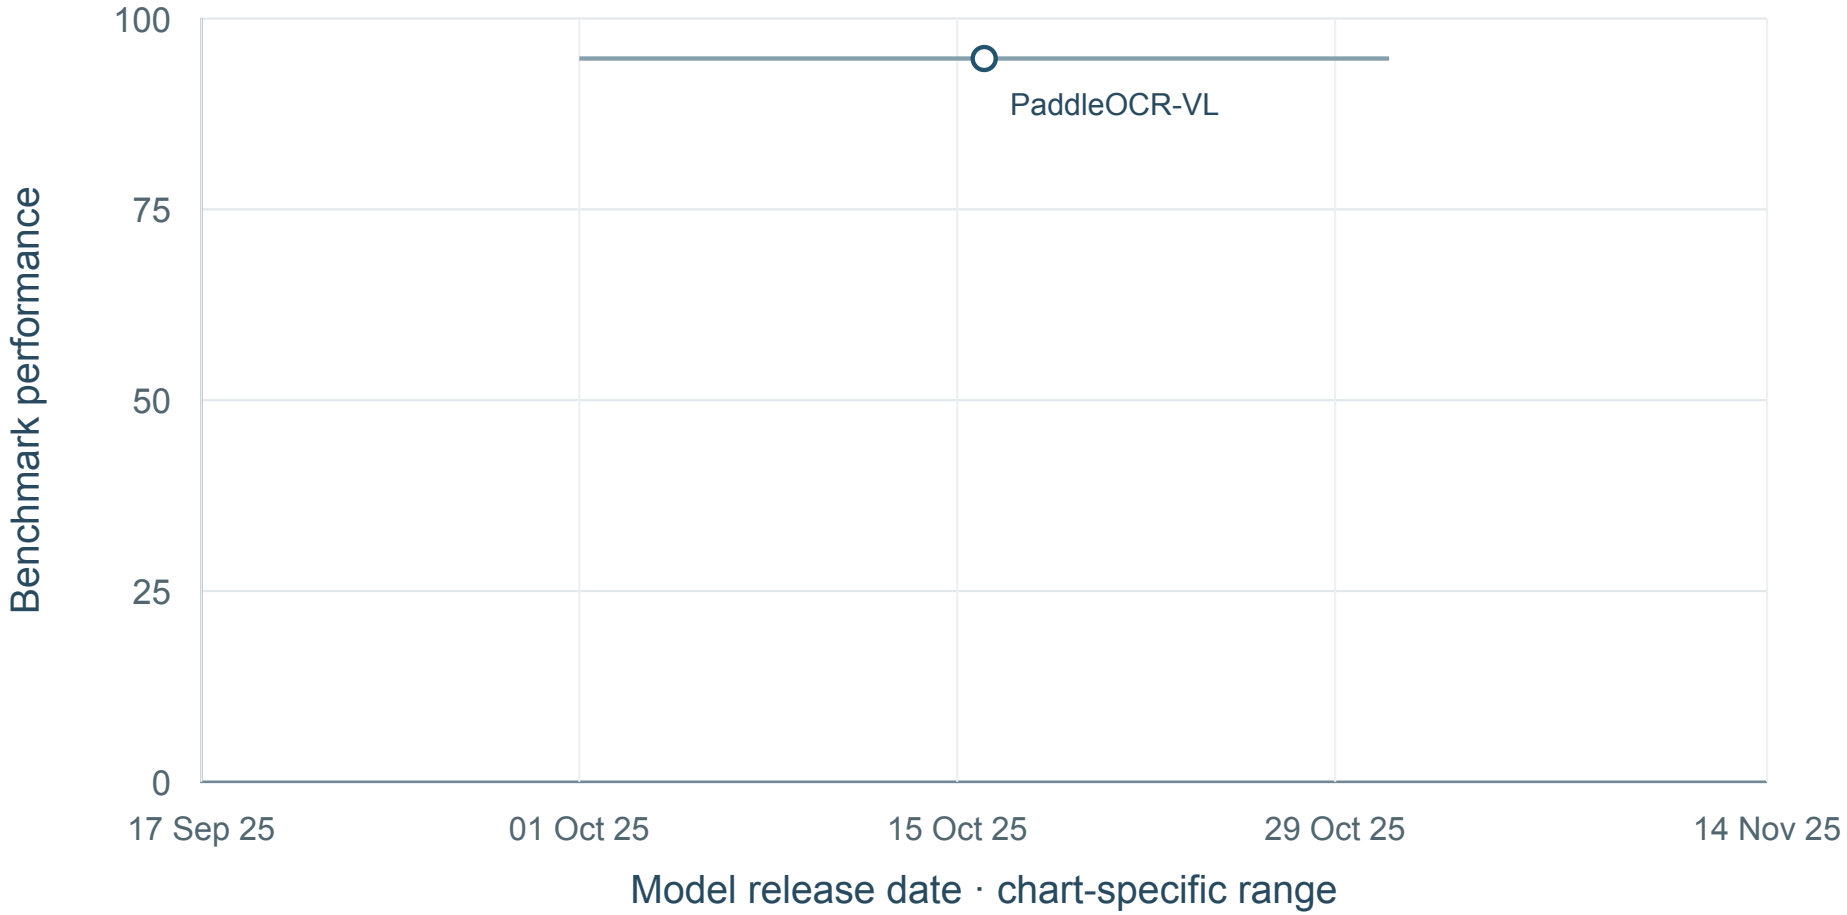

1 shown · 0 undated · 0 definition-held · sources: MC038


No mean curve: Fewer than five dated model configurations.

Result-source references: MC038. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Reading-order edit distance (lower is better) (lower is better)

Mode not specified; MC038 Model-card evaluation table image; OmniDocBench v1.5

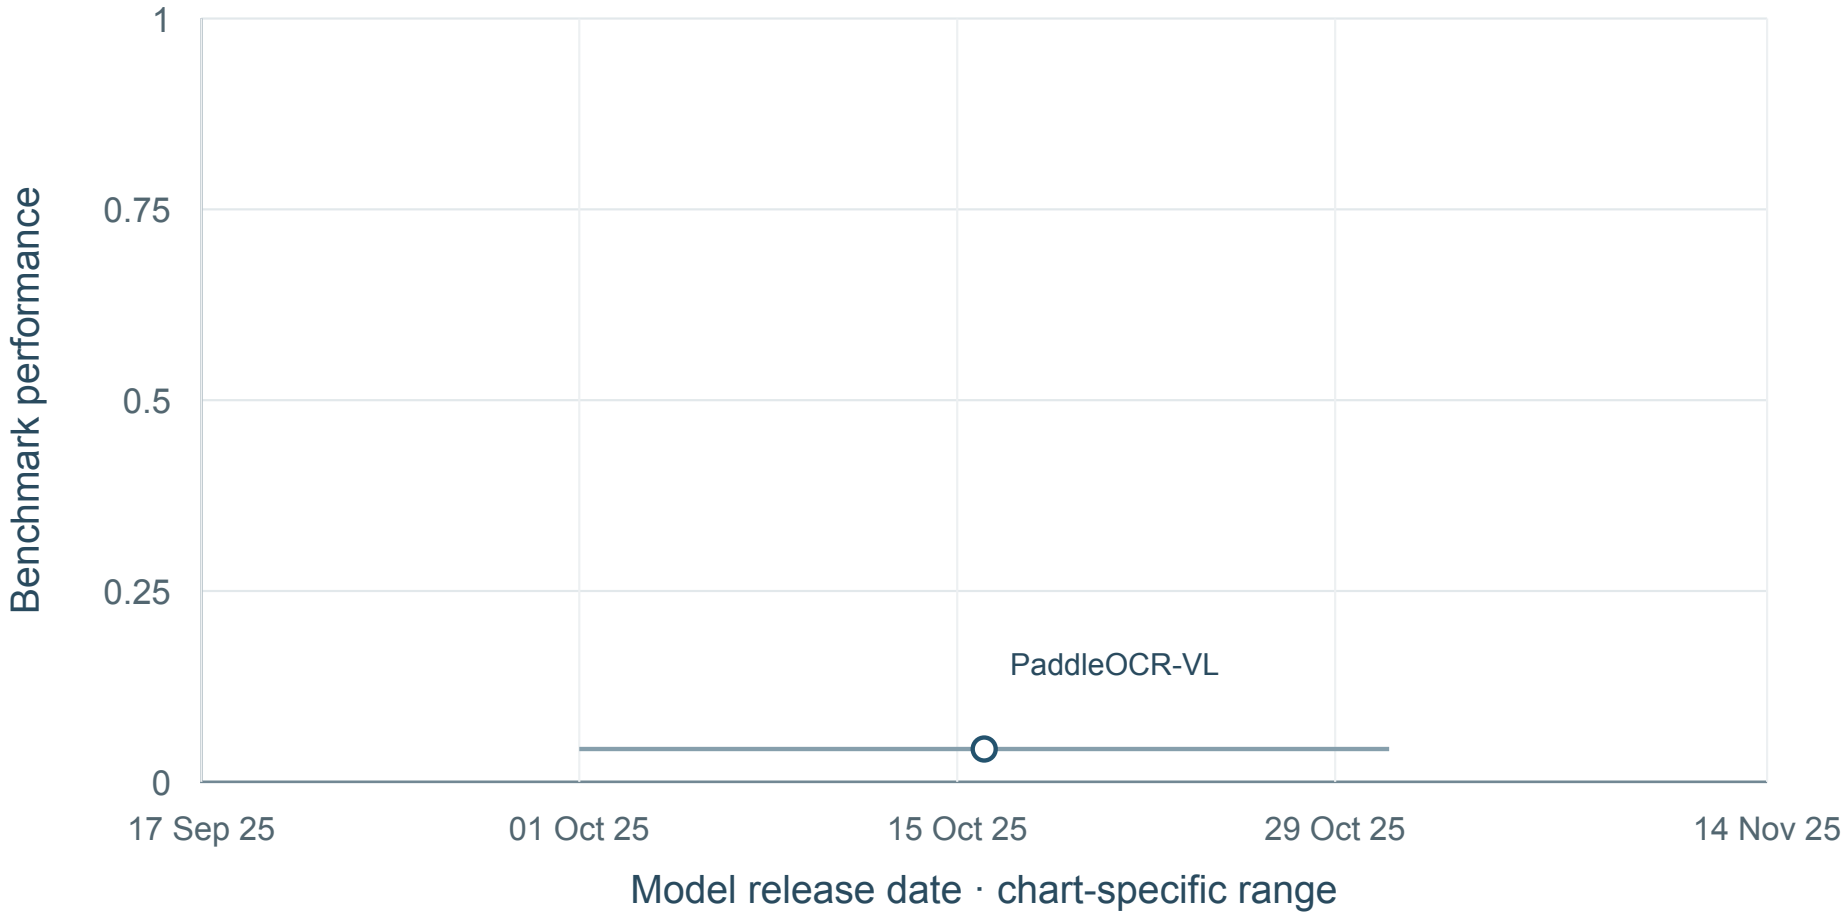

1 shown · 0 undated · 0 definition-held · sources: MC038


No mean curve: Fewer than five dated model configurations.

Result-source references: MC038. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Overall score (%)

Mode not specified; MC100 Model-card evaluation table image; OmniDocBench v1.5

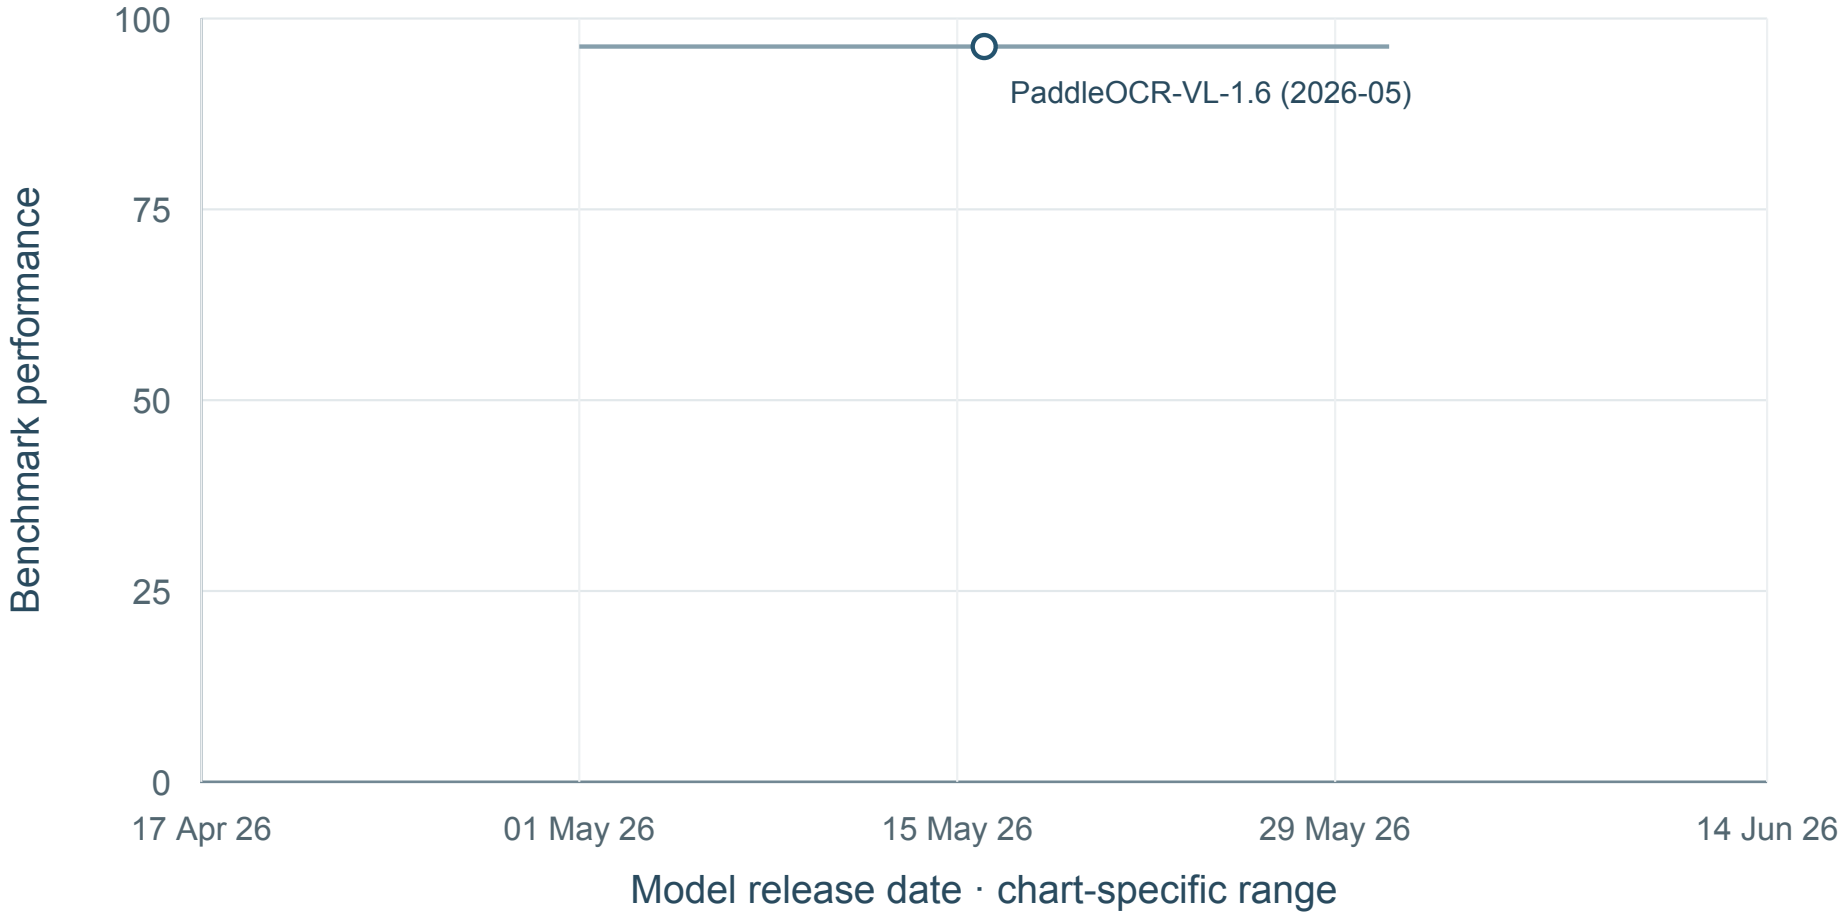

1 shown · 0 undated · 0 definition-held · sources: MC100


No mean curve: Fewer than five dated model configurations.

Result-source references: MC100. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Text edit distance (lower is better) (lower is better)

Mode not specified; MC100 Model-card evaluation table image; OmniDocBench v1.5

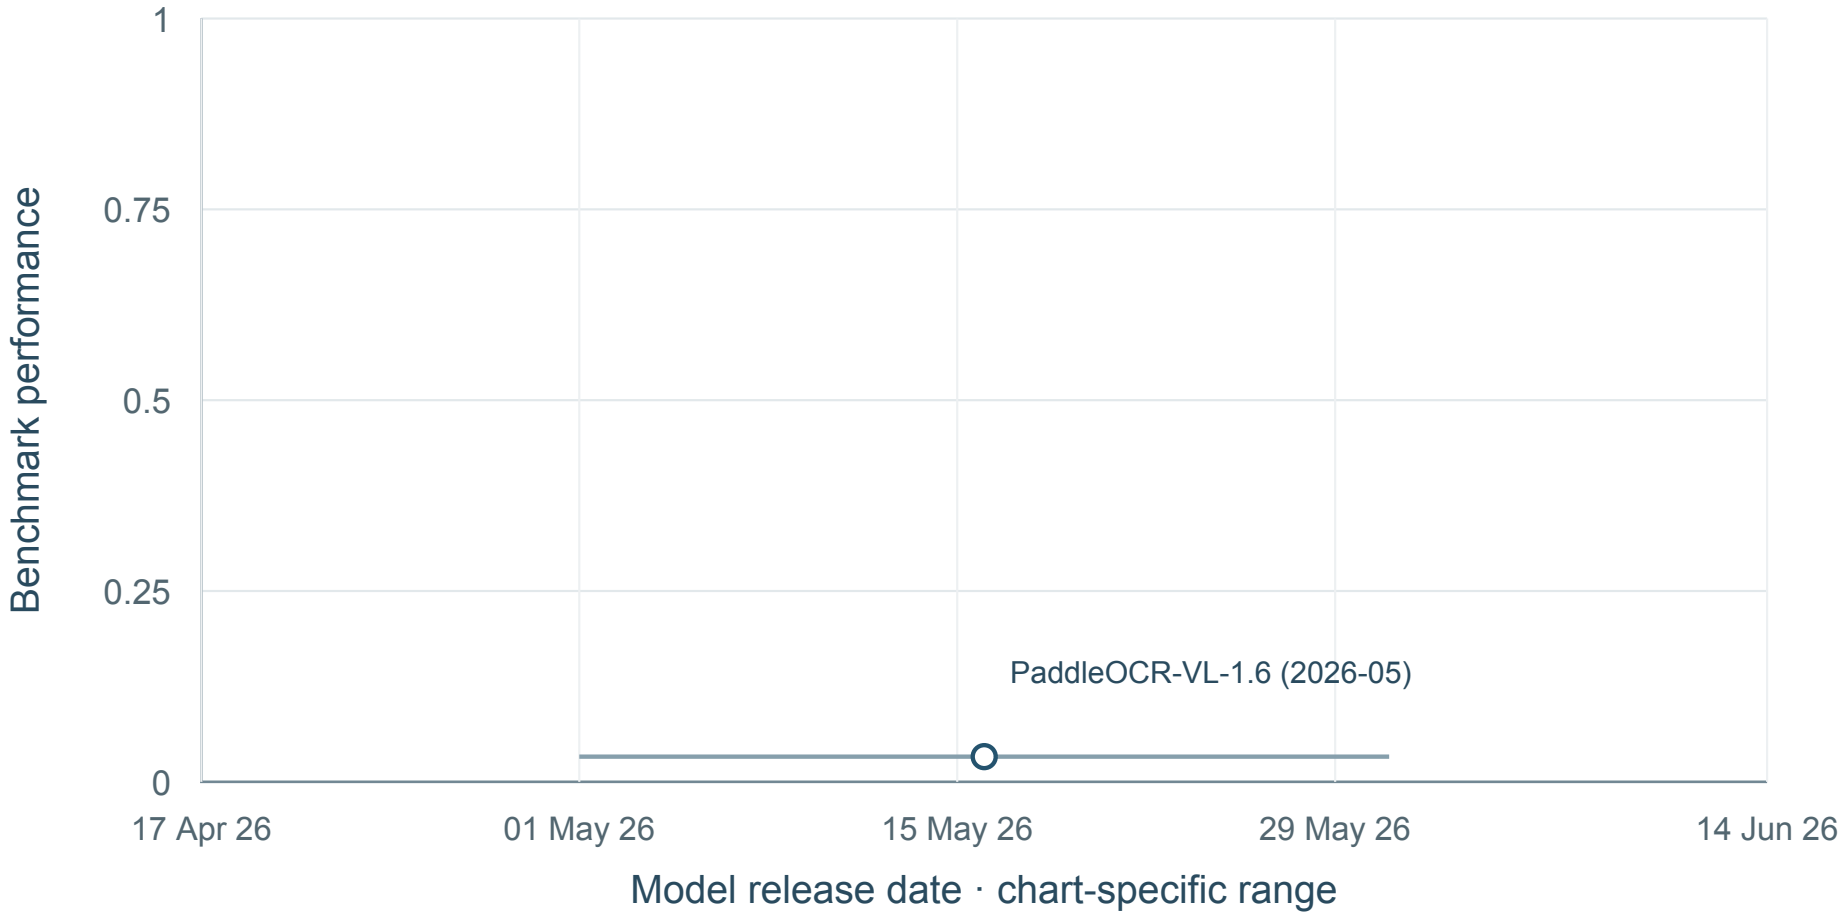

1 shown · 0 undated · 0 definition-held · sources: MC100


No mean curve: Fewer than five dated model configurations.

Result-source references: MC100. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Formula CDM (%)

Mode not specified; MC100 Model-card evaluation table image; OmniDocBench v1.5

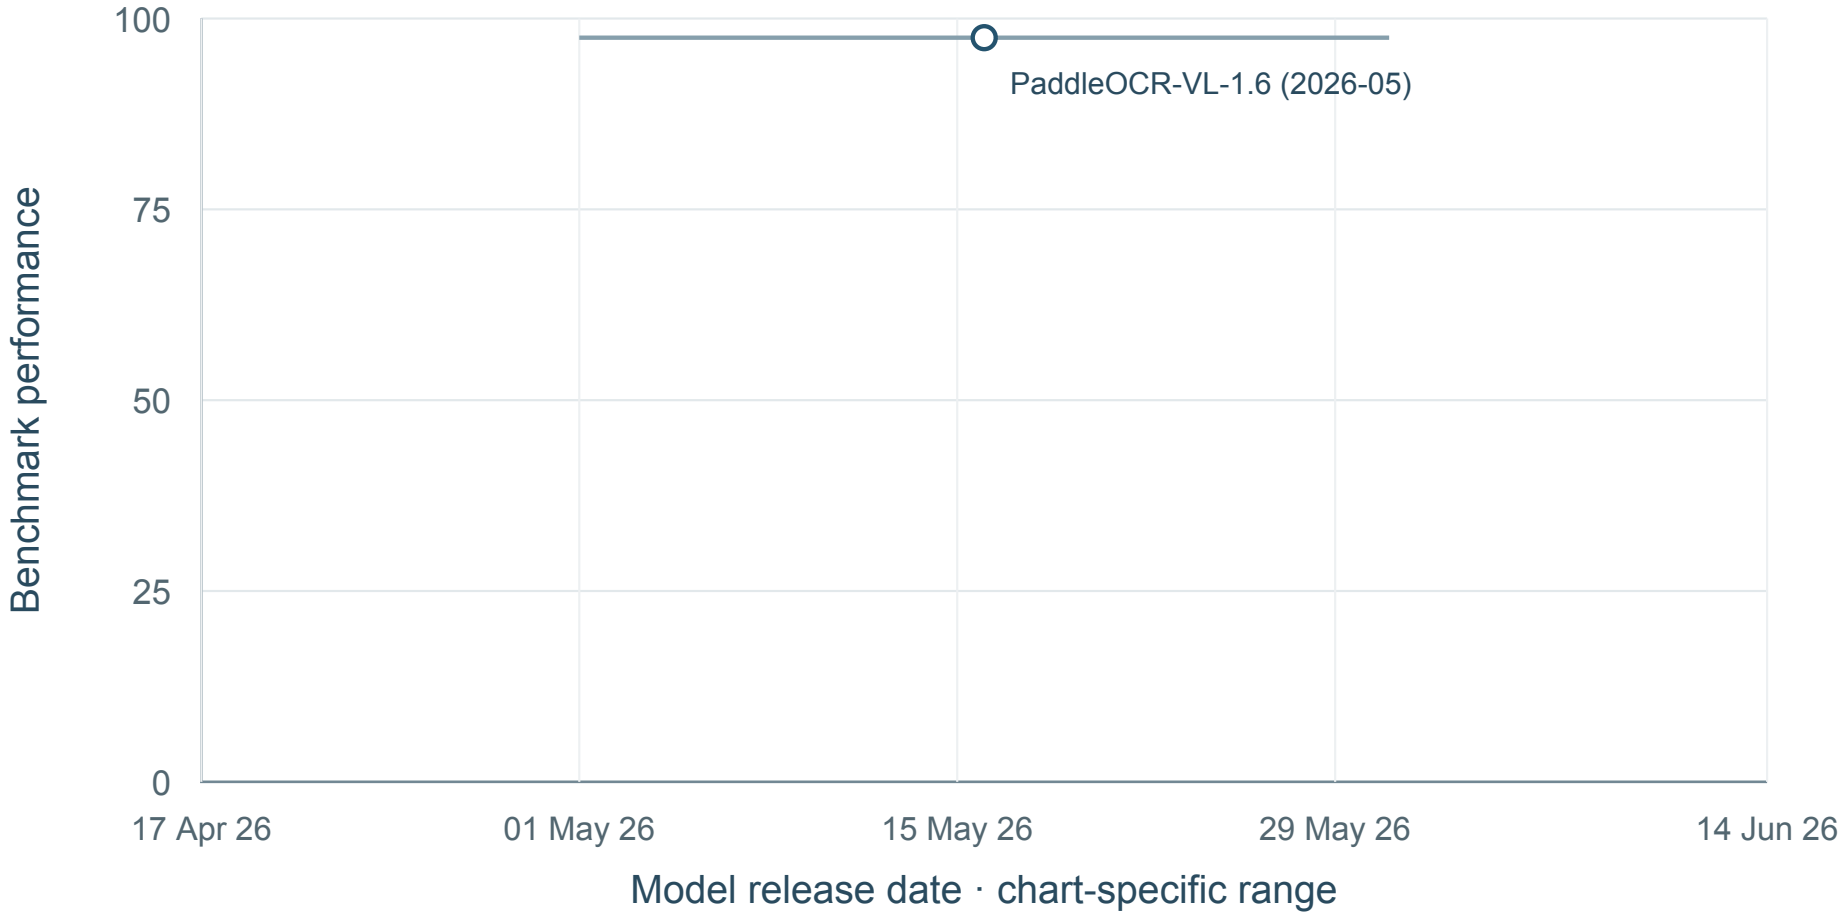

1 shown · 0 undated · 0 definition-held · sources: MC100


No mean curve: Fewer than five dated model configurations.

Result-source references: MC100. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Table TEDS (%)

Mode not specified; MC100 Model-card evaluation table image; OmniDocBench v1.5

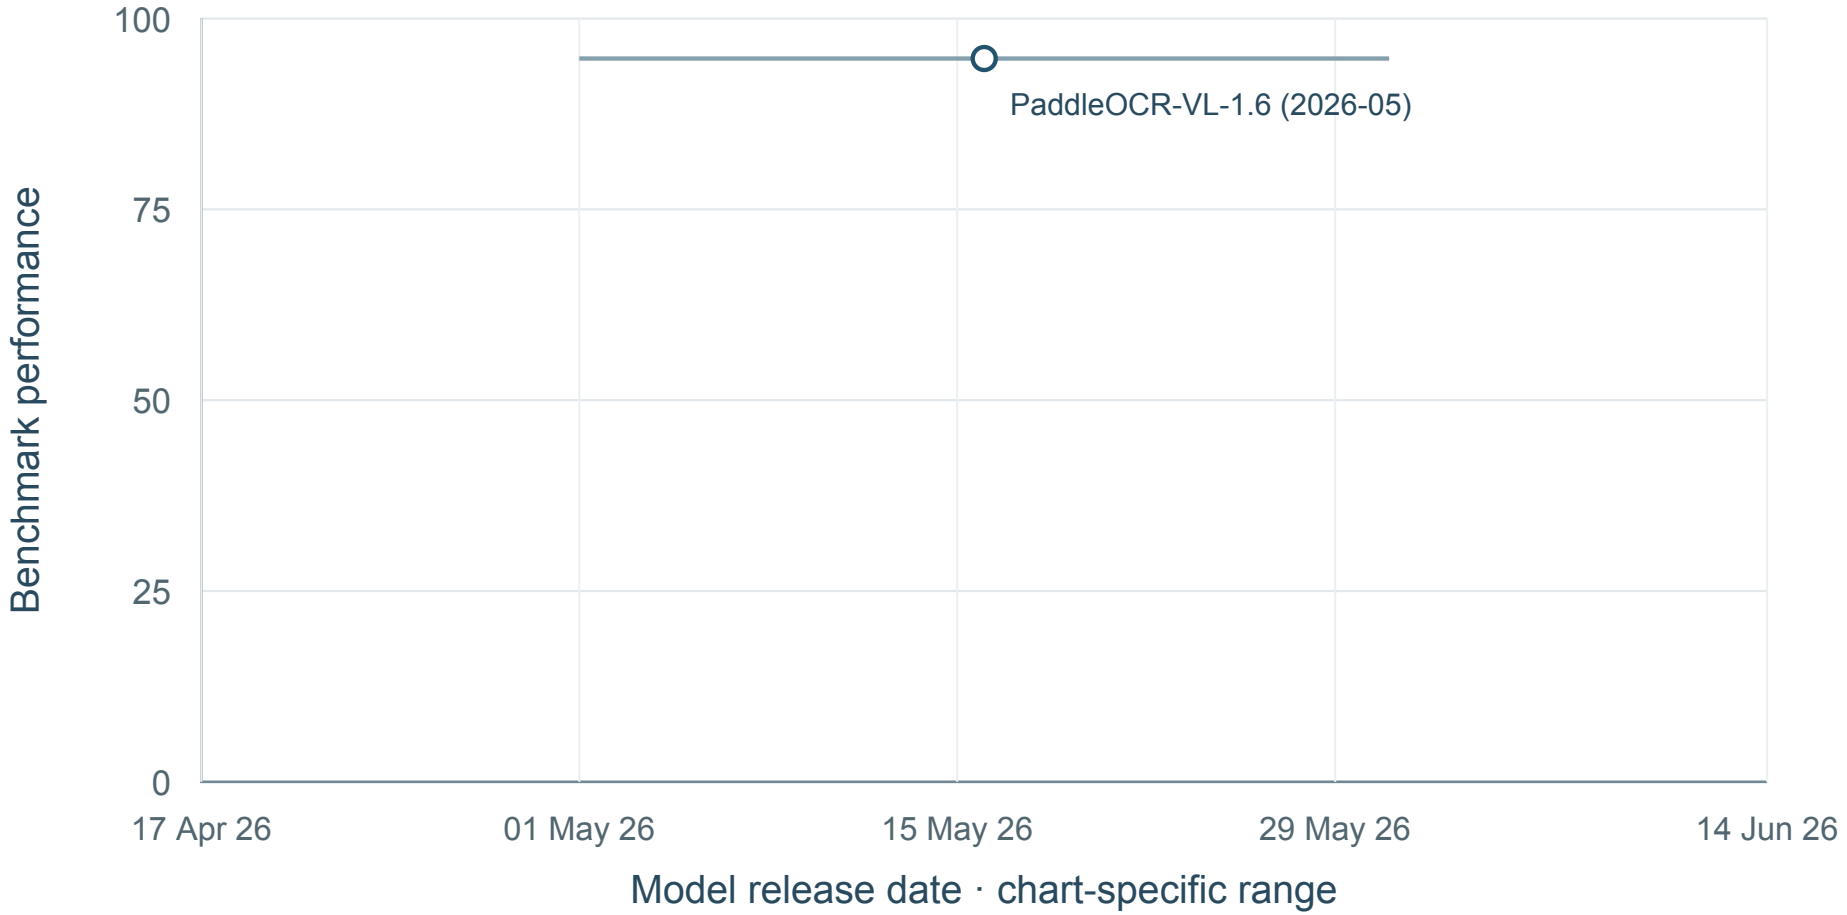

1 shown · 0 undated · 0 definition-held · sources: MC100


No mean curve: Fewer than five dated model configurations.

Result-source references: MC100. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Table TEDS-S (%)

Mode not specified; MC100 Model-card evaluation table image; OmniDocBench v1.5

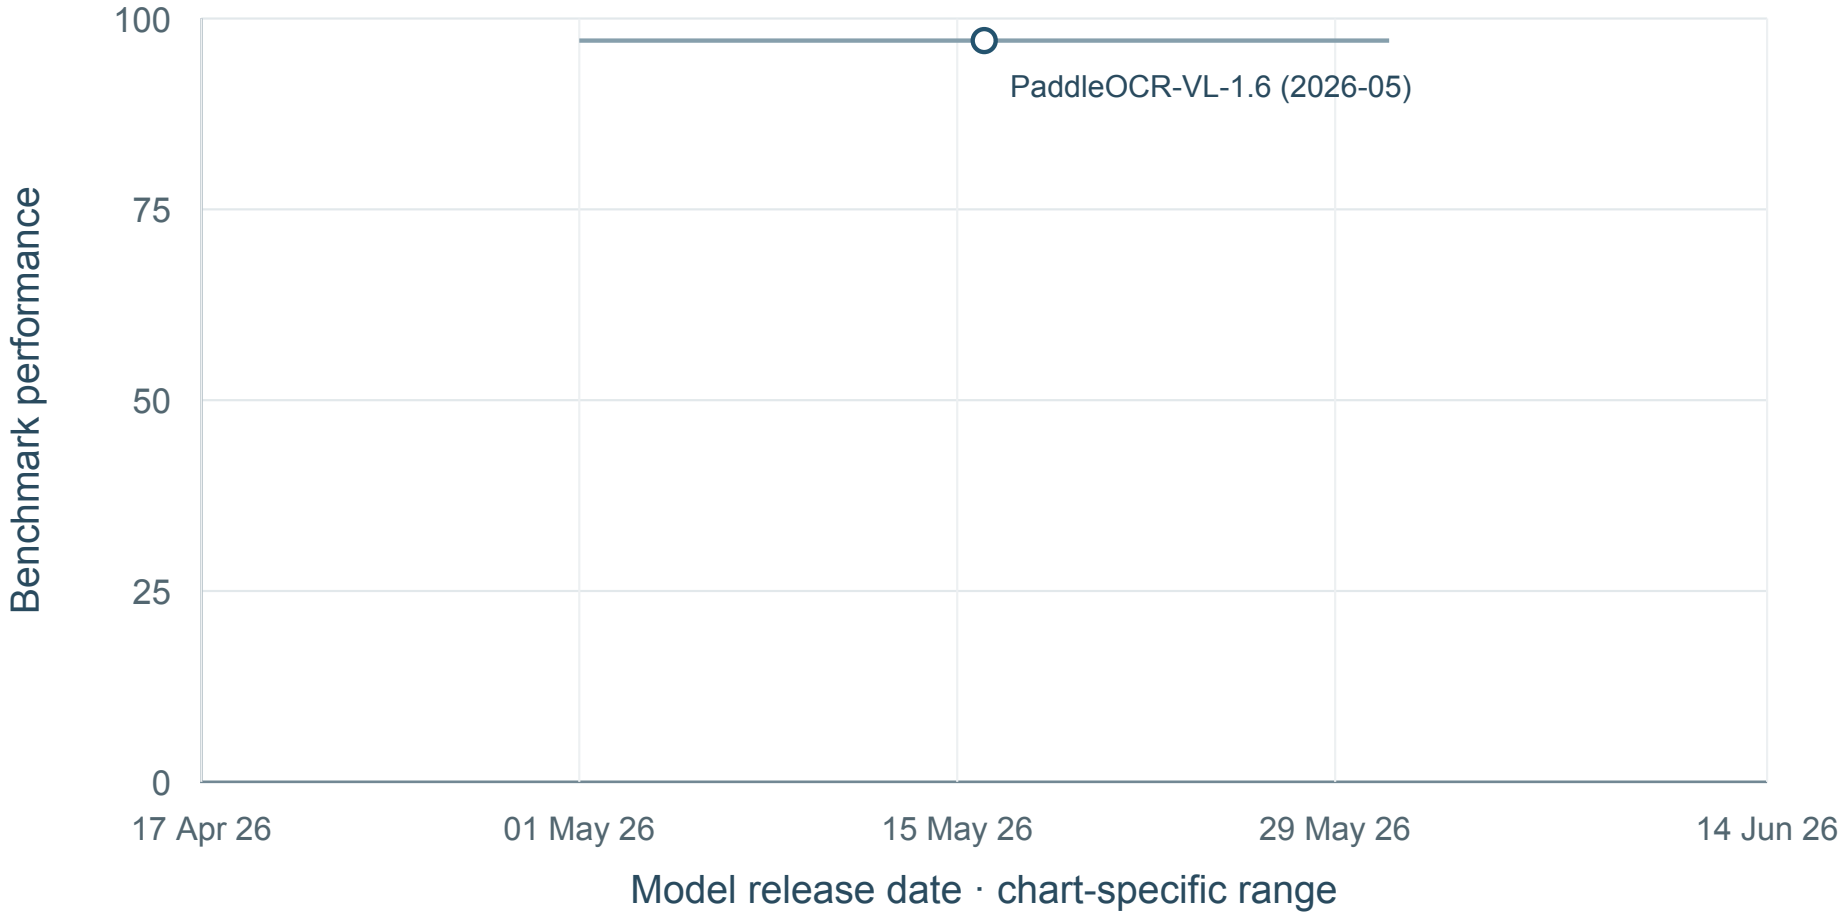

1 shown · 0 undated · 0 definition-held · sources: MC100


No mean curve: Fewer than five dated model configurations.

Result-source references: MC100. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

OmniDocBench: Reading-order edit distance (lower is better) (lower is better)

Mode not specified; MC100 Model-card evaluation table image; OmniDocBench v1.5

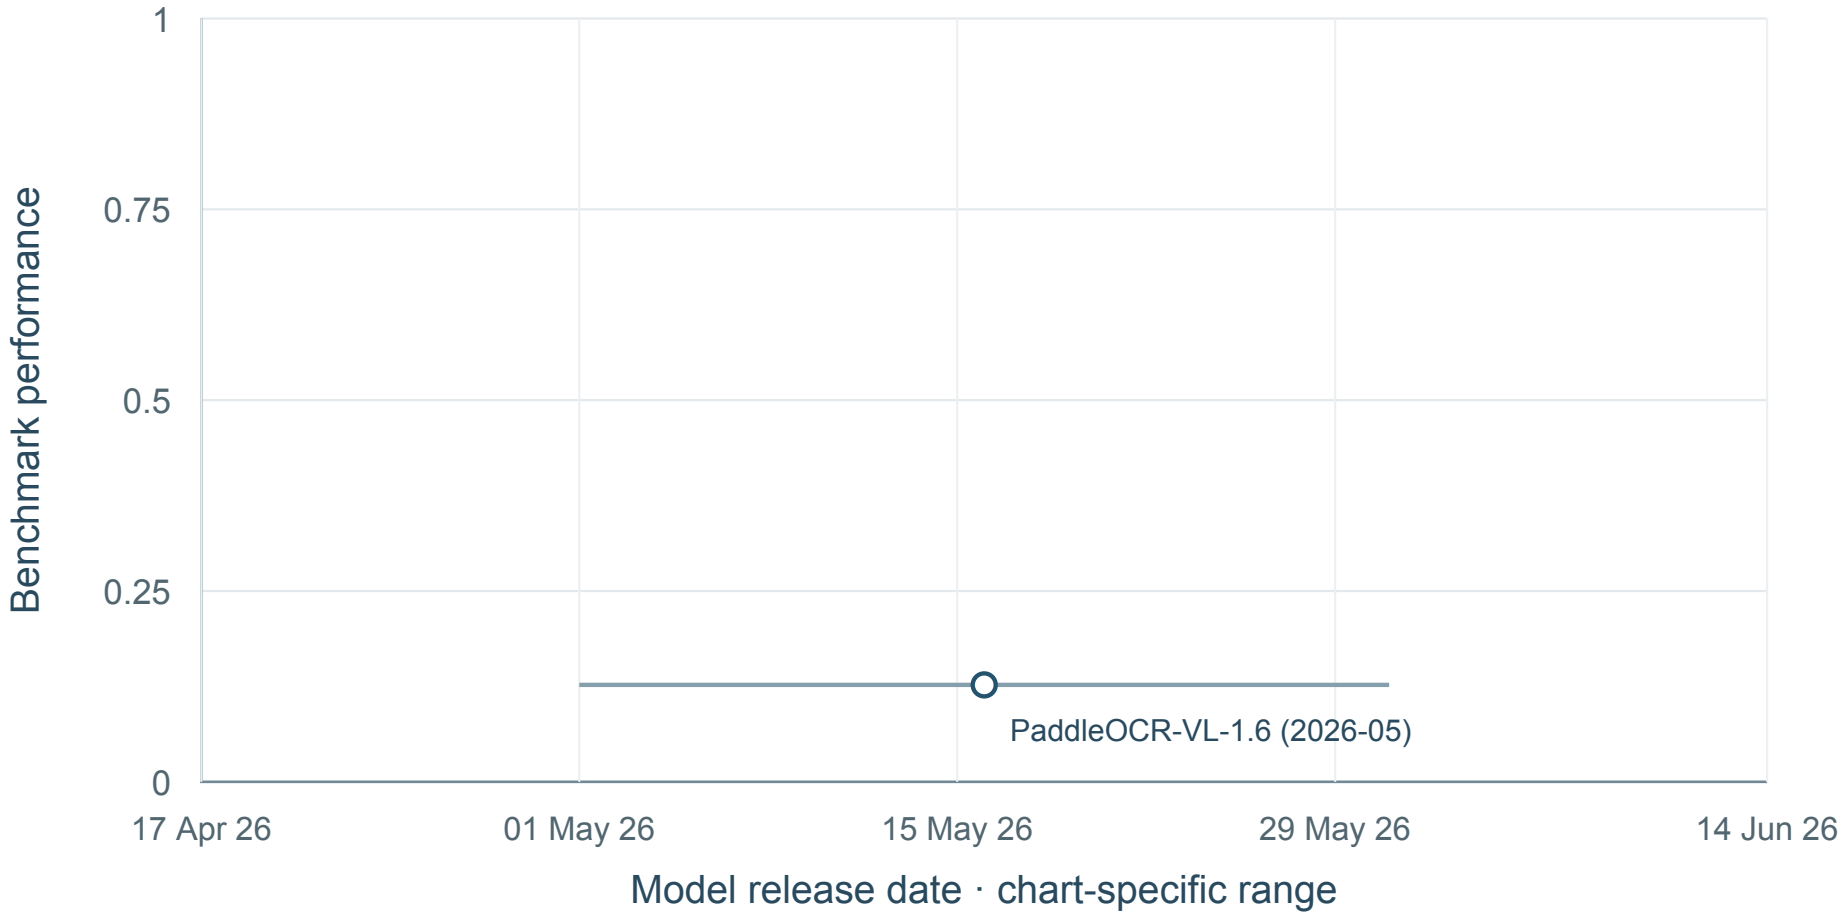

1 shown · 0 undated · 0 definition-held · sources: MC100

No mean curve: Fewer than five dated model configurations.

Result-source references: MC100. Exact point locators and raw values: data/F001_OmniDocBench_values.csv.

Benchmark reference (APA): Ouyang, L., Qu, Y., Zhou, H., Zhu, J., Zhang, R., Lin, Q., Wang, B., Zhao, Z., Jiang, M., Zhao, X., Shi, J., Wu, F., Chu, P., Liu, M., Li, Z., Xu, C., Zhang, B., Shi, B., Tu, Z., & He, C. (2024). OmniDocBench: Benchmarking diverse PDF document parsing with comprehensive annotations. arXiv. https://arxiv.org/abs/2412.07626

F002 READoc

Convert whole PDFs to structured Markdown

34 source values; 0 new; 3 separate conditions; 5 visible time points; 0 definition-held values; 0 visible mean curves.

Benchmark references (APA)

Li, Z., Abulaiti, A., Lu, Y., Chen, X., Zheng, J., Lin, H., Han, X., & Sun, L. (2024). READoc: A unified benchmark for realistic document structured extraction. arXiv. https://arxiv.org/abs/2409.05137

Workflow and article scope

Challenges: A

Prepare and read source documents; Bind values to the correct unit

Whole-document parsing; not codebook interpretation.

Manuscript anchors: Lu and Wang, Challenges A–B; manuscript paragraphs 15–18; Wrong-subgroup example, manuscript paragraph 29

Result-source references: S022. Full references appear in the final bibliography.

Complete condition inventory


01. Overall composite | READoc-arXiv; original paper Table 3
15 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S022.

02. Overall composite | READoc-GitHub; original paper Table 4
15 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S022.

03. Overall composite | READoc-Zenodo; original paper Table 5
4 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S022.

READoc: Overall composite

READoc-arXiv; original paper Table 3

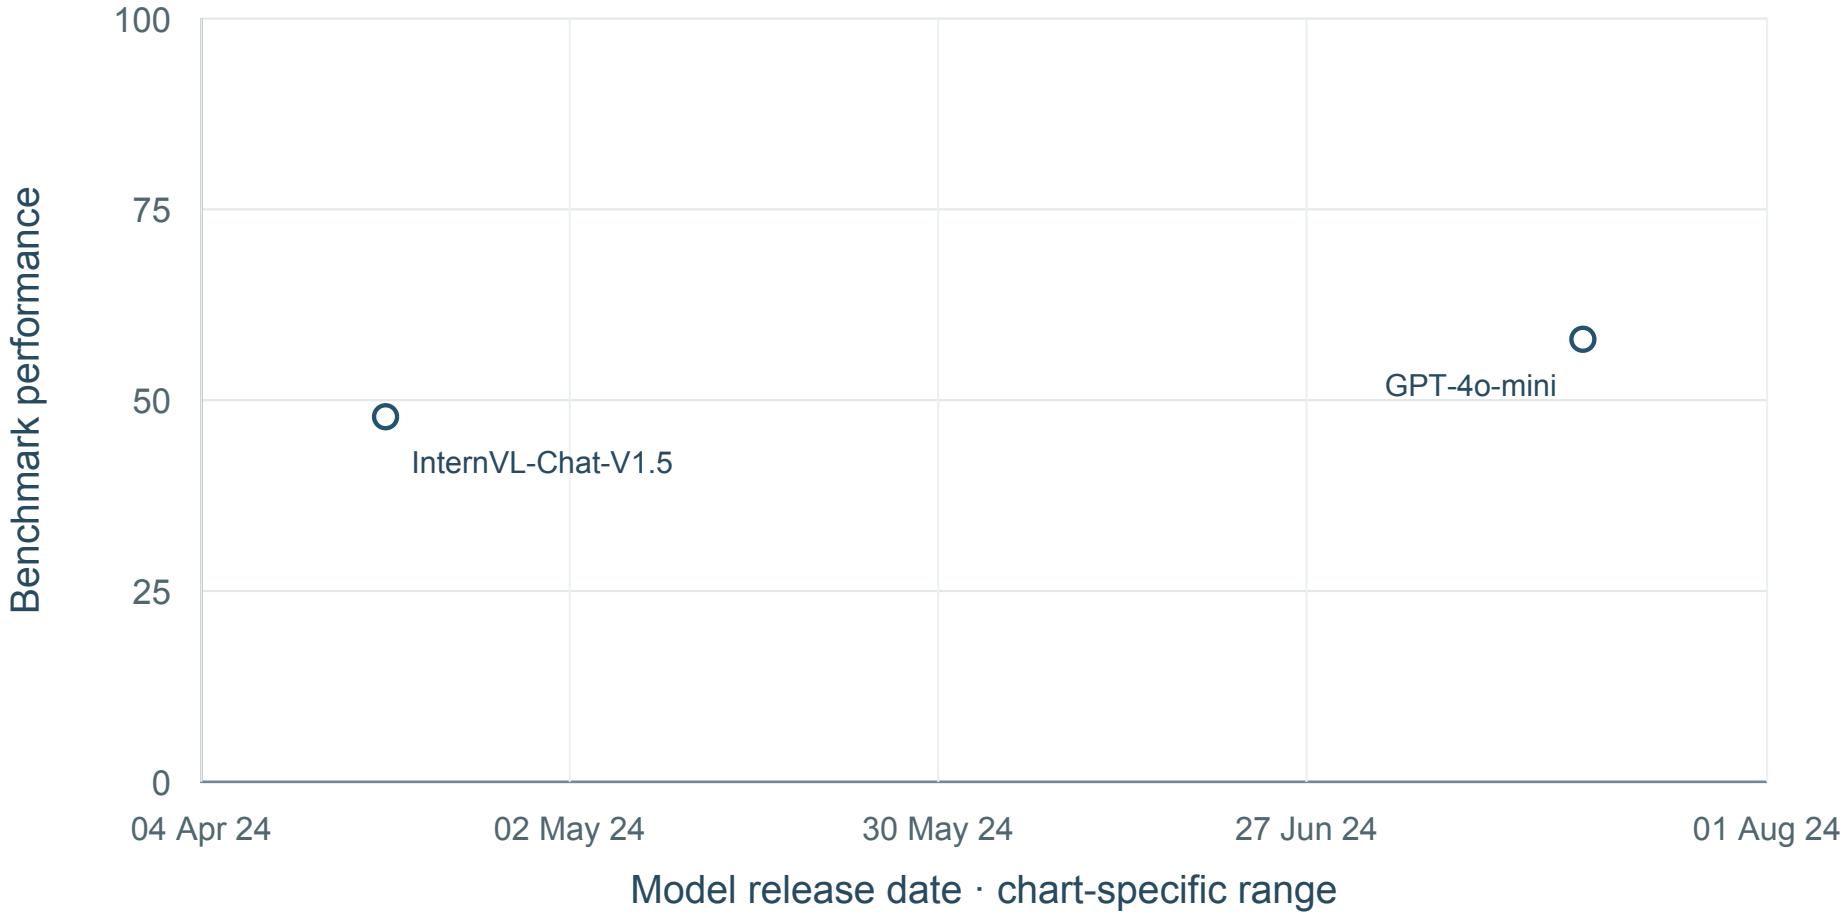

2 shown · 13 undated · 0 definition-held · sources: S022


No mean curve: Fewer than five dated model configurations.

Result-source references: S022. Exact point locators and raw values: data/F002_READoc_values.csv.

Benchmark reference (APA): Li, Z., Abulaiti, A., Lu, Y., Chen, X., Zheng, J., Lin, H., Han, X., & Sun, L. (2024). READoc: A unified benchmark for realistic document structured extraction. arXiv. https://arxiv.org/abs/2409.05137

READoc: Overall composite

READoc-GitHub; original paper Table 4

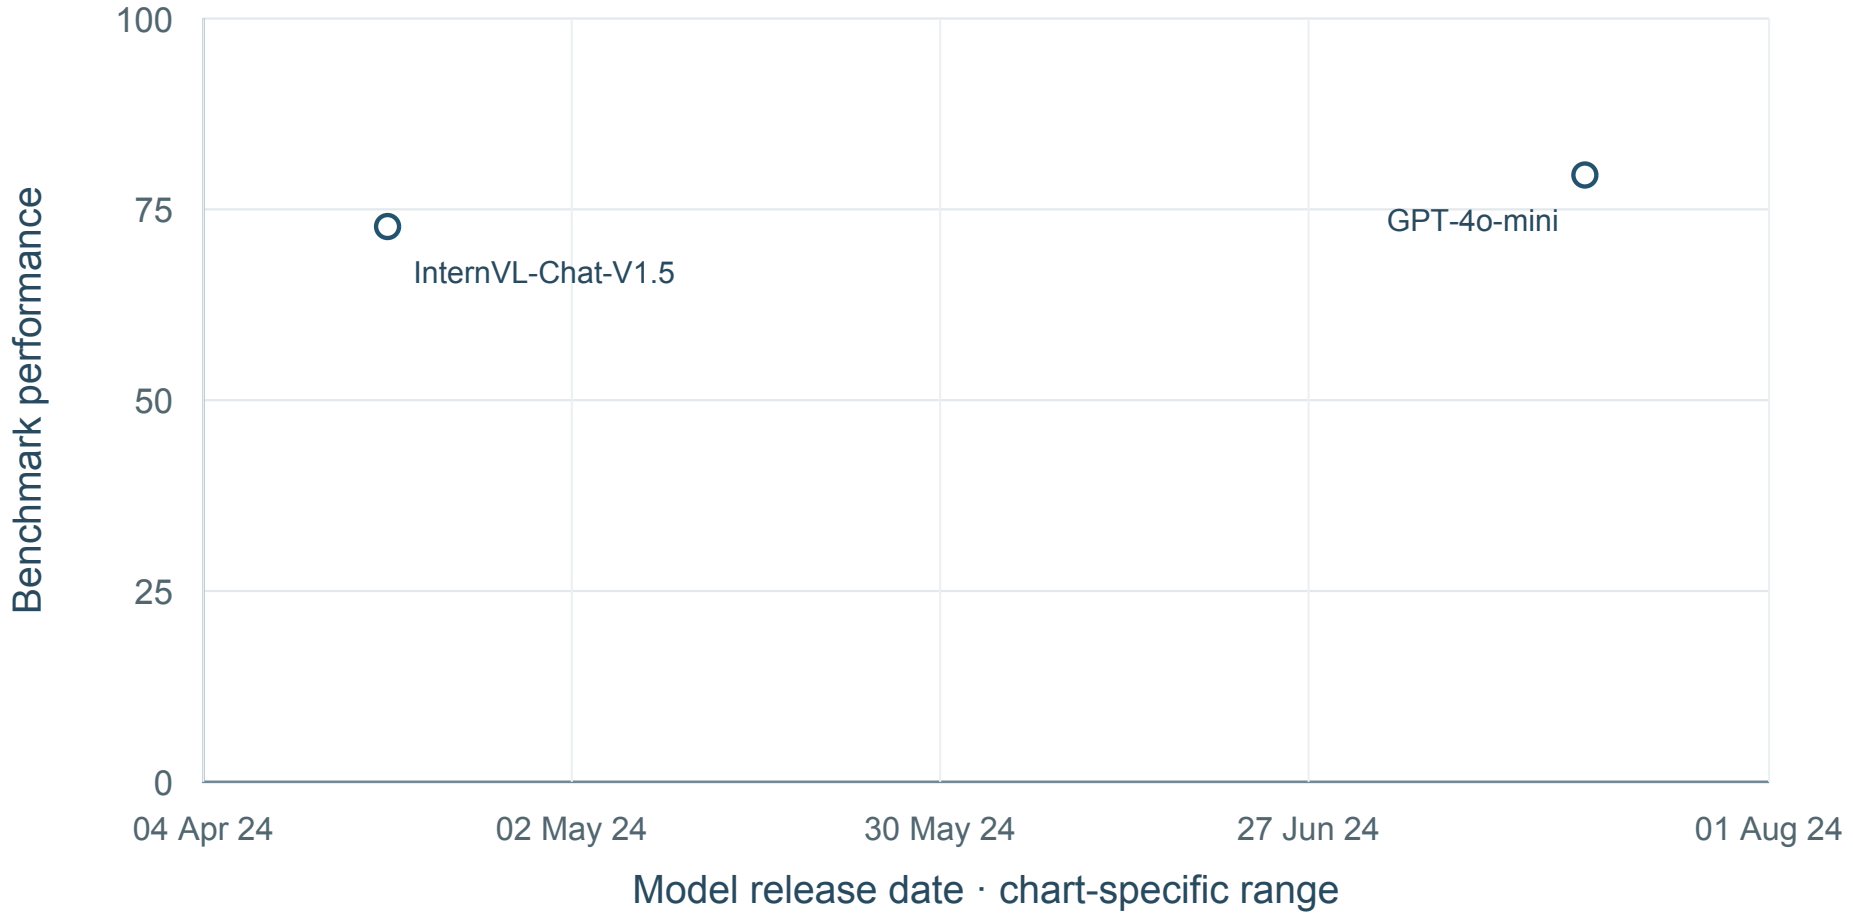

2 shown · 13 undated · 0 definition-held · sources: S022


No mean curve: Fewer than five dated model configurations.

Result-source references: S022. Exact point locators and raw values: data/F002_READoc_values.csv.

Benchmark reference (APA): Li, Z., Abulaiti, A., Lu, Y., Chen, X., Zheng, J., Lin, H., Han, X., & Sun, L. (2024). READoc: A unified benchmark for realistic document structured extraction. arXiv. https://arxiv.org/abs/2409.05137

READoc: Overall composite

READoc-Zenodo; original paper Table 5

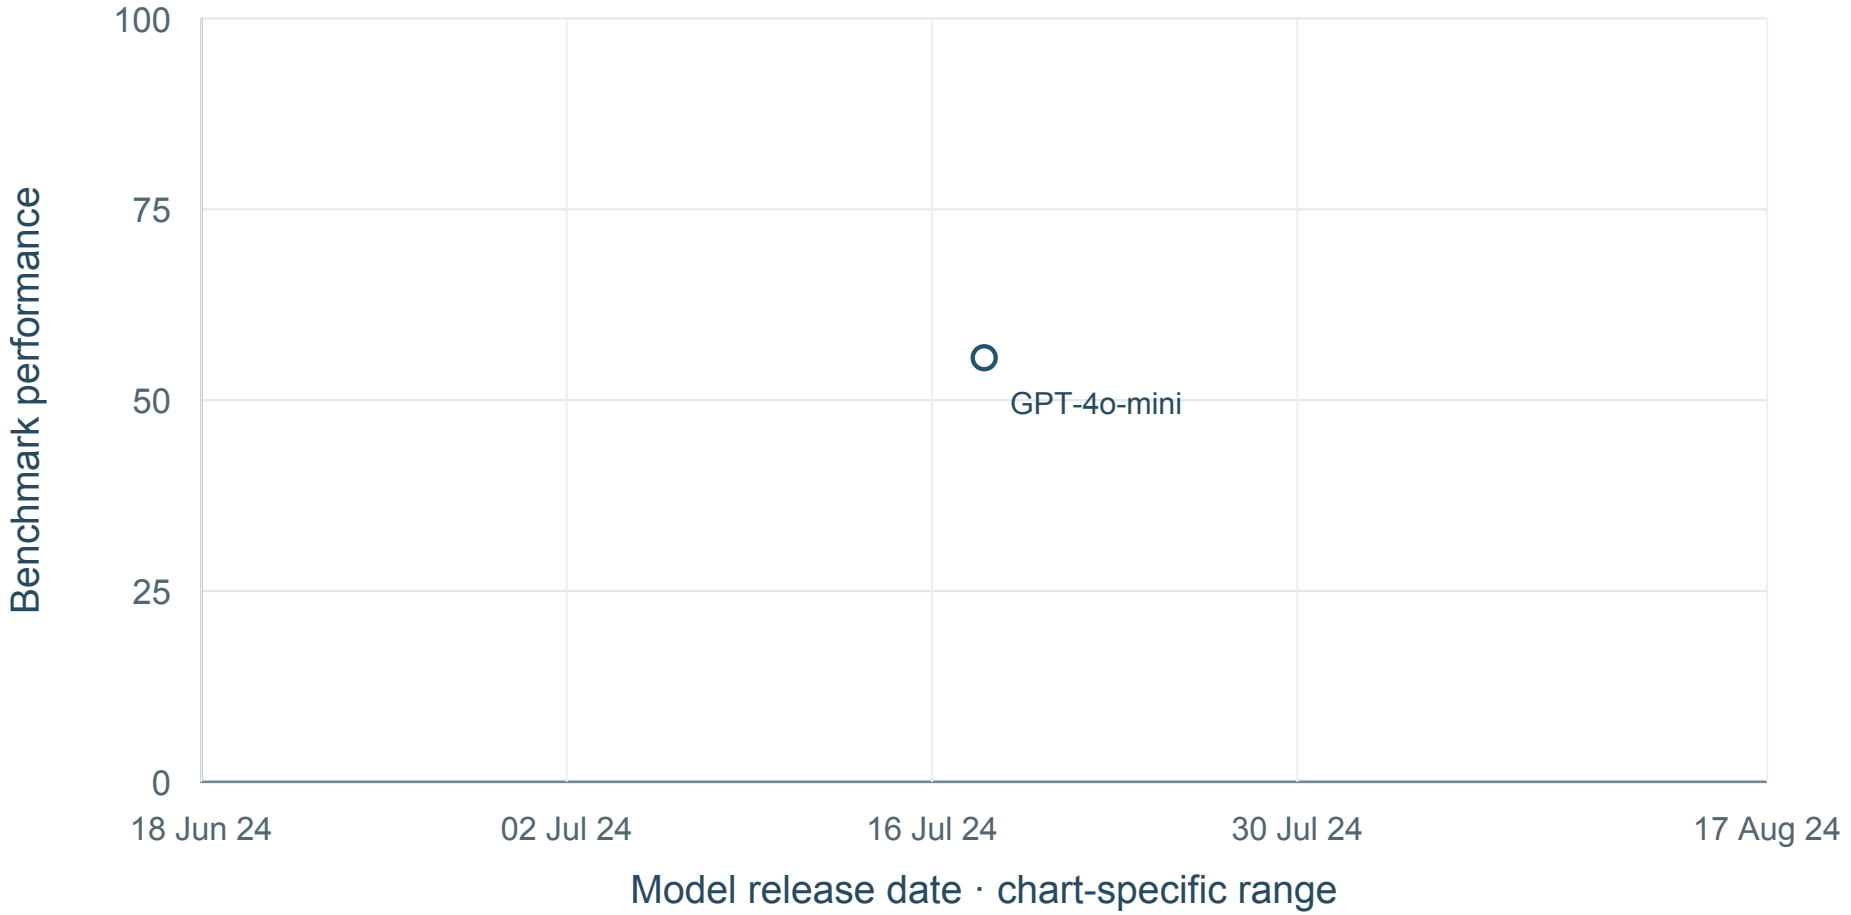

1 shown · 3 undated · 0 definition-held · sources: S022

No mean curve: Fewer than five dated model configurations.

Result-source references: S022. Exact point locators and raw values: data/F002_READoc_values.csv.

Benchmark reference (APA): Li, Z., Abulaiti, A., Lu, Y., Chen, X., Zheng, J., Lin, H., Han, X., & Sun, L. (2024). READoc: A unified benchmark for realistic document structured extraction. arXiv. https://arxiv.org/abs/2409.05137

F003 olmOCR-bench

Unit tests on text, tables, mathematics and reading order

120 source values; 89 new; 11 separate conditions; 36 visible time points; 0 definition-held values; 1 visible mean curves.

Benchmark references (APA)

Poznanski, J., Rangapur, A., Borchardt, J., Dunkelberger, J., Huff, R., Lin, D., Rangapur, A., Wilhelm, C., Lo, K., & Soldaini, L. (2025). olmOCR: Unlocking trillions of tokens in PDFs with vision language models. arXiv. https://arxiv.org/abs/2502.18443

Workflow and article scope

Challenges: A

Prepare and read source documents; Bind values to the correct unit

Unit-test coverage is not exhaustive; parser system, not language-model-only performance.

Manuscript anchors: Lu and Wang, Challenges A–B; manuscript paragraphs 15–18; Wrong-subgroup example, manuscript paragraph 29

Result-source references: S023; S024; MC042. Full references appear in the final bibliography.

Complete condition inventory

01. Unit-test pass score | olmOCR-Bench; paper Table 4
12 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S023.

02. Unit-test pass score | olmOCR 2 paper Table 1; source-reported release month
19 values; 19 time points; visible mean curve. Sources: S024.

03. Unit-test pass score (%) | Mode not specified; MC042 H5; olmOCR-bench (test revision unpinned; frozen card table); ArXiv
11 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC042.

04. Unit-test pass score (%) | Mode not specified; MC042 H5; olmOCR-bench (test revision unpinned; frozen card table); Old ScansMath
11 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC042.

05. Unit-test pass score (%) | Mode not specified; MC042 H5; olmOCR-bench (test revision unpinned; frozen card table); Tables
11 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC042.

06. Unit-test pass score (%) | Mode not specified; MC042 H5; olmOCR-bench (test revision unpinned; frozen card table); Old Scans
11 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC042.

07. Unit-test pass score (%) | Mode not specified; MC042 H5; olmOCR-bench (test revision unpinned; frozen card table); Headers andFooters
11 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC042.

08. Unit-test pass score (%) | Mode not specified; MC042 H5; olmOCR-bench (test revision unpinned; frozen card table); Multicolumn
10 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC042.


09. Unit-test pass score (%) | Mode not specified; MC042 H5; olmOCR-bench (test revision unpinned; frozen card table); Long TinyText
11 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC042.

10. Unit-test pass score (%) | Mode not specified; MC042 H5; olmOCR-bench (test revision unpinned; frozen card table); Base
11 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC042.

11. Unit-test pass score (%) | Mode not specified; MC042 H5; olmOCR-bench (test revision unpinned; frozen card table); Overall
2 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC042.

olmOCR-bench: Unit-test pass score

olmOCR-Bench; paper Table 4

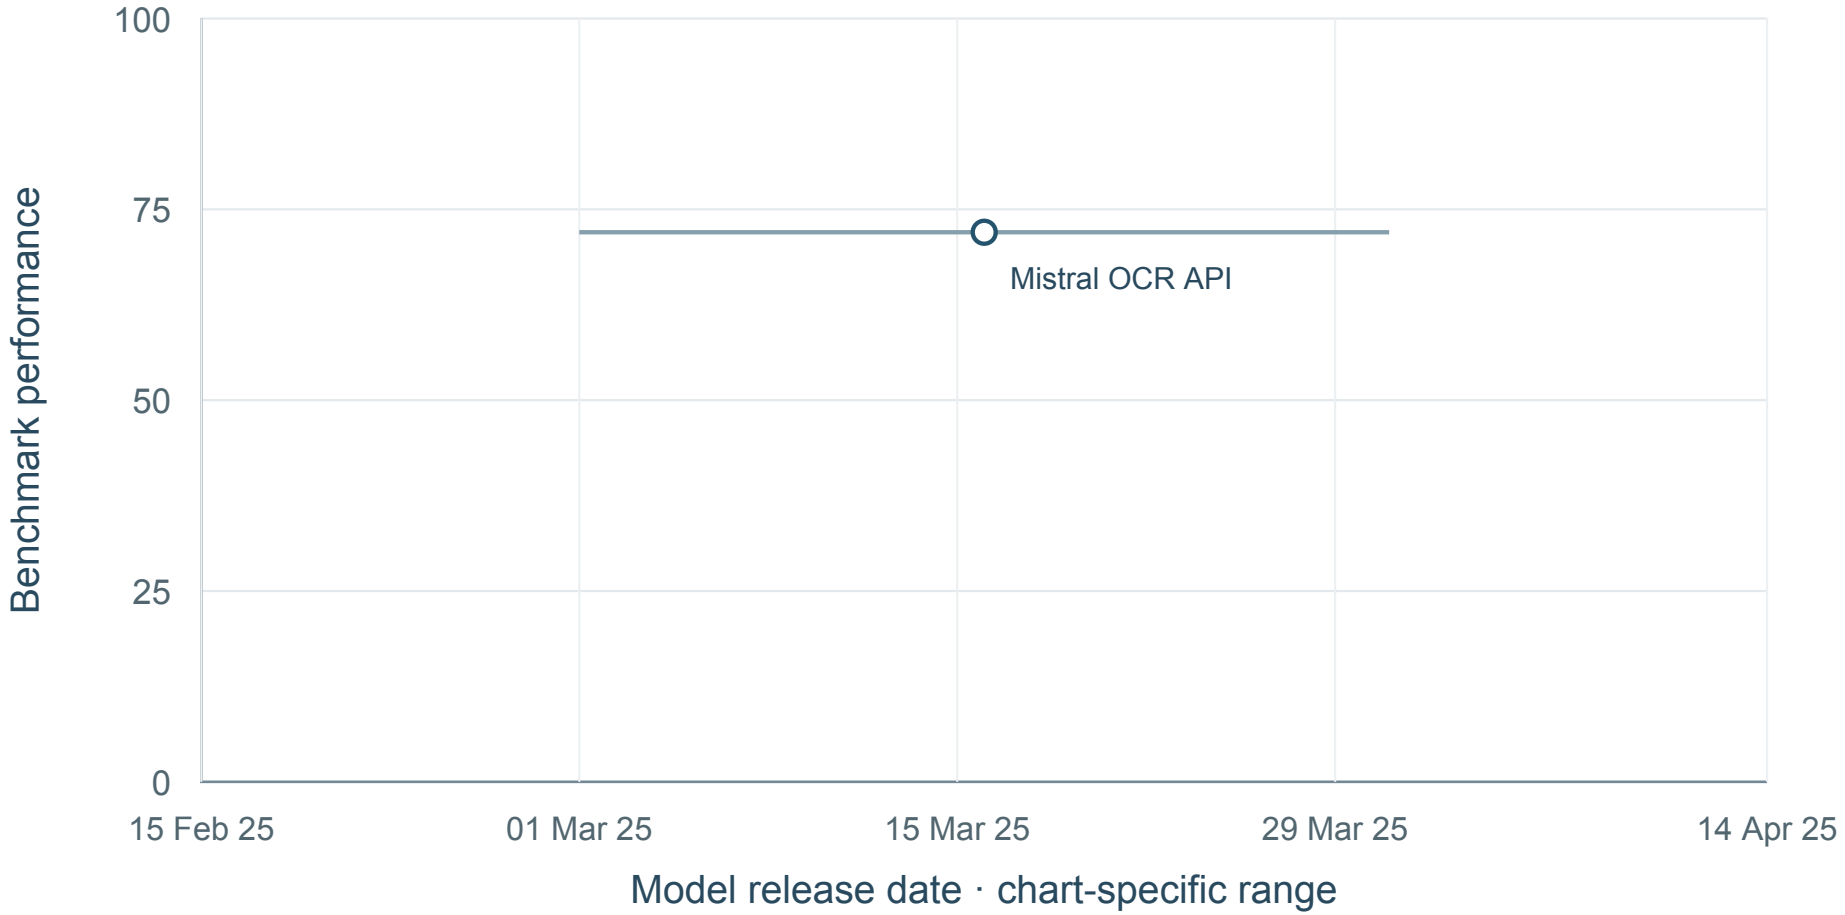


1 shown · 11 undated · 0 definition-held · sources: S023

No mean curve: Fewer than five dated model configurations.

Result-source references: S023. Exact point locators and raw values: data/F003_olmOCR_bench_values.csv.

Benchmark reference (APA): Poznanski, J., Rangapur, A., Borchardt, J., Dunkelberger, J., Huff, R., Lin, D., Rangapur, A., Wilhelm, C., Lo, K., & Soldaini, L. (2025). olmOCR: Unlocking trillions of tokens in PDFs with vision language models. arXiv. https://arxiv.org/abs/2502.18443

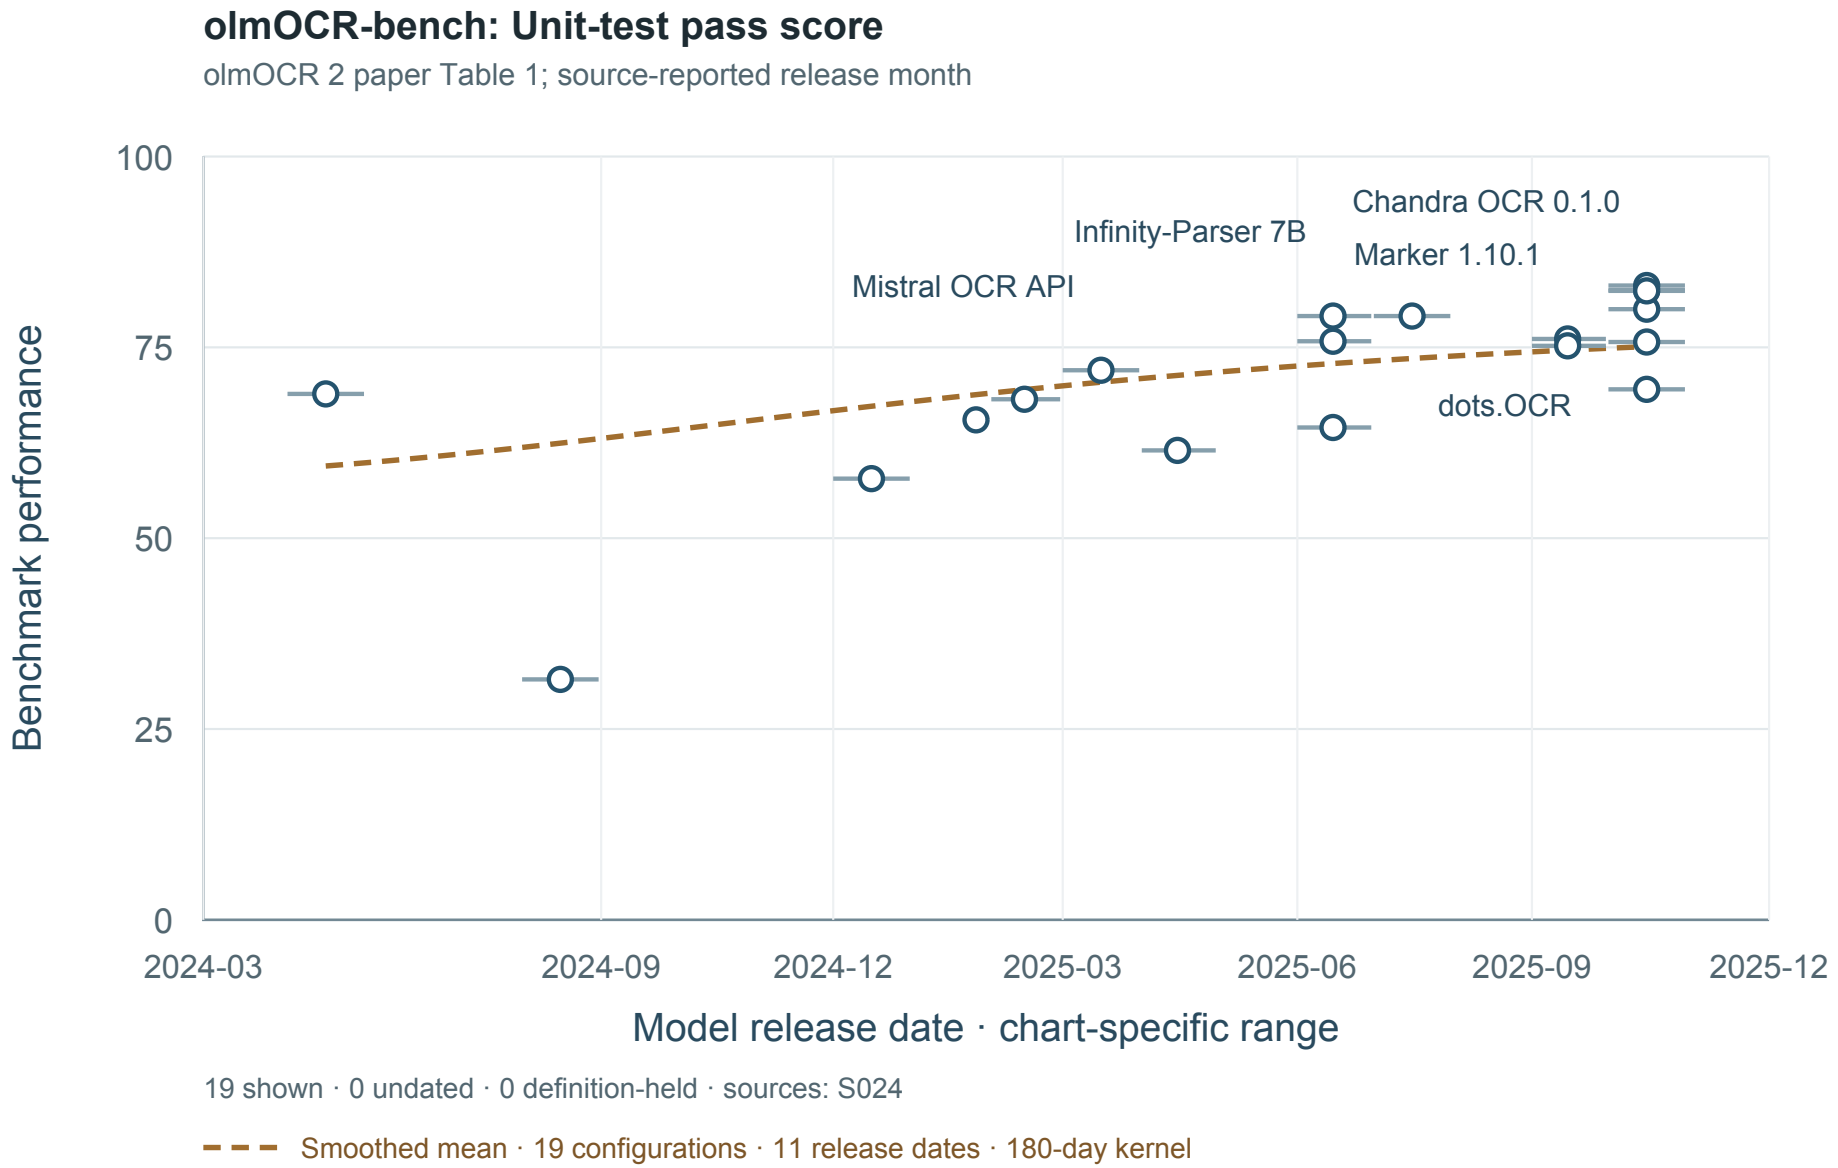


Result-source references: S024. Exact point locators and raw values: data/F003_olmOCR_bench_values.csv.

Benchmark reference (APA): Poznanski, J., Rangapur, A., Borchardt, J., Dunkelberger, J., Huff, R., Lin, D., Rangapur, A., Wilhelm, C., Lo, K., & Soldaini, L. (2025). olmOCR: Unlocking trillions of tokens in PDFs with vision language models. arXiv. https://arxiv.org/abs/2502.18443

olmOCR-bench: Unit-test pass score (%)

Mode not specified; MC042 H5; olmOCR-bench (test revision unpinned; frozen card table); ArXiv

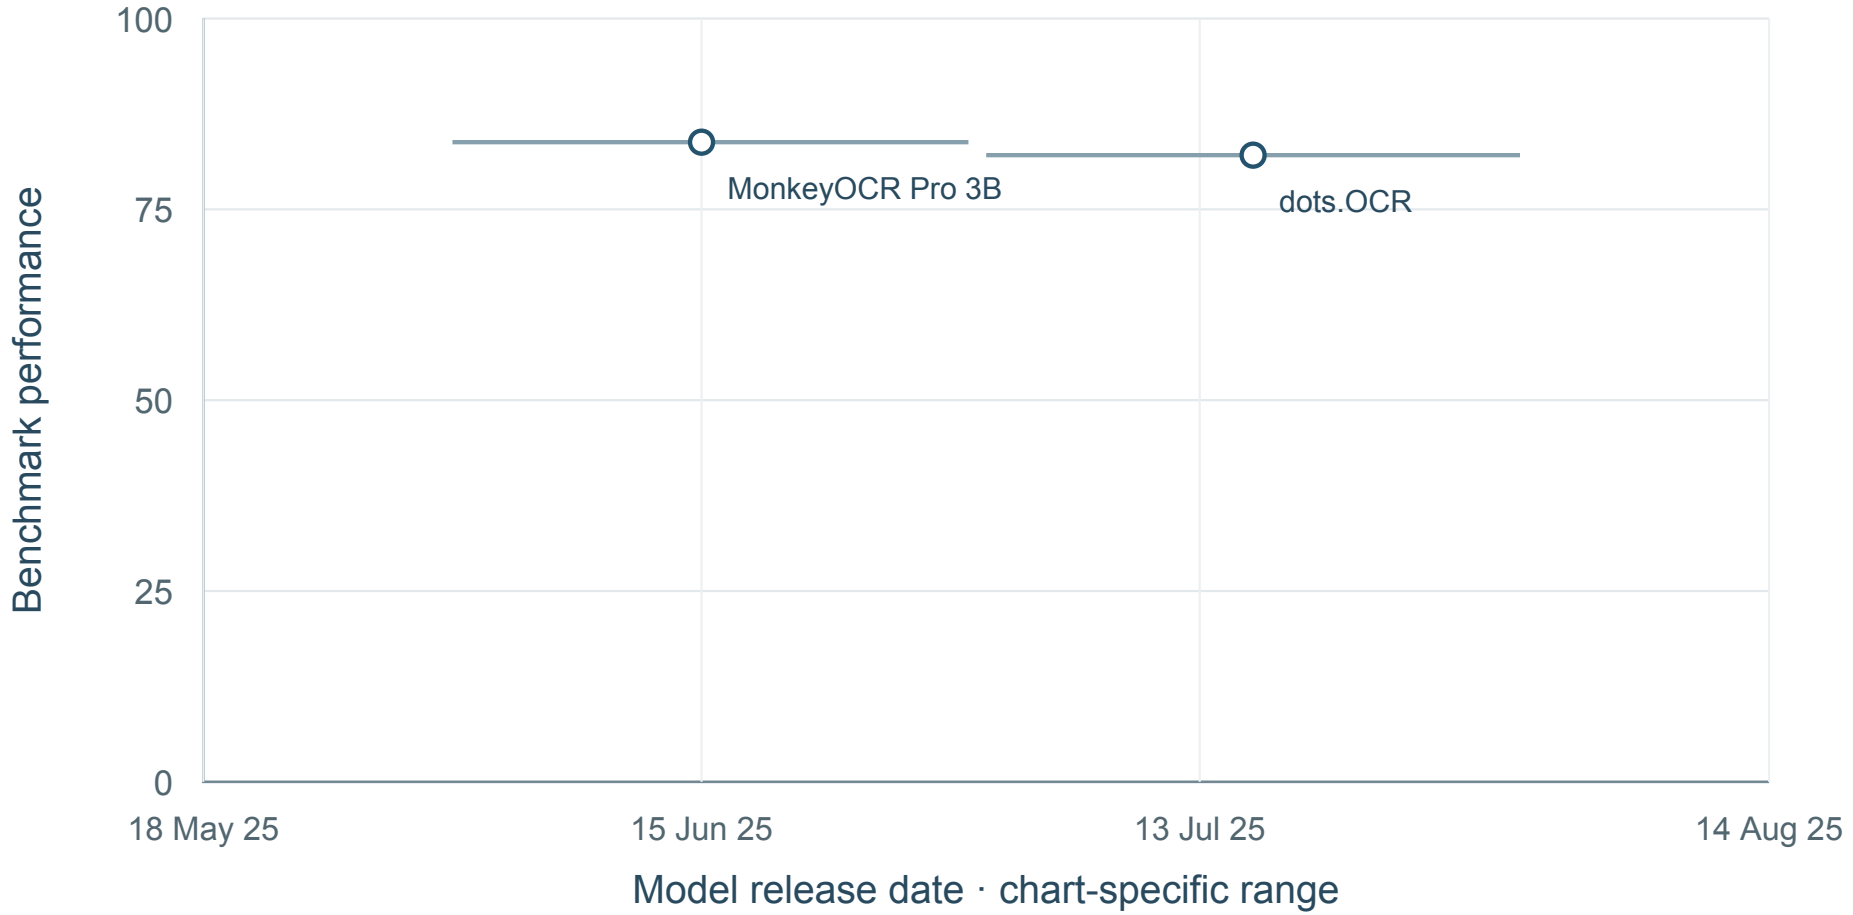

2 shown · 9 undated · 0 definition-held · sources: MC042


No mean curve: Fewer than five dated model configurations.

Result-source references: MC042. Exact point locators and raw values: data/F003_olmOCR_bench_values.csv.

Benchmark reference (APA): Poznanski, J., Rangapur, A., Borchardt, J., Dunkelberger, J., Huff, R., Lin, D., Rangapur, A., Wilhelm, C., Lo, K., & Soldaini, L. (2025). olmOCR: Unlocking trillions of tokens in PDFs with vision language models. arXiv. https://arxiv.org/abs/2502.18443

olmOCR-bench: Unit-test pass score (%)

Mode not specified; MC042 H5; olmOCR-bench (test revision unpinned; frozen card table); Old ScansMath

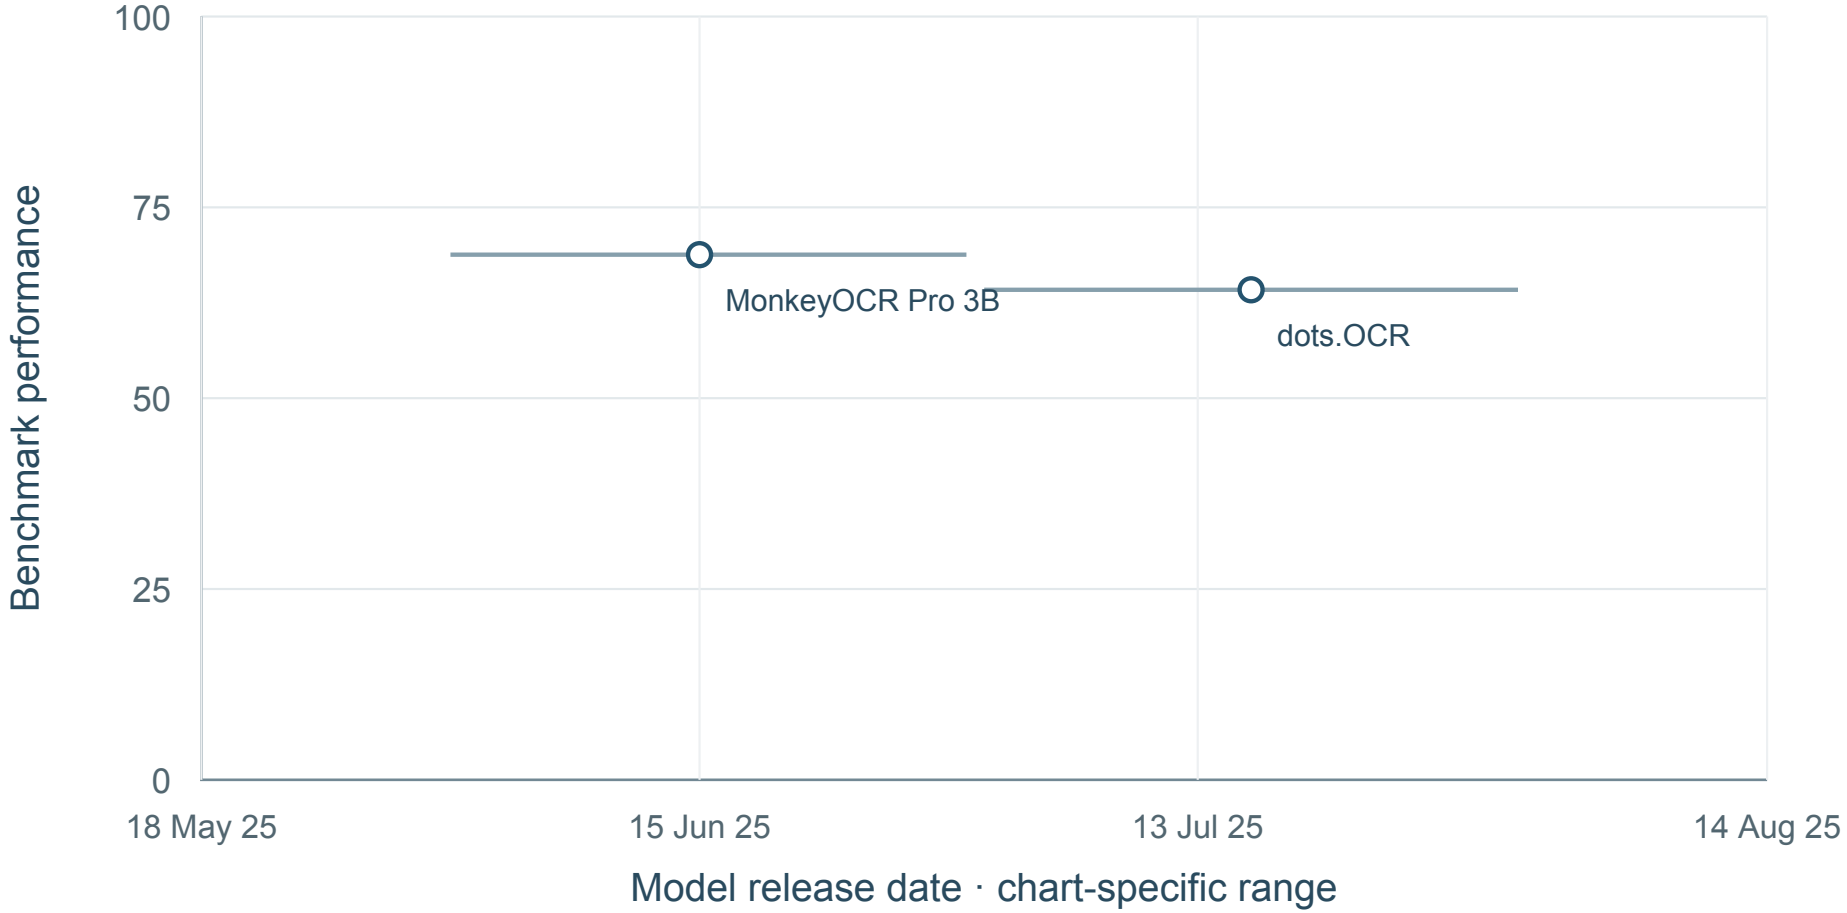

2 shown · 9 undated · 0 definition-held · sources: MC042


No mean curve: Fewer than five dated model configurations.

Result-source references: MC042. Exact point locators and raw values: data/F003_olmOCR_bench_values.csv.

Benchmark reference (APA): Poznanski, J., Rangapur, A., Borchardt, J., Dunkelberger, J., Huff, R., Lin, D., Rangapur, A., Wilhelm, C., Lo, K., & Soldaini, L. (2025). olmOCR: Unlocking trillions of tokens in PDFs with vision language models. arXiv. https://arxiv.org/abs/2502.18443

olmOCR-bench: Unit-test pass score (%)

Mode not specified; MC042 H5; olmOCR-bench (test revision unpinned; frozen card table); Tables

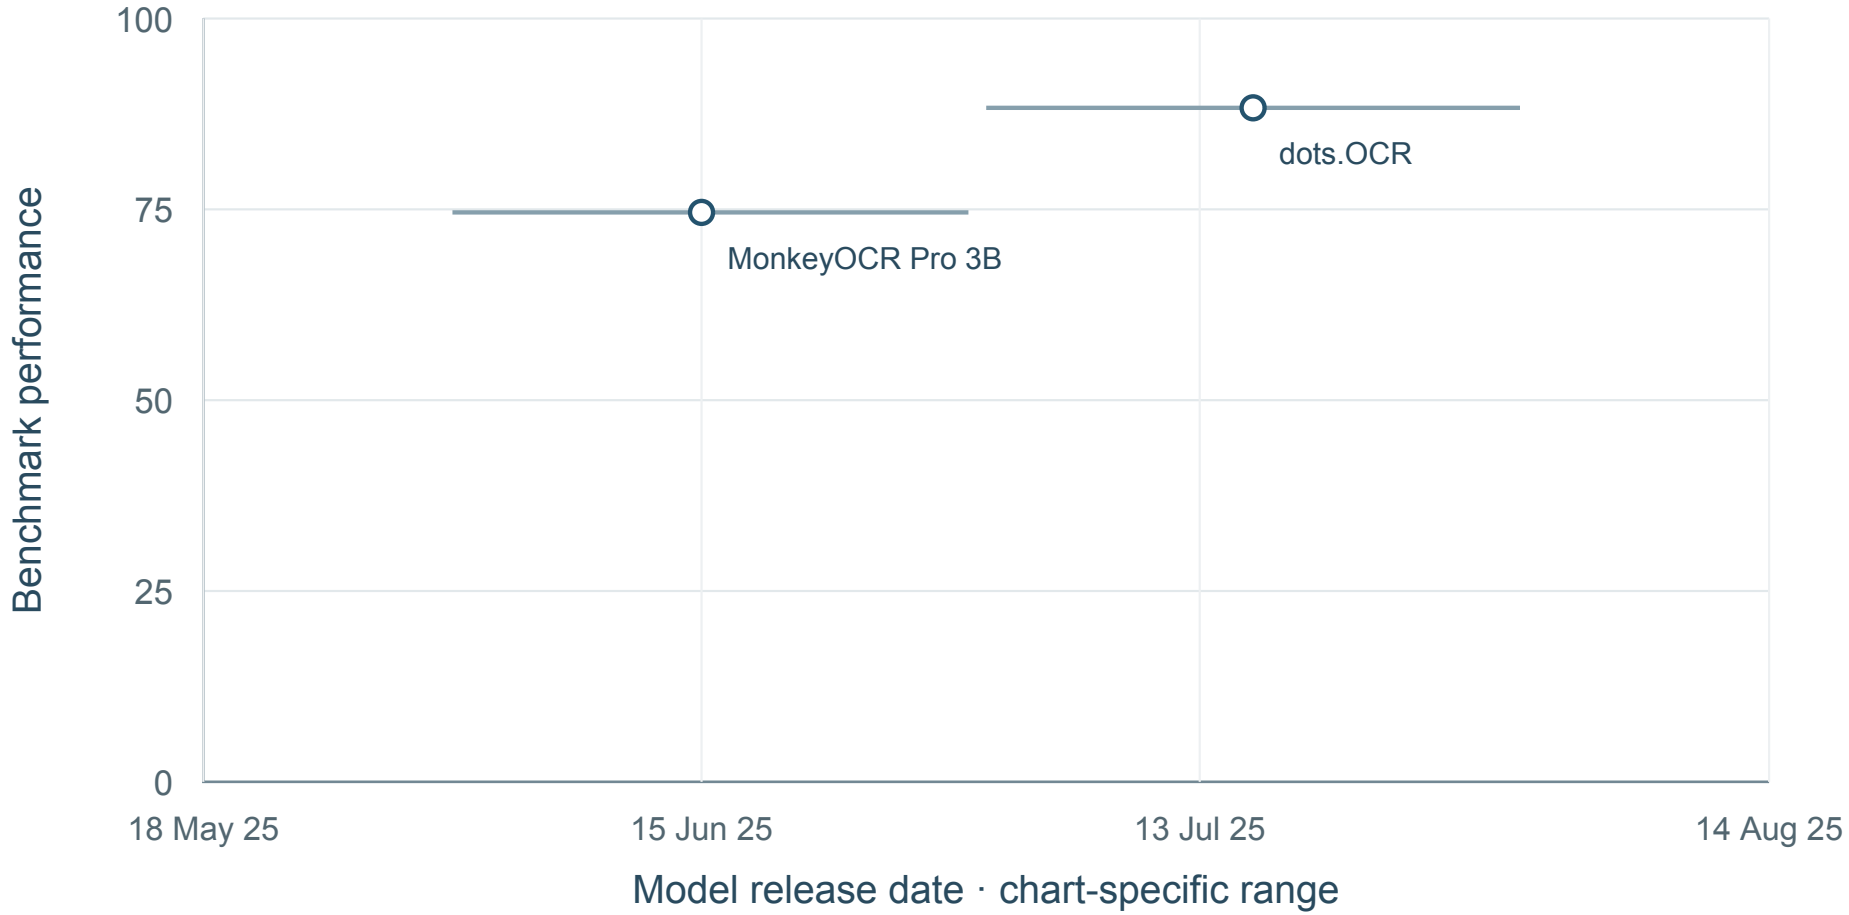

2 shown · 9 undated · 0 definition-held · sources: MC042


No mean curve: Fewer than five dated model configurations.

Result-source references: MC042. Exact point locators and raw values: data/F003_olmOCR_bench_values.csv.

Benchmark reference (APA): Poznanski, J., Rangapur, A., Borchardt, J., Dunkelberger, J., Huff, R., Lin, D., Rangapur, A., Wilhelm, C., Lo, K., & Soldaini, L. (2025). olmOCR: Unlocking trillions of tokens in PDFs with vision language models. arXiv. https://arxiv.org/abs/2502.18443

olmOCR-bench: Unit-test pass score (%)

Mode not specified; MC042 H5; olmOCR-bench (test revision unpinned; frozen card table); Old Scans

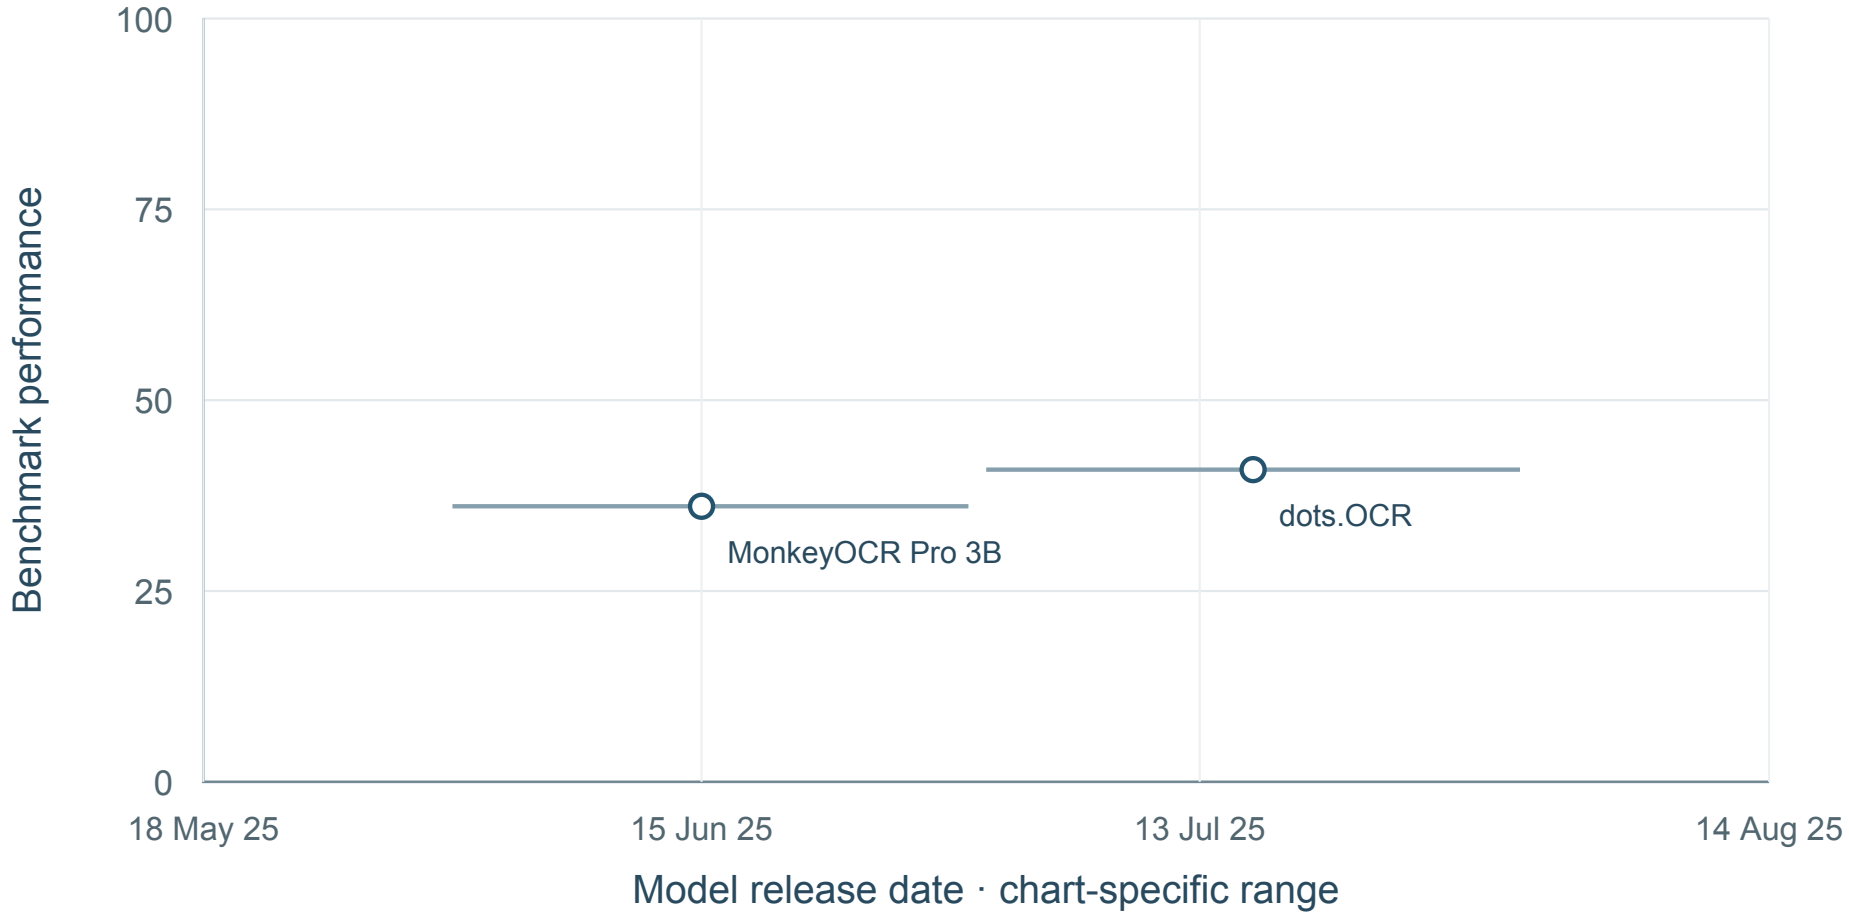

2 shown · 9 undated · 0 definition-held · sources: MC042


No mean curve: Fewer than five dated model configurations.

Result-source references: MC042. Exact point locators and raw values: data/F003_olmOCR_bench_values.csv.

Benchmark reference (APA): Poznanski, J., Rangapur, A., Borchardt, J., Dunkelberger, J., Huff, R., Lin, D., Rangapur, A., Wilhelm, C., Lo, K., & Soldaini, L. (2025). olmOCR: Unlocking trillions of tokens in PDFs with vision language models. arXiv. https://arxiv.org/abs/2502.18443

olmOCR-bench: Unit-test pass score (%)

Mode not specified; MC042 H5; olmOCR-bench (test revision unpinned; frozen card table); Headers andFooters

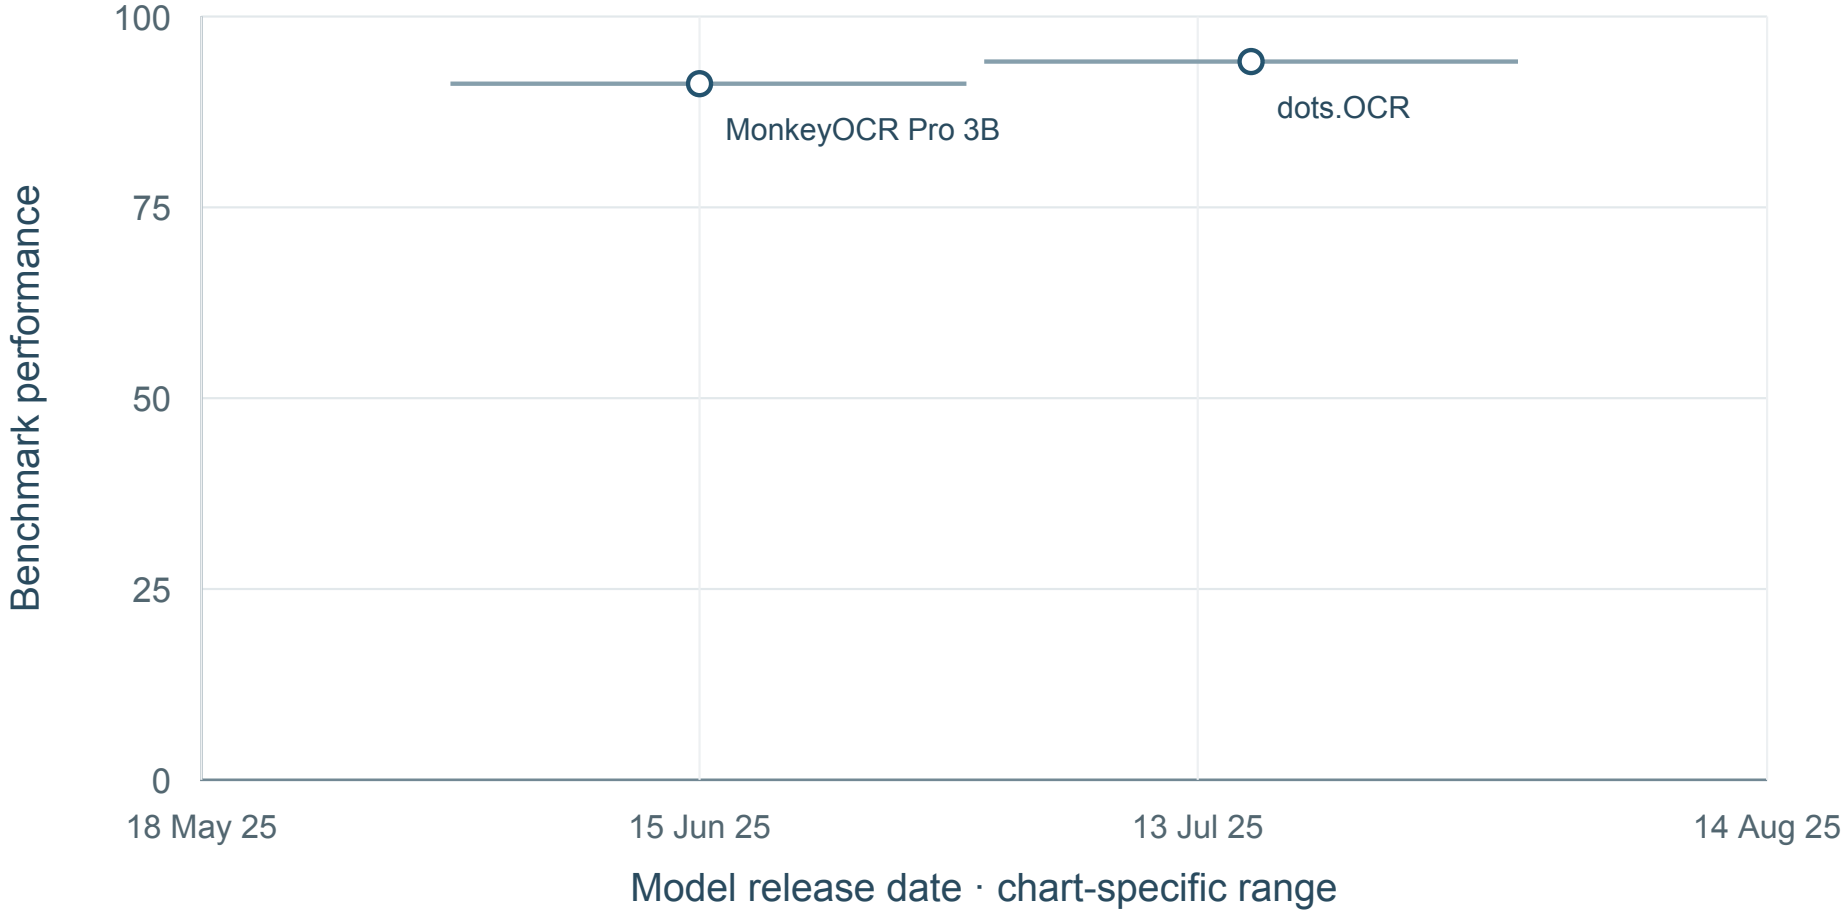

2 shown · 9 undated · 0 definition-held · sources: MC042


No mean curve: Fewer than five dated model configurations.

Result-source references: MC042. Exact point locators and raw values: data/F003_olmOCR_bench_values.csv.

Benchmark reference (APA): Poznanski, J., Rangapur, A., Borchardt, J., Dunkelberger, J., Huff, R., Lin, D., Rangapur, A., Wilhelm, C., Lo, K., & Soldaini, L. (2025). olmOCR: Unlocking trillions of tokens in PDFs with vision language models. arXiv. https://arxiv.org/abs/2502.18443

olmOCR-bench: Unit-test pass score (%)

Mode not specified; MC042 H5; olmOCR-bench (test revision unpinned; frozen card table); Multicolumn

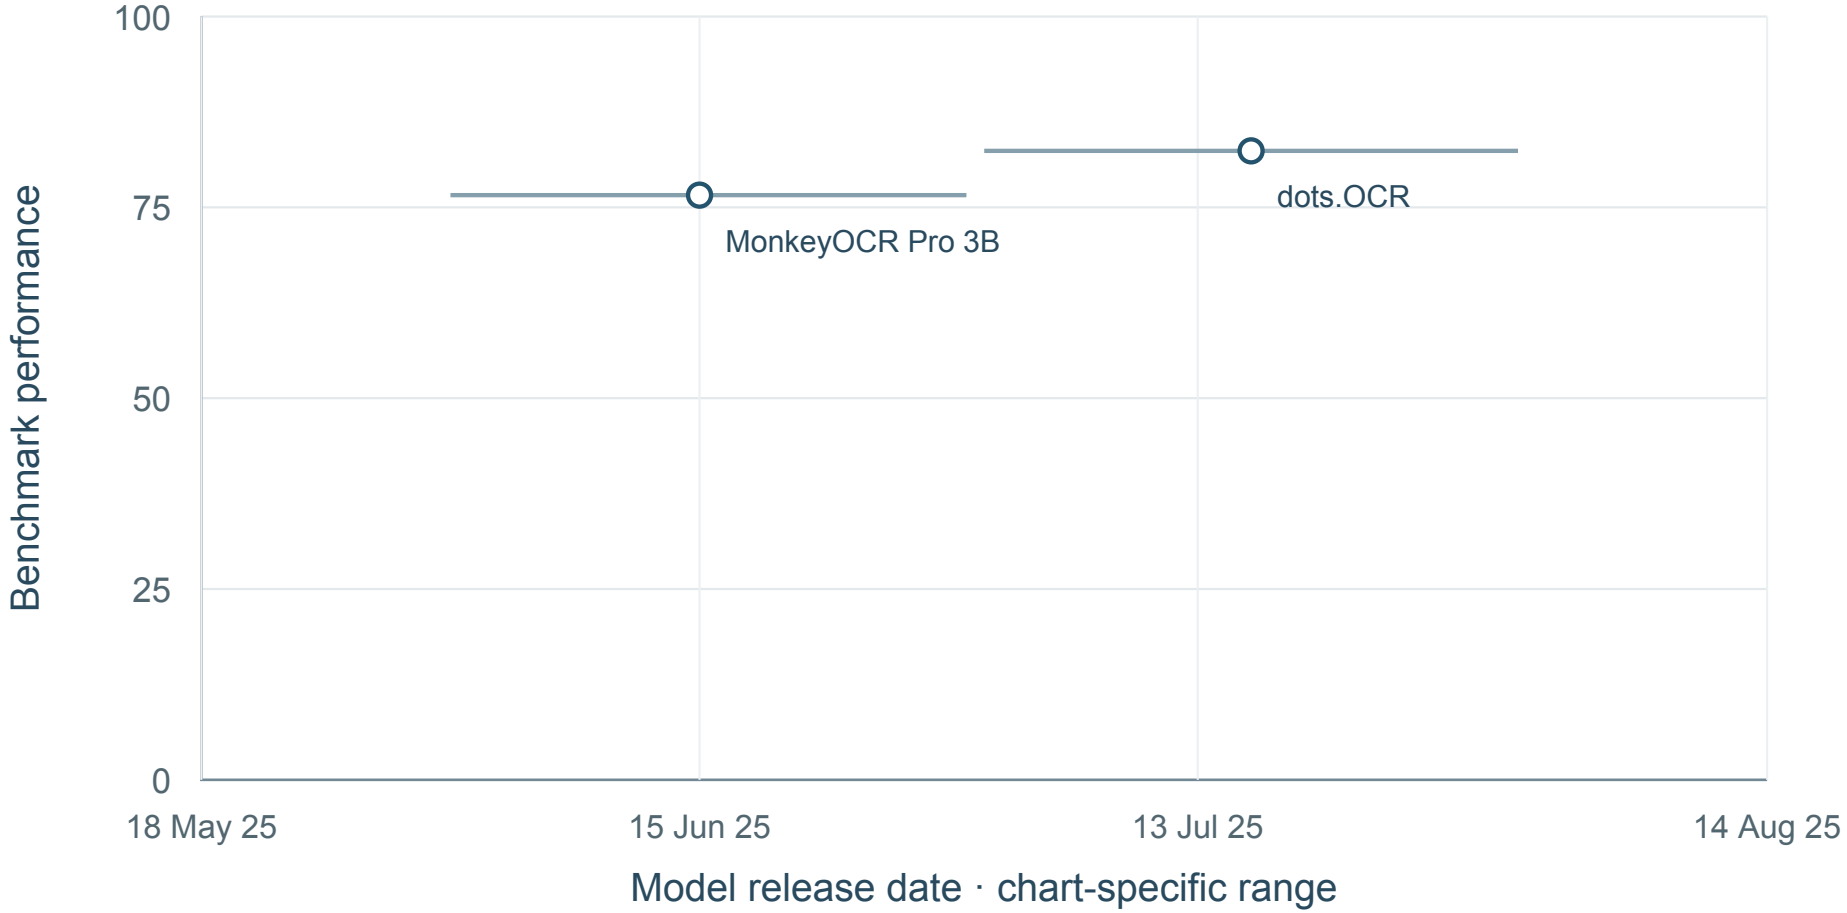

2 shown · 8 undated · 0 definition-held · sources: MC042


No mean curve: Fewer than five dated model configurations.

Result-source references: MC042. Exact point locators and raw values: data/F003_olmOCR_bench_values.csv.

Benchmark reference (APA): Poznanski, J., Rangapur, A., Borchardt, J., Dunkelberger, J., Huff, R., Lin, D., Rangapur, A., Wilhelm, C., Lo, K., & Soldaini, L. (2025). olmOCR: Unlocking trillions of tokens in PDFs with vision language models. arXiv. https://arxiv.org/abs/2502.18443

olmOCR-bench: Unit-test pass score (%)

Mode not specified; MC042 H5; olmOCR-bench (test revision unpinned; frozen card table); Long TinyText

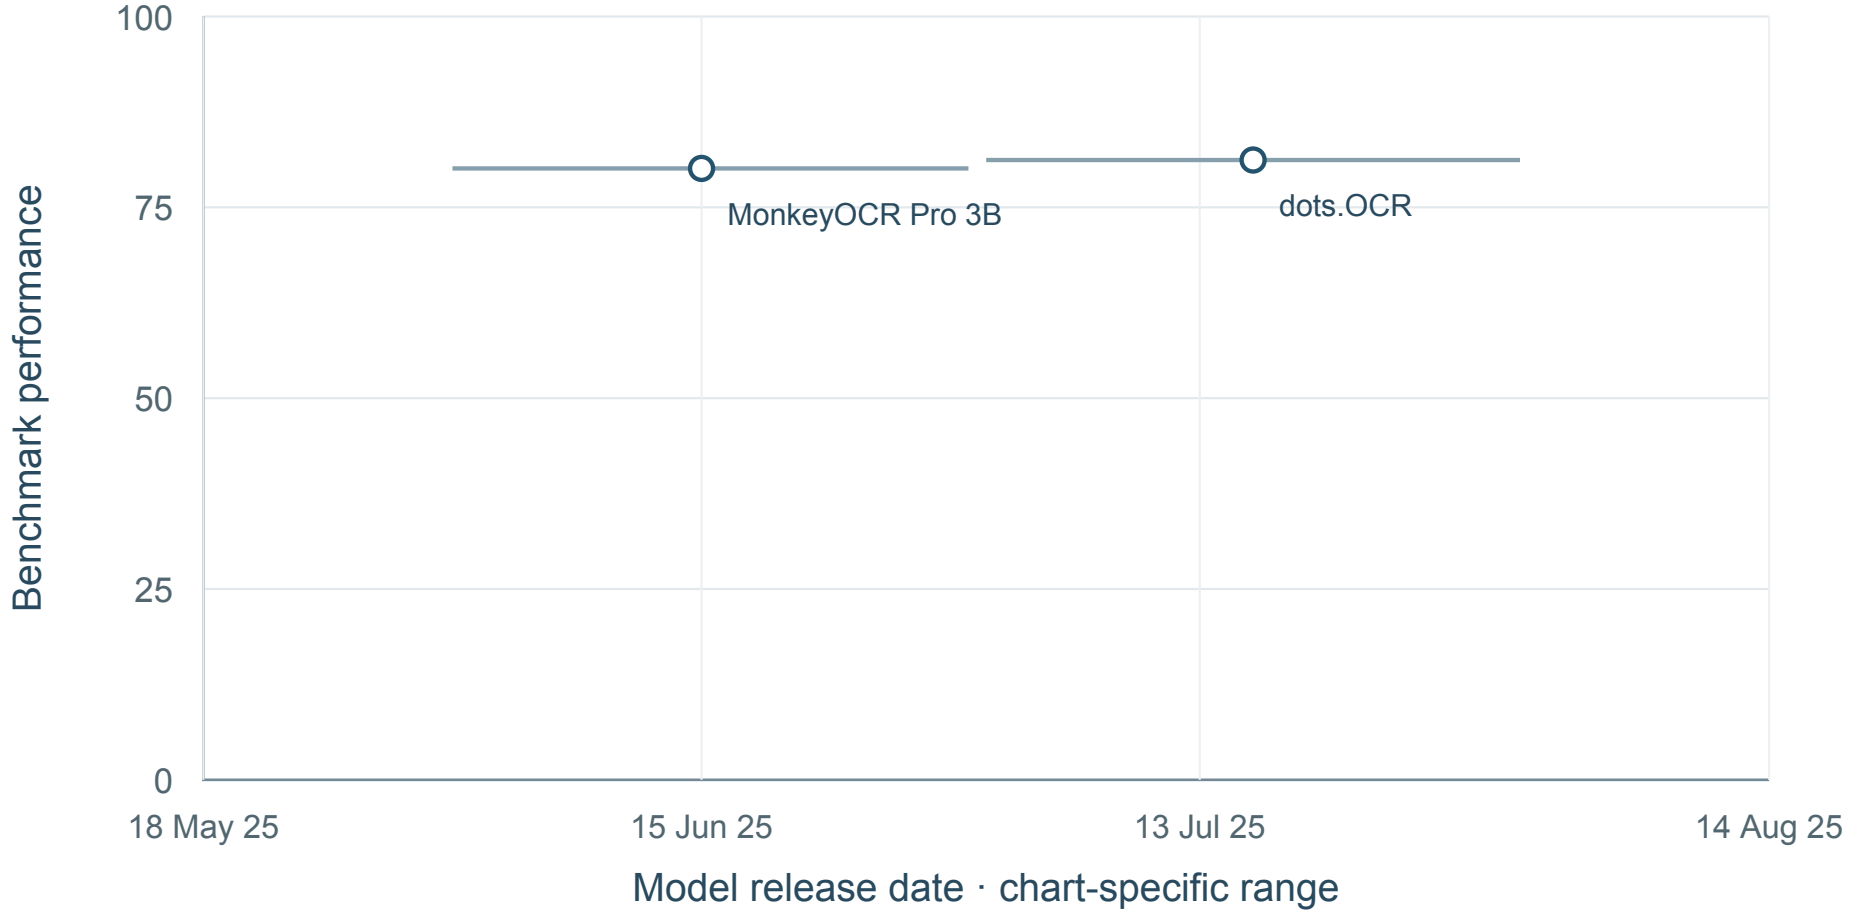

2 shown · 9 undated · 0 definition-held · sources: MC042


No mean curve: Fewer than five dated model configurations.

Result-source references: MC042. Exact point locators and raw values: data/F003_olmOCR_bench_values.csv.

Benchmark reference (APA): Poznanski, J., Rangapur, A., Borchardt, J., Dunkelberger, J., Huff, R., Lin, D., Rangapur, A., Wilhelm, C., Lo, K., & Soldaini, L. (2025). olmOCR: Unlocking trillions of tokens in PDFs with vision language models. arXiv. https://arxiv.org/abs/2502.18443

olmOCR-bench: Unit-test pass score (%)

Mode not specified; MC042 H5; olmOCR-bench (test revision unpinned; frozen card table); Base

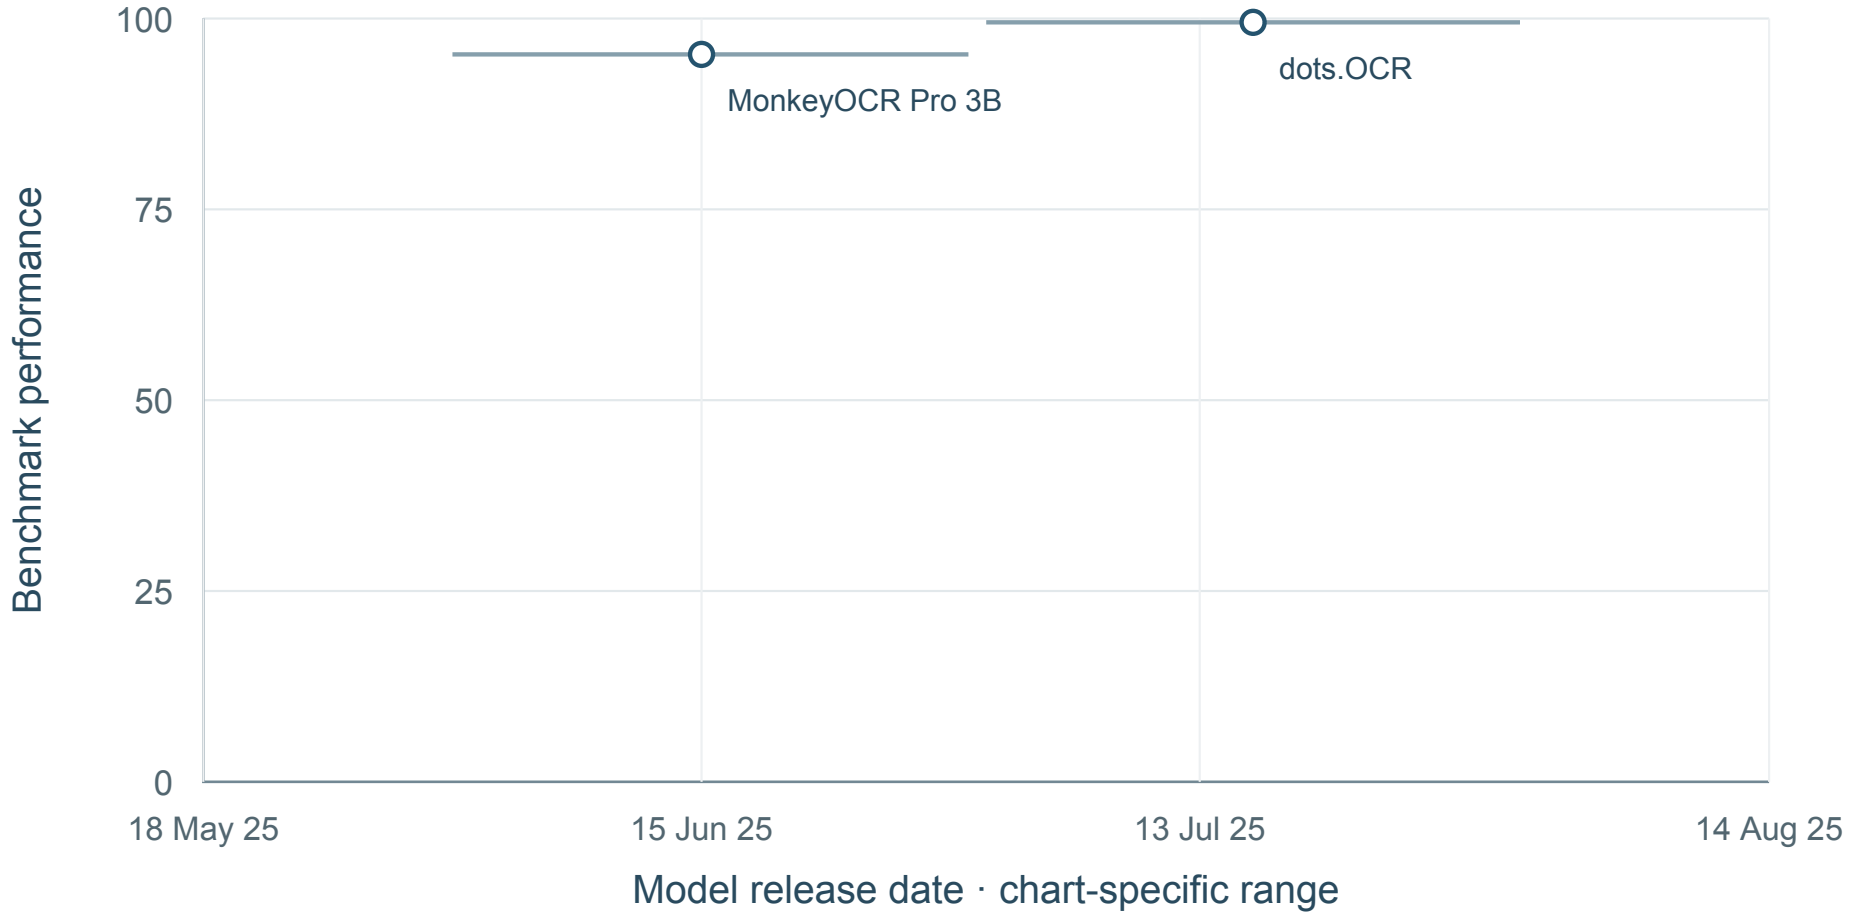

2 shown · 9 undated · 0 definition-held · sources: MC042

No mean curve: Fewer than five dated model configurations.

Result-source references: MC042. Exact point locators and raw values: data/F003_olmOCR_bench_values.csv.

Benchmark reference (APA): Poznanski, J., Rangapur, A., Borchardt, J., Dunkelberger, J., Huff, R., Lin, D., Rangapur, A., Wilhelm, C., Lo, K., & Soldaini, L. (2025). olmOCR: Unlocking trillions of tokens in PDFs with vision language models. arXiv. https://arxiv.org/abs/2502.18443

F004 OCRBench

OCR-centred visual QA and text recognition; Text localization, visual extraction and reasoning

39 source values; 22 new; 14 separate conditions; 20 visible time points; 0 definition-held values; 0 visible mean curves.

Benchmark references (APA)

Liu, Y., Li, Z., Huang, M., Yang, B., Yu, W., Li, C., Yin, X.-C., Liu, C.-L., Jin, L., & Bai, X. (2024). OCRBench: on the hidden mystery of OCR in large multimodal models. Science China Information Sciences, 67(12). https://doi.org/10.1007/s11432-024-4235-6

Fu, L., Kuang, Z., Song, J., Huang, M., Yang, B., Li, Y., Zhu, L., Luo, Q., Wang, X., Lu, H., Li, Z., Tang, G., Shan, B., Lin, C., Liu, Q., Wu, B., Feng, H., Liu, H., Huang, C., … Bai, X. (2024). OCRBench v2: An improved benchmark for evaluating large multimodal models on visual text localization and reasoning. arXiv. https://arxiv.org/abs/2501.00321

Workflow and article scope

Challenges: A

Prepare and read source documents; Bind values to the correct unit

Mixed visual tasks; normalization to 0–100 is a scale conversion only.; Different tasks and difficulty from v1; no cross-version trend.

Manuscript anchors: Lu and Wang, Challenges A–B; manuscript paragraphs 15–18; Wrong-subgroup example, manuscript paragraph 29

Result-source references: S012; MC014; MC033; MC083; MC084; MC098; MC013; MC037. Full references appear in the final bibliography.

Complete condition inventory

01. Total points | Fixed Qwen2.5-VL model-card comparison; OCRBench;
5 values; 3 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S012.

02. Overall score | Fixed Qwen2.5-VL model-card comparison; OCRBench-V2(en/zh); en
6 values; 3 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S012.

03. Overall score | Fixed Qwen2.5-VL model-card comparison; OCRBench-V2(en/zh); zh
6 values; 3 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S012.

04. Reported OCRBench score (card 0–100 scale) | Mode not specified; MC014 H2; OCRBench (source-reported original benchmark)
4 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC014.

05. Reported OCRBench score (card 0–100 scale) | Thinking; MC033 H1; OCRBench (source-reported original benchmark)
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC033.

06. Reported OCRBench score (card 0–100 scale) | Mode not specified; effort xhigh; MC033 H1; OCRBench (source-reported original benchmark)
1 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC033.

07. Reported OCRBench score (card 0–100 scale) | Thinking; effort high; MC033 H1; OCRBench (source-reported original benchmark)
1 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC033.

08. Reported OCRBench score (card 0–100 scale) | Mode not specified; MC083 H2; OCRBench (source-reported original benchmark)
5 values; 3 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC083.

09. Reported OCRBench score (card 0–100 scale) | Mode not specified; MC084 H2; OCRBench (source-reported original benchmark)
4 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC084.

10. Reported OCRBench score (card 0–100 scale) | Mode not specified; MC098 H2; OCRBench (source-reported original benchmark)
2 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC098.

11. Total OCRBench points | Instruct / non-thinking variant; MC013 Model-card evaluation table image; OCRBench (source-reported original benchmark)
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC013.


12. Reported OCRBench v2 score | Instruct / non-thinking variant; MC013 Model-card evaluation table image; OCRBench v2; English
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC013.

13. Reported OCRBench v2 score | Instruct / non-thinking variant; MC013 Model-card evaluation table image; OCRBench v2; Chinese
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC013.

14. Total OCRBench points | Mode not specified; MC037 Model-card evaluation table image; OCRBench (source-reported original benchmark)
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC037.

OCRBench: Total points

Fixed Qwen2.5-VL model-card comparison; OCRBench;

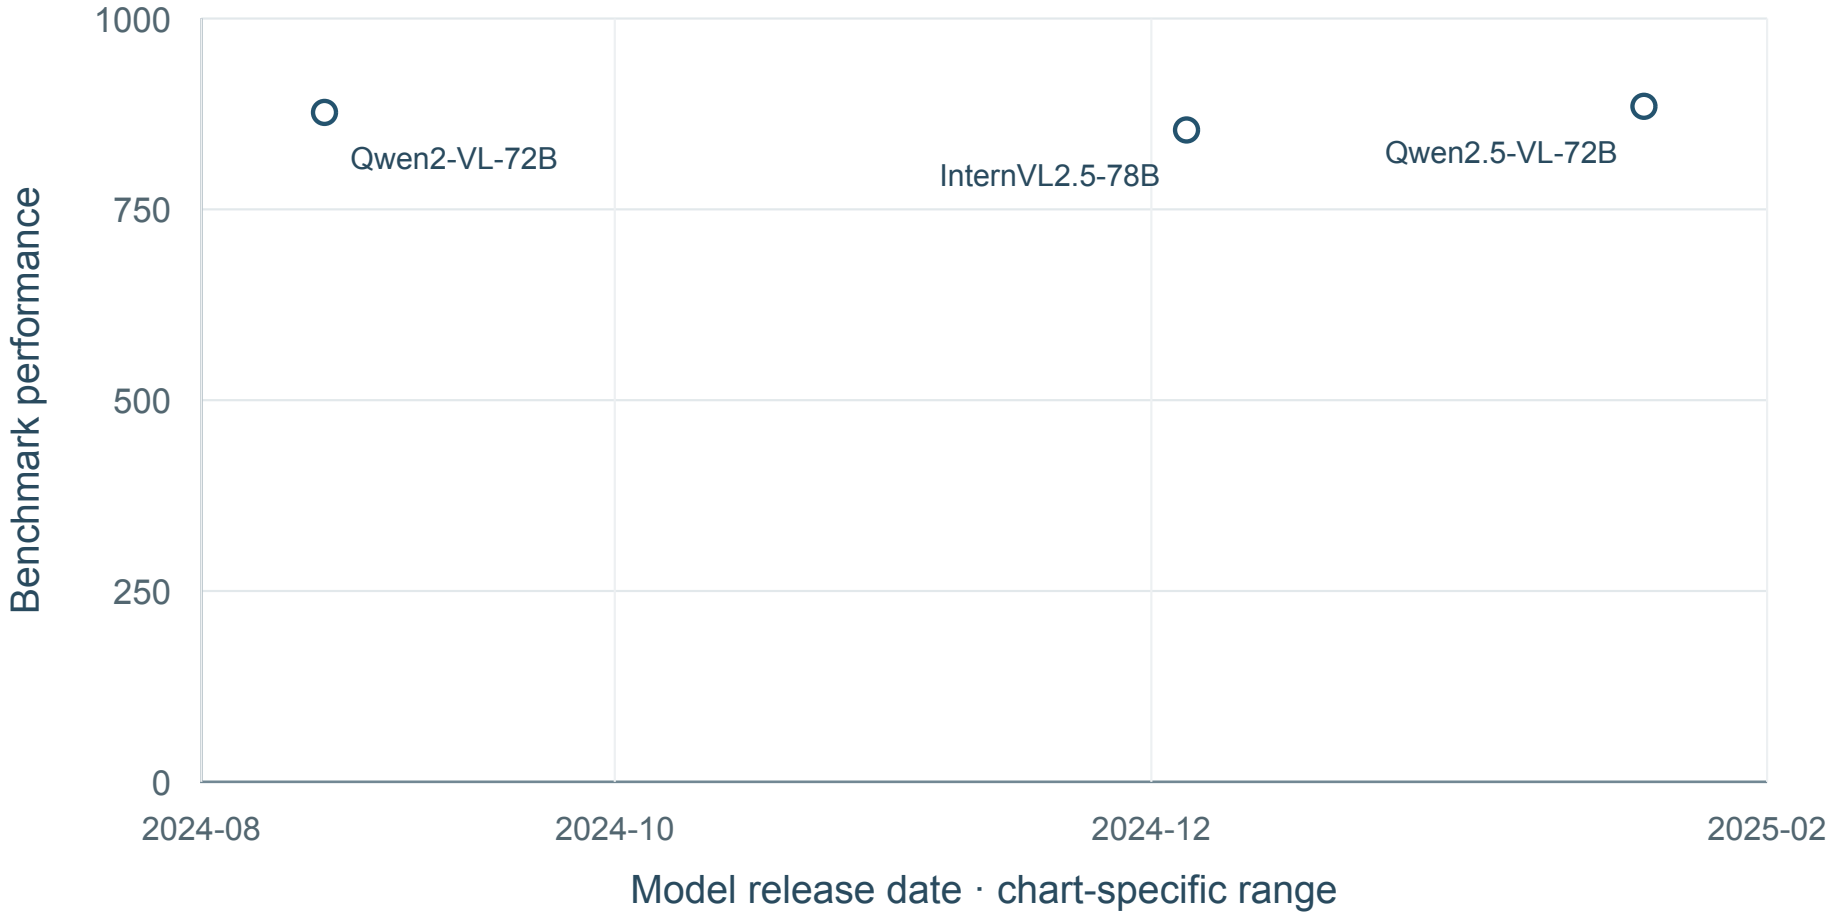

3 shown · 2 undated · 0 definition-held · sources: S012


No mean curve: Fewer than five dated model configurations.

Result-source references: S012. Exact point locators and raw values: data/F004_OCRBench_values.csv.

Benchmark reference (APA): Liu, Y., Li, Z., Huang, M., Yang, B., Yu, W., Li, C., Yin, X.-C., Liu, C.-L., Jin, L., & Bai, X. (2024). OCRBench: on the hidden mystery of OCR in large multimodal models. Science China Information Sciences, 67(12). https://doi.org/10.1007/s11432-024-4235-6

OCRBench v2: Overall score

Fixed Qwen2.5-VL model-card comparison; OCRBench-V2(en/zh); en

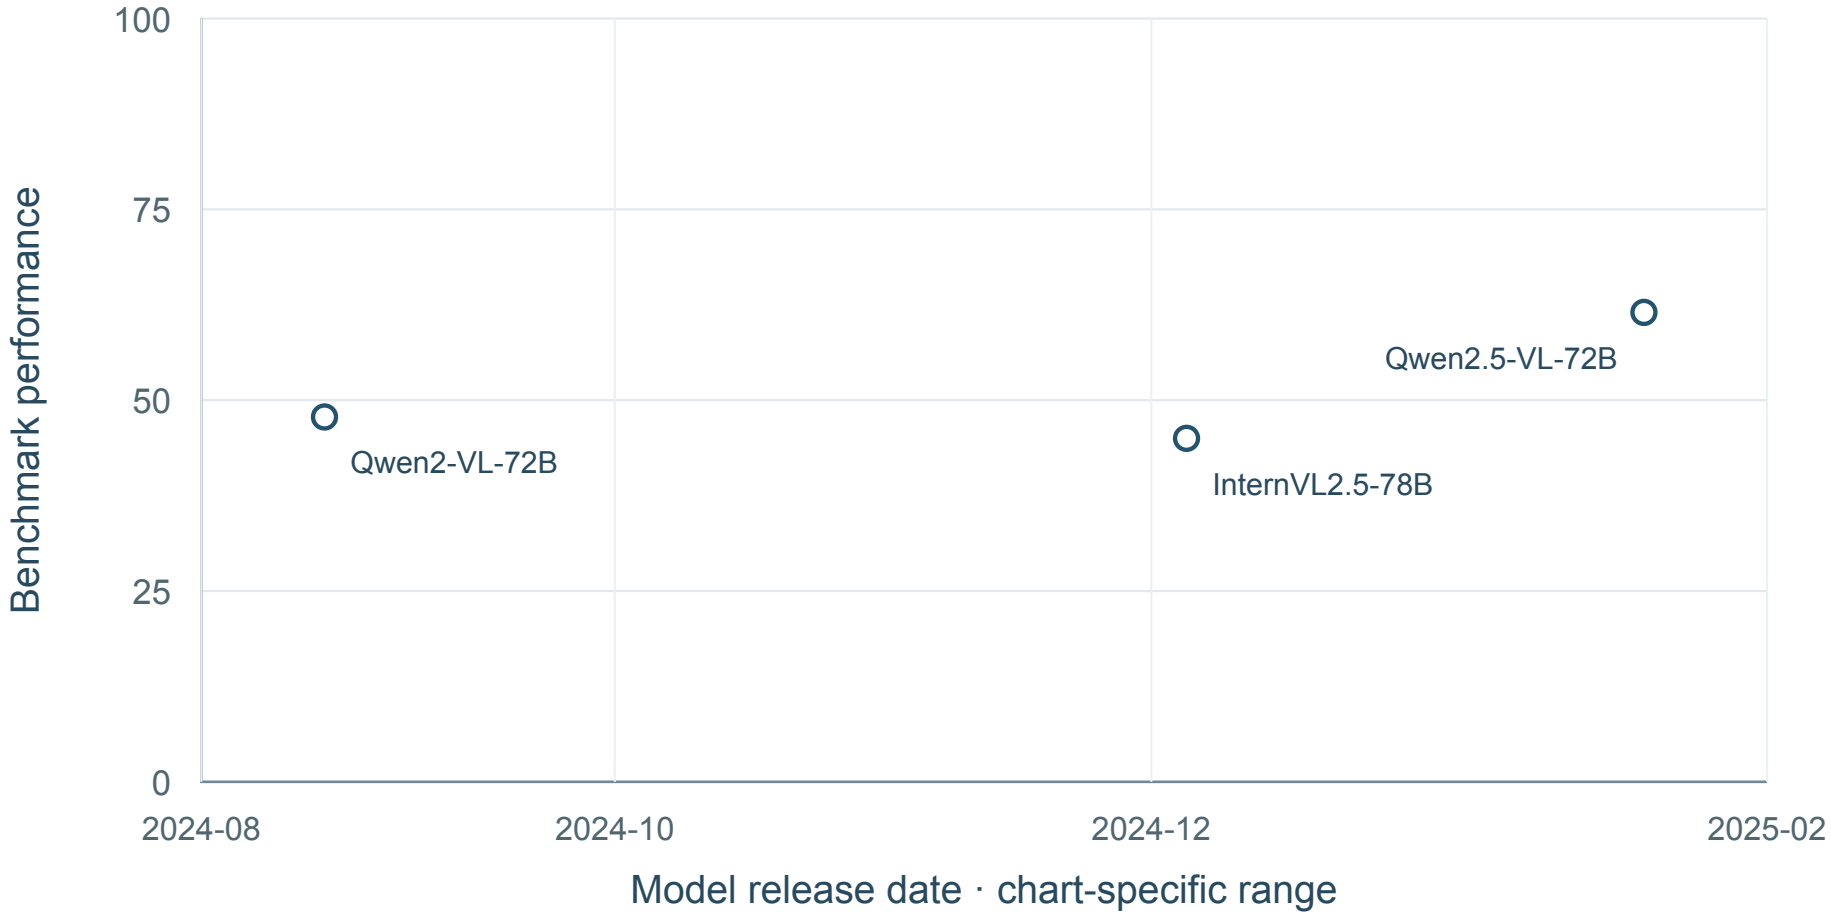

3 shown · 3 undated · 0 definition-held · sources: S012


No mean curve: Fewer than five dated model configurations.

Result-source references: S012. Exact point locators and raw values: data/F004_OCRBench_values.csv.

Benchmark reference (APA): Fu, L., Kuang, Z., Song, J., Huang, M., Yang, B., Li, Y., Zhu, L., Luo, Q., Wang, X., Lu, H., Li, Z., Tang, G., Shan, B., Lin, C., Liu, Q., Wu, B., Feng, H., Liu, H., Huang, C., … Bai, X. (2024). OCRBench v2: An improved benchmark for evaluating large multimodal models on visual text localization and reasoning. arXiv. https://arxiv.org/abs/2501.00321

OCRBench v2: Overall score

Fixed Qwen2.5-VL model-card comparison; OCRBench-V2(en/zh); zh

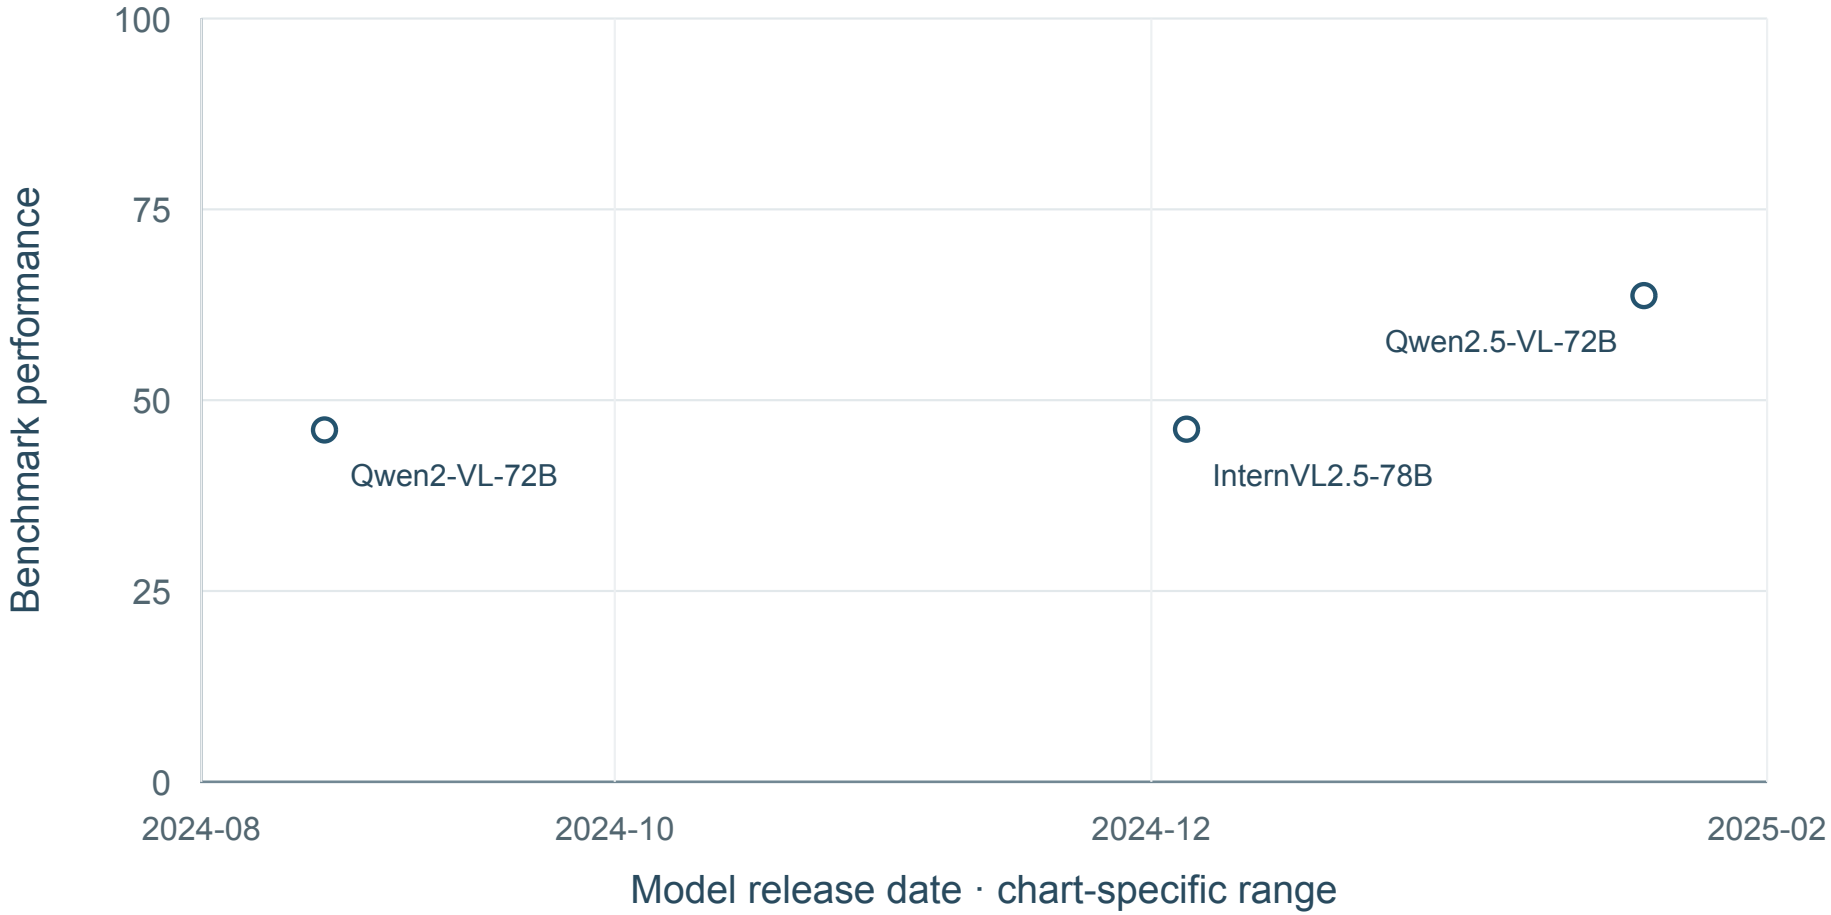

3 shown · 3 undated · 0 definition-held · sources: S012


No mean curve: Fewer than five dated model configurations.

Result-source references: S012. Exact point locators and raw values: data/F004_OCRBench_values.csv.

Benchmark reference (APA): Fu, L., Kuang, Z., Song, J., Huang, M., Yang, B., Li, Y., Zhu, L., Luo, Q., Wang, X., Lu, H., Li, Z., Tang, G., Shan, B., Lin, C., Liu, Q., Wu, B., Feng, H., Liu, H., Huang, C., … Bai, X. (2024). OCRBench v2: An improved benchmark for evaluating large multimodal models on visual text localization and reasoning. arXiv. https://arxiv.org/abs/2501.00321

OCRBench: Reported OCRBench score (card 0–100 scale)

Mode not specified; MC014 H2; OCRBench (source-reported original benchmark)

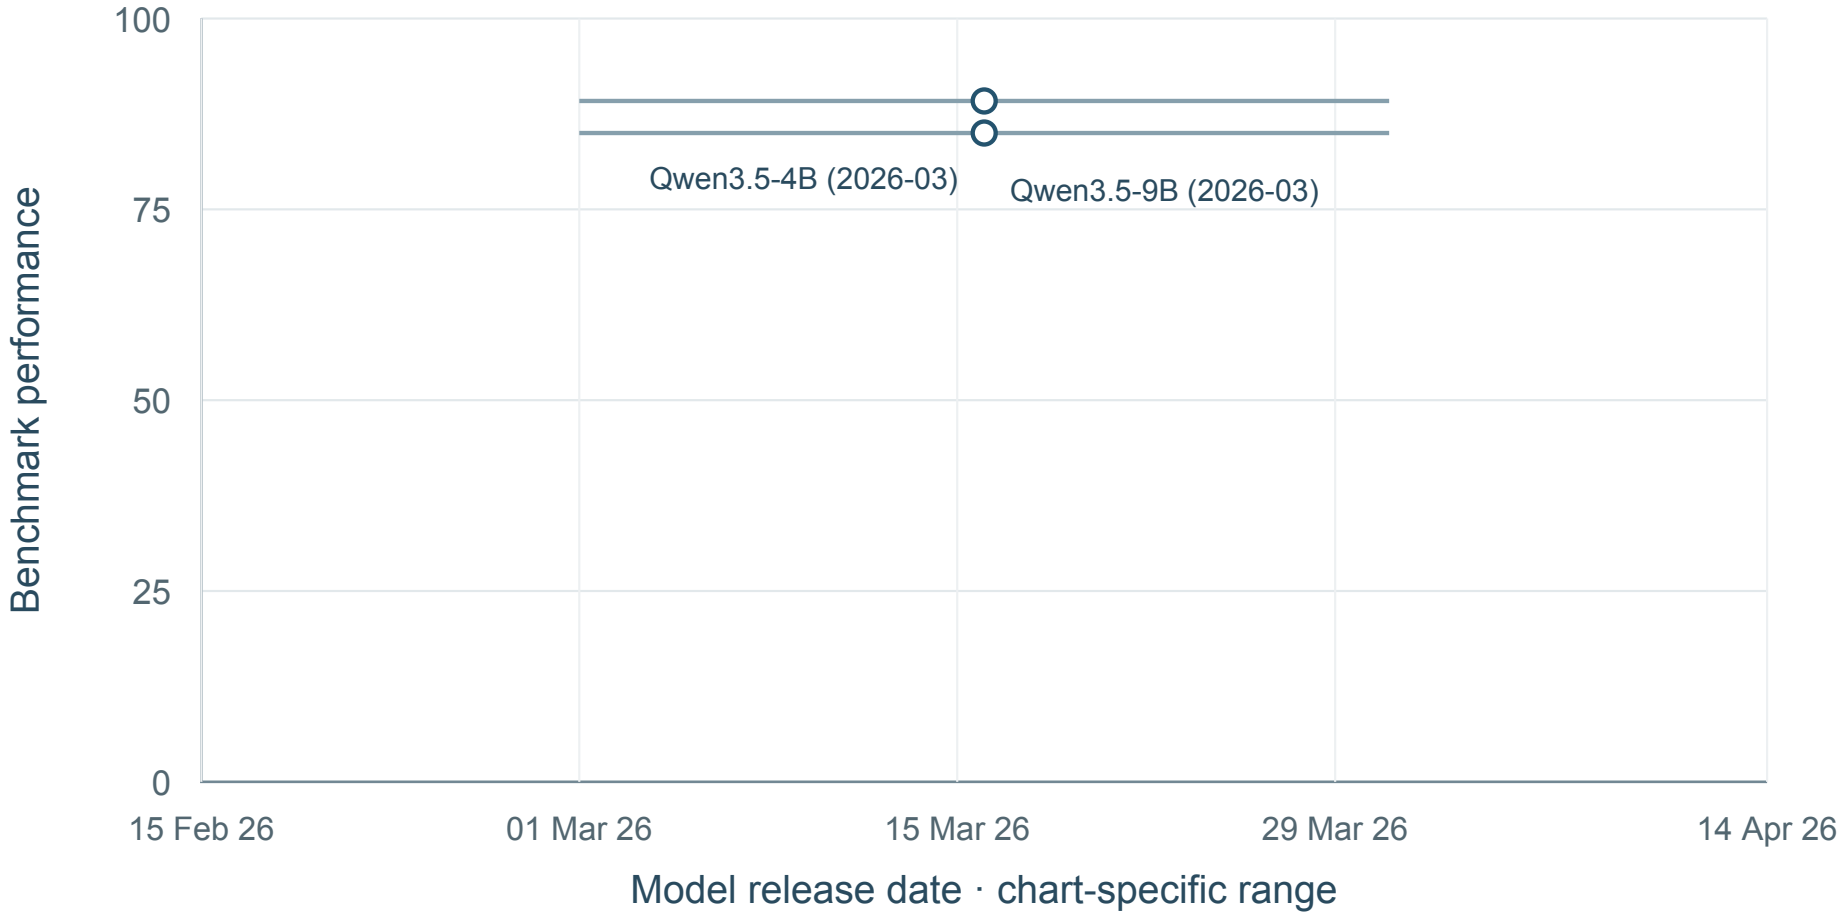

2 shown · 2 undated · 0 definition-held · sources: MC014


No mean curve: Fewer than five dated model configurations.

Result-source references: MC014. Exact point locators and raw values: data/F004_OCRBench_values.csv.

Benchmark reference (APA): Liu, Y., Li, Z., Huang, M., Yang, B., Yu, W., Li, C., Yin, X.-C., Liu, C.-L., Jin, L., & Bai, X. (2024). OCRBench: on the hidden mystery of OCR in large multimodal models. Science China Information Sciences, 67(12). https://doi.org/10.1007/s11432-024-4235-6

OCRBench: Reported OCRBench score (card 0–100 scale)

Mode not specified; effort xhigh; MC033 H1; OCRBench (source-reported original benchmark)

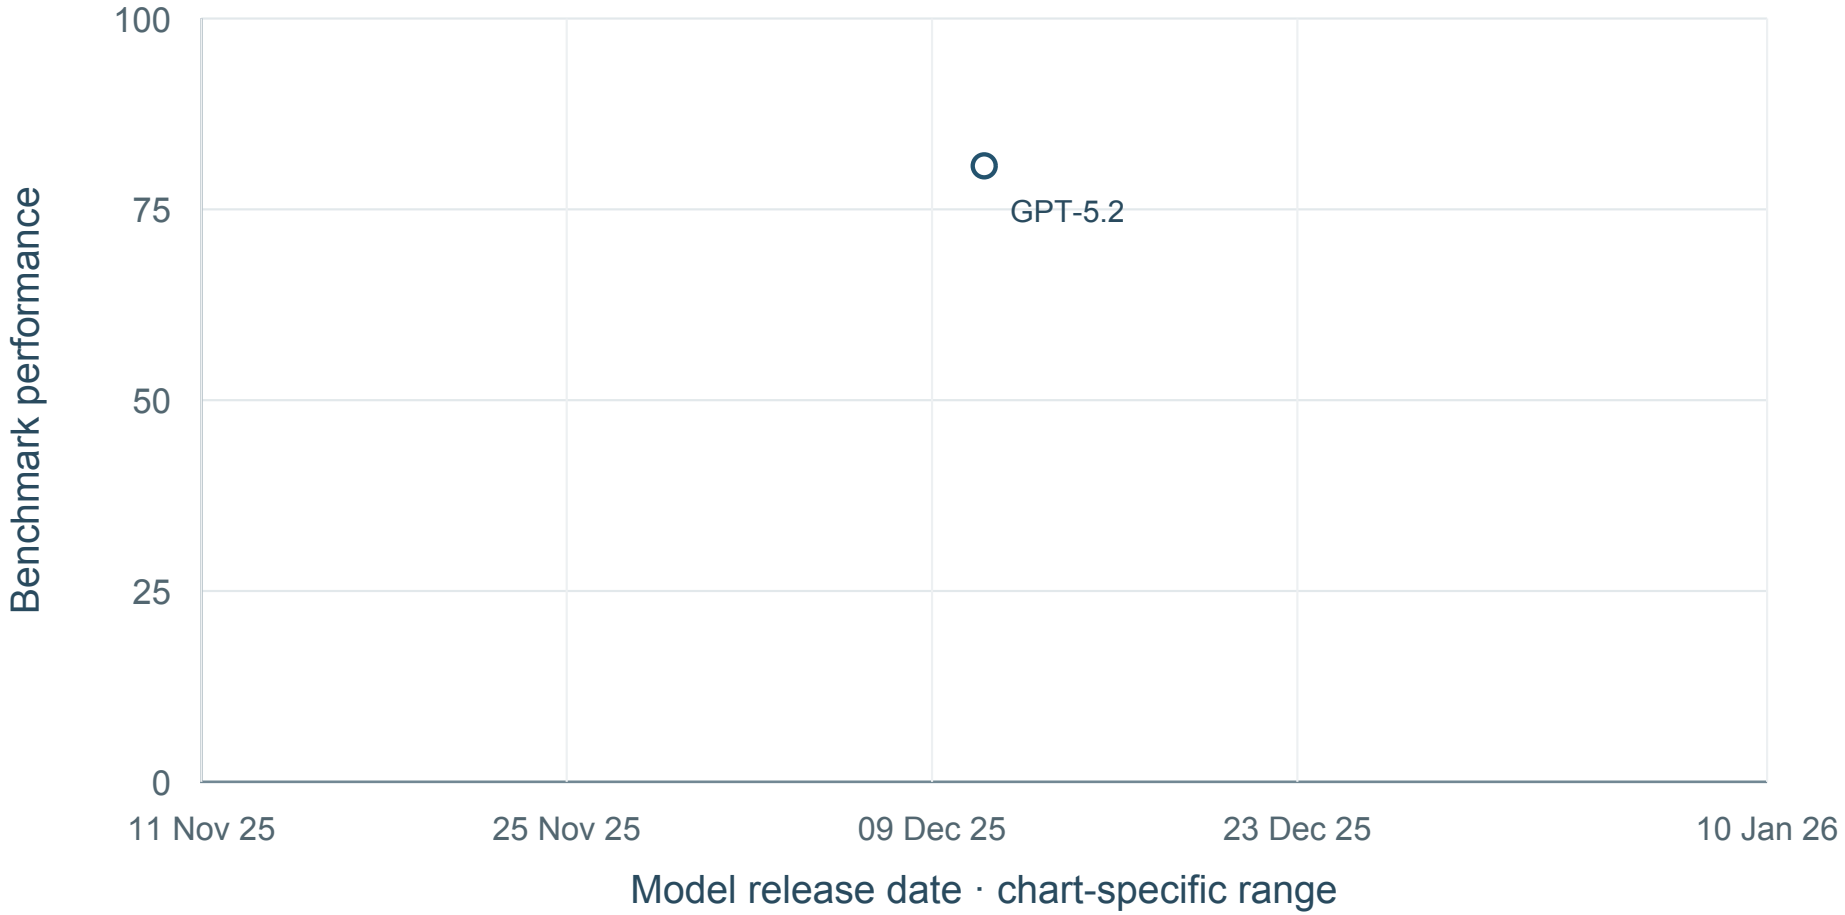

1 shown · 0 undated · 0 definition-held · sources: MC033


No mean curve: Fewer than five dated model configurations.

Result-source references: MC033. Exact point locators and raw values: data/F004_OCRBench_values.csv.

Benchmark reference (APA): Liu, Y., Li, Z., Huang, M., Yang, B., Yu, W., Li, C., Yin, X.-C., Liu, C.-L., Jin, L., & Bai, X. (2024). OCRBench: on the hidden mystery of OCR in large multimodal models. Science China Information Sciences, 67(12). https://doi.org/10.1007/s11432-024-4235-6

OCRBench: Reported OCRBench score (card 0–100 scale)

Thinking; effort high; MC033 H1; OCRBench (source-reported original benchmark)

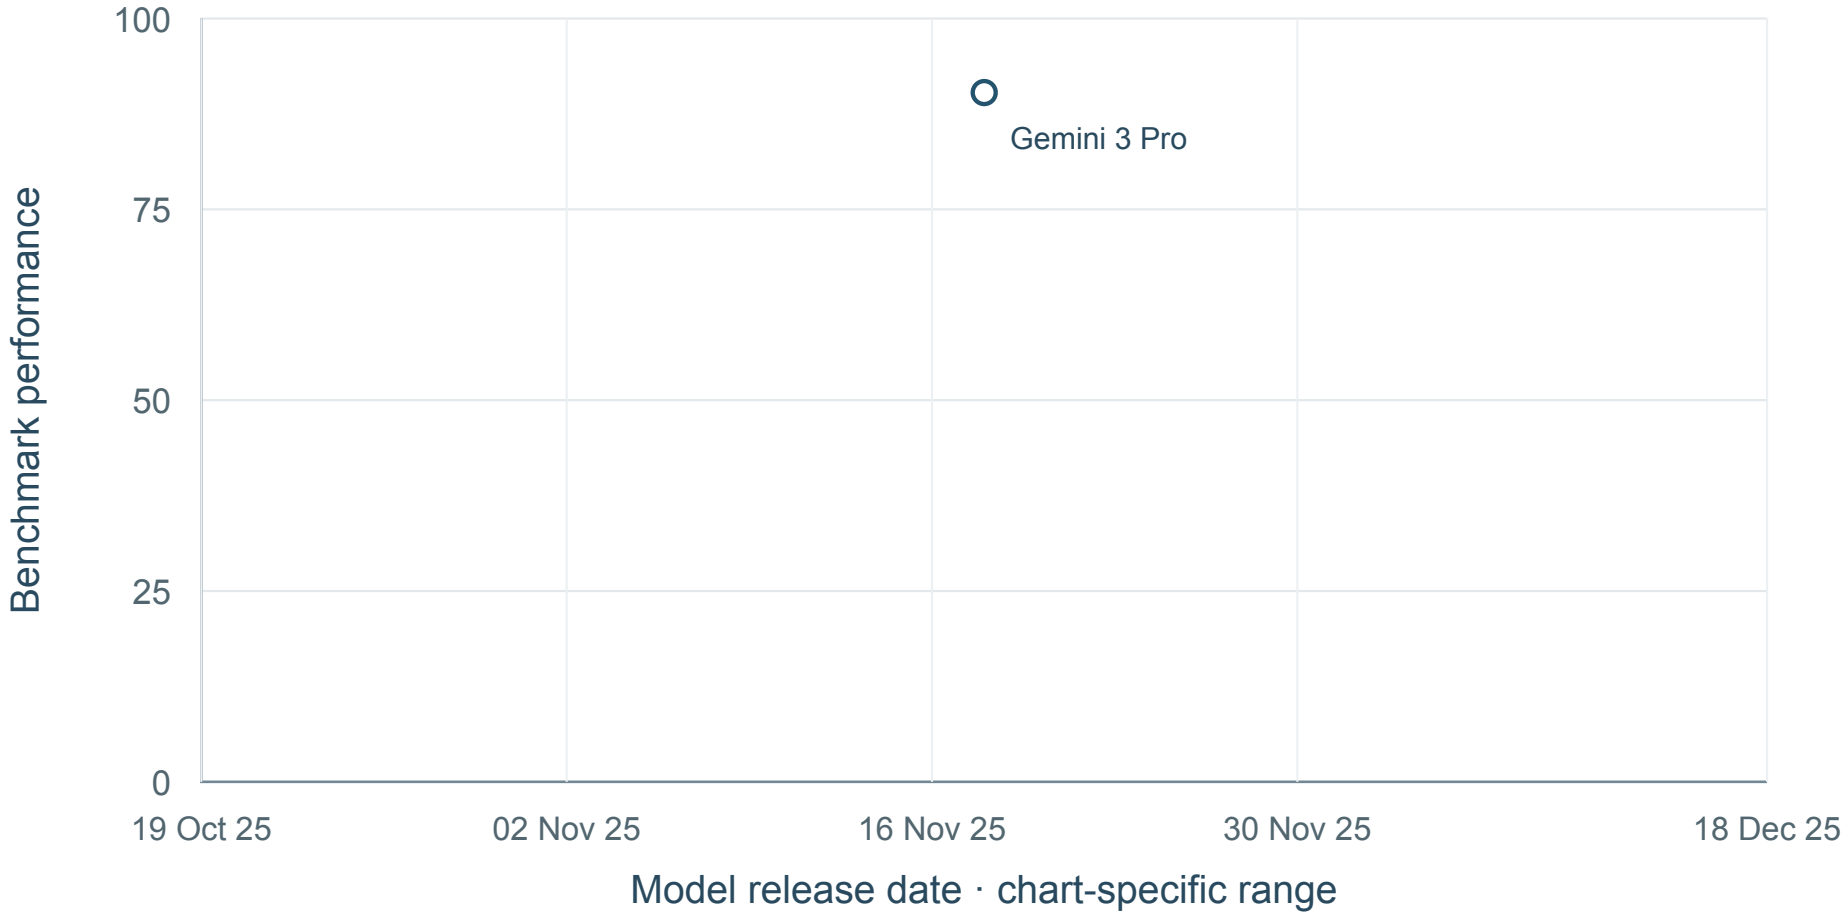

1 shown · 0 undated · 0 definition-held · sources: MC033


No mean curve: Fewer than five dated model configurations.

Result-source references: MC033. Exact point locators and raw values: data/F004_OCRBench_values.csv.

Benchmark reference (APA): Liu, Y., Li, Z., Huang, M., Yang, B., Yu, W., Li, C., Yin, X.-C., Liu, C.-L., Jin, L., & Bai, X. (2024). OCRBench: on the hidden mystery of OCR in large multimodal models. Science China Information Sciences, 67(12). https://doi.org/10.1007/s11432-024-4235-6

OCRBench: Reported OCRBench score (card 0–100 scale)

Mode not specified; MC083 H2; OCRBench (source-reported original benchmark)

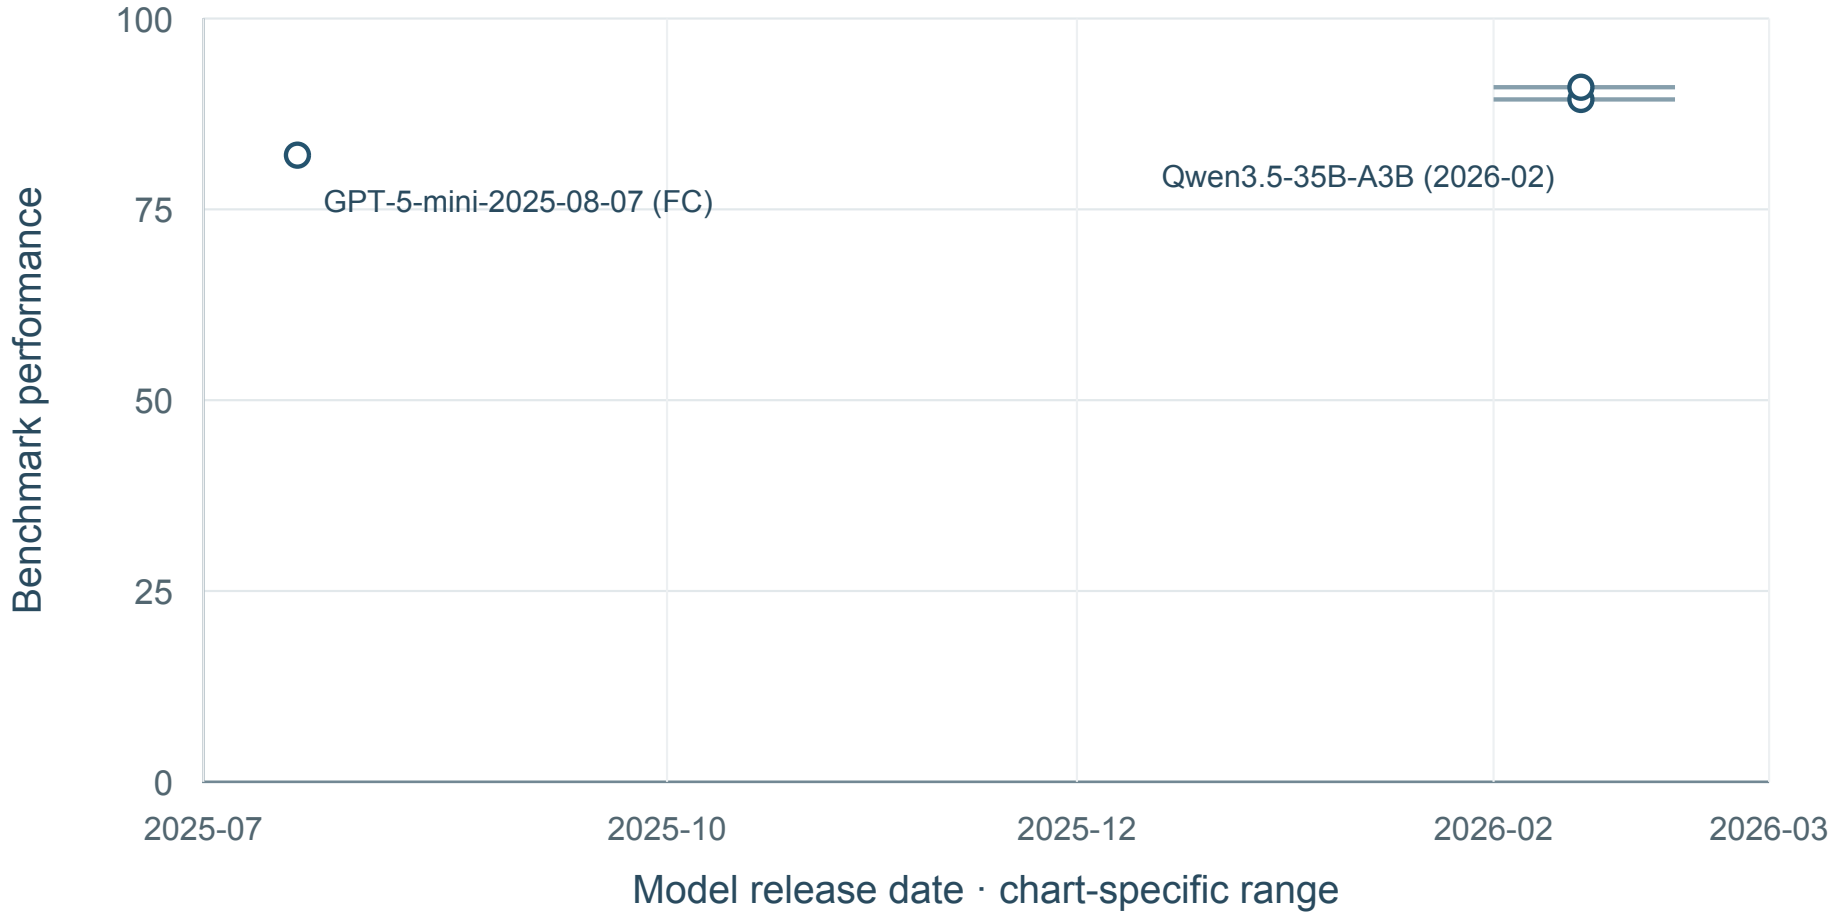

3 shown · 2 undated · 0 definition-held · sources: MC083


No mean curve: Fewer than five dated model configurations.

Result-source references: MC083. Exact point locators and raw values: data/F004_OCRBench_values.csv.

Benchmark reference (APA): Liu, Y., Li, Z., Huang, M., Yang, B., Yu, W., Li, C., Yin, X.-C., Liu, C.-L., Jin, L., & Bai, X. (2024). OCRBench: on the hidden mystery of OCR in large multimodal models. Science China Information Sciences, 67(12). https://doi.org/10.1007/s11432-024-4235-6

OCRBench: Reported OCRBench score (card 0–100 scale)

Mode not specified; MC084 H2; OCRBench (source-reported original benchmark)

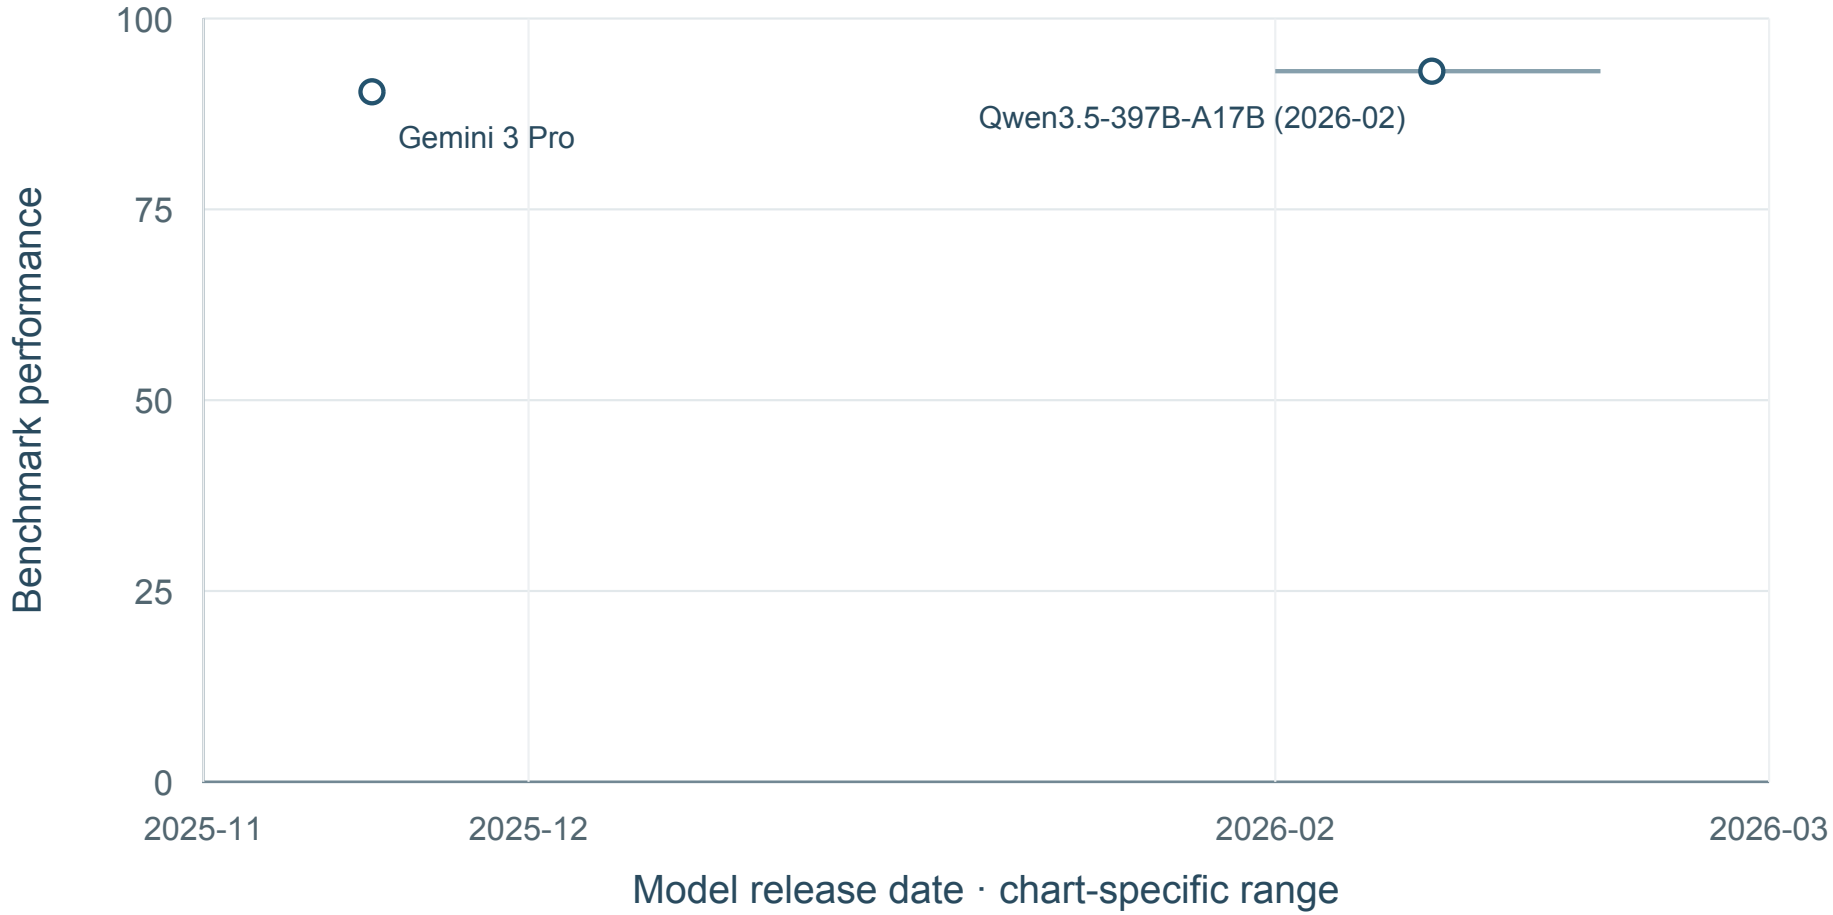

2 shown · 2 undated · 0 definition-held · sources: MC084


No mean curve: Fewer than five dated model configurations.

Result-source references: MC084. Exact point locators and raw values: data/F004_OCRBench_values.csv.

Benchmark reference (APA): Liu, Y., Li, Z., Huang, M., Yang, B., Yu, W., Li, C., Yin, X.-C., Liu, C.-L., Jin, L., & Bai, X. (2024). OCRBench: on the hidden mystery of OCR in large multimodal models. Science China Information Sciences, 67(12). https://doi.org/10.1007/s11432-024-4235-6

OCRBench: Reported OCRBench score (card 0–100 scale)

Mode not specified; MC098 H2; OCRBench (source-reported original benchmark)

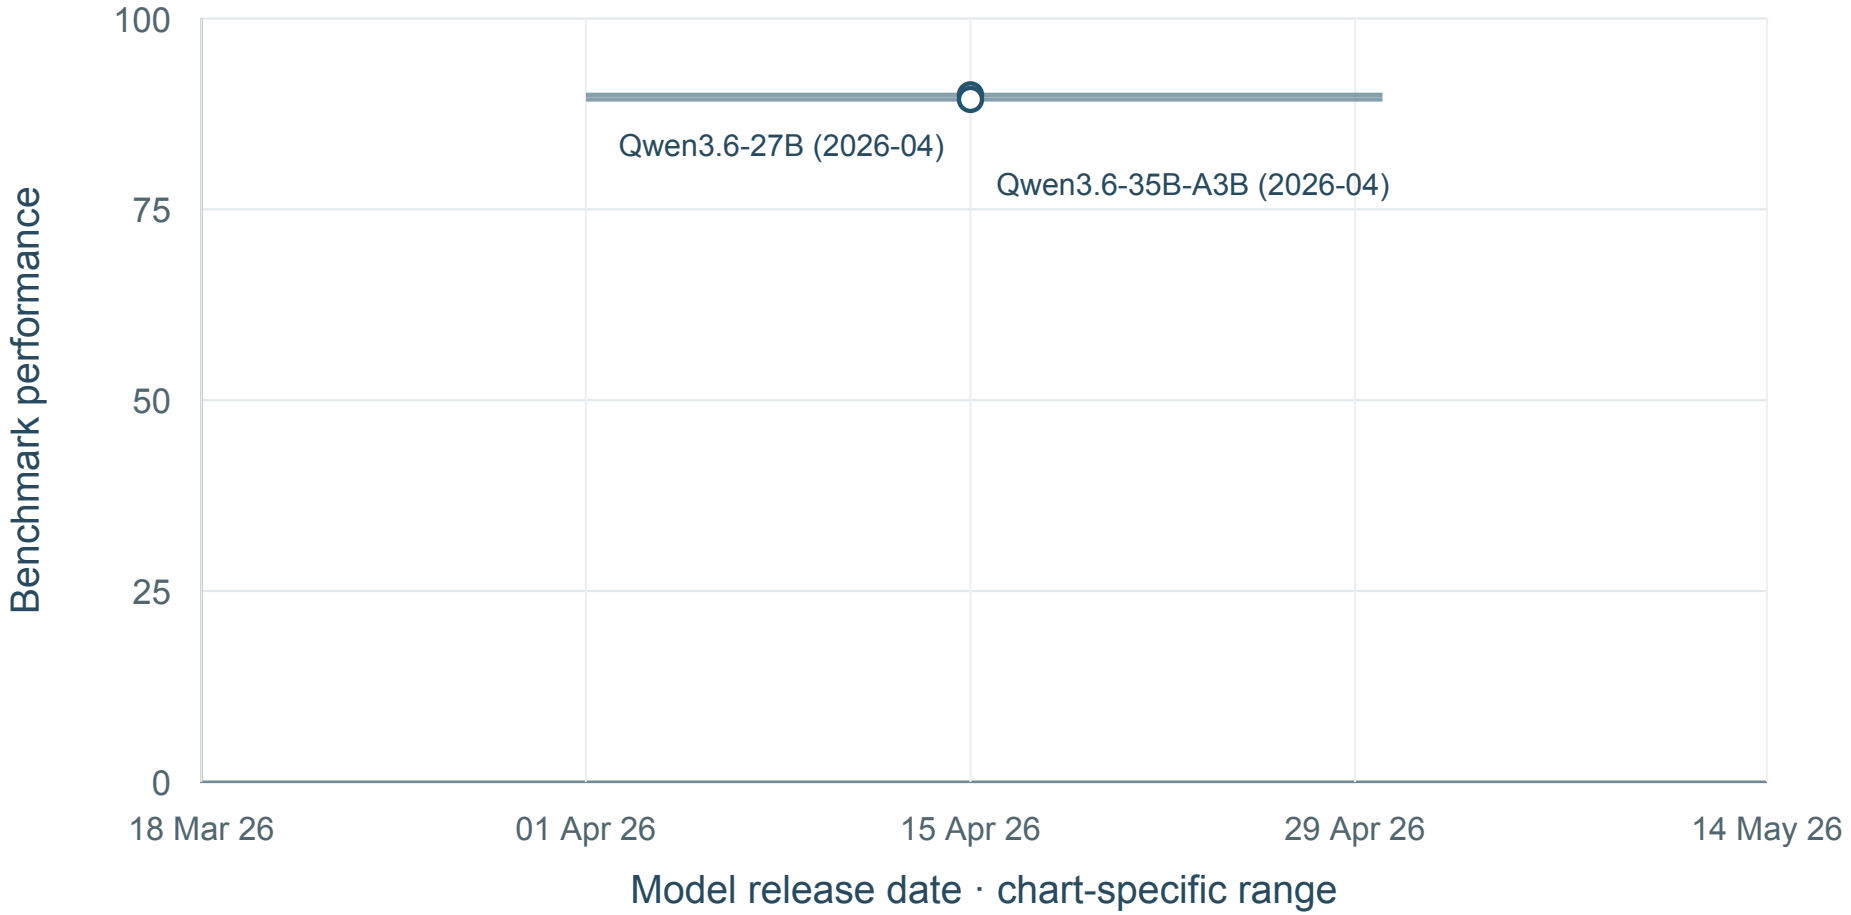

2 shown · 0 undated · 0 definition-held · sources: MC098

No mean curve: Fewer than five dated model configurations.

Result-source references: MC098. Exact point locators and raw values: data/F004_OCRBench_values.csv.

Benchmark reference (APA): Liu, Y., Li, Z., Huang, M., Yang, B., Yu, W., Li, C., Yin, X.-C., Liu, C.-L., Jin, L., & Bai, X. (2024). OCRBench: on the hidden mystery of OCR in large multimodal models. Science China Information Sciences, 67(12). https://doi.org/10.1007/s11432-024-4235-6

F005 MDPBench

Multilingual digital and photographed document parsing

46 source values; 0 new; 2 separate conditions; 16 visible time points; 0 definition-held values; 2 visible mean curves.

Benchmark references (APA)

Li, Z., Lin, Z., Liu, Q., Zhang, Z., Zhang, S., Guo, Z., Song, J., Zhang, J., Bai, X., & Liu, Y. (2026). MDPBench: A benchmark for multilingual document parsing in real-world scenarios. arXiv. https://arxiv.org/abs/2603.28130

Workflow and article scope

Challenges: A

Prepare and read source documents; Bind values to the correct unit

Photographic and language robustness are distinct from psychological coding.

Manuscript anchors: Lu and Wang, Challenges A–B; manuscript paragraphs 15–18; Wrong-subgroup example, manuscript paragraph 29

Result-source references: S025. Full references appear in the final bibliography.


Complete condition inventory

01. Overall parsing score | Digital-born; original paper Table 2
23 values; 8 time points; visible mean curve. Sources: S025.

02. Overall parsing score | Photographed; original paper Table 2
23 values; 8 time points; visible mean curve. Sources: S025.

MDPBench: Overall parsing score

Digital-born; original paper Table 2

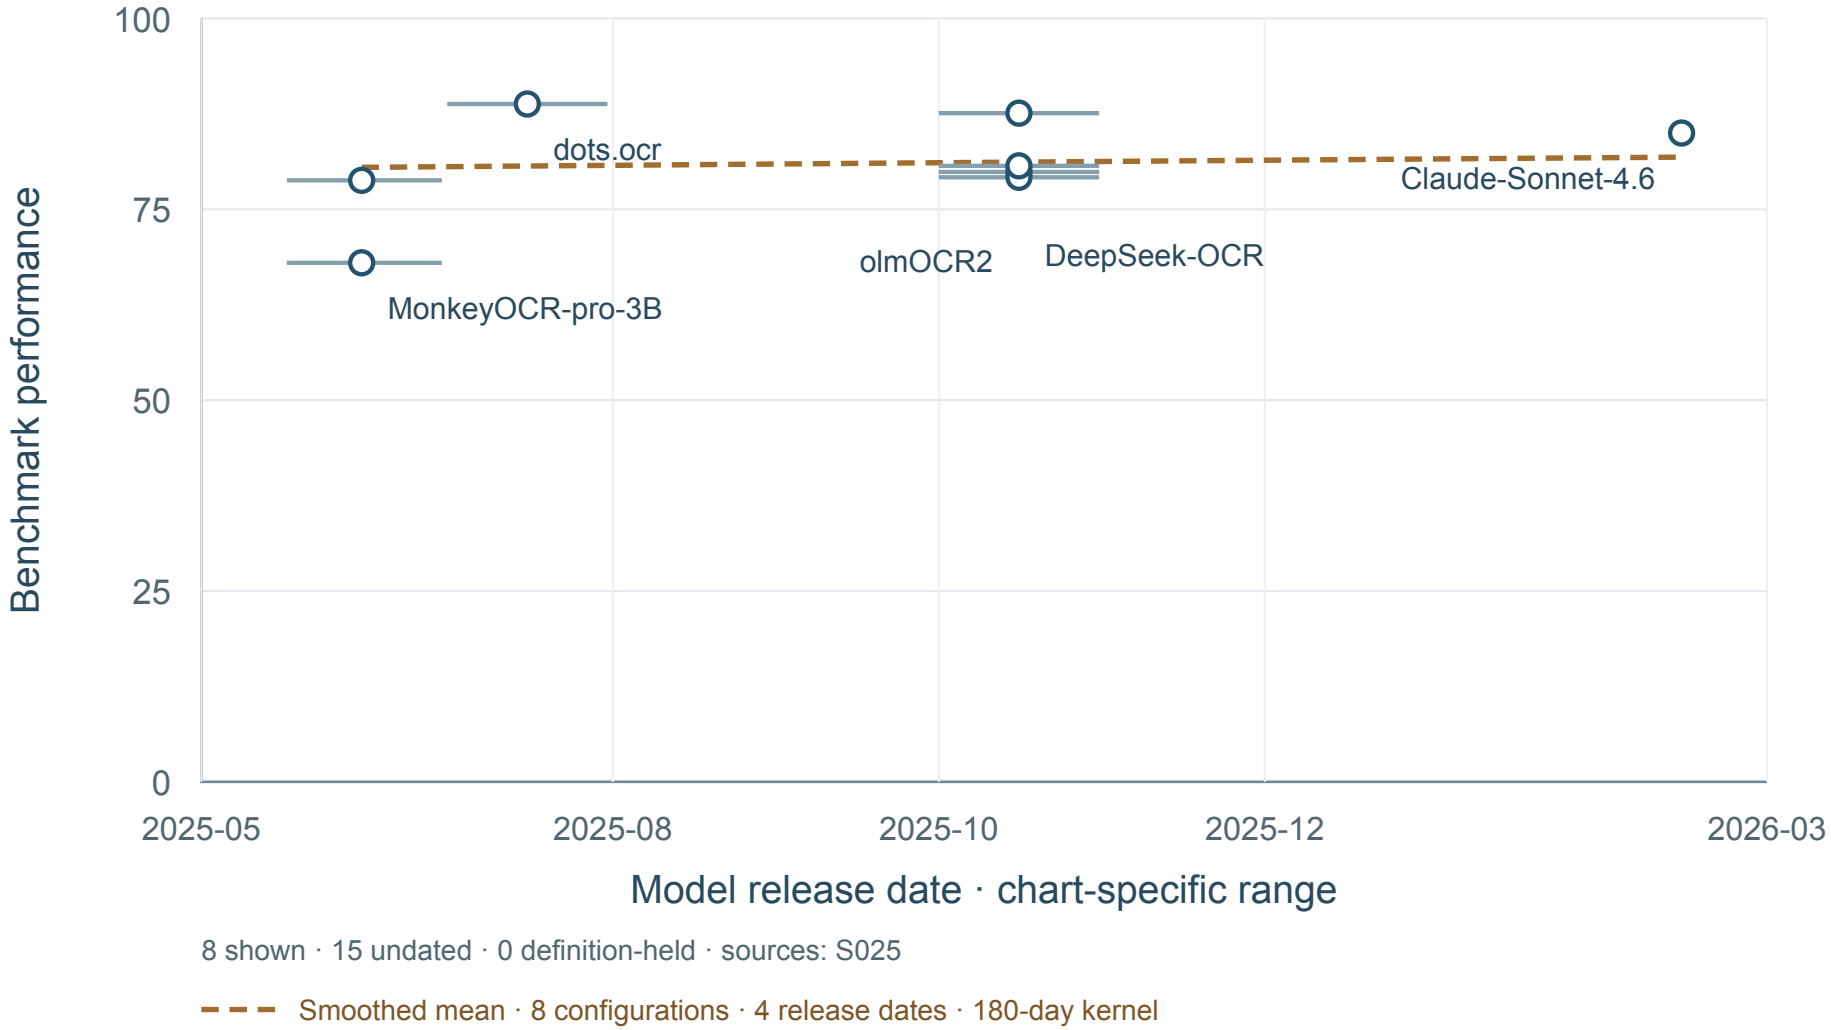

8 shown · 15 undated · 0 definition-held · sources: S025


Smoothed mean · 8 configurations · 4 release dates · 180-day kernel

Result-source references: S025. Exact point locators and raw values: data/F005_MDPBench_values.csv.

Benchmark reference (APA): Li, Z., Lin, Z., Liu, Q., Zhang, Z., Zhang, S., Guo, Z., Song, J., Zhang, J., Bai, X., & Liu, Y. (2026). MDPBench: A benchmark for multilingual document parsing in real-world scenarios. arXiv. https://arxiv.org/abs/2603.28130

MDPBench: Overall parsing score

Photographed; original paper Table 2

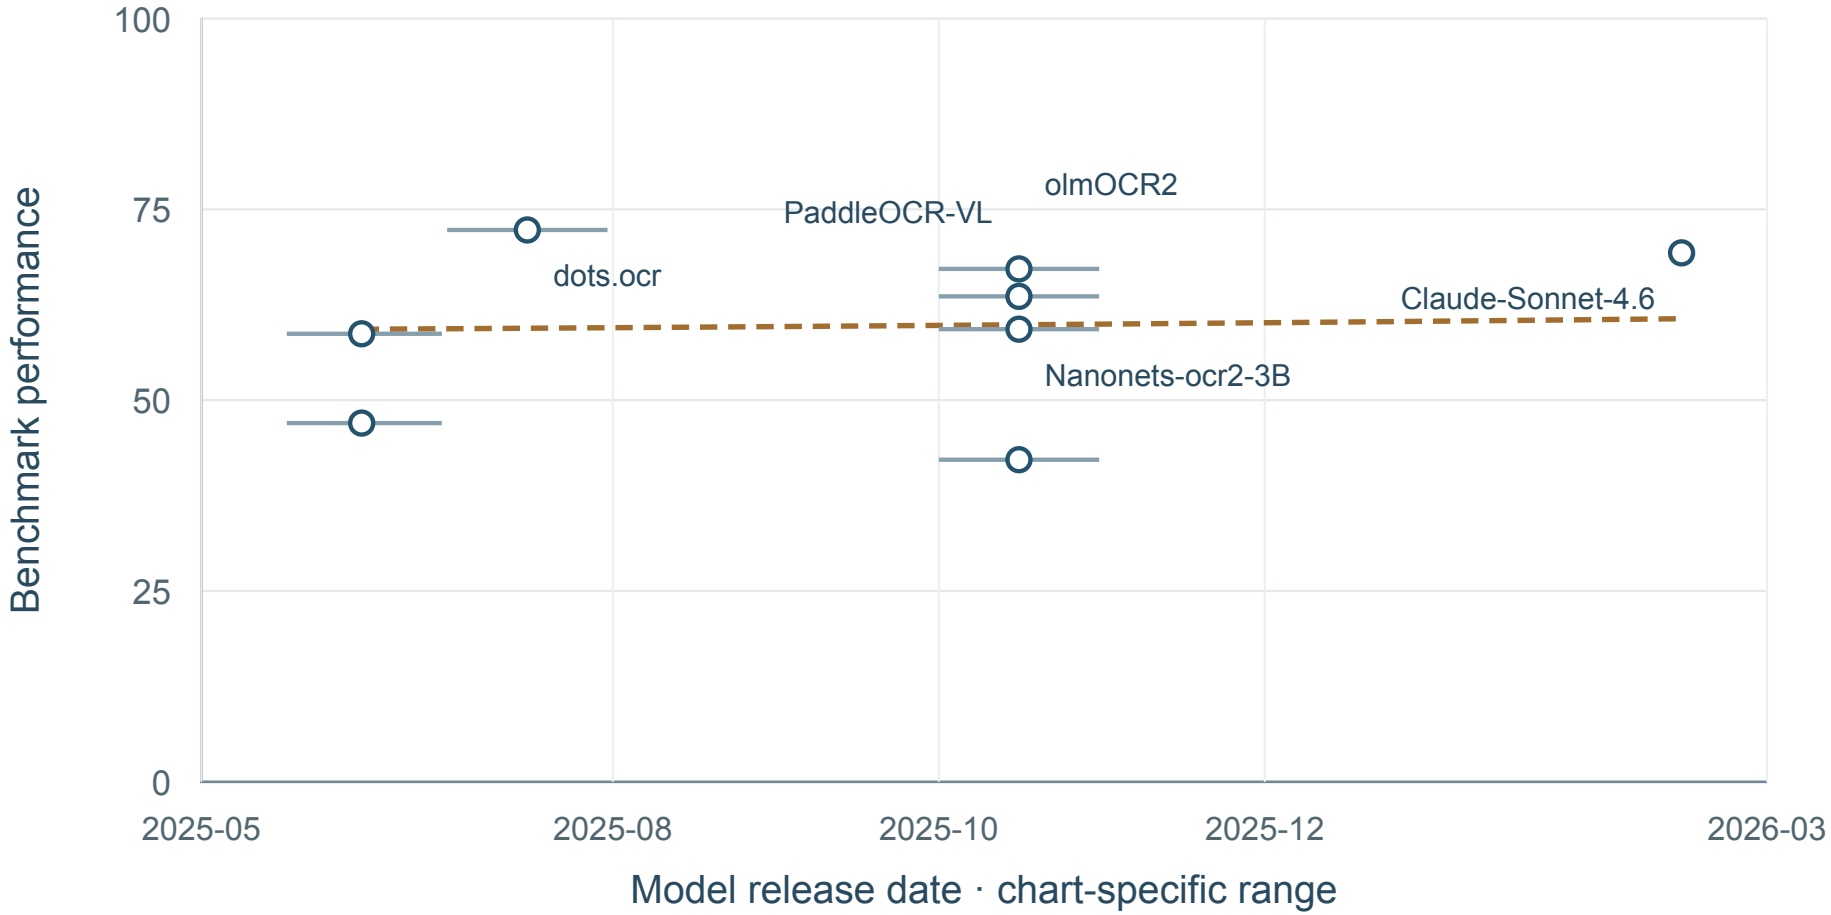

8 shown · 15 undated · 0 definition-held · sources: S025

Smoothed mean · 8 configurations · 4 release dates · 180-day kernel

Result-source references: S025. Exact point locators and raw values: data/F005_MDPBench_values.csv.

Benchmark reference (APA): Li, Z., Lin, Z., Liu, Q., Zhang, Z., Zhang, S., Guo, Z., Song, J., Zhang, J., Bai, X., & Liu, Y. (2026). MDPBench: A benchmark for multilingual document parsing in real-world scenarios. arXiv. https://arxiv.org/abs/2603.28130

F006 PureDocBench

Source-traceable clean and degraded document parsing

174 source values; 0 new; 3 separate conditions; 174 visible time points; 0 definition-held values; 3 visible mean curves.

Benchmark references (APA)

Li, Z., Ma, Z., Chen, J., Zhang, J., Su, Z., Zhang, Y., Yu, Z., Liu, R., Lv, X., Li, B., Gao, J., Zhang, Z., Yuan, C., Li, B., & Hu, W. (2026). How far is document parsing from solved? PureDocBench: A source-traceable benchmark across clean, degraded, and real-world settings. arXiv. https://arxiv.org/abs/2605.07492

Workflow and article scope

Challenges: A

Prepare and read source documents; Bind values to the correct unit

Programmatically constructed documents; distribution differs from published psychology PDFs.

Manuscript anchors: Lu and Wang, Challenges A–B; manuscript paragraphs 15–18; Wrong-subgroup example, manuscript paragraph 29


Result-source references: S026. Full references appear in the final bibliography.

Complete condition inventory

01. Overall parsing score | Clean; same 1475 source pages
58 values; 58 time points; visible mean curve. Sources: S026.

02. Overall parsing score | Digital degradation; same 1475 source pages
58 values; 58 time points; visible mean curve. Sources: S026.

03. Overall parsing score | Real degradation; same 1475 source pages
58 values; 58 time points; visible mean curve. Sources: S026.

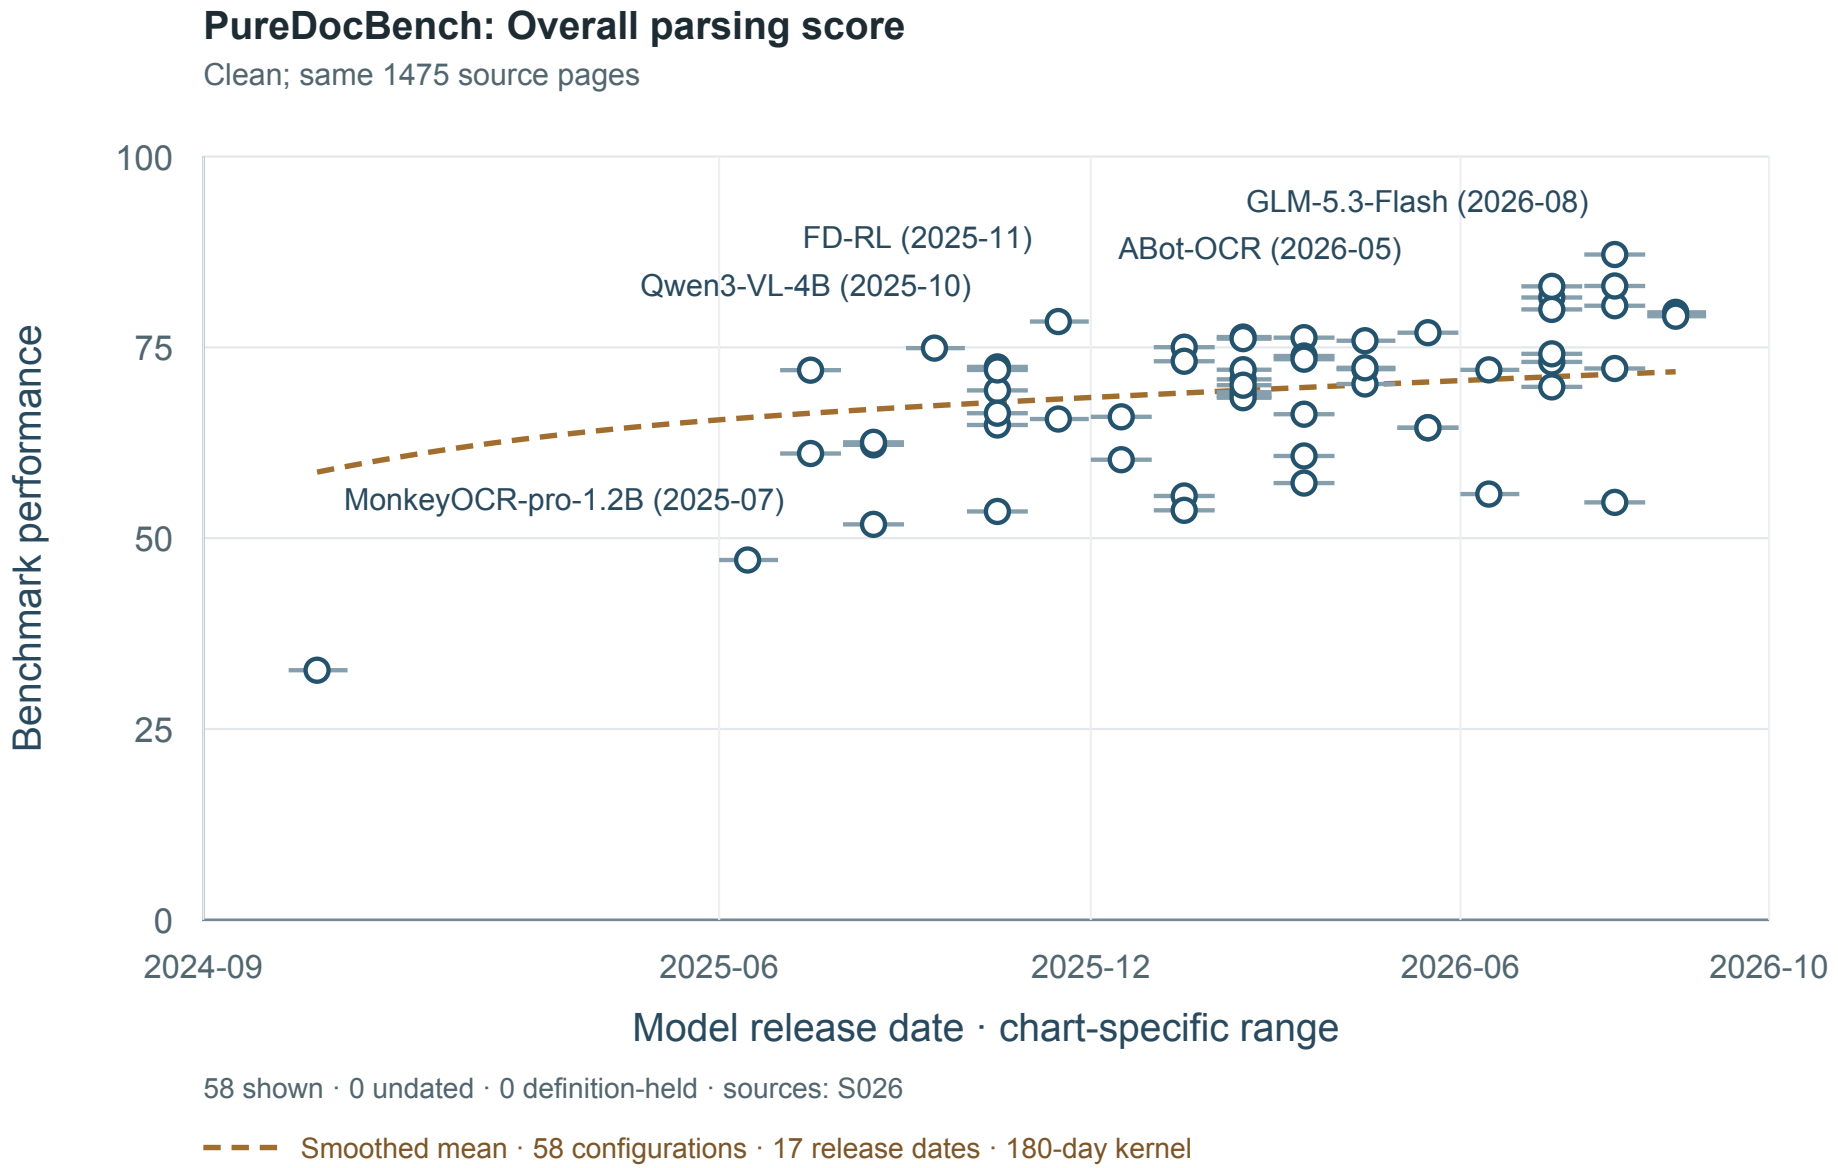


Result-source references: S026. Exact point locators and raw values: data/F006_PureDocBench_values.csv.

Benchmark reference (APA): Li, Z., Ma, Z., Chen, J., Zhang, J., Su, Z., Zhang, Y., Yu, Z., Liu, R., Lv, X., Li, B., Gao, J., Zhang, Z., Yuan, C., Li, B., & Hu, W. (2026). How far is document parsing from solved? PureDocBench: A source-traceable benchmark across clean, degraded, and real-world settings. arXiv. https://arxiv.org/abs/2605.07492

PureDocBench: Overall parsing score

Digital degradation; same 1475 source pages

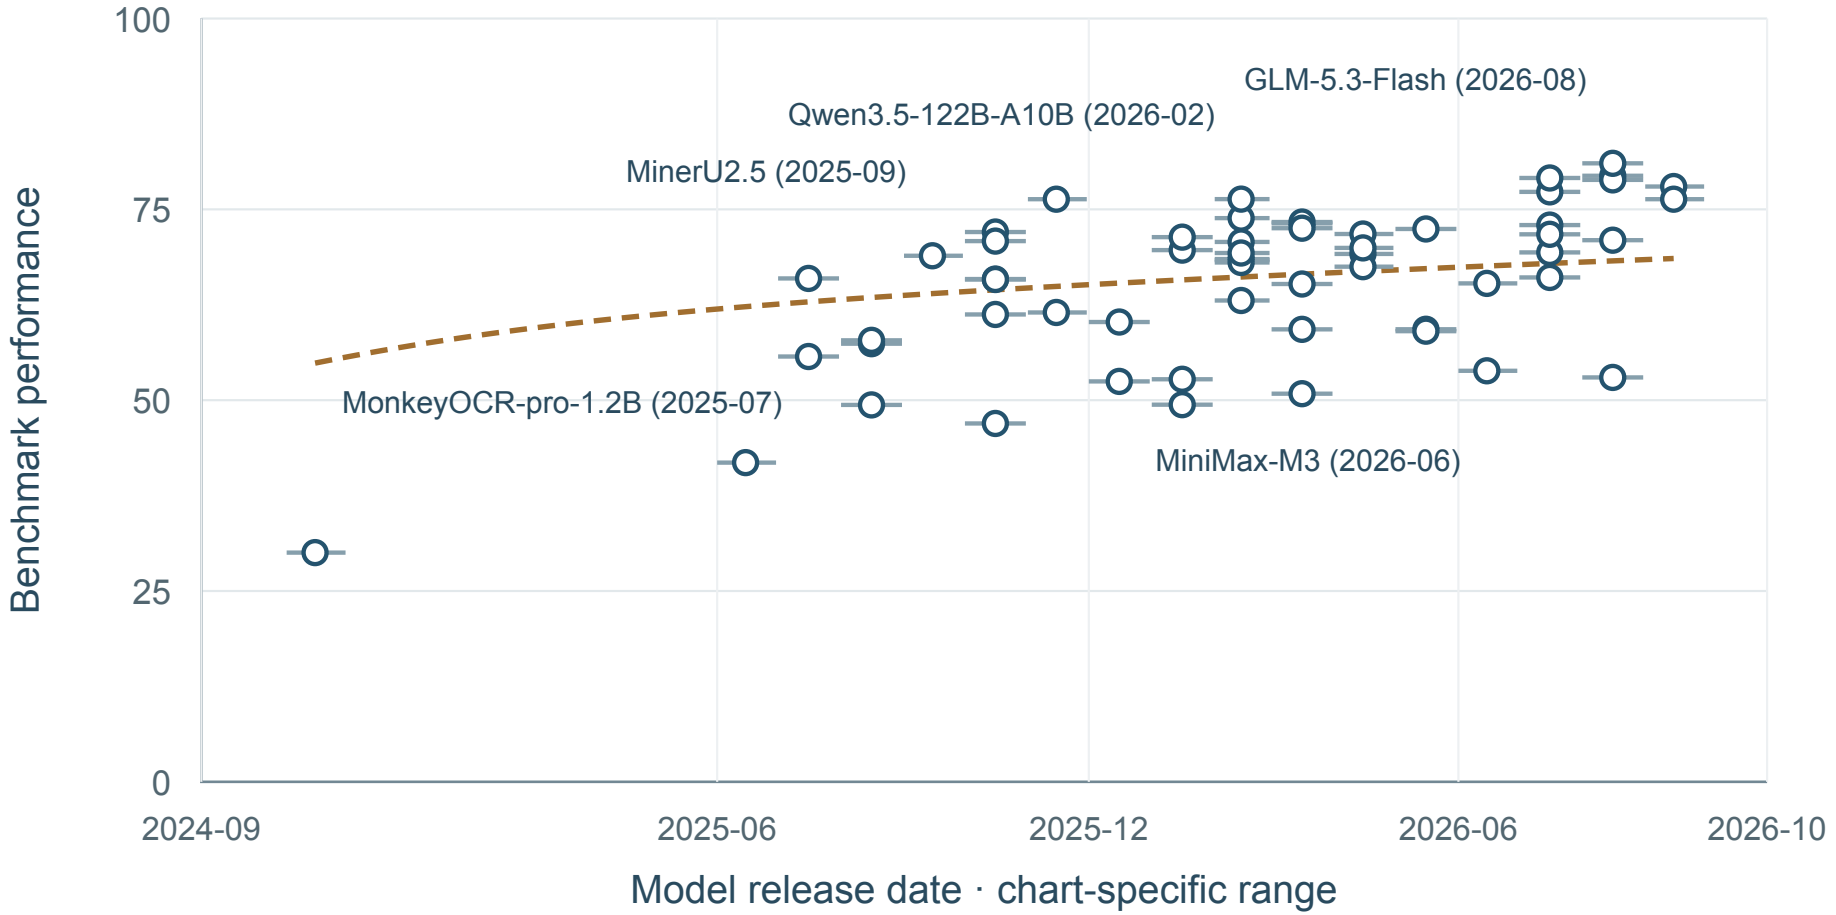

58 shown · 0 undated · 0 definition-held · sources: S026


Smoothed mean · 58 configurations · 17 release dates · 180-day kernel

Result-source references: S026. Exact point locators and raw values: data/F006_PureDocBench_values.csv.

Benchmark reference (APA): Li, Z., Ma, Z., Chen, J., Zhang, J., Su, Z., Zhang, Y., Yu, Z., Liu, R., Lv, X., Li, B., Gao, J., Zhang, Z., Yuan, C., Li, B., & Hu, W. (2026). How far is document parsing from solved? PureDocBench: A source-traceable benchmark across clean, degraded, and real-world settings. arXiv. https://arxiv.org/abs/2605.07492

PureDocBench: Overall parsing score

Real degradation; same 1475 source pages

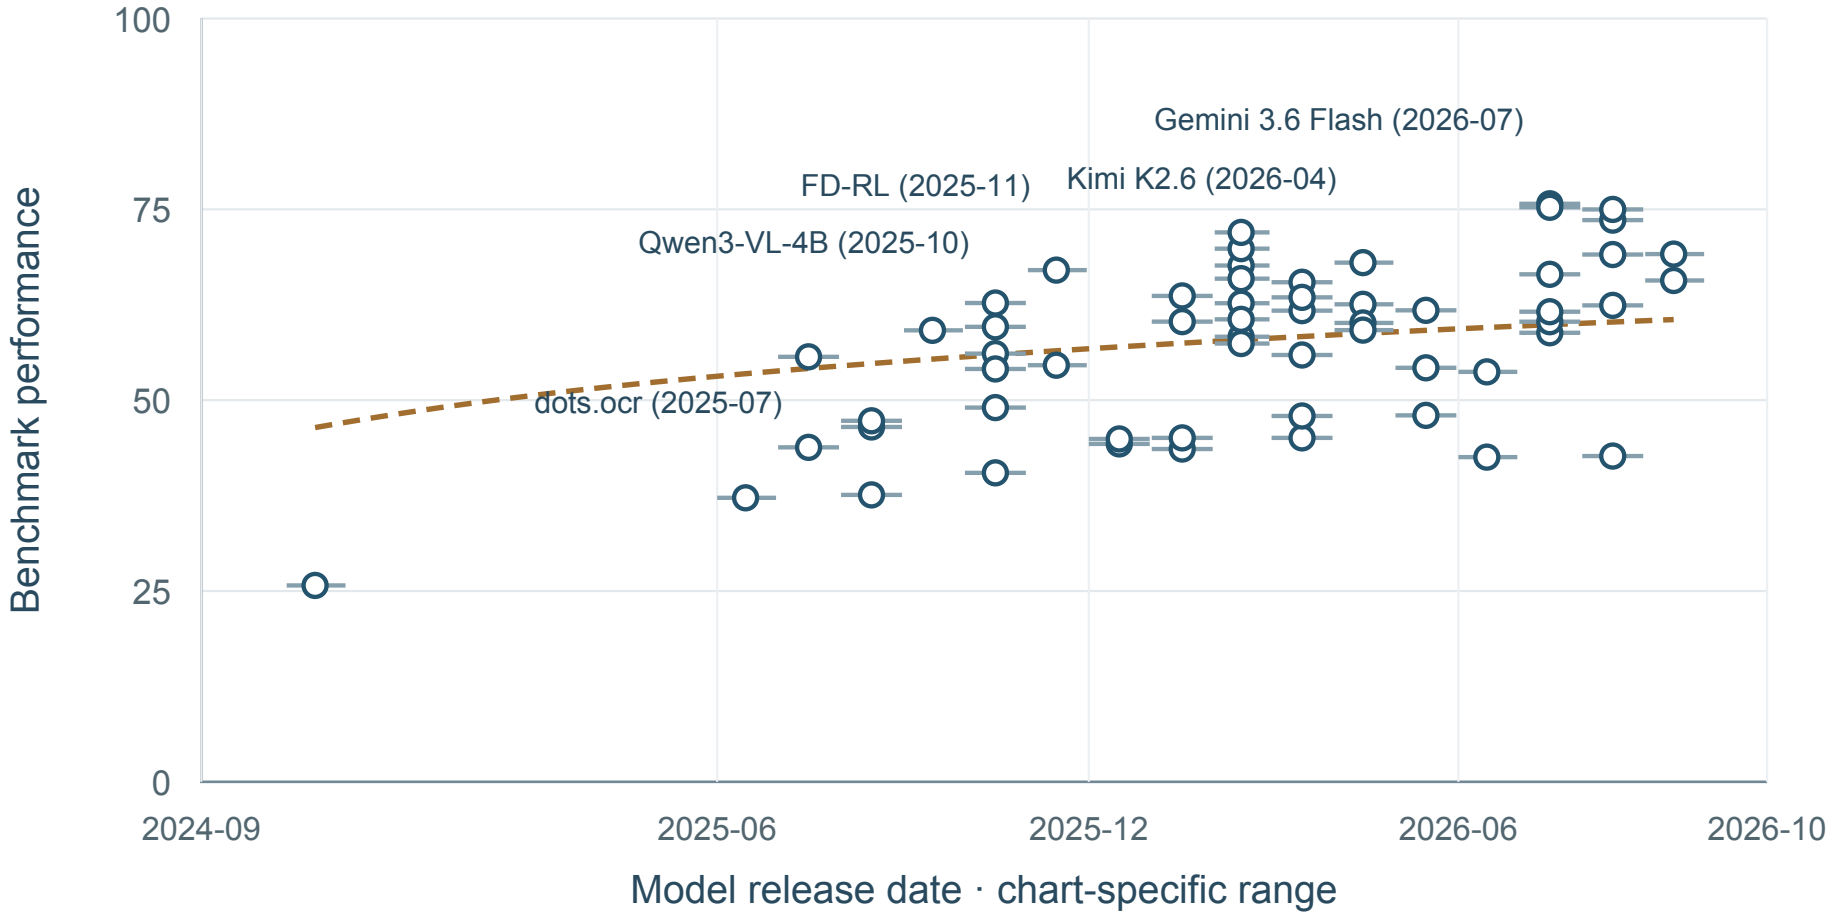

58 shown · 0 undated · 0 definition-held · sources: S026

Smoothed mean · 58 configurations · 17 release dates · 180-day kernel

Result-source references: S026. Exact point locators and raw values: data/F006_PureDocBench_values.csv.

Benchmark reference (APA): Li, Z., Ma, Z., Chen, J., Zhang, J., Su, Z., Zhang, Y., Yu, Z., Liu, R., Lv, X., Li, B., Gao, J., Zhang, Z., Yuan, C., Li, B., & Hu, W. (2026). How far is document parsing from solved? PureDocBench: A source-traceable benchmark across clean, degraded, and real-world settings. arXiv. https://arxiv.org/abs/2605.07492

F007 Dr. DocBench

Difficult expert-domain parsing of long documents

24 source values; 0 new; 2 separate conditions; 6 visible time points; 0 definition-held values; 0 visible mean curves.

Benchmark references (APA)

Yang, M., Yu, X. V., Li, P., Guo, X., Qi, Z., Kim, K., Ye, L., Luo, X., Bi, J., Zhang, H., Riaz, H., Zhang, X., Xiao, Y., Liu, B., Tang, T., Zhao, Y., Lin, Q., Wang, Z., Liu, M., … He, Z. (2026). Dr. DocBench: A comprehensive benchmark for expert-level and difficult document parsing. arXiv. https://arxiv.org/abs/2606.01393

Workflow and article scope

Challenges: A

Prepare and read source documents; Bind values to the correct unit

Failure-based sampling deliberately changes difficulty and coverage.

Manuscript anchors: Lu and Wang, Challenges A–B; manuscript paragraphs 15–18; Wrong-subgroup example, manuscript paragraph 29

Result-source references: S027. Full references appear in the final bibliography.


Complete condition inventory

01. Overall parsing score | Original Table 1
12 values; 3 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S027.

02. Text edit distance | Original Table 1
12 values; 3 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S027.

Dr. DocBench: Overall parsing score

Original Table 1

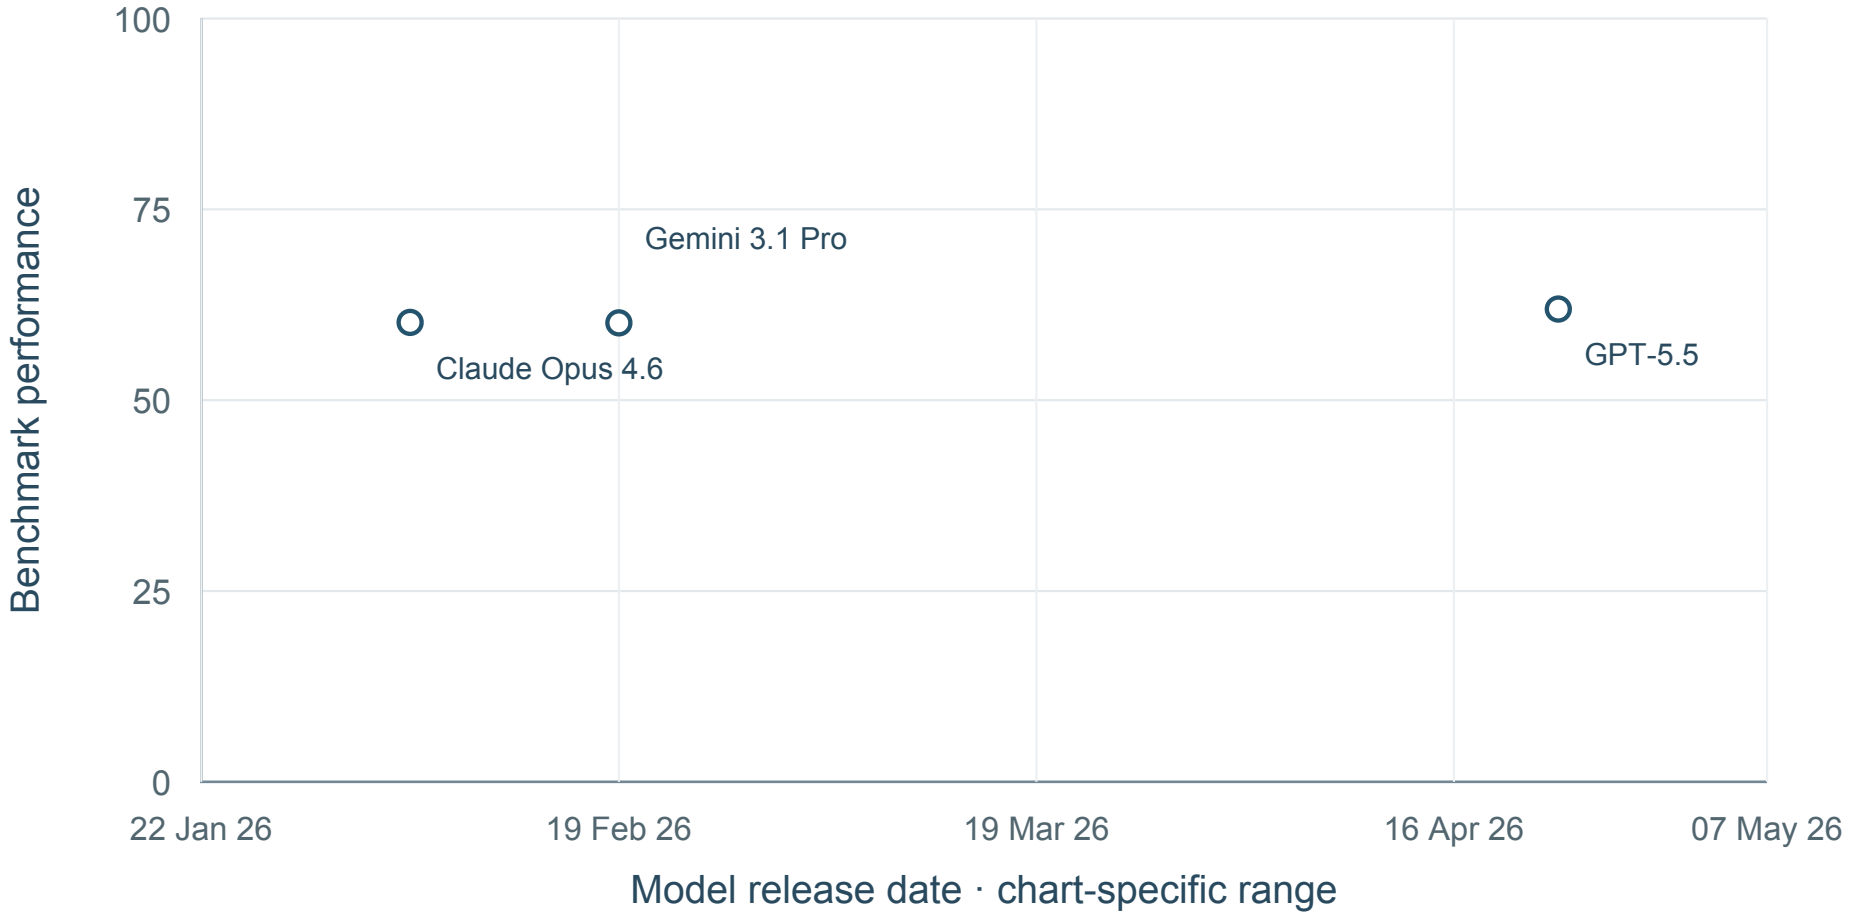

3 shown · 9 undated · 0 definition-held · sources: S027


No mean curve: Fewer than five dated model configurations.

Result-source references: S027. Exact point locators and raw values: data/F007_Dr_DocBench_values.csv.

Benchmark reference (APA): Yang, M., Yu, X. V., Li, P., Guo, X., Qi, Z., Kim, K., Ye, L., Luo, X., Bi, J., Zhang, H., Riaz, H., Zhang, X., Xiao, Y., Liu, B., Tang, T., Zhao, Y., Lin, Q., Wang, Z., Liu, M., … He, Z. (2026). Dr. DocBench: A comprehensive benchmark for expert-level and difficult document parsing. arXiv. https://arxiv.org/abs/2606.01393

Dr. DocBench: Text edit distance (lower is better)

Original Table 1

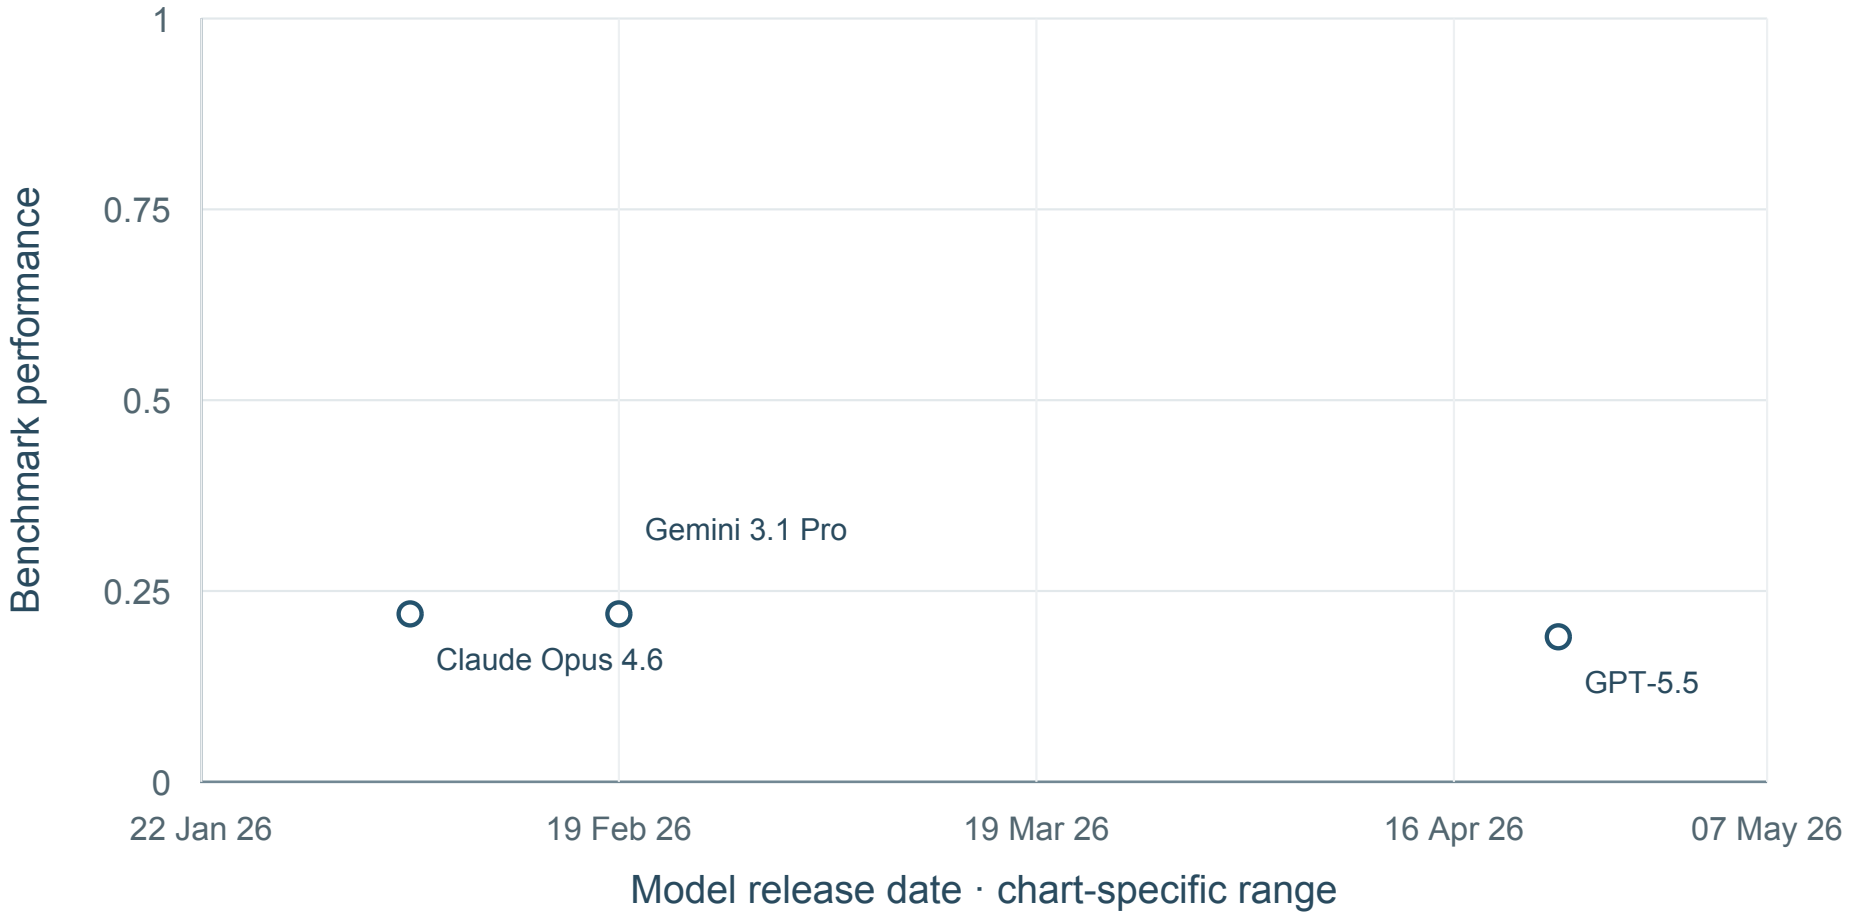

3 shown · 9 undated · 0 definition-held · sources: S027

No mean curve: Fewer than five dated model configurations.

Result-source references: S027. Exact point locators and raw values: data/F007_Dr_DocBench_values.csv.

Benchmark reference (APA): Yang, M., Yu, X. V., Li, P., Guo, X., Qi, Z., Kim, K., Ye, L., Luo, X., Bi, J., Zhang, H., Riaz, H., Zhang, X., Xiao, Y., Liu, B., Tang, T., Zhao, Y., Lin, Q., Wang, Z., Liu, M., … He, Z. (2026). Dr. DocBench: A comprehensive benchmark for expert-level and difficult document parsing. arXiv. https://arxiv.org/abs/2606.01393

F008 DocVQA

Answer questions from visual document pages

17 source values; 11 new; 7 separate conditions; 3 visible time points; 3 definition-held values; 0 visible mean curves.

Benchmark references (APA)

Mathew, M., Karatzas, D., & Jawahar, C. V. (2020). DocVQA: A dataset for VQA on document images. arXiv. https://arxiv.org/abs/2007.00398

Workflow and article scope

Challenges: A

Prepare and read source documents; Bind values to the correct unit

Question answering over mostly short documents; ANLS is not a proportion of correct meta-analytic values.

Manuscript anchors: Lu and Wang, Challenges A–B; manuscript paragraphs 15–18; Wrong-subgroup example, manuscript paragraph 29

Result-source references: S012; MC029; MC041; MC054; MC055; MC013; MC037. Full references appear in the final bibliography.

Complete condition inventory

01. ANLS | Fixed Qwen2.5-VL model-card comparison; DocVQA_VAL;
6 values; 3 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S012.

02. ANLS (source 0–100 scale) | Mode not specified; MC029 M4; DocVQA; Split not further specified by card
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC029.

03. Source-reported IDP-Leaderboard score (metric/denominator unspecified) | Mode not specified; MC041 H3; DocVQA
3 values; 0 time points; definition unresolved; raw data only. Sources: MC041.

04. ANLS (source 0–100 scale) | Mode not specified; MC054 H3; DocVQA; Test
2 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC054.


05. ANLS (source 0–100 scale) | Mode not specified; MC055 M7; DocVQA; Split not further specified by card
3 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC055.

06. ANLS (source 0–100 scale) | Instruct / non-thinking variant; MC013 Model-card evaluation table image; DocVQA TEST; Test
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC013.

07. ANLS (source 0–100 scale) | Mode not specified; MC037 Model-card evaluation table image; DocVQA test; Test
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC037.

DocVQA: ANLS

Fixed Qwen2.5-VL model-card comparison; DocVQA_VAL;

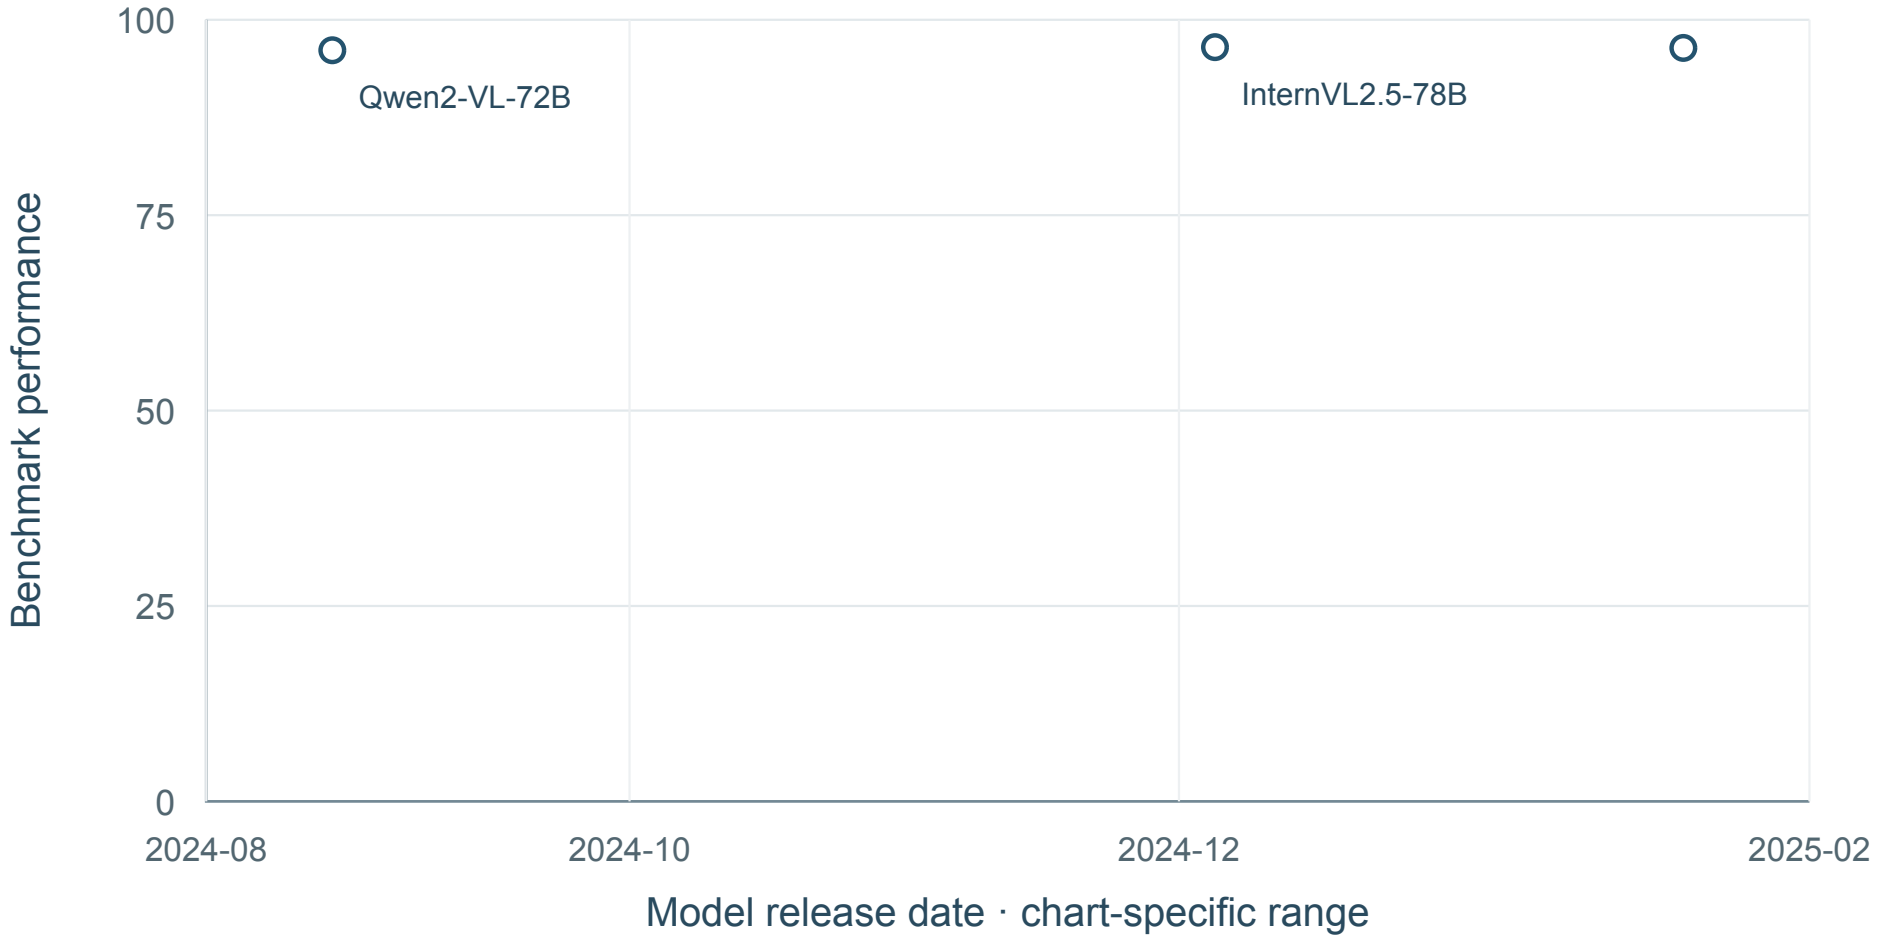

3 shown · 3 undated · 0 definition-held · sources: S012

No mean curve: Fewer than five dated model configurations.

Result-source references: S012. Exact point locators and raw values: data/F008_DocVQA_values.csv.

Benchmark reference (APA): Mathew, M., Karatzas, D., & Jawahar, C. V. (2020). DocVQA: A dataset for VQA on document images. arXiv. https://arxiv.org/abs/2007.00398

F010 ChartQA

Visual and logical question answering on charts

16 source values; 10 new; 6 separate conditions; 3 visible time points; 3 definition-held values; 0 visible mean curves.

Benchmark references (APA)

Masry, A., Long, D. X., Tan, J. Q., Joty, S., & Hoque, E. (2022). ChartQA: A benchmark for question answering about charts with visual and logical reasoning. In Findings of the Association for Computational Linguistics: ACL 2022 (pp. 2263–2279). https://doi.org/10.18653/v1/2022.findings-acl.177

Workflow and article scope

Challenges: A; C

Bind values to the correct unit; Transform and calculate values

Chart lookup/reasoning does not validate extraction from complete scientific reports.

Manuscript anchors: Wrong-subgroup example, manuscript paragraph 29; Lu and Wang, Challenge C; manuscript paragraphs 15, 17–18 and 33

Result-source references: S012; MC029; MC041; MC054; MC055; MC037. Full references appear in the final bibliography.

Complete condition inventory

01. Relaxed accuracy | Fixed Qwen2.5-VL model-card comparison; ChartQA_TEST;
6 values; 3 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S012.

02. Relaxed answer accuracy (source 0–100 scale) | Mode not specified; MC029 M4; ChartQA; Split not further specified by card
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC029.

03. Source-reported IDP-Leaderboard score (metric/denominator unspecified) | Mode not specified; MC041 H3; ChartQA
3 values; 0 time points; definition unresolved; raw data only. Sources: MC041.


04. Relaxed answer accuracy (source 0–100 scale) | Mode not specified; MC054 H3; ChartQA; Split not further specified by card
2 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC054.

05. Relaxed answer accuracy (source 0–100 scale) | Mode not specified; MC055 M7; ChartQA; Split not further specified by card
3 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC055.

06. Relaxed answer accuracy (source 0–100 scale) | Mode not specified; MC037 Model-card evaluation table image; ChartQA test average; Test
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC037.

ChartQA: Relaxed accuracy

Fixed Qwen2.5-VL model-card comparison; ChartQA_TEST;

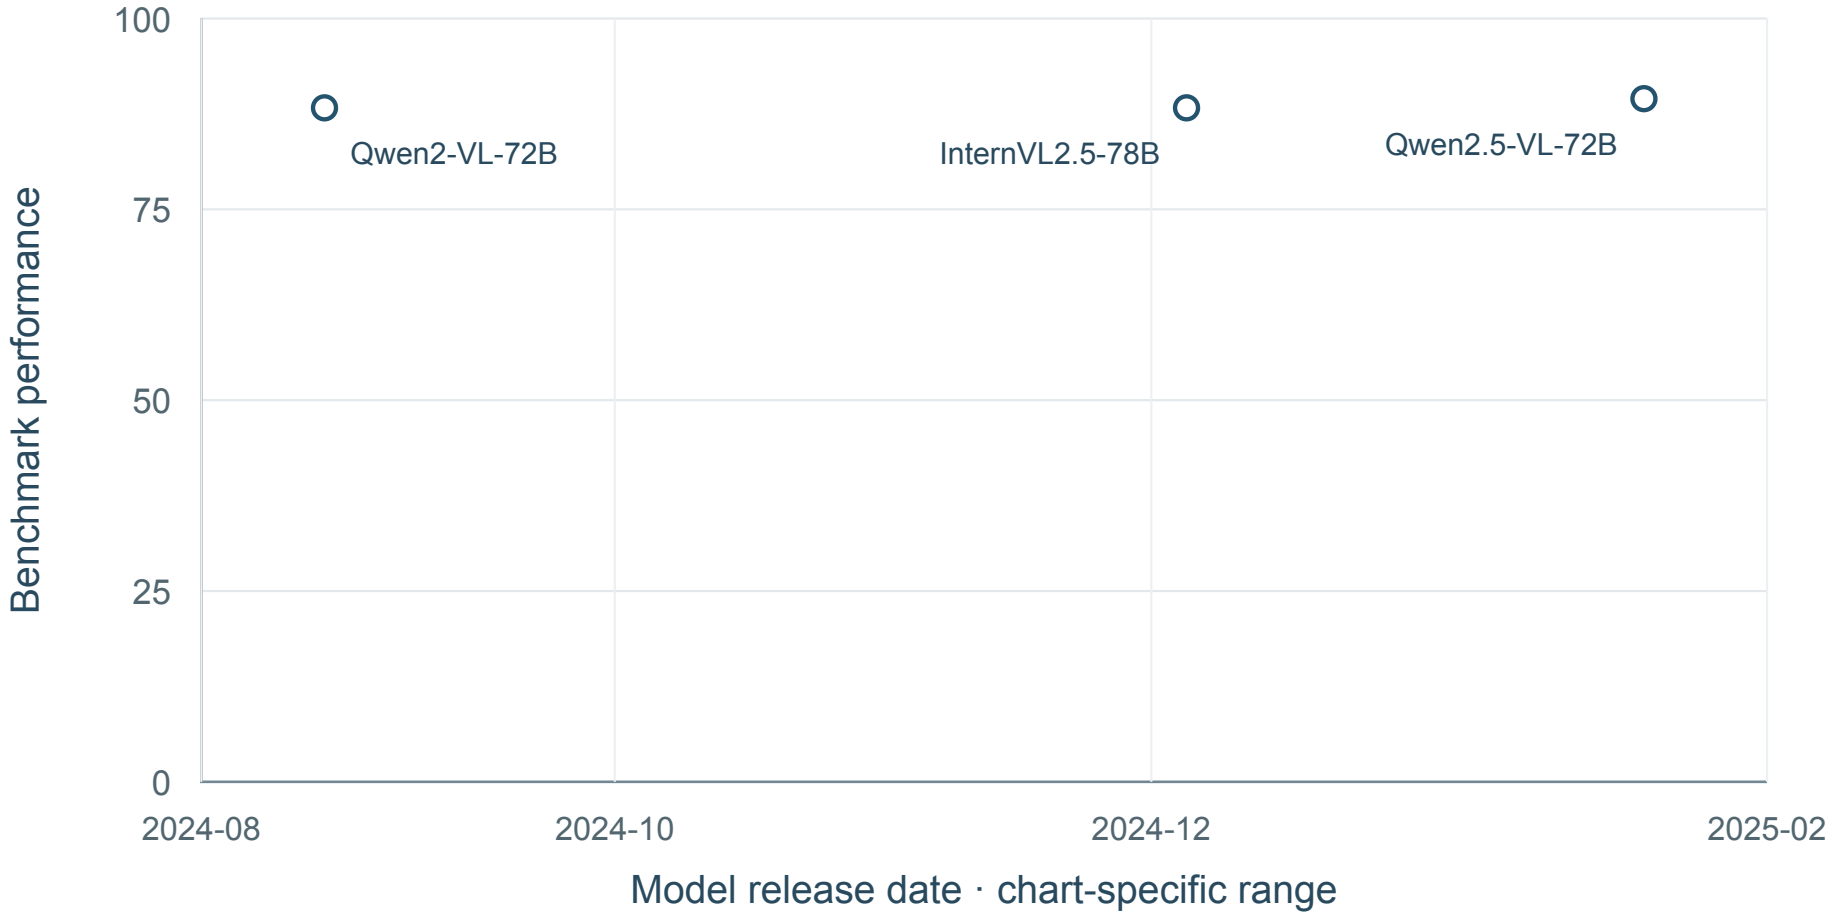

3 shown · 3 undated · 0 definition-held · sources: S012

No mean curve: Fewer than five dated model configurations.

Result-source references: S012. Exact point locators and raw values: data/F010_ChartQA_values.csv.

Benchmark reference (APA): Masry, A., Long, D. X., Tan, J. Q., Joty, S., & Hoque, E. (2022). ChartQA: A benchmark for question answering about charts with visual and logical reasoning. In Findings of the Association for Computational Linguistics: ACL 2022 (pp. 2263–2279). https://doi.org/10.18653/v1/2022.findings-acl.177

F011 ChartQAPro

Harder and more diverse chart question answering

64 source values; 0 new; 3 separate conditions; 3 visible time points; 0 definition-held values; 0 visible mean curves.

Benchmark references (APA)

Masry, A., Islam, M. S., Ahmed, M., Bajaj, A., Kabir, F., Kartha, A., Laskar, M. T. R., Rahman, M., Rahman, S., Shahmohammadi, M., Thakkar, M., Parvez, M. R., Hoque, E., & Joty, S. (2025). ChartQAPro: A more diverse and challenging benchmark for chart question answering. Findings of the Association for Computational Linguistics: ACL 2025. https://arxiv.org/abs/2504.05506v2

Workflow and article scope

Challenges: A; C

Bind values to the correct unit; Transform and calculate values

Cannot append ChartQAPro values to the easier ChartQA trajectory.

Manuscript anchors: Wrong-subgroup example, manuscript paragraph 29; Lu and Wang, Challenge C; manuscript paragraphs 15, 17–18 and 33

Result-source references: S029. Full references appear in the final bibliography.

Complete condition inventory


01. Answer accuracy | Direct; corrected source paper Table 3
22 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S029.

02. Answer accuracy | CoT; corrected source paper Table 3
21 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S029.

03. Answer accuracy | PoT; corrected source paper Table 3
21 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S029.

ChartQAPro: Answer accuracy

Direct; corrected source paper Table 3

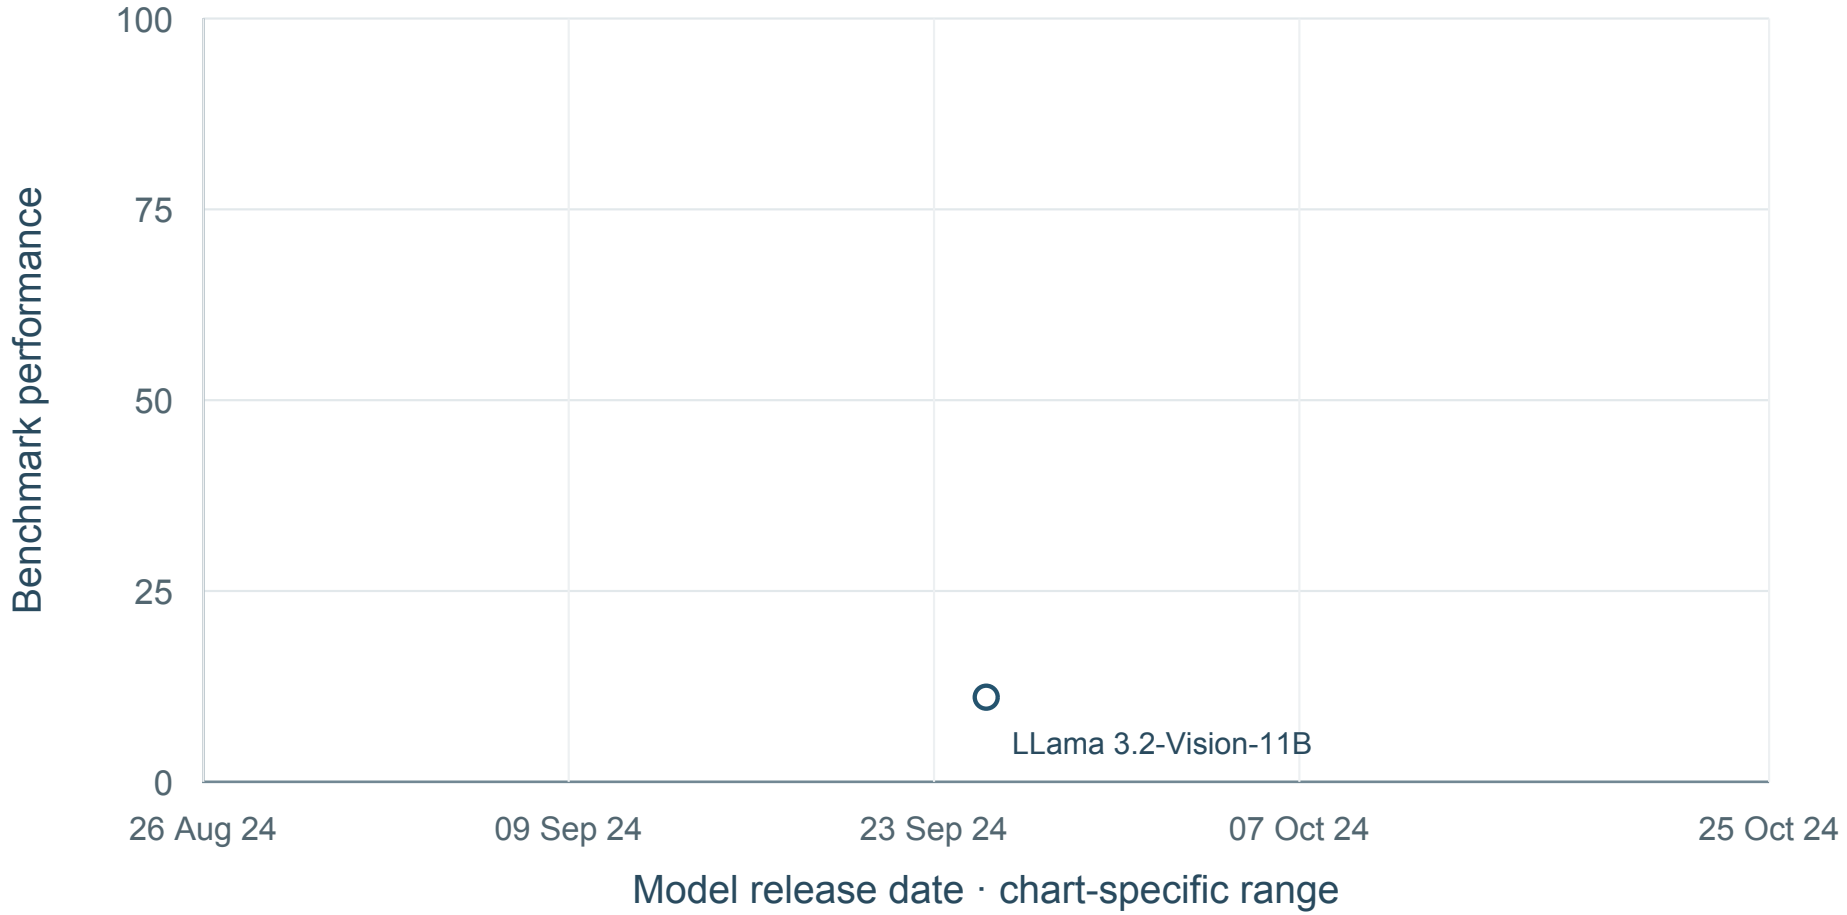

1 shown · 21 undated · 0 definition-held · sources: S029


No mean curve: Fewer than five dated model configurations.

Result-source references: S029. Exact point locators and raw values: data/F011_ChartQAPro_values.csv.

Benchmark reference (APA): Masry, A., Islam, M. S., Ahmed, M., Bajaj, A., Kabir, F., Kartha, A., Laskar, M. T. R., Rahman, M., Rahman, S., Shahmohammadi, M., Thakkar, M., Parvez, M. R., Hoque, E., & Joty, S. (2025). ChartQAPro: A more diverse and challenging benchmark for chart question answering. Findings of the Association for Computational Linguistics: ACL 2025. https://arxiv.org/abs/2504.05506v2

ChartQAPro: Answer accuracy

CoT; corrected source paper Table 3

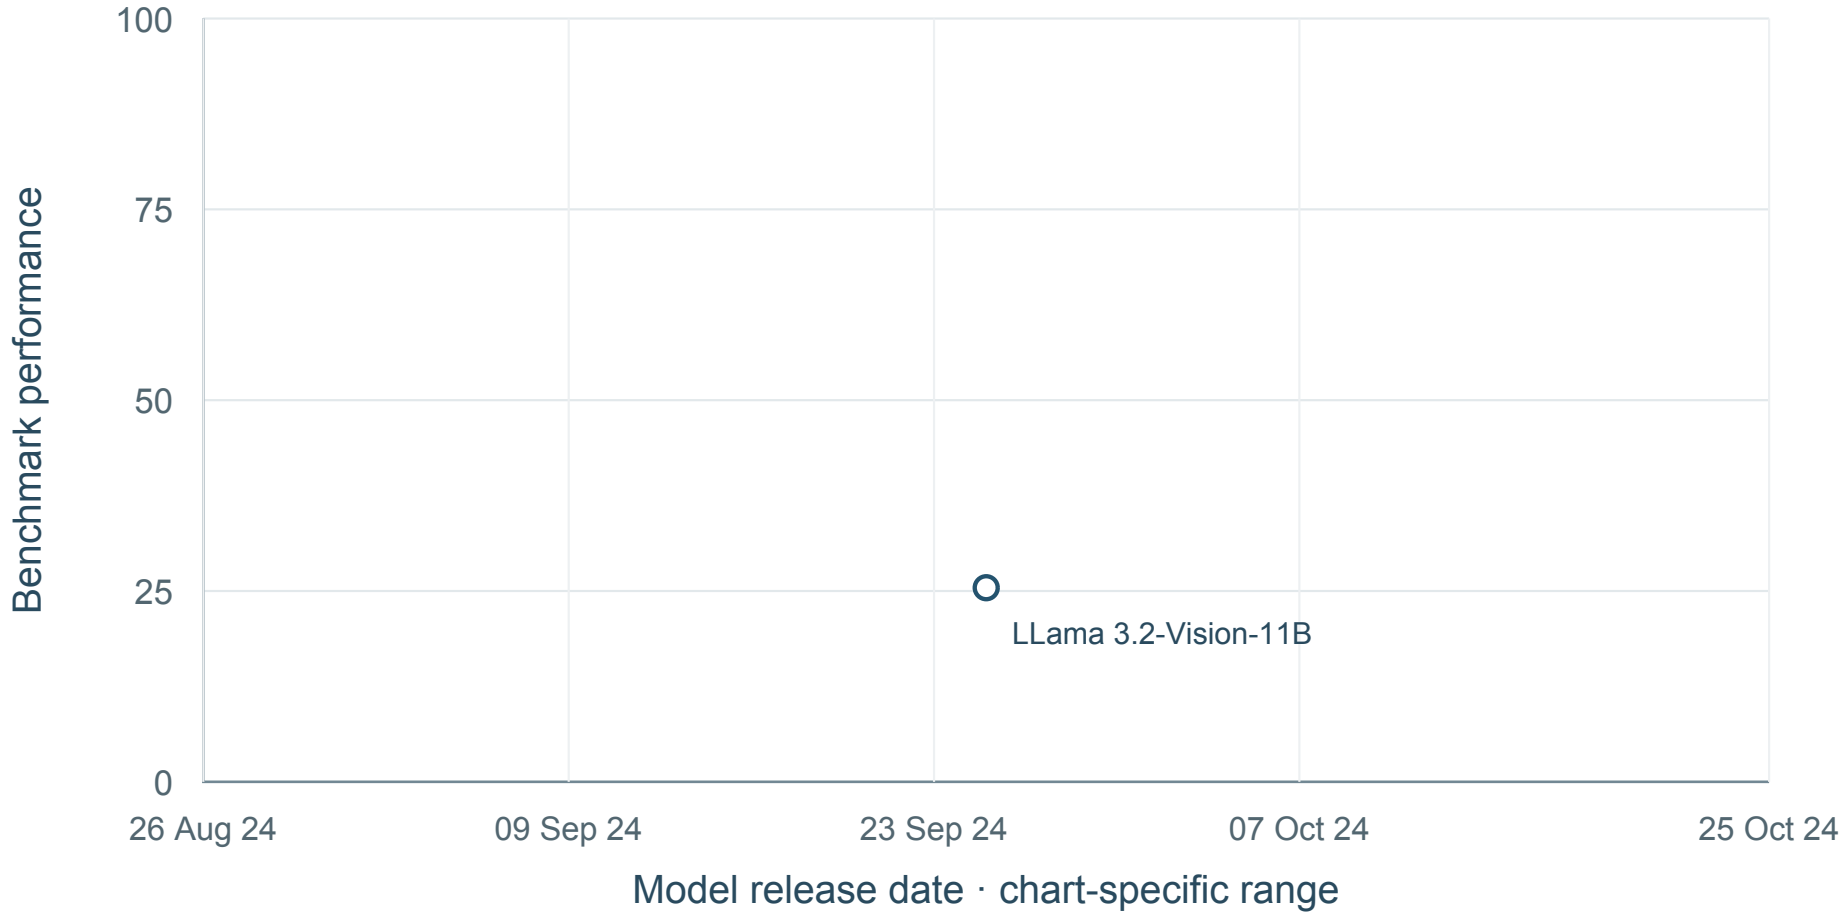

1 shown · 20 undated · 0 definition-held · sources: S029


No mean curve: Fewer than five dated model configurations.

Result-source references: S029. Exact point locators and raw values: data/F011_ChartQAPro_values.csv.

Benchmark reference (APA): Masry, A., Islam, M. S., Ahmed, M., Bajaj, A., Kabir, F., Kartha, A., Laskar, M. T. R., Rahman, M., Rahman, S., Shahmohammadi, M., Thakkar, M., Parvez, M. R., Hoque, E., & Joty, S. (2025). ChartQAPro: A more diverse and challenging benchmark for chart question answering. Findings of the Association for Computational Linguistics: ACL 2025. https://arxiv.org/abs/2504.05506v2

ChartQAPro: Answer accuracy

PoT; corrected source paper Table 3

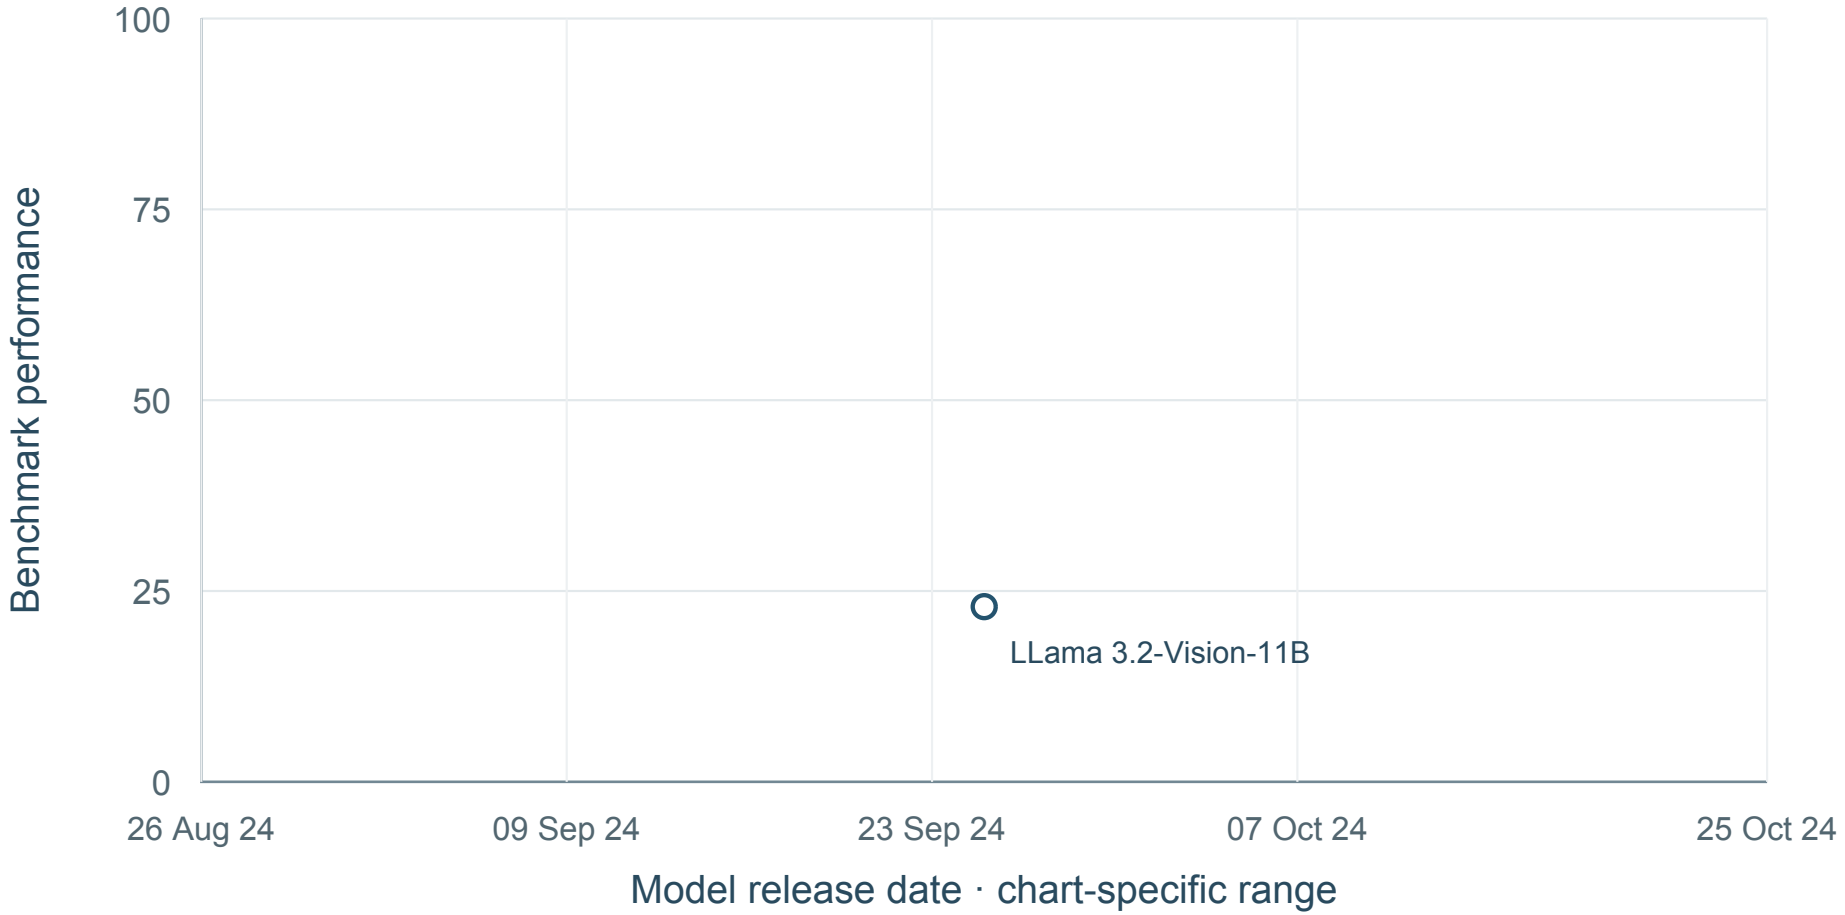

1 shown · 20 undated · 0 definition-held · sources: S029

No mean curve: Fewer than five dated model configurations.

Result-source references: S029. Exact point locators and raw values: data/F011_ChartQAPro_values.csv.

Benchmark reference (APA): Masry, A., Islam, M. S., Ahmed, M., Bajaj, A., Kabir, F., Kartha, A., Laskar, M. T. R., Rahman, M., Rahman, S., Shahmohammadi, M., Thakkar, M., Parvez, M. R., Hoque, E., & Joty, S. (2025). ChartQAPro: A more diverse and challenging benchmark for chart question answering. Findings of the Association for Computational Linguistics: ACL 2025. https://arxiv.org/abs/2504.05506v2

F012 HiTab

Hierarchical table question answering and data-to-text

9 source values; 0 new; 1 separate conditions; 0 visible time points; 0 definition-held values; 0 visible mean curves.

Benchmark references (APA)

Cheng, Z., Dong, H., Wang, Z., Jia, R., Guo, J., Gao, Y., Han, S., Lou, J.-G., & Zhang, D. (2021). HiTab: A hierarchical table dataset for question answering and natural language generation. arXiv. https://arxiv.org/abs/2108.06712

Workflow and article scope

Challenges: A; C

Bind values to the correct unit; Transform and calculate values

Hierarchical table skill, not full review extraction; QA and generation are different tasks.

Manuscript anchors: Wrong-subgroup example, manuscript paragraph 29; Lu and Wang, Challenge C; manuscript paragraphs 15, 17–18 and 33


Result-source references: S030. Full references appear in the final bibliography.

Complete condition inventory

01. Execution accuracy | Test; supervision and logical form as named
9 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S030.

HiTab: Execution accuracy

Test; supervision and logical form as named

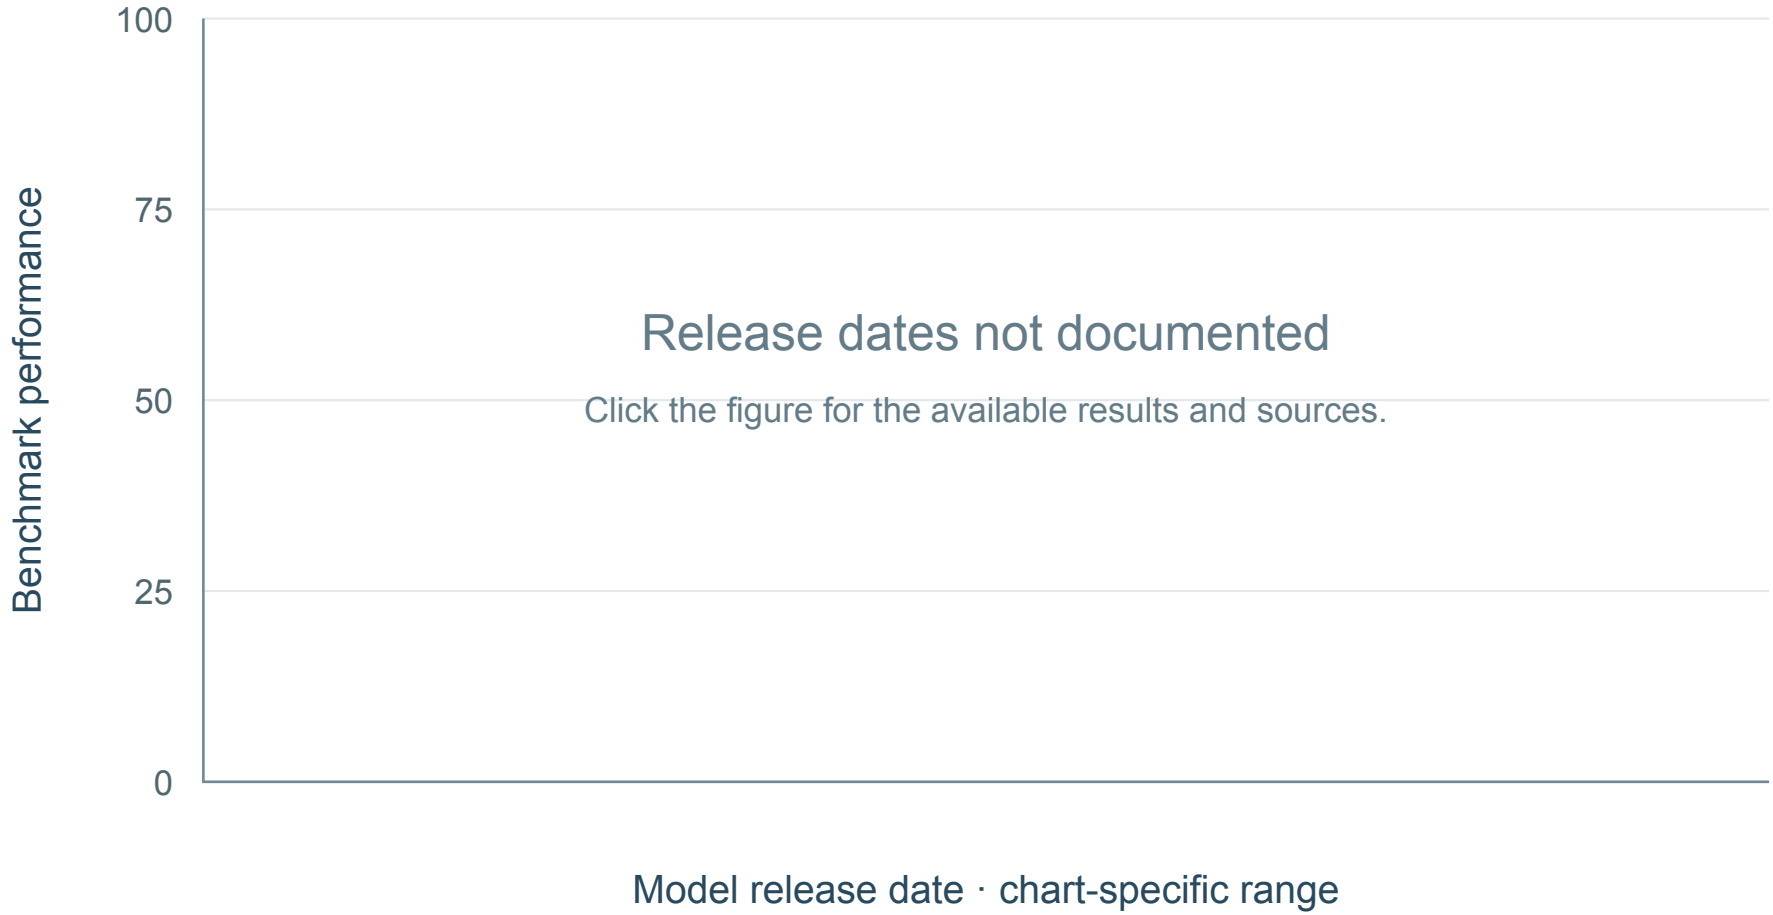

0 shown · 9 undated · 0 definition-held · sources: S030

No mean curve: Fewer than five dated model configurations.

Result-source references: S030. Exact point locators and raw values: data/F012_HiTab_values.csv.

Benchmark reference (APA): Cheng, Z., Dong, H., Wang, Z., Jia, R., Guo, J., Gao, Y., Han, S., Lou, J.-G., & Zhang, D. (2021). HiTab: A hierarchical table dataset for question answering and natural language generation. arXiv. https://arxiv.org/abs/2108.06712

F013 MultiHiertt

Multi-step numerical reasoning across hierarchical tables and text

11 source values; 0 new; 1 separate conditions; 0 visible time points; 0 definition-held values; 0 visible mean curves.

Benchmark references (APA)

Zhao, Y., Li, Y., Li, C., & Zhang, R. (2022). MultiHiertt: Numerical reasoning over multi hierarchical tabular and textual data. In Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers) (pp. 6588–6600). https://doi.org/10.18653/v1/2022.acl-long.454

Workflow and article scope

Challenges: A; B; C

Locate relevant evidence; Bind values to the correct unit; Transform and calculate values

Financial reporting domain; supports reasoning-trace diagnosis.

Manuscript anchors: Source-based step comparisons, manuscript paragraph 31; Wrong-subgroup example, manuscript paragraph 29; Lu and Wang, Challenge C; manuscript paragraphs 15, 17–18 and 33


Result-source references: S048. Full references appear in the final bibliography.

Complete condition inventory

01. Exact match | Original test; source Table 4
11 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S048.

MultiHiertt: Exact match

Original test; source Table 4

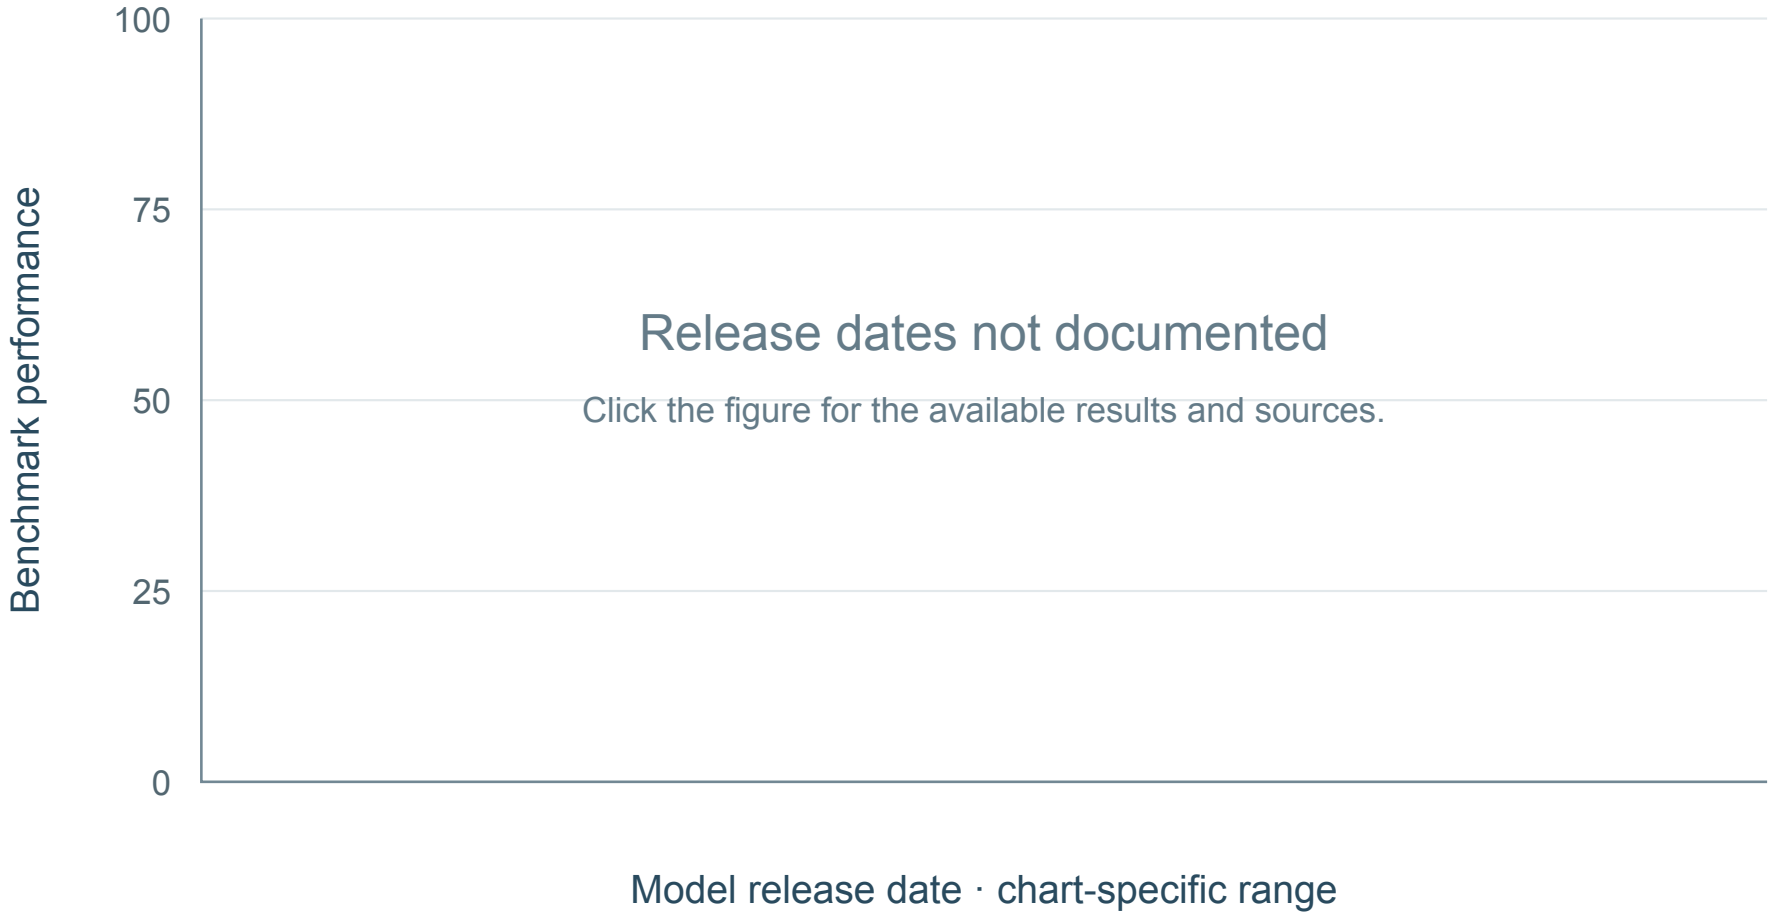

0 shown · 11 undated · 0 definition-held · sources: S048

No mean curve: Fewer than five dated model configurations.

Result-source references: S048. Exact point locators and raw values: data/F013_MultiHiertt_values.csv.

Benchmark reference (APA): Zhao, Y., Li, Y., Li, C., & Zhang, R. (2022). MultiHiertt: Numerical reasoning over multi hierarchical tabular and textual data. In Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers) (pp. 6588–6600). https://doi.org/10.18653/v1/2022.acl-long.454

F014 TAT-QA

Hybrid table/text numerical question answering

11 source values; 0 new; 3 separate conditions; 0 visible time points; 0 definition-held values; 0 visible mean curves.

Benchmark references (APA)

Zhu, F., Lei, W., Huang, Y., Wang, C., Zhang, S., Lv, J., Feng, F., & Chua, T.-S. (2021). TAT-QA: A question answering benchmark on a hybrid of tabular and textual content in finance. In Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers) (pp. 3277–3287). https://doi.org/10.18653/v1/2021.acl-long.254

Workflow and article scope

Challenges: A; C

Bind values to the correct unit; Transform and calculate values

Financial data; answer matching does not establish codebook reproducibility.

Manuscript anchors: Wrong-subgroup example, manuscript paragraph 29; Lu and Wang, Challenge C; manuscript paragraphs 15, 17–18 and 33

Result-source references: S071. Full references appear in the final bibliography.

Complete condition inventory


01. Exact match | Original test; Table 3
5 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S071.

02. Answer F1 | Original test; Table 3
5 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S071.

03. Answer F1 | Original test; reported human reference
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S071.

TAT-QA: Exact match

Original test; Table 3

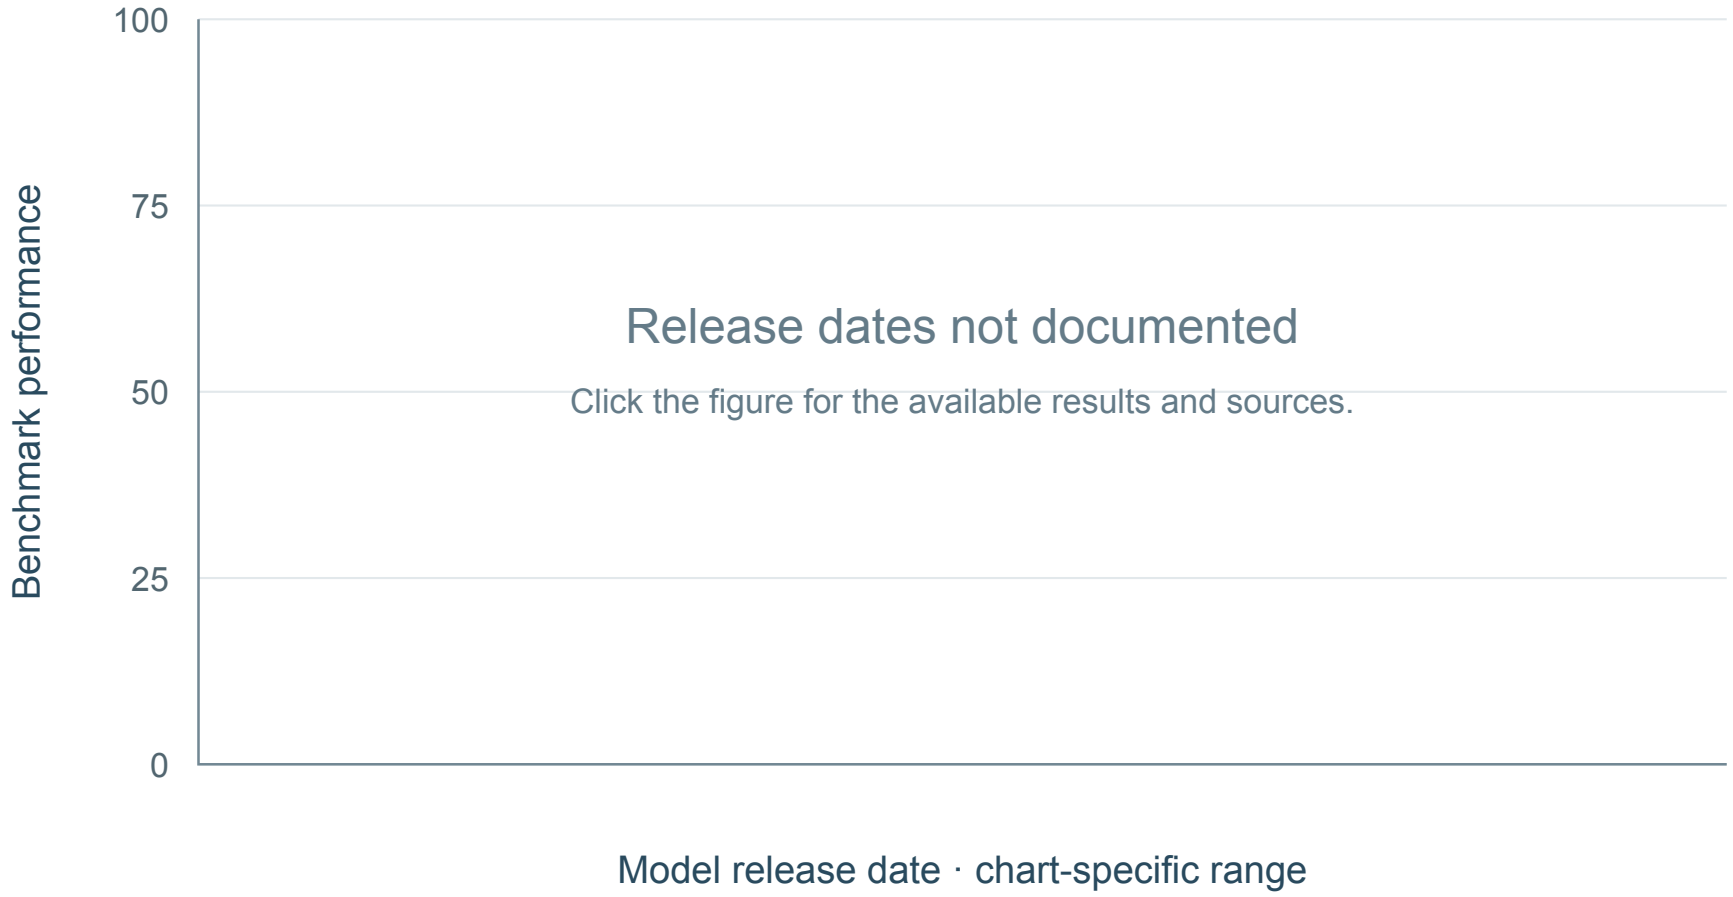

0 shown · 5 undated · 0 definition-held · sources: S071

No mean curve: Fewer than five dated model configurations.

Result-source references: S071. Exact point locators and raw values: data/F014_TAT_QA_values.csv.

Benchmark reference (APA): Zhu, F., Lei, W., Huang, Y., Wang, C., Zhang, S., Lv, J., Feng, F., & Chua, T.-S. (2021). TAT-QA: A question answering benchmark on a hybrid of tabular and textual content in finance. In Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers) (pp. 3277–3287). https://doi.org/10.18653/v1/2021.acl-long.254

F015 FinQA

Generate numerical reasoning programs from financial reports

25 source values; 0 new; 2 separate conditions; 0 visible time points; 0 definition-held values; 0 visible mean curves.

Benchmark references (APA)

Chen, Z., Chen, W., Smiley, C., Shah, S., Borova, I., Langdon, D., Moussa, R., Beane, M., Huang, T.-H., Routledge, B., & Wang, W. Y. (2021). FinQA: A dataset of numerical reasoning over financial data. arXiv. https://arxiv.org/abs/2109.00122

Workflow and article scope

Challenges: A; C; D

Bind values to the correct unit; Coordinate retrieval, tools and intermediate steps; Transform and calculate values

Finance-specific operations; not effect-size conversion validation.

Manuscript anchors: Wrong-subgroup example, manuscript paragraph 29; Lu and Wang, Challenge D; manuscript paragraphs 9, 15–18 and 31; Lu and Wang, Challenge C; manuscript paragraphs 15, 17–18 and 33

Result-source references: S031. Full references appear in the final bibliography.


Complete condition inventory

01. Execution accuracy | Original paper Table 2
13 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S031.

02. Program accuracy | Original paper Table 2
12 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S031.

FinQA: Execution accuracy

Original paper Table 2

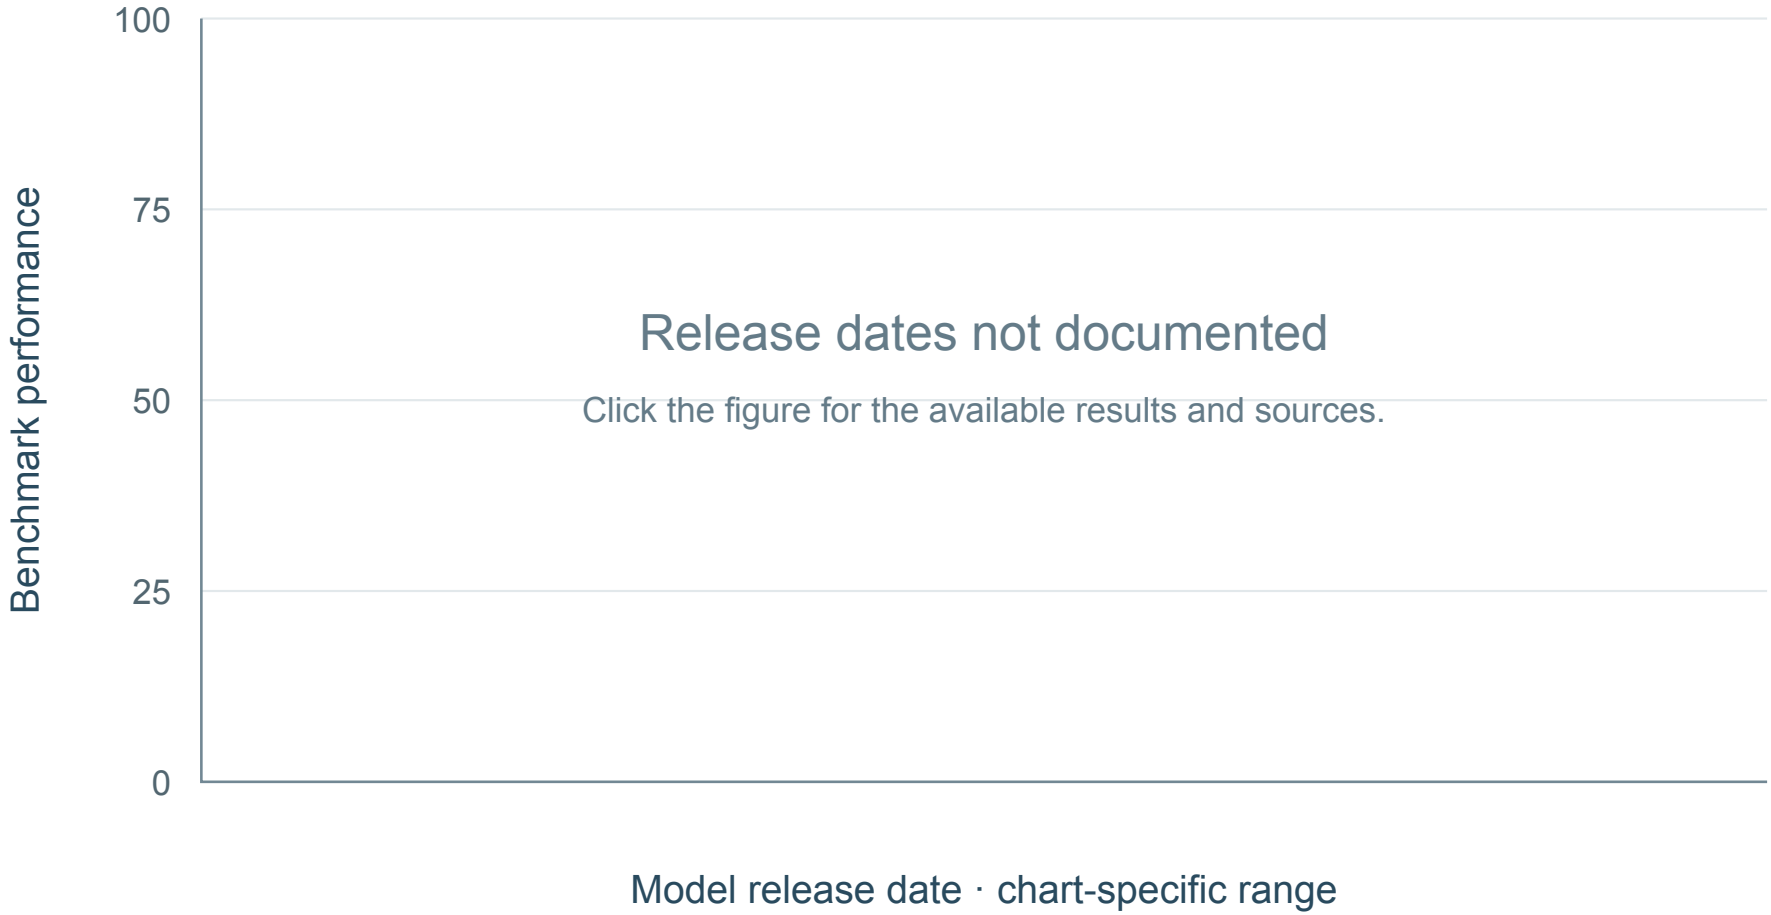

0 shown · 13 undated · 0 definition-held · sources: S031

No mean curve: Fewer than five dated model configurations.

Result-source references: S031. Exact point locators and raw values: data/F015_FinQA_values.csv.

Benchmark reference (APA): Chen, Z., Chen, W., Smiley, C., Shah, S., Borova, I., Langdon, D., Moussa, R., Beane, M., Huang, T.-H., Routledge, B., & Wang, W. Y. (2021). FinQA: A dataset of numerical reasoning over financial data. arXiv. https://arxiv.org/abs/2109.00122

F018 DocMath-Eval

Numerical reasoning over short/long financial documents

384 source values; 0 new; 8 separate conditions; 176 visible time points; 0 definition-held values; 8 visible mean curves.

Benchmark references (APA)

Zhao, Y., Long, Y., Liu, H., Kamoi, R., Nan, L., Chen, L., Liu, Y., Tang, X., Zhang, R., & Cohan, A. (2023). DocMath-Eval: Evaluating math reasoning capabilities of LLMs in understanding long and specialized documents. arXiv. https://arxiv.org/abs/2311.09805

Workflow and article scope

Challenges: A; B; C

Locate relevant evidence; Bind values to the correct unit; Transform and calculate values

Three subsets adapt previous benchmarks; avoid counting them as independent evidence.

Manuscript anchors: Source-based step comparisons, manuscript paragraph 31; Wrong-subgroup example, manuscript paragraph 29; Lu and Wang, Challenge C; manuscript paragraphs 15, 17–18 and 33

Result-source references: S011. Full references appear in the final bibliography.

Complete condition inventory

01. Accuracy | testmini; simpshort; COT
48 values; 22 time points; visible mean curve. Sources: S011.

02. Accuracy | testmini; simpshort; POT
48 values; 22 time points; visible mean curve. Sources: S011.

03. Accuracy | testmini; compshort; COT
48 values; 22 time points; visible mean curve. Sources: S011.


04. Accuracy | testmini; compshort; POT
48 values; 22 time points; visible mean curve. Sources: S011.

05. Accuracy | testmini; simplong; COT
48 values; 22 time points; visible mean curve. Sources: S011.

06. Accuracy | testmini; simplong; POT
48 values; 22 time points; visible mean curve. Sources: S011.


07. Accuracy | testmini; complong; COT
48 values; 22 time points; visible mean curve. Sources: S011.

08. Accuracy | testmini; complong; POT
48 values; 22 time points; visible mean curve. Sources: S011.

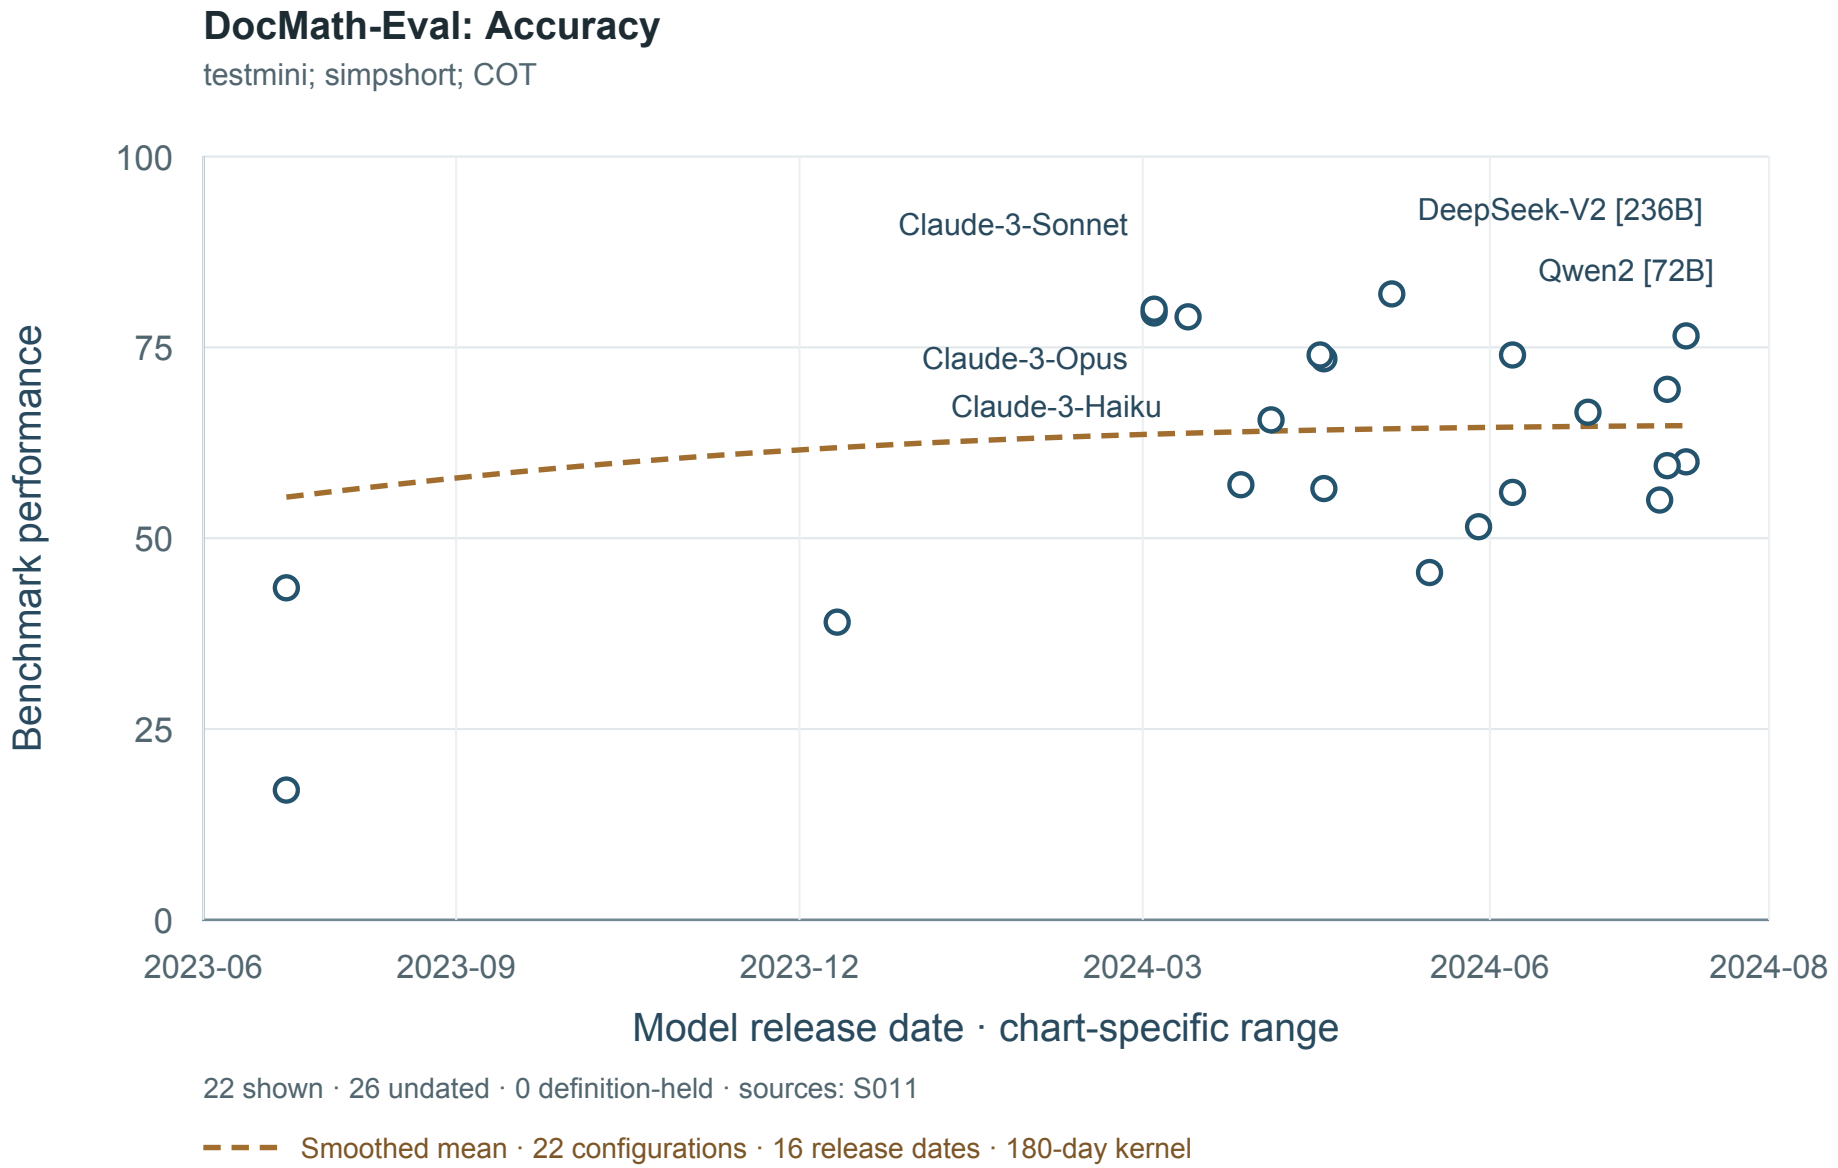


Result-source references: S011. Exact point locators and raw values: data/F018_DocMath_Eval_values.csv.

Benchmark reference (APA): Zhao, Y., Long, Y., Liu, H., Kamoi, R., Nan, L., Chen, L., Liu, Y., Tang, X., Zhang, R., & Cohan, A. (2023). DocMath-Eval: Evaluating math reasoning capabilities of LLMs in understanding long and specialized documents. arXiv. https://arxiv.org/abs/2311.09805

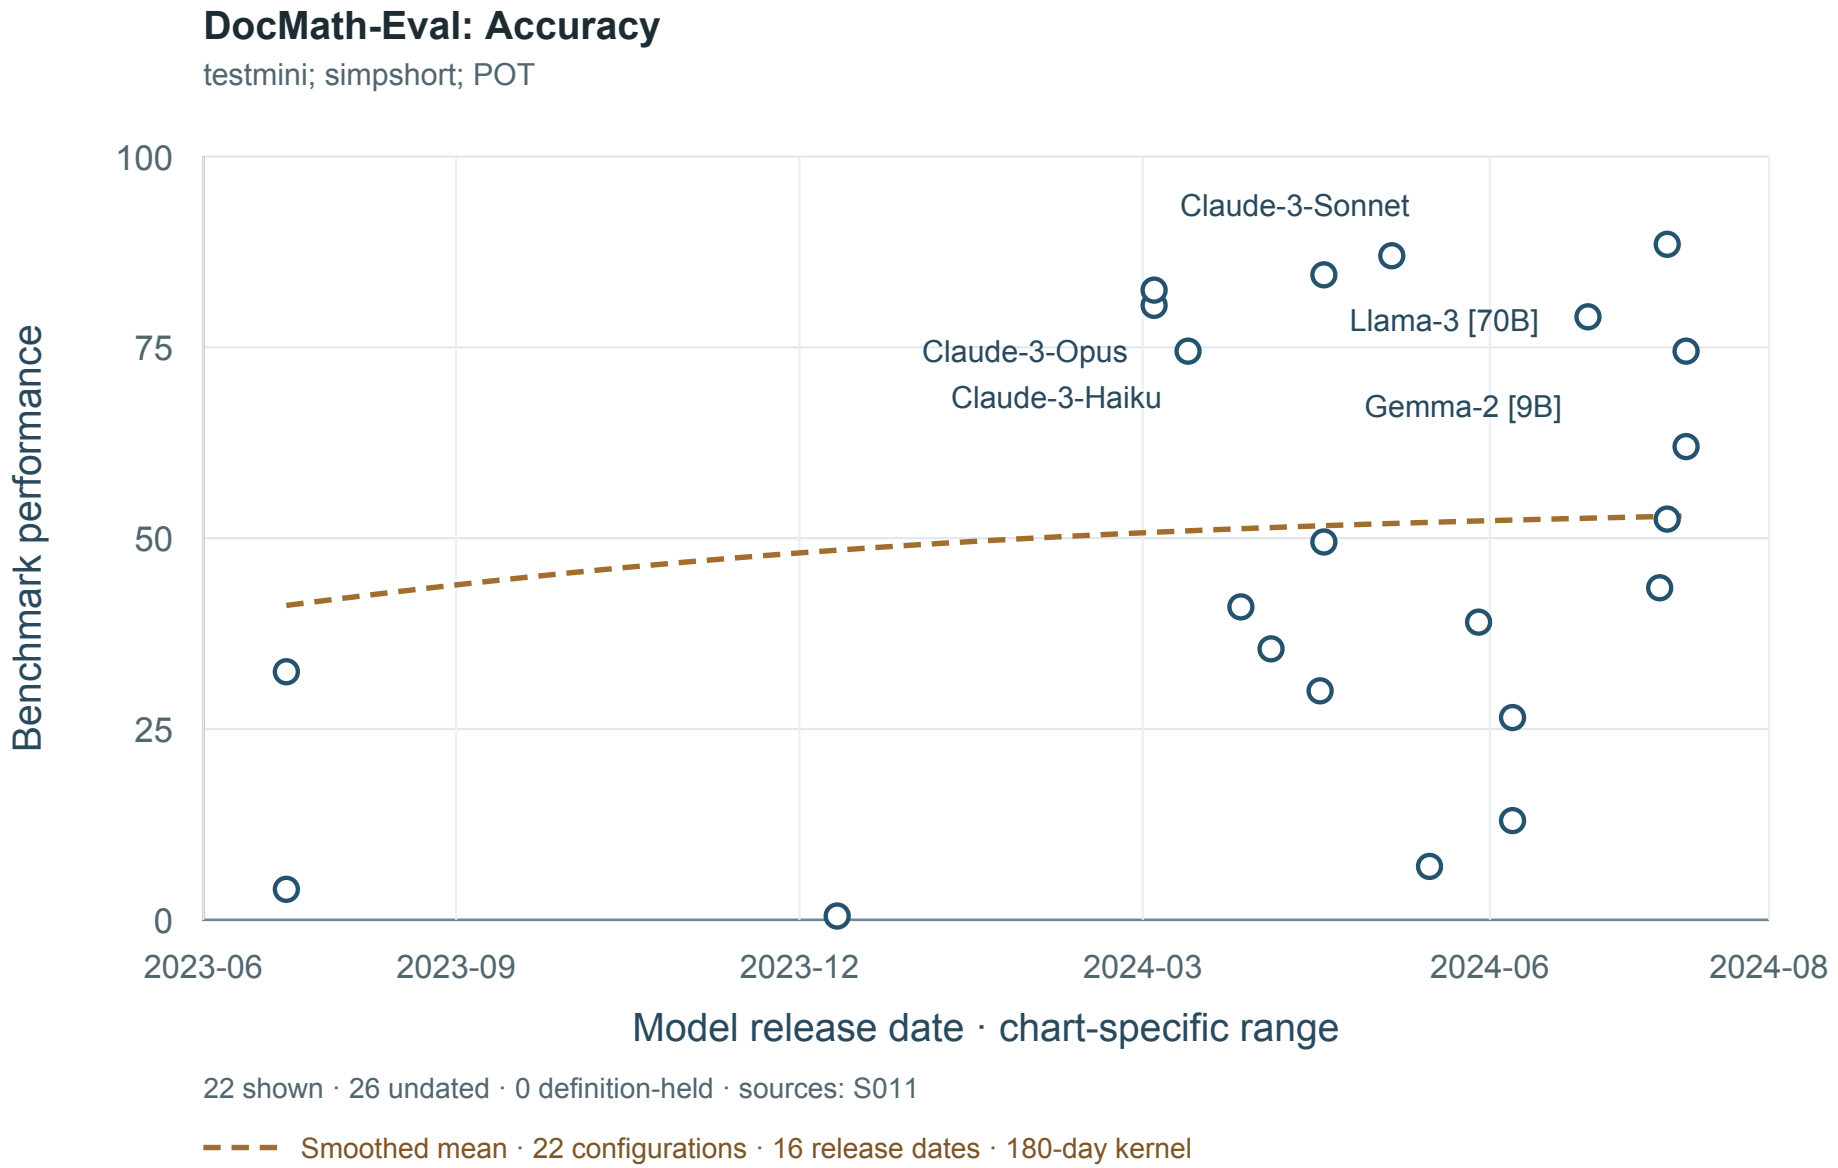


Result-source references: S011. Exact point locators and raw values: data/F018_DocMath_Eval_values.csv.

Benchmark reference (APA): Zhao, Y., Long, Y., Liu, H., Kamoi, R., Nan, L., Chen, L., Liu, Y., Tang, X., Zhang, R., & Cohan, A. (2023). DocMath-Eval: Evaluating math reasoning capabilities of LLMs in understanding long and specialized documents. arXiv. https://arxiv.org/abs/2311.09805

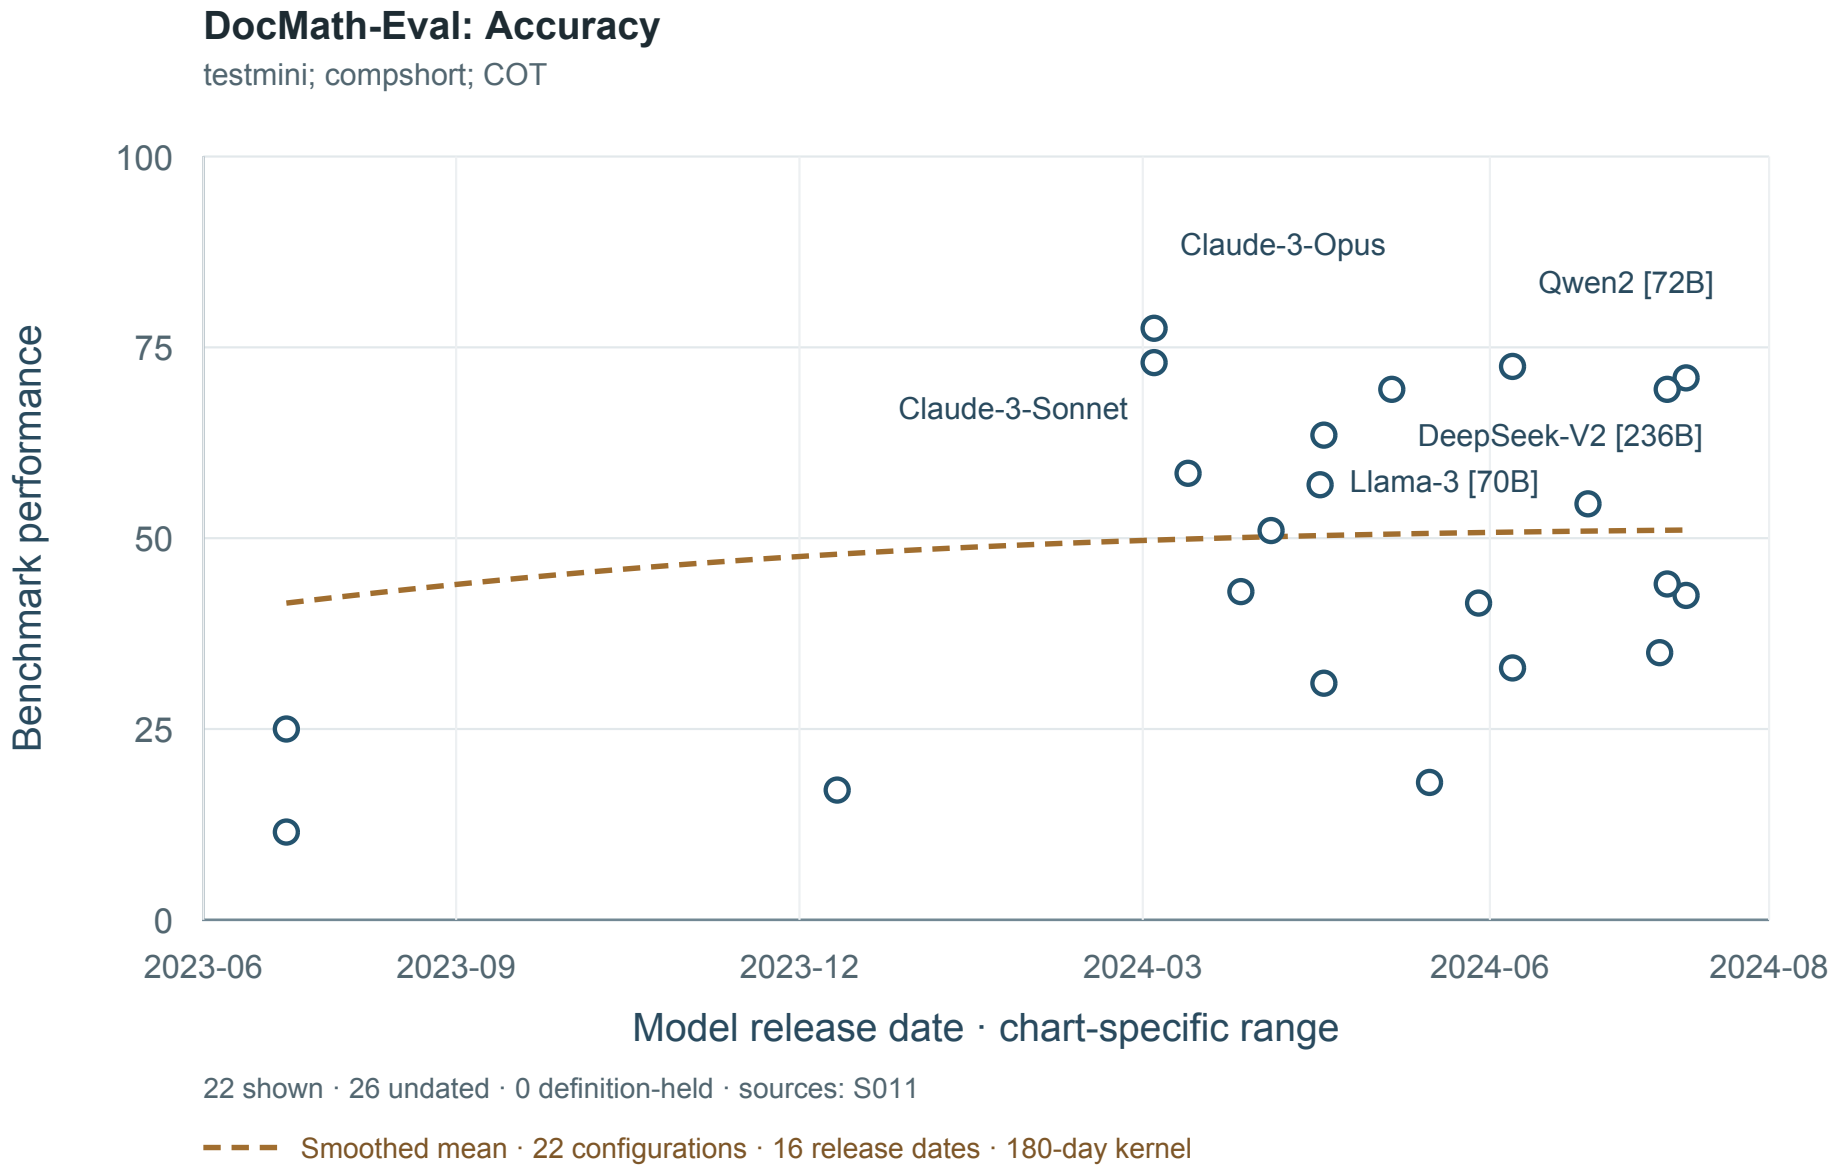


Result-source references: S011. Exact point locators and raw values: data/F018_DocMath_Eval_values.csv.

Benchmark reference (APA): Zhao, Y., Long, Y., Liu, H., Kamoi, R., Nan, L., Chen, L., Liu, Y., Tang, X., Zhang, R., & Cohan, A. (2023). DocMath-Eval: Evaluating math reasoning capabilities of LLMs in understanding long and specialized documents. arXiv. https://arxiv.org/abs/2311.09805

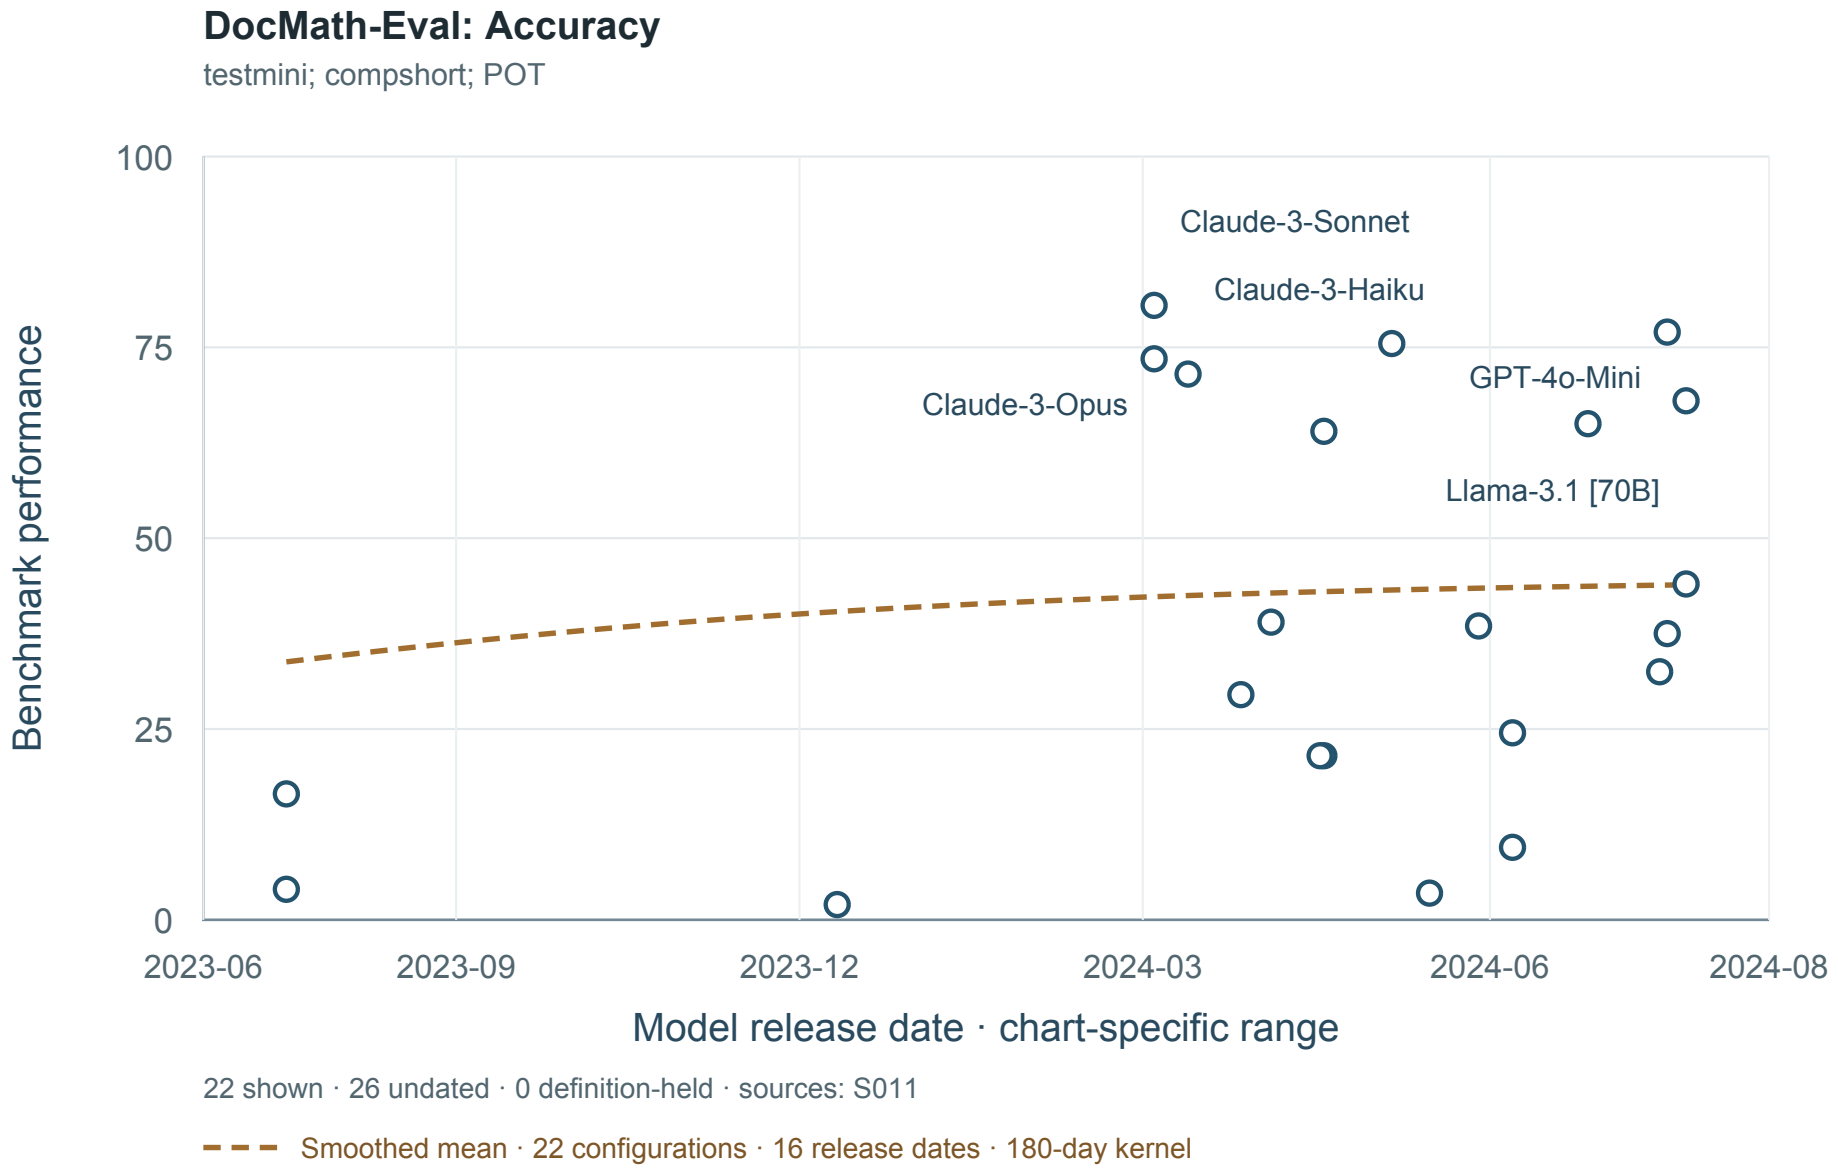


Result-source references: S011. Exact point locators and raw values: data/F018_DocMath_Eval_values.csv.

Benchmark reference (APA): Zhao, Y., Long, Y., Liu, H., Kamoi, R., Nan, L., Chen, L., Liu, Y., Tang, X., Zhang, R., & Cohan, A. (2023). DocMath-Eval: Evaluating math reasoning capabilities of LLMs in understanding long and specialized documents. arXiv. https://arxiv.org/abs/2311.09805

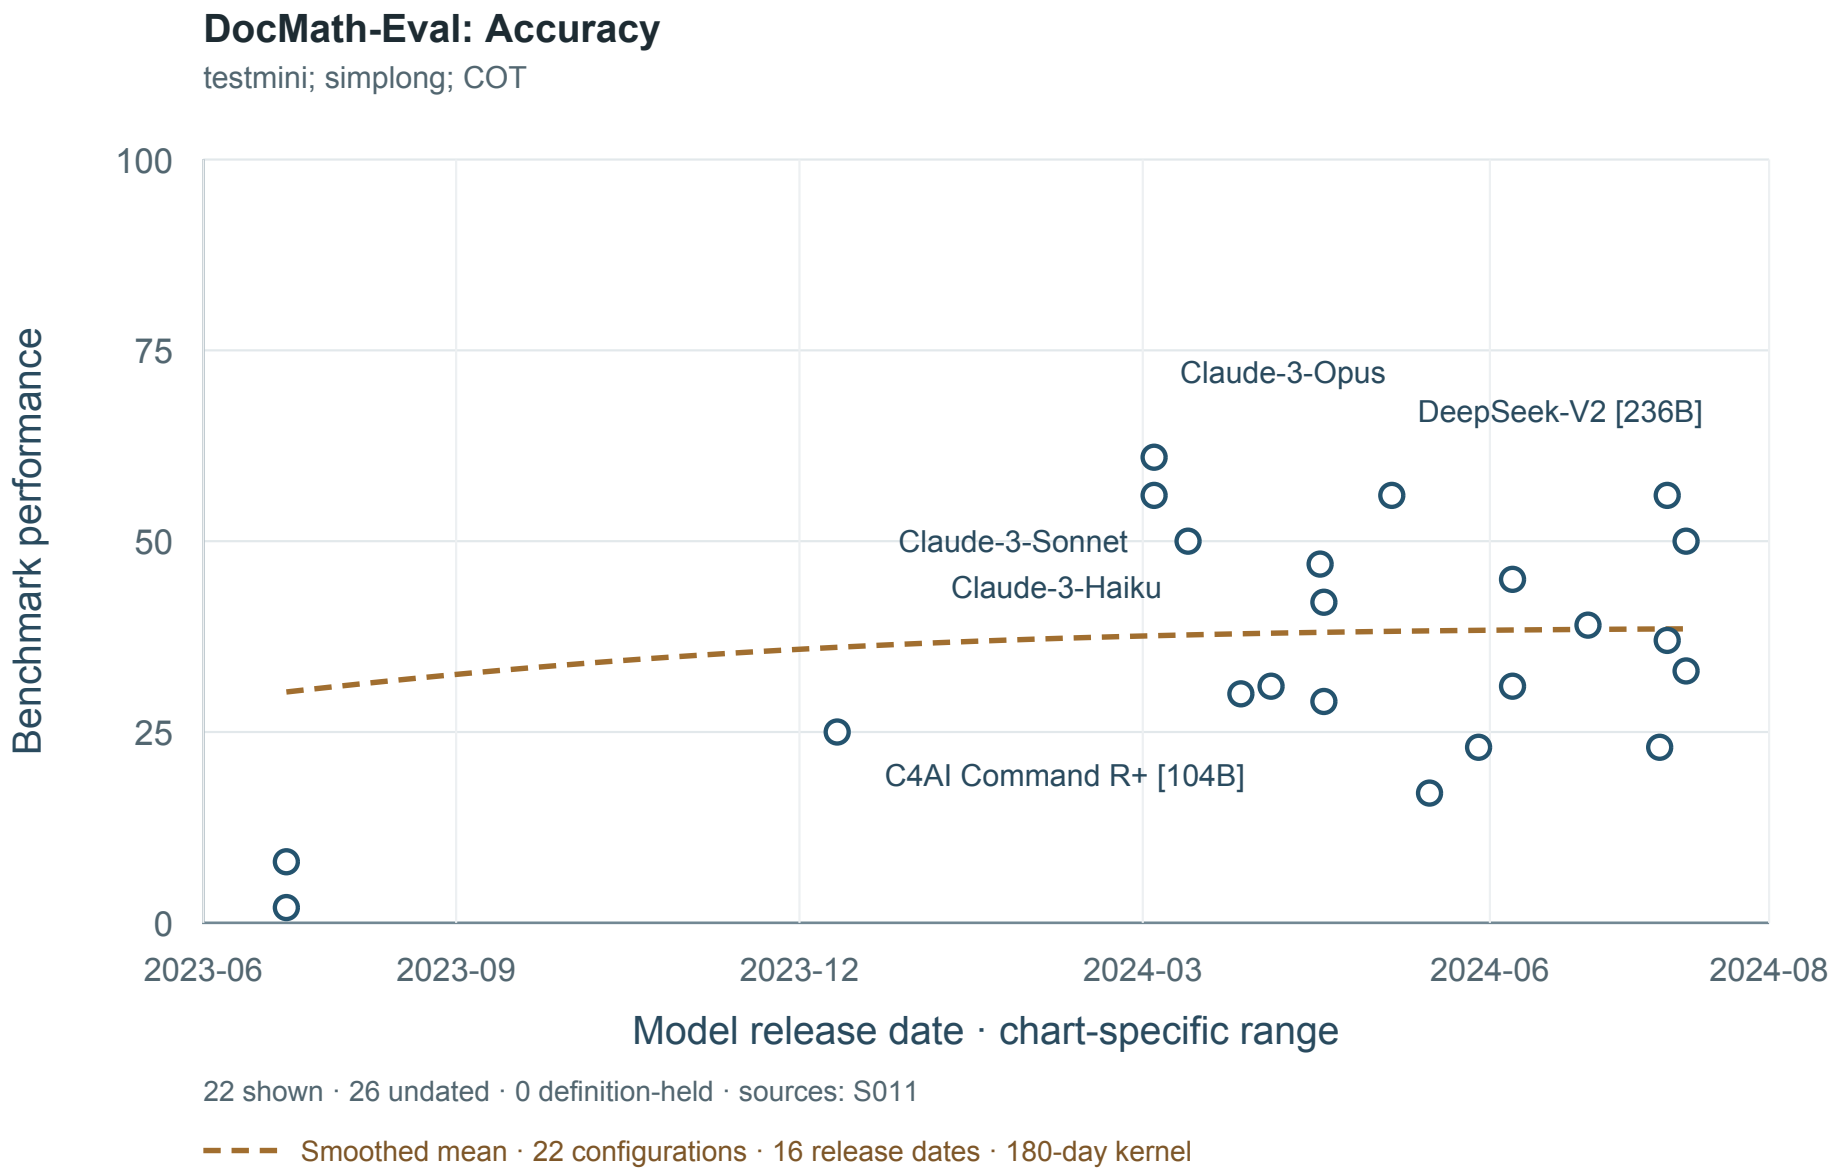


Result-source references: S011. Exact point locators and raw values: data/F018_DocMath_Eval_values.csv.

Benchmark reference (APA): Zhao, Y., Long, Y., Liu, H., Kamoi, R., Nan, L., Chen, L., Liu, Y., Tang, X., Zhang, R., & Cohan, A. (2023). DocMath-Eval: Evaluating math reasoning capabilities of LLMs in understanding long and specialized documents. arXiv. https://arxiv.org/abs/2311.09805

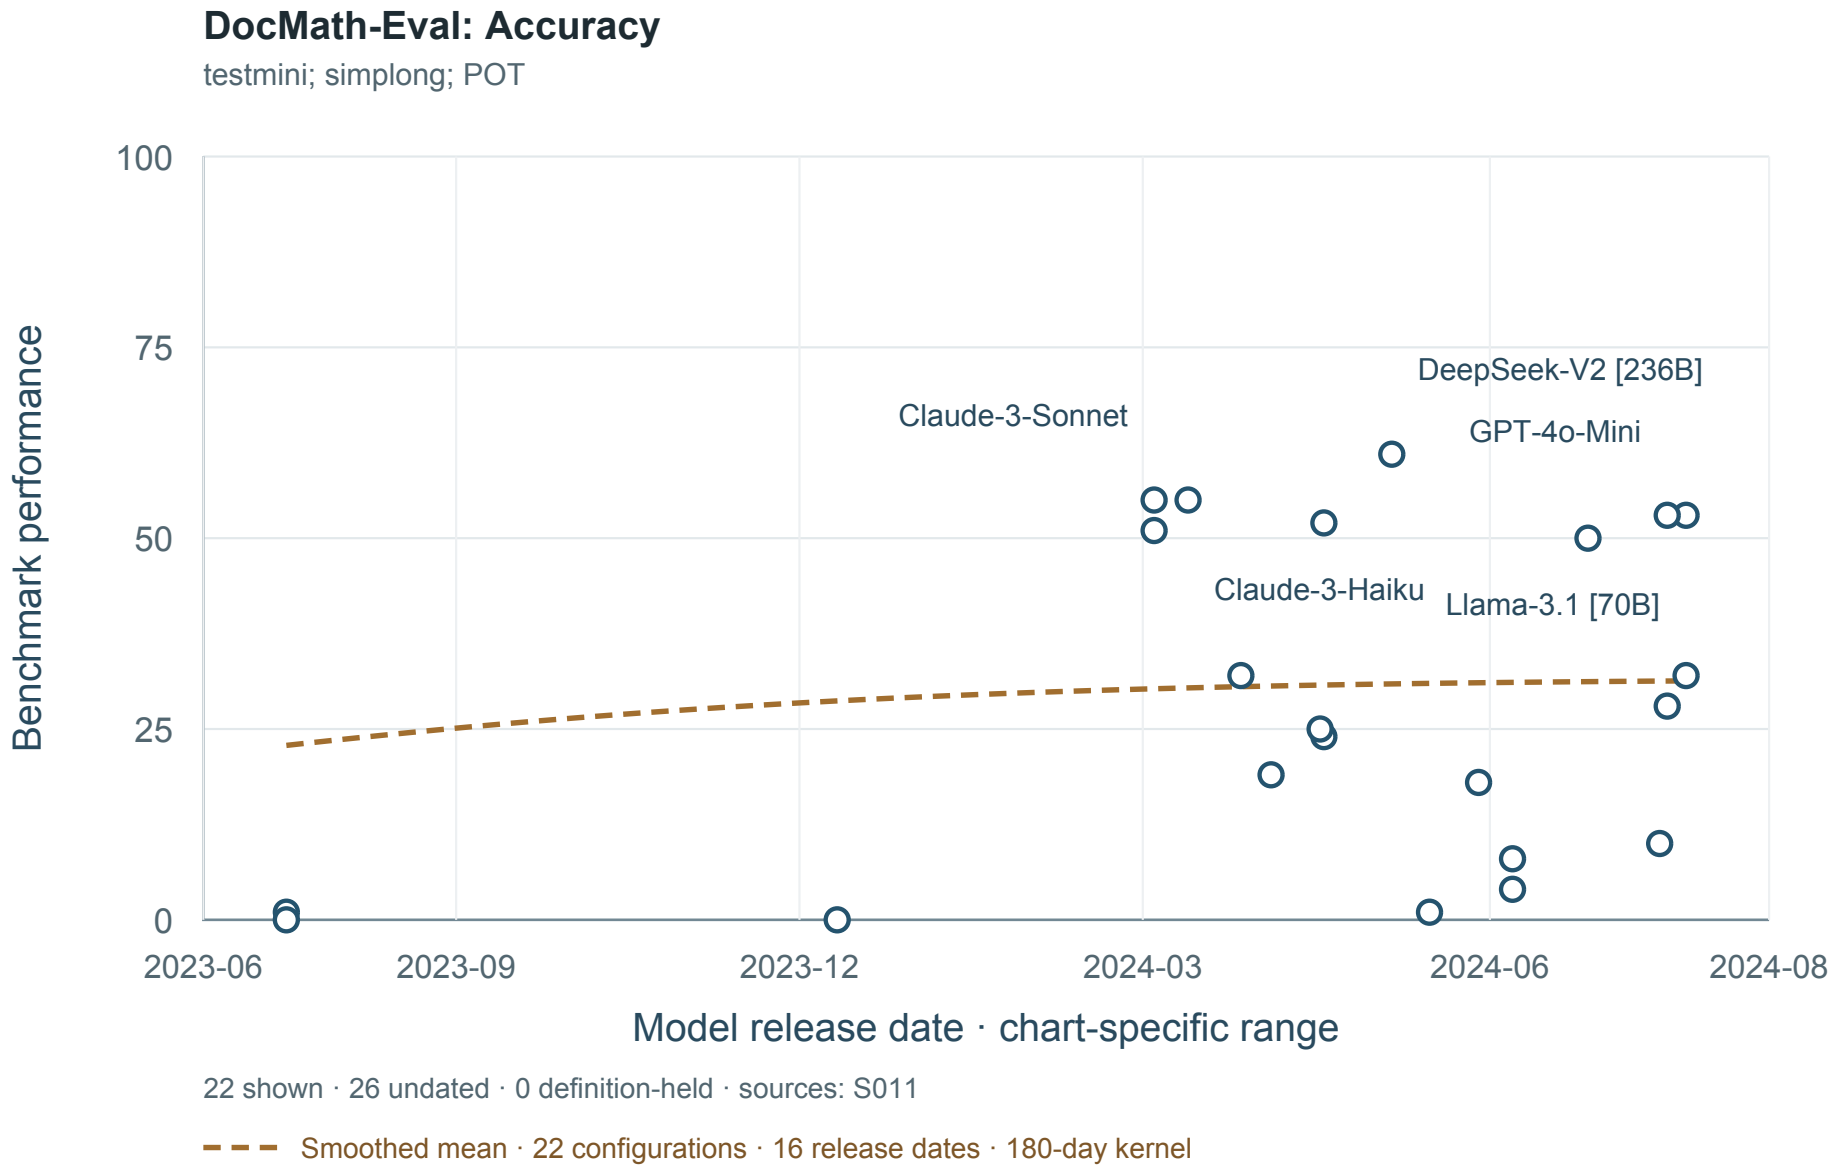


Result-source references: S011. Exact point locators and raw values: data/F018_DocMath_Eval_values.csv.

Benchmark reference (APA): Zhao, Y., Long, Y., Liu, H., Kamoi, R., Nan, L., Chen, L., Liu, Y., Tang, X., Zhang, R., & Cohan, A. (2023). DocMath-Eval: Evaluating math reasoning capabilities of LLMs in understanding long and specialized documents. arXiv. https://arxiv.org/abs/2311.09805

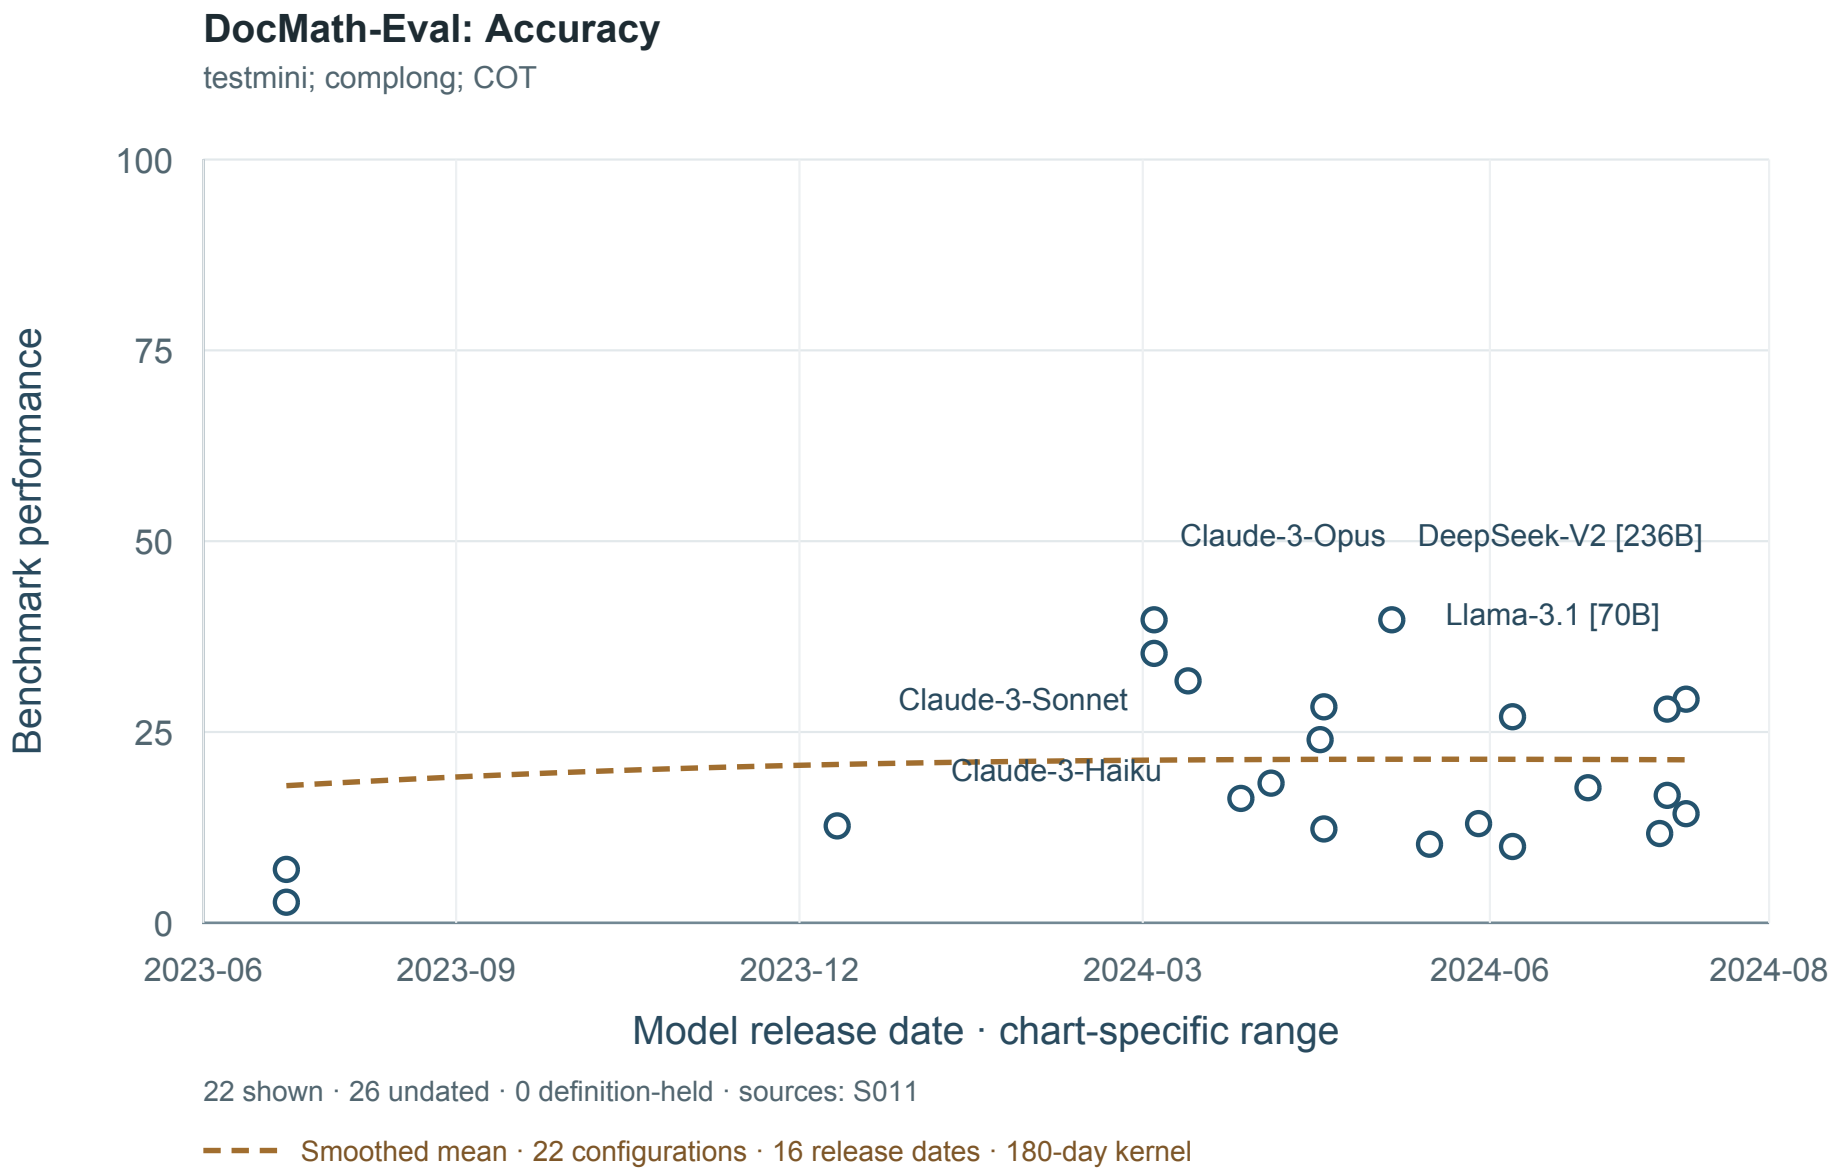

Result-source references: S011. Exact point locators and raw values: data/F018_DocMath_Eval_values.csv.

Benchmark reference (APA): Zhao, Y., Long, Y., Liu, H., Kamoi, R., Nan, L., Chen, L., Liu, Y., Tang, X., Zhang, R., & Cohan, A. (2023). DocMath-Eval: Evaluating math reasoning capabilities of LLMs in understanding long and specialized documents. arXiv. https://arxiv.org/abs/2311.09805

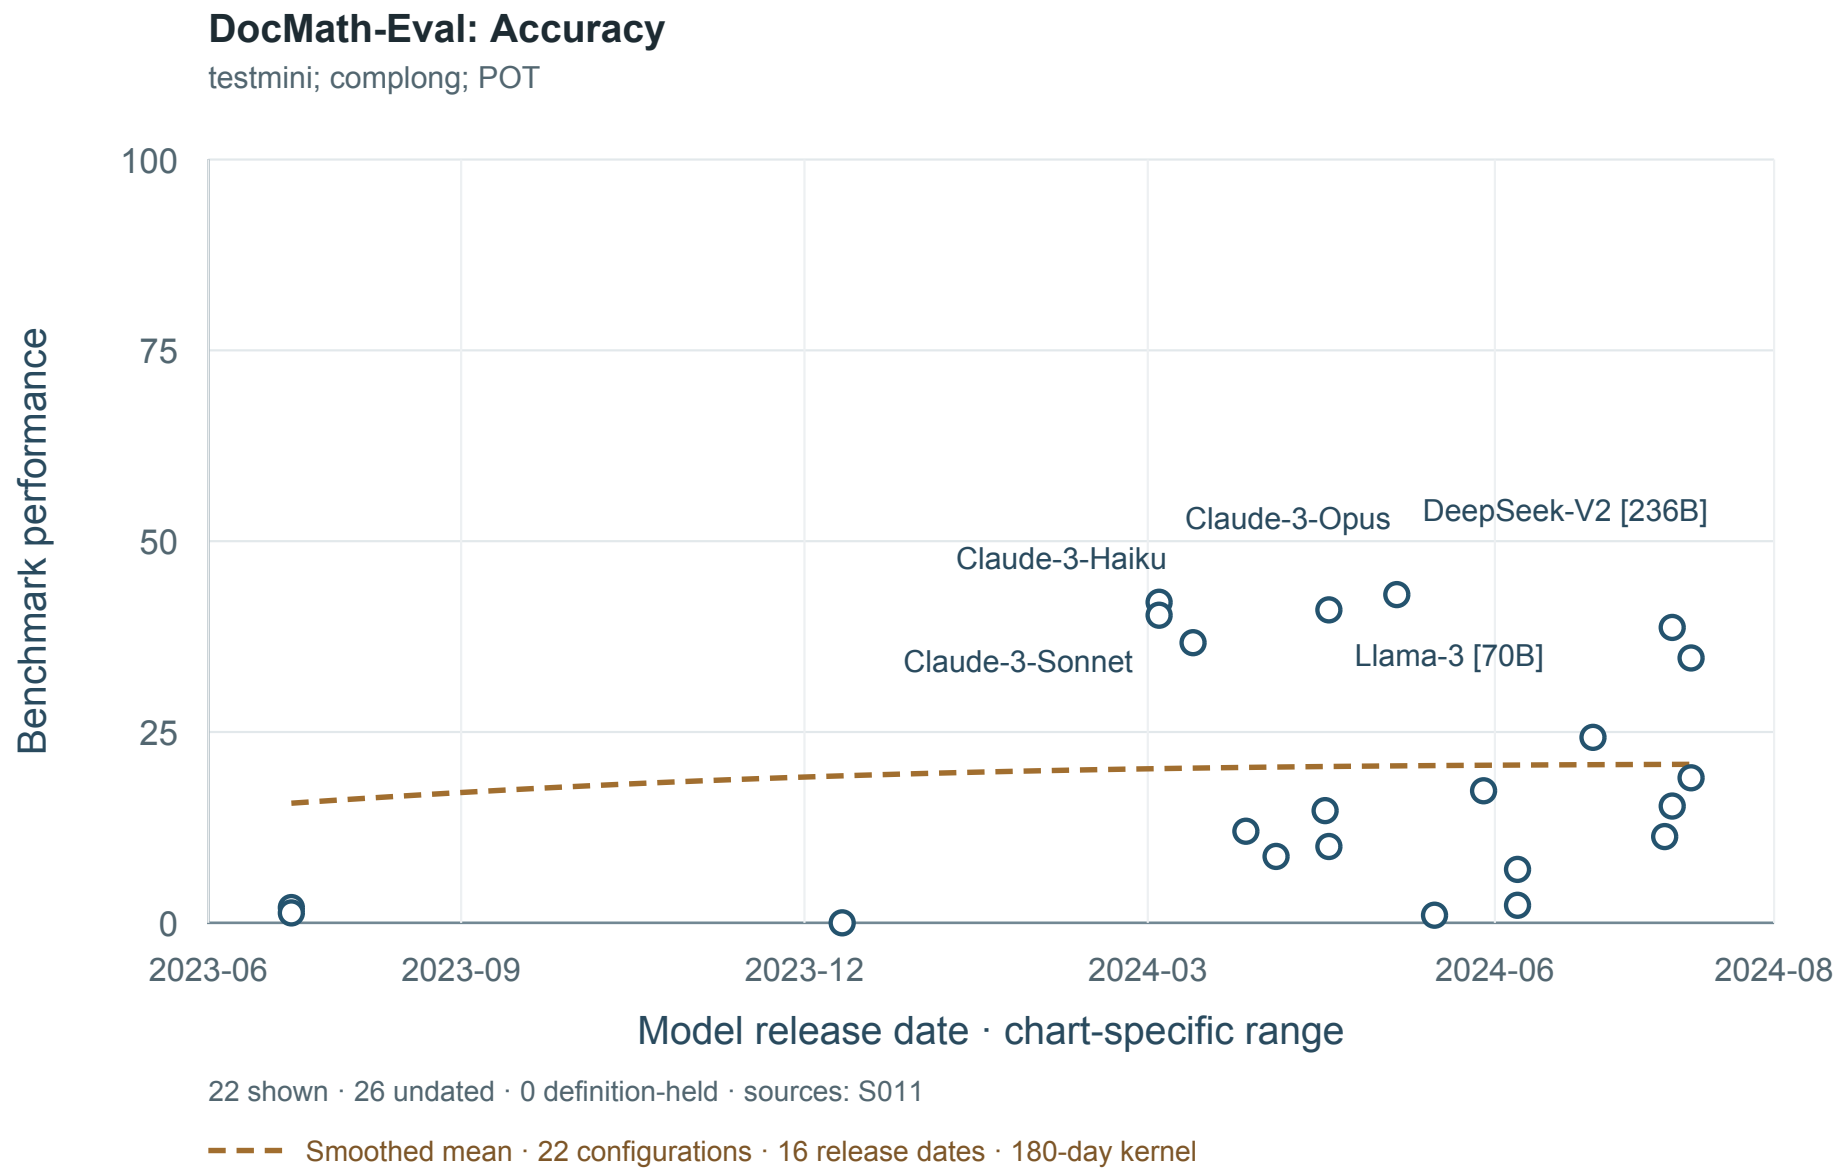

Result-source references: S011. Exact point locators and raw values: data/F018_DocMath_Eval_values.csv.

Benchmark reference (APA): Zhao, Y., Long, Y., Liu, H., Kamoi, R., Nan, L., Chen, L., Liu, Y., Tang, X., Zhang, R., & Cohan, A. (2023). DocMath-Eval: Evaluating math reasoning capabilities of LLMs in understanding long and specialized documents. arXiv. https://arxiv.org/abs/2311.09805

F019 MMLongBench-Doc

Long multimodal document QA including cross-page and unanswerable items

38 source values; 13 new; 6 separate conditions; 13 visible time points; 0 definition-held values; 0 visible mean curves.

Benchmark references (APA)

Ma, Y., Zang, Y., Chen, L., Chen, M., Jiao, Y., Li, X., Lu, X., Liu, Z., Ma, Y., Dong, X., Zhang, P., Pan, L., Jiang, Y.-G., Wang, J., Cao, Y., & Sun, A. (2024). MMLongBench-Doc: Benchmarking Long-context document understanding with visualizations. arXiv. https://arxiv.org/abs/2407.01523

Workflow and article scope

Challenges: A; B

Prepare and read source documents; Locate relevant evidence; Bind values to the correct unit

Model-based response extraction/evaluation and input route can change scores.

Manuscript anchors: Lu and Wang, Challenges A–B; manuscript paragraphs 15–18; Source-based step comparisons, manuscript paragraph 31; Wrong-subgroup example, manuscript paragraph 29

Result-source references: S033; MC014; MC083; MC084; MC013. Full references appear in the final bibliography.

Complete condition inventory

01. Generalized accuracy | Original Table 3; input route, size and window named; OCR+text input
10 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S033.

02. Generalized accuracy | Original Table 3; input route, size and window named; Vision input
15 values; 4 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S033.

03. Reported MMLongBench-Doc score | Mode not specified; MC014 H2; MMLongBench-Doc
4 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC014.


04. Reported MMLongBench-Doc score | Mode not specified; MC083 H2; MMLongBench-Doc
4 values; 3 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC083.

05. Reported MMLongBench-Doc score | Mode not specified; MC084 H2; MMLongBench-Doc
4 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC084.

06. Reported MMLongBench-Doc score | Instruct / non-thinking variant; MC013 Model-card evaluation table image; MMLongBench-Doc
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC013.

MMLongBench-Doc: Generalized accuracy

Original Table 3; input route, size and window named; OCR+text input

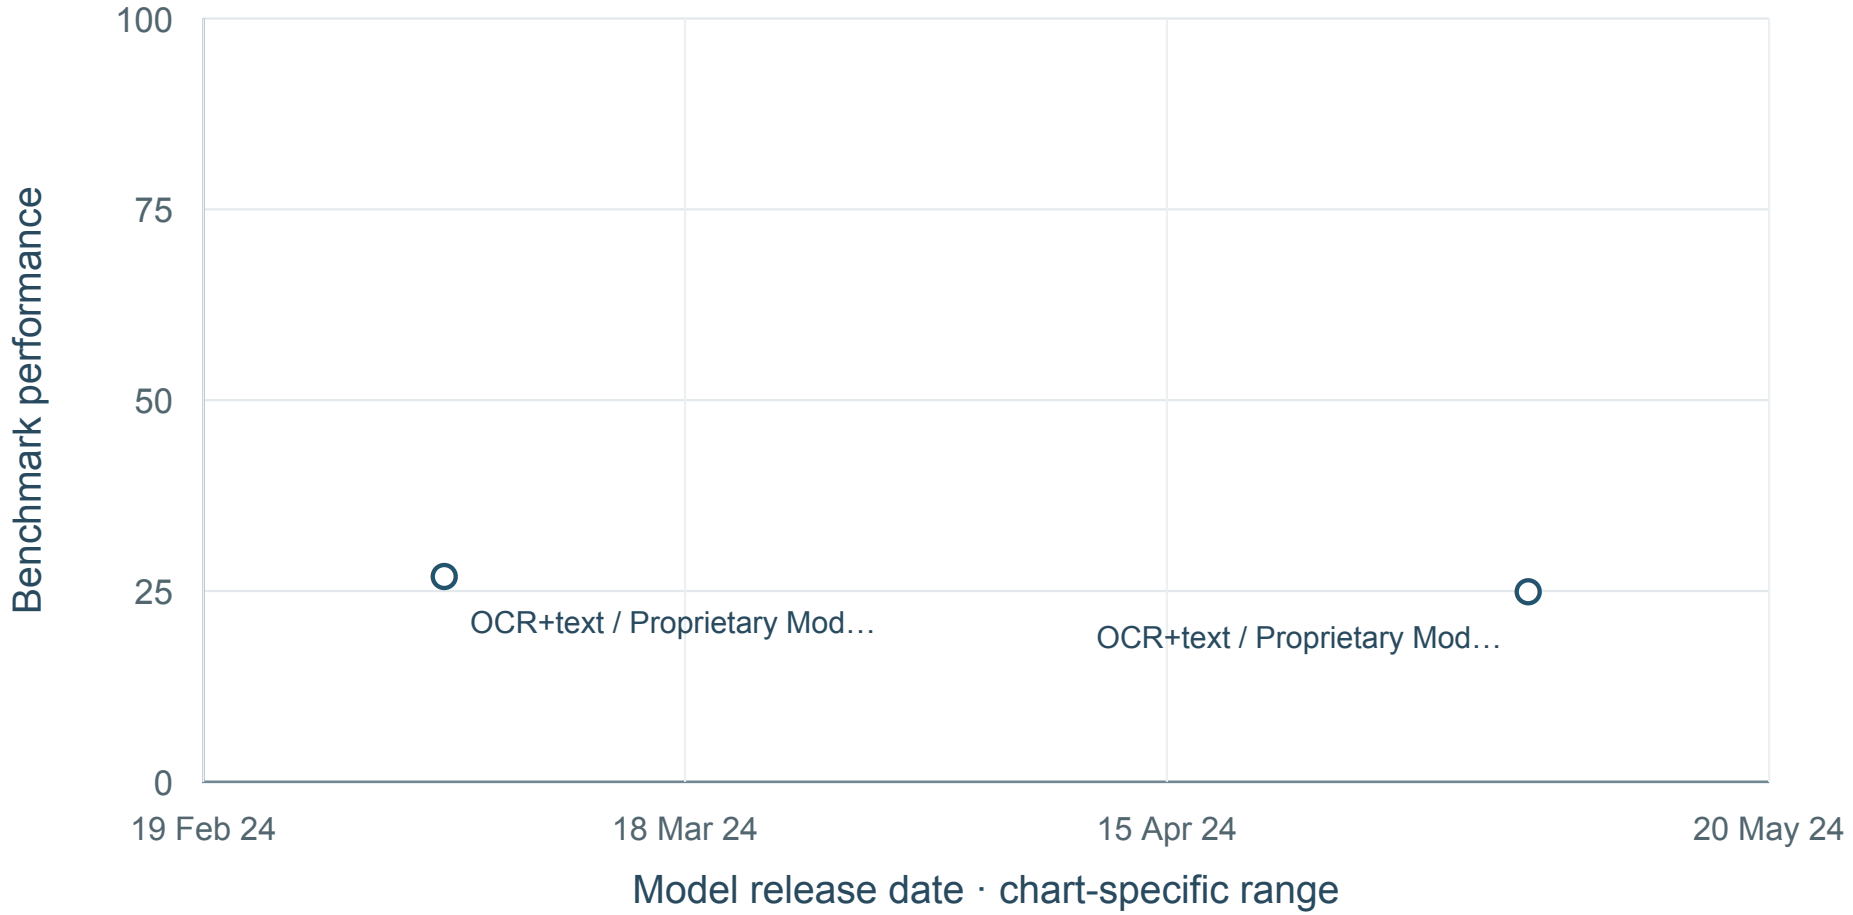

2 shown · 8 undated · 0 definition-held · sources: S033


No mean curve: Fewer than five dated model configurations.

Result-source references: S033. Exact point locators and raw values: data/F019_MMLongBench_Doc_values.csv.

Benchmark reference (APA): Ma, Y., Zang, Y., Chen, L., Chen, M., Jiao, Y., Li, X., Lu, X., Liu, Z., Ma, Y., Dong, X., Zhang, P., Pan, L., Jiang, Y.-G., Wang, J., Cao, Y., & Sun, A. (2024). MMLongBench-Doc: Benchmarking Long-context document understanding with visualizations. arXiv. https://arxiv.org/abs/2407.01523

MMLongBench-Doc: Generalized accuracy

Original Table 3; input route, size and window named; Vision input

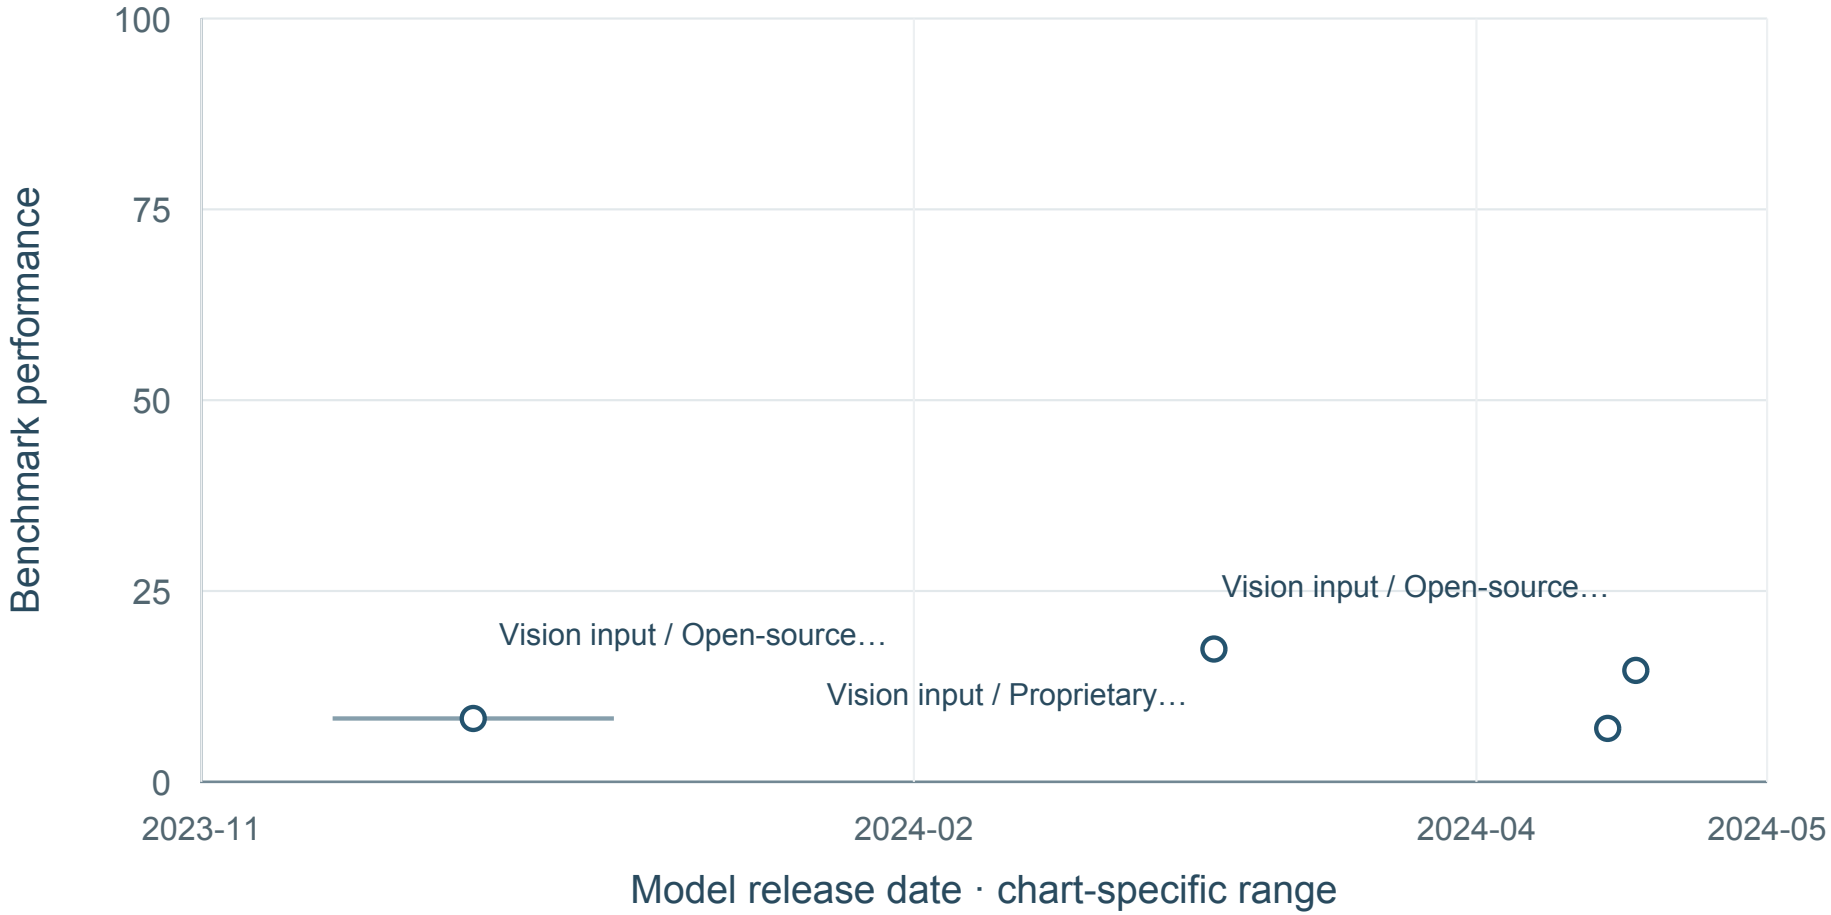

4 shown · 11 undated · 0 definition-held · sources: S033


No mean curve: Fewer than five dated model configurations.

Result-source references: S033. Exact point locators and raw values: data/F019_MMLongBench_Doc_values.csv.

Benchmark reference (APA): Ma, Y., Zang, Y., Chen, L., Chen, M., Jiao, Y., Li, X., Lu, X., Liu, Z., Ma, Y., Dong, X., Zhang, P., Pan, L., Jiang, Y.-G., Wang, J., Cao, Y., & Sun, A. (2024). MMLongBench-Doc: Benchmarking Long-context document understanding with visualizations. arXiv. https://arxiv.org/abs/2407.01523

MMLongBench-Doc: Reported MMLongBench-Doc score

Mode not specified; MC014 H2; MMLongBench-Doc

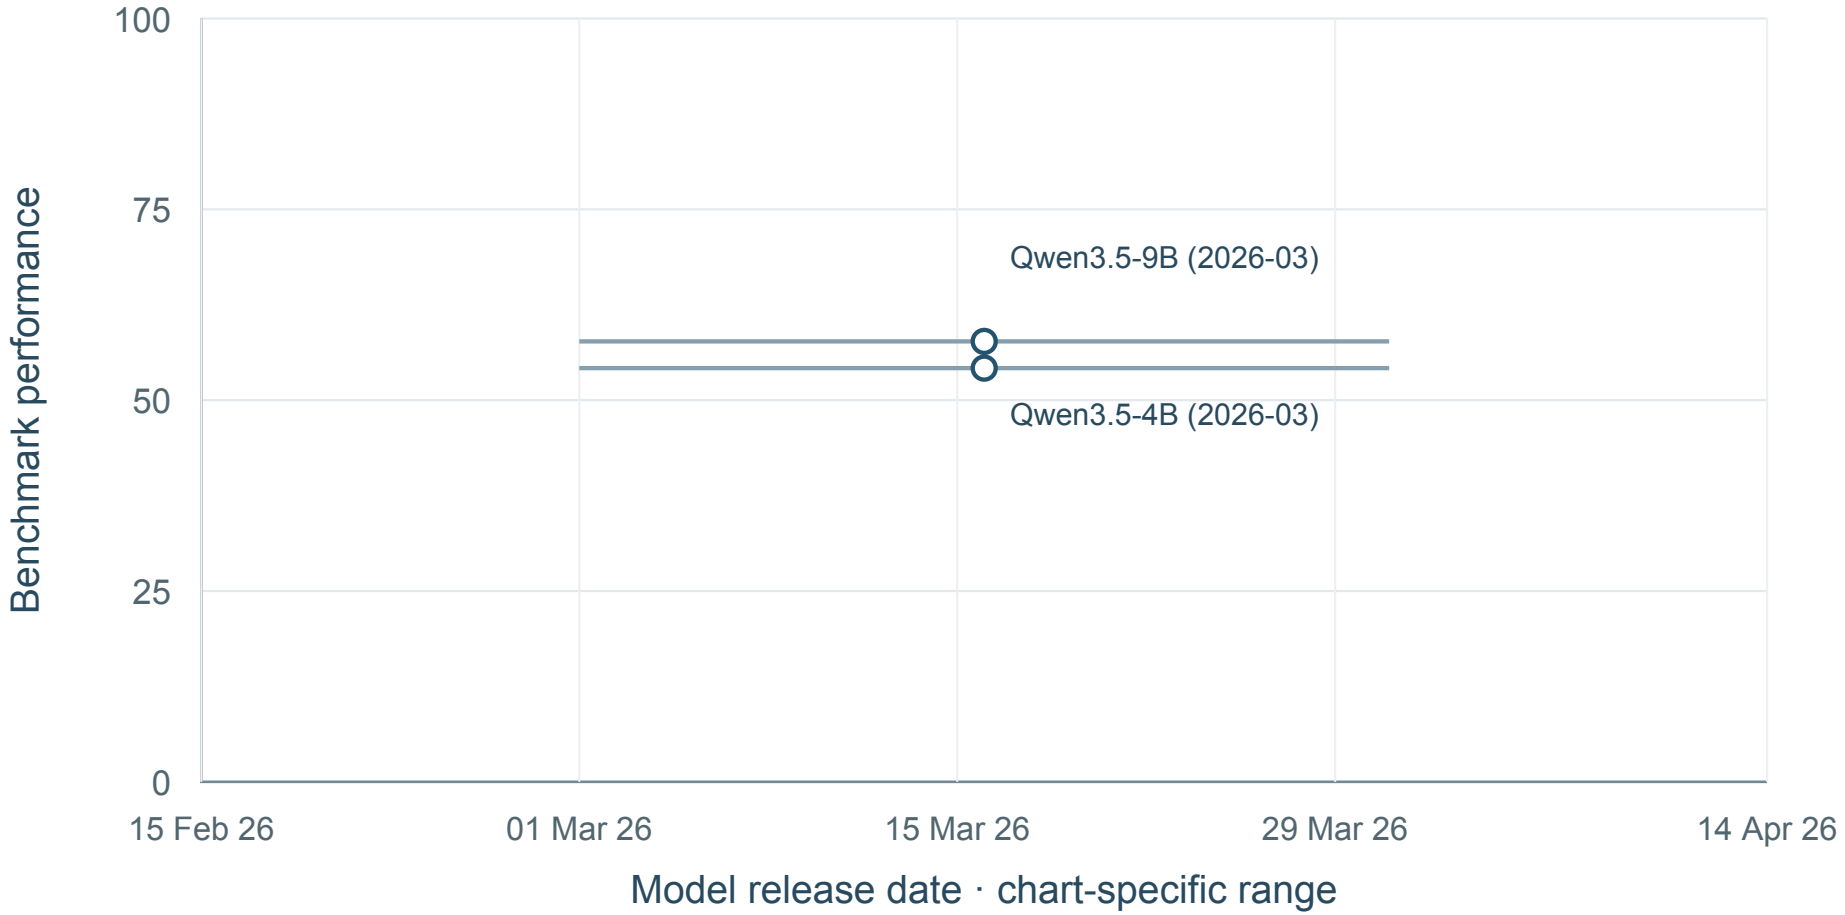

2 shown · 2 undated · 0 definition-held · sources: MC014


No mean curve: Fewer than five dated model configurations.

Result-source references: MC014. Exact point locators and raw values: data/F019_MMLongBench_Doc_values.csv.

Benchmark reference (APA): Ma, Y., Zang, Y., Chen, L., Chen, M., Jiao, Y., Li, X., Lu, X., Liu, Z., Ma, Y., Dong, X., Zhang, P., Pan, L., Jiang, Y.-G., Wang, J., Cao, Y., & Sun, A. (2024). MMLongBench-Doc: Benchmarking Long-context document understanding with visualizations. arXiv. https://arxiv.org/abs/2407.01523

MMLongBench-Doc: Reported MMLongBench-Doc score

Mode not specified; MC083 H2; MMLongBench-Doc

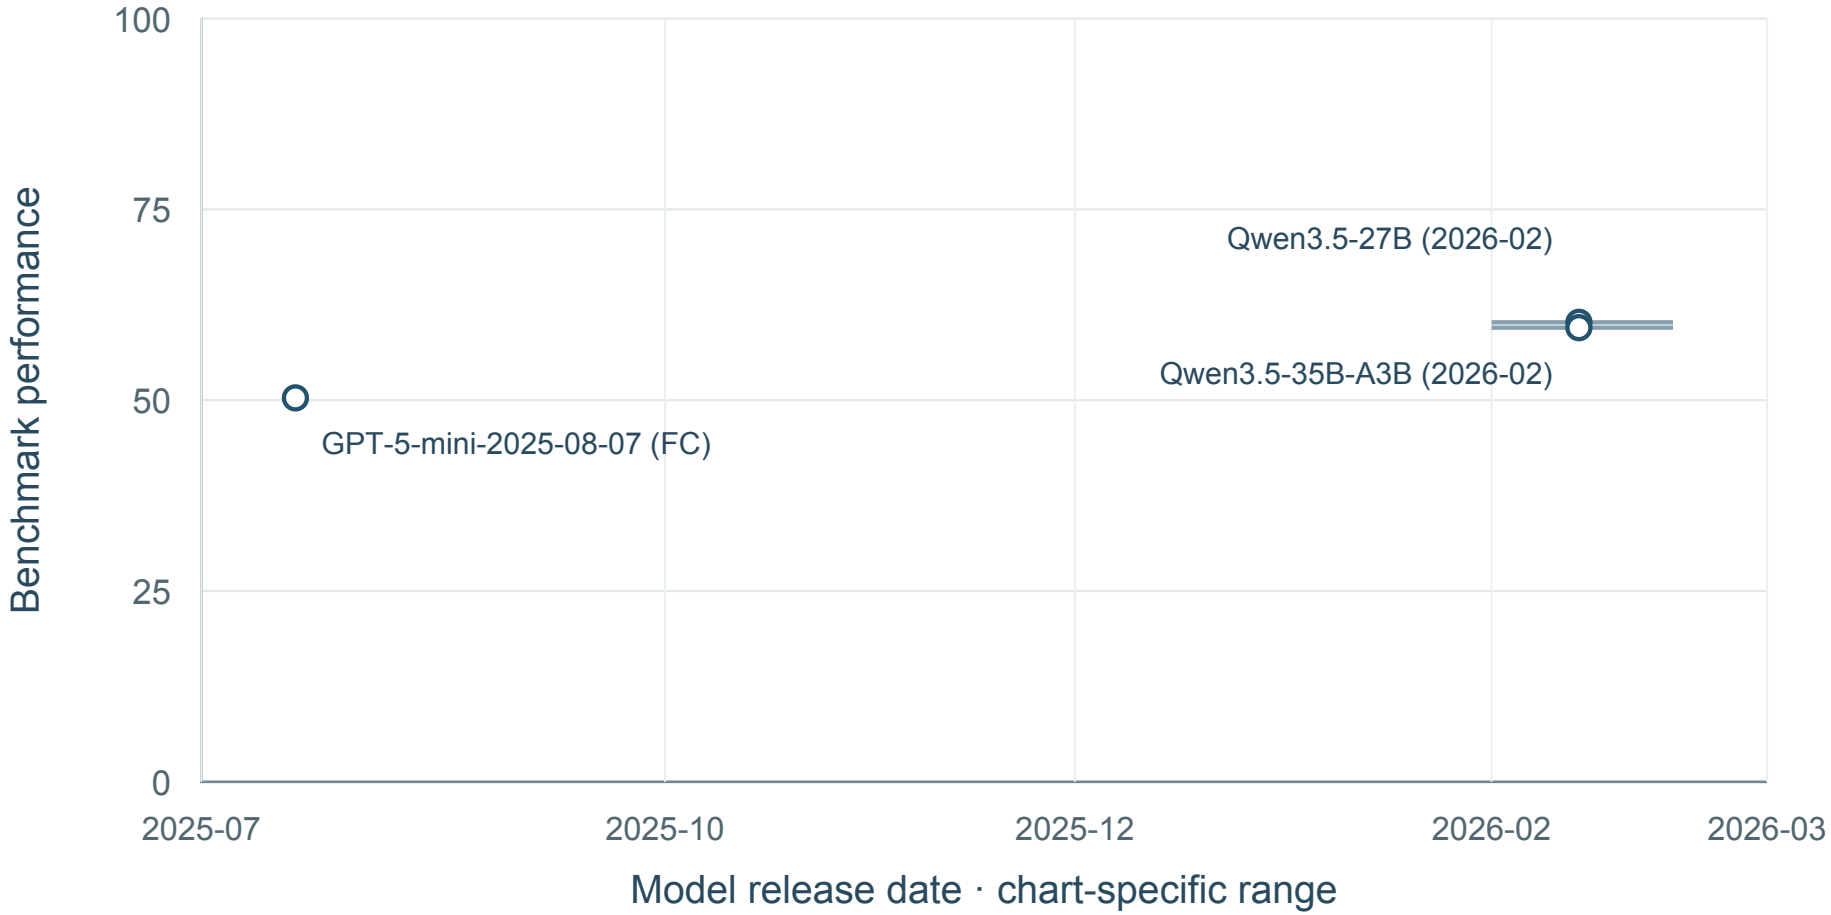

3 shown · 1 undated · 0 definition-held · sources: MC083


No mean curve: Fewer than five dated model configurations.

Result-source references: MC083. Exact point locators and raw values: data/F019_MMLongBench_Doc_values.csv.

Benchmark reference (APA): Ma, Y., Zang, Y., Chen, L., Chen, M., Jiao, Y., Li, X., Lu, X., Liu, Z., Ma, Y., Dong, X., Zhang, P., Pan, L., Jiang, Y.-G., Wang, J., Cao, Y., & Sun, A. (2024). MMLongBench-Doc: Benchmarking Long-context document understanding with visualizations. arXiv. https://arxiv.org/abs/2407.01523

MMLongBench-Doc: Reported MMLongBench-Doc score

Mode not specified; MC084 H2; MMLongBench-Doc

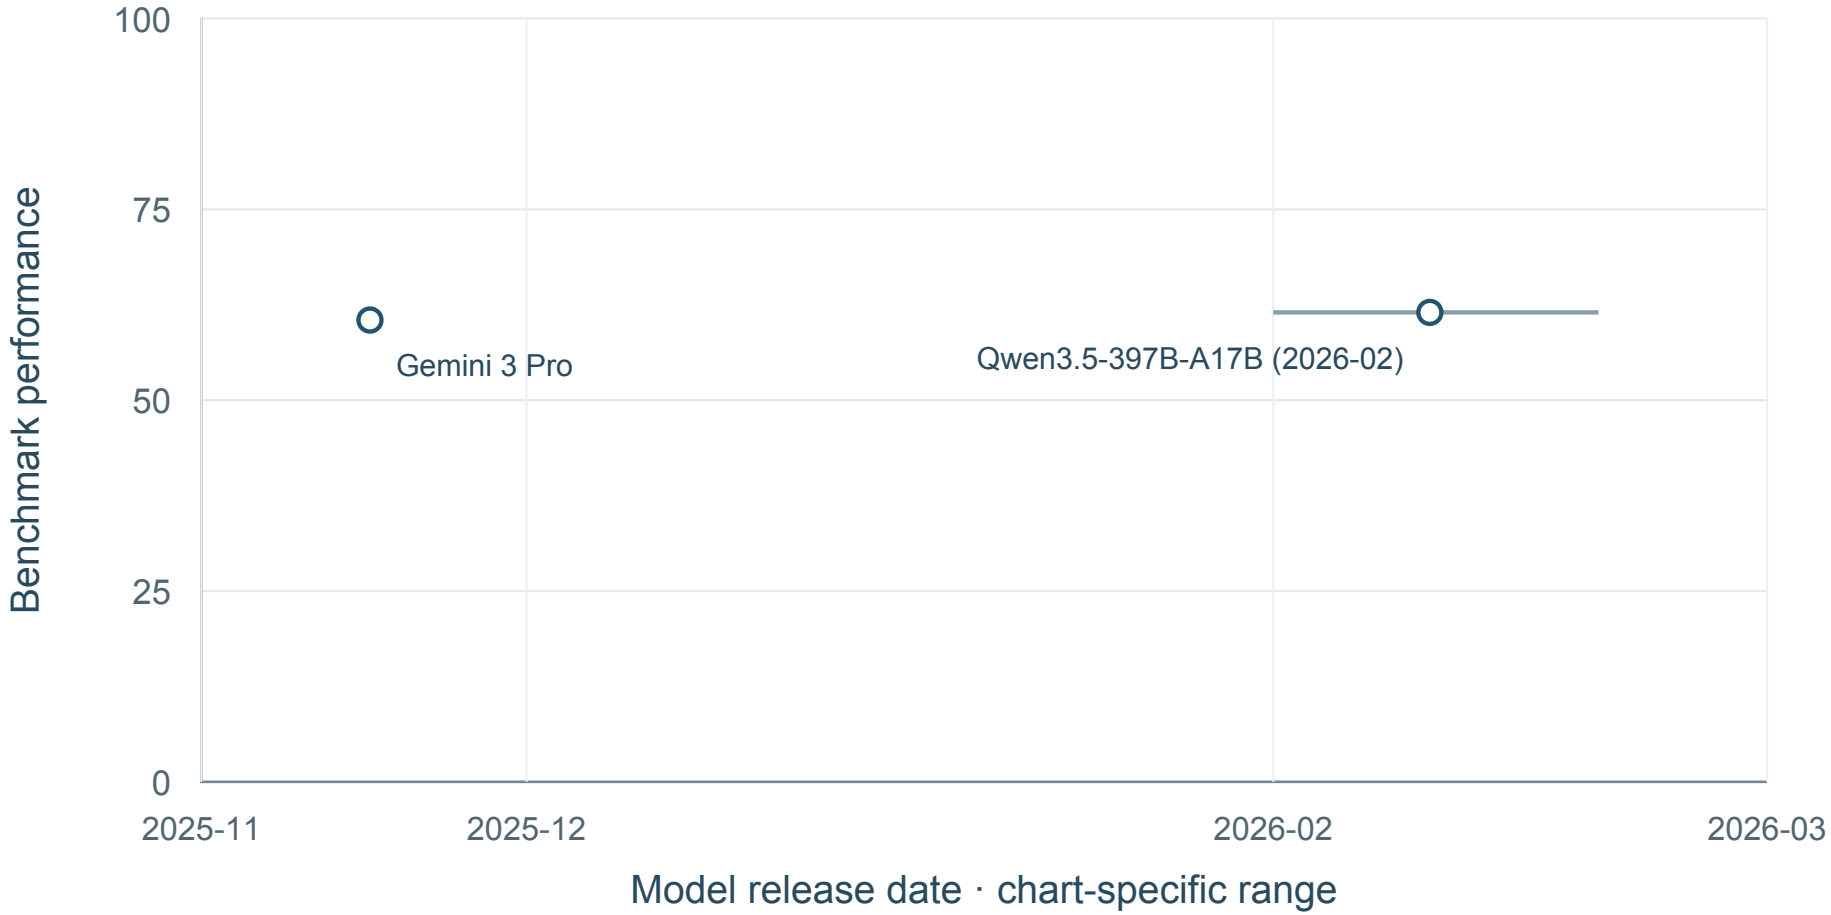

2 shown · 2 undated · 0 definition-held · sources: MC084

No mean curve: Fewer than five dated model configurations.

Result-source references: MC084. Exact point locators and raw values: data/F019_MMLongBench_Doc_values.csv.

Benchmark reference (APA): Ma, Y., Zang, Y., Chen, L., Chen, M., Jiao, Y., Li, X., Lu, X., Liu, Z., Ma, Y., Dong, X., Zhang, P., Pan, L., Jiang, Y.-G., Wang, J., Cao, Y., & Sun, A. (2024). MMLongBench-Doc: Benchmarking Long-context document understanding with visualizations. arXiv. https://arxiv.org/abs/2407.01523

F020 LongBench

Bilingual long-context QA, summarization and retrieval; Deep long-context understanding across realistic tasks

440 source values; 42 new; 30 separate conditions; 278 visible time points; 6 definition-held values; 13 visible mean curves.

Benchmark references (APA)

Bai, Y., Tu, S., Zhang, J., Peng, H., Wang, X., Lv, X., Cao, S., Xu, J., Hou, L., Dong, Y., Tang, J., & Li, J. (2024). LongBench v2: Towards deeper understanding and reasoning on realistic Long-context multitasks. arXiv. https://arxiv.org/abs/2412.15204

Bai, Y., Lv, X., Zhang, J., Lyu, H., Tang, J., Huang, Z., Du, Z., Liu, X., Zeng, A., Hou, L., Dong, Y., Tang, J., & Li, J. (2023). LongBench: A bilingual, multitask benchmark for long context understanding. arXiv. https://arxiv.org/abs/2308.14508

Qwen Team. (2024). Qwen2.5 technical report. arXiv. https://arxiv.org/abs/2412.15115

Workflow and article scope

Challenges: B; D

Locate relevant evidence; Bind values to the correct unit; Coordinate retrieval, tools and intermediate steps

Mixed metrics and inherited datasets; do not read average as extraction accuracy.; Human reference is time-limited; task mix differs across length subsets.

Manuscript anchors: Source-based step comparisons, manuscript paragraph 31; Wrong-subgroup example, manuscript paragraph 29; Lu and Wang, Challenge D; manuscript paragraphs 9, 15–18 and 31

Result-source references: S001; S034; MC014; MC016; MC033; MC049; MC058; MC083; MC084; MC076. Full references appear in the final bibliography.

Complete condition inventory

01. Accuracy | 503-question v2; overall; CoT
38 values; 25 time points; visible mean curve. Sources: S001.

02. Accuracy | 503-question v2; easy; CoT
38 values; 25 time points; visible mean curve. Sources: S001.

03. Accuracy | 503-question v2; hard; CoT
38 values; 25 time points; visible mean curve. Sources: S001.

04. Accuracy | 503-question v2; short; CoT
38 values; 25 time points; visible mean curve. Sources: S001.

05. Accuracy | 503-question v2; medium; CoT
38 values; 25 time points; visible mean curve. Sources: S001.

06. Accuracy | 503-question v2; long; CoT
38 values; 25 time points; visible mean curve. Sources: S001.

07. Accuracy | 503-question v2; overall; no-CoT
27 values; 18 time points; visible mean curve. Sources: S001.

08. Accuracy | 503-question v2; easy; no-CoT
27 values; 18 time points; visible mean curve. Sources: S001.

09. Accuracy | 503-question v2; hard; no-CoT
27 values; 18 time points; visible mean curve. Sources: S001.

10. Accuracy | 503-question v2; short; no-CoT
27 values; 18 time points; visible mean curve. Sources: S001.

11. Accuracy | 503-question v2; medium; no-CoT
27 values; 18 time points; visible mean curve. Sources: S001.

12. Accuracy | 503-question v2; long; no-CoT
27 values; 18 time points; visible mean curve. Sources: S001.

13. Macro-average task score | Original LongBench; heterogeneous category average
8 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S034.

14. Answer accuracy (%) | Thinking; MC014 H1; LongBench v2
1 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC014.

15. Answer accuracy (%) | Mode not specified; MC014 H1; LongBench v2
2 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC014.

16. Answer accuracy (%) | Mode not specified; MC016 M3; LongBench v2
5 values; 5 time points; visible mean curve. Sources: MC016.

17. Answer accuracy (%) | Thinking; MC033 H1; LongBench v2
2 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC033.

18. Answer accuracy (%) | Mode not specified; effort xhigh; MC033 H1; LongBench v2
1 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC033.

19. Answer accuracy (%) | Thinking; effort high; MC033 H1; LongBench v2
1 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC033.

20. Reported task aggregate score | Non-thinking; MC049 H2; 32B comparison; LongBench v1
6 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC049.

21. Reported task aggregate score | Non-thinking; MC049 H4; 1.2B comparison; LongBench v1
3 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC049.

22. Reported LongBench-Chat judge score | Mode not specified; MC058 H18; LongBench-Chat; LongBench- Chat
6 values; 0 time points; definition unresolved; raw data only. Sources: MC058.

23. Answer accuracy (%) | Mode not specified; MC083 H1; LongBench v2
5 values; 4 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC083.

24. Answer accuracy (%) | Mode not specified; MC084 H1; LongBench v2
4 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC084.

25. Answer accuracy (%) | Mode not specified; MC076 Table 22; LongBench v2; Overall
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC076.

26. Answer accuracy (%) | Mode not specified; MC076 Table 22; LongBench v2; Short
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC076.

27. Answer accuracy (%) | Mode not specified; MC076 Table 22; LongBench v2; Medium
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC076.


28. Answer accuracy (%) | Mode not specified; MC076 Table 22; LongBench v2; Long
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC076.

29. Answer accuracy (%) | Mode not specified; MC076 Table 22; LongBench v2; Easy
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC076.

30. Answer accuracy (%) | Mode not specified; MC076 Table 22; LongBench v2; Hard
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC076.


LongBench v2: Accuracy

503-question v2; overall; CoT

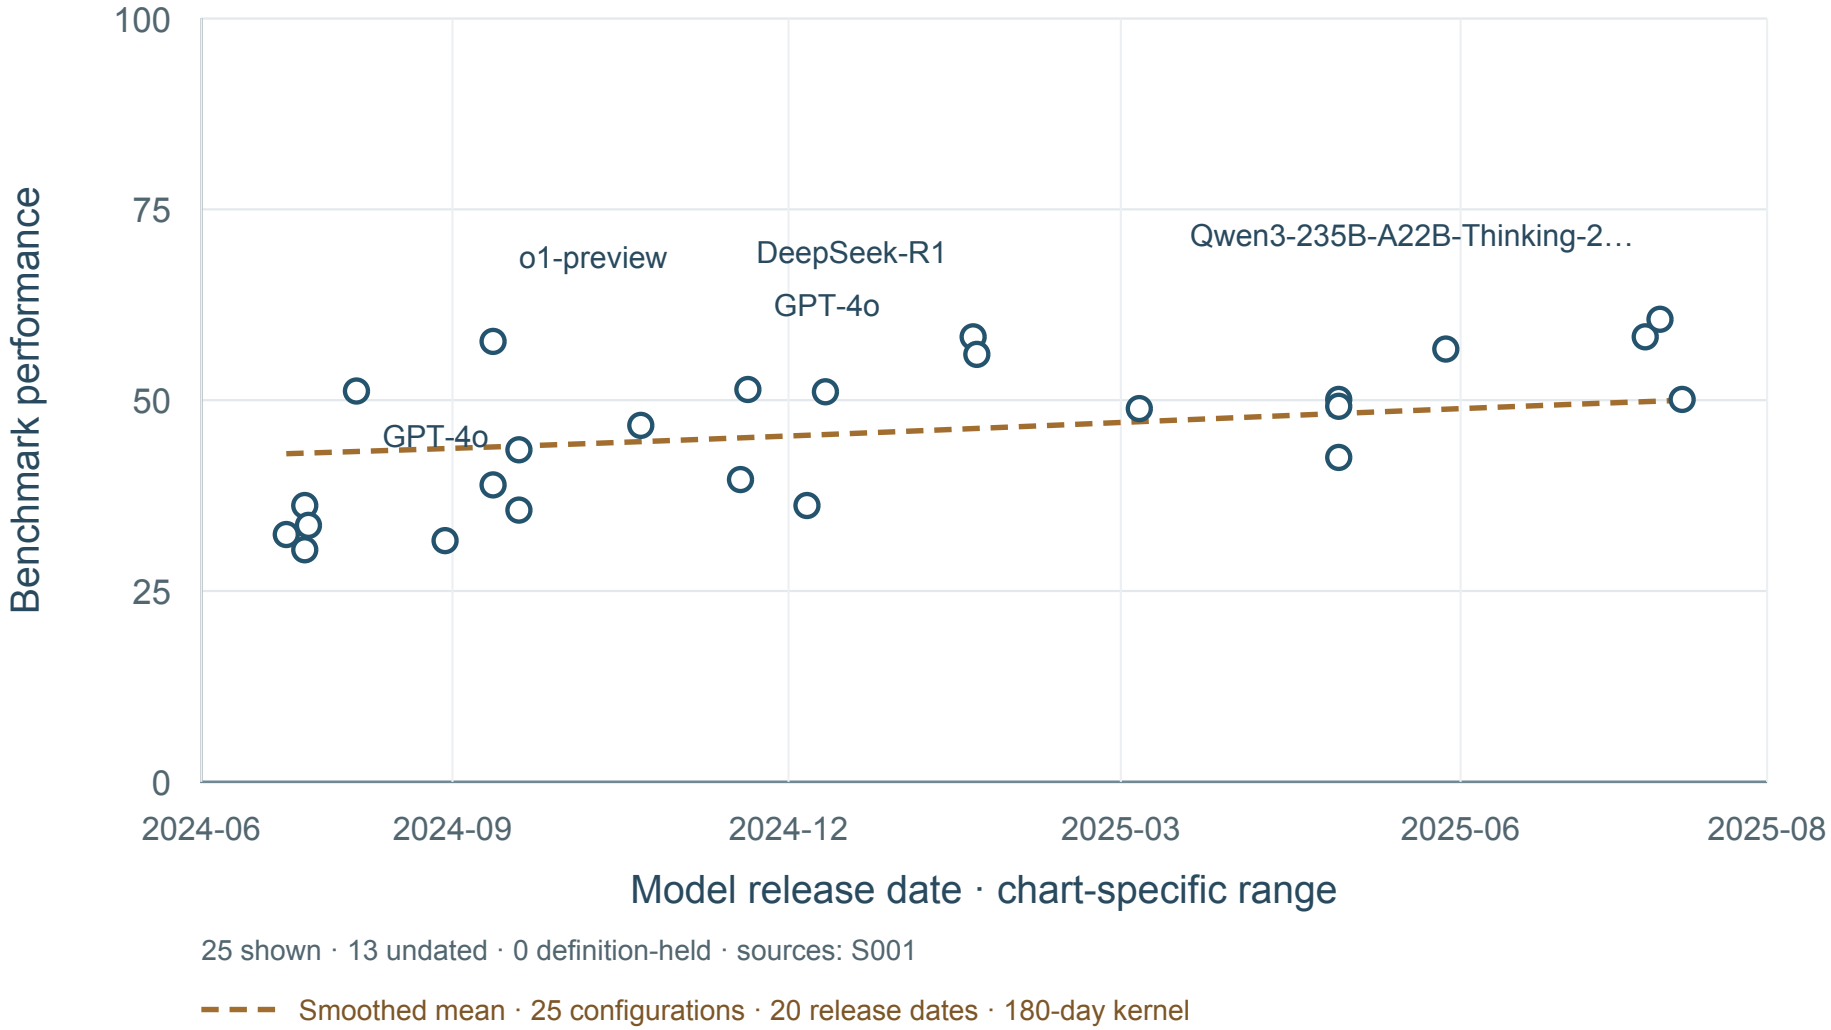


Result-source references: S001. Exact point locators and raw values: data/F020_LongBench_values.csv.

Benchmark reference (APA): Bai, Y., Tu, S., Zhang, J., Peng, H., Wang, X., Lv, X., Cao, S., Xu, J., Hou, L., Dong, Y., Tang, J., & Li, J. (2024). LongBench v2: Towards deeper understanding and reasoning on realistic Long-context multitasks. arXiv. https://arxiv.org/abs/2412.15204

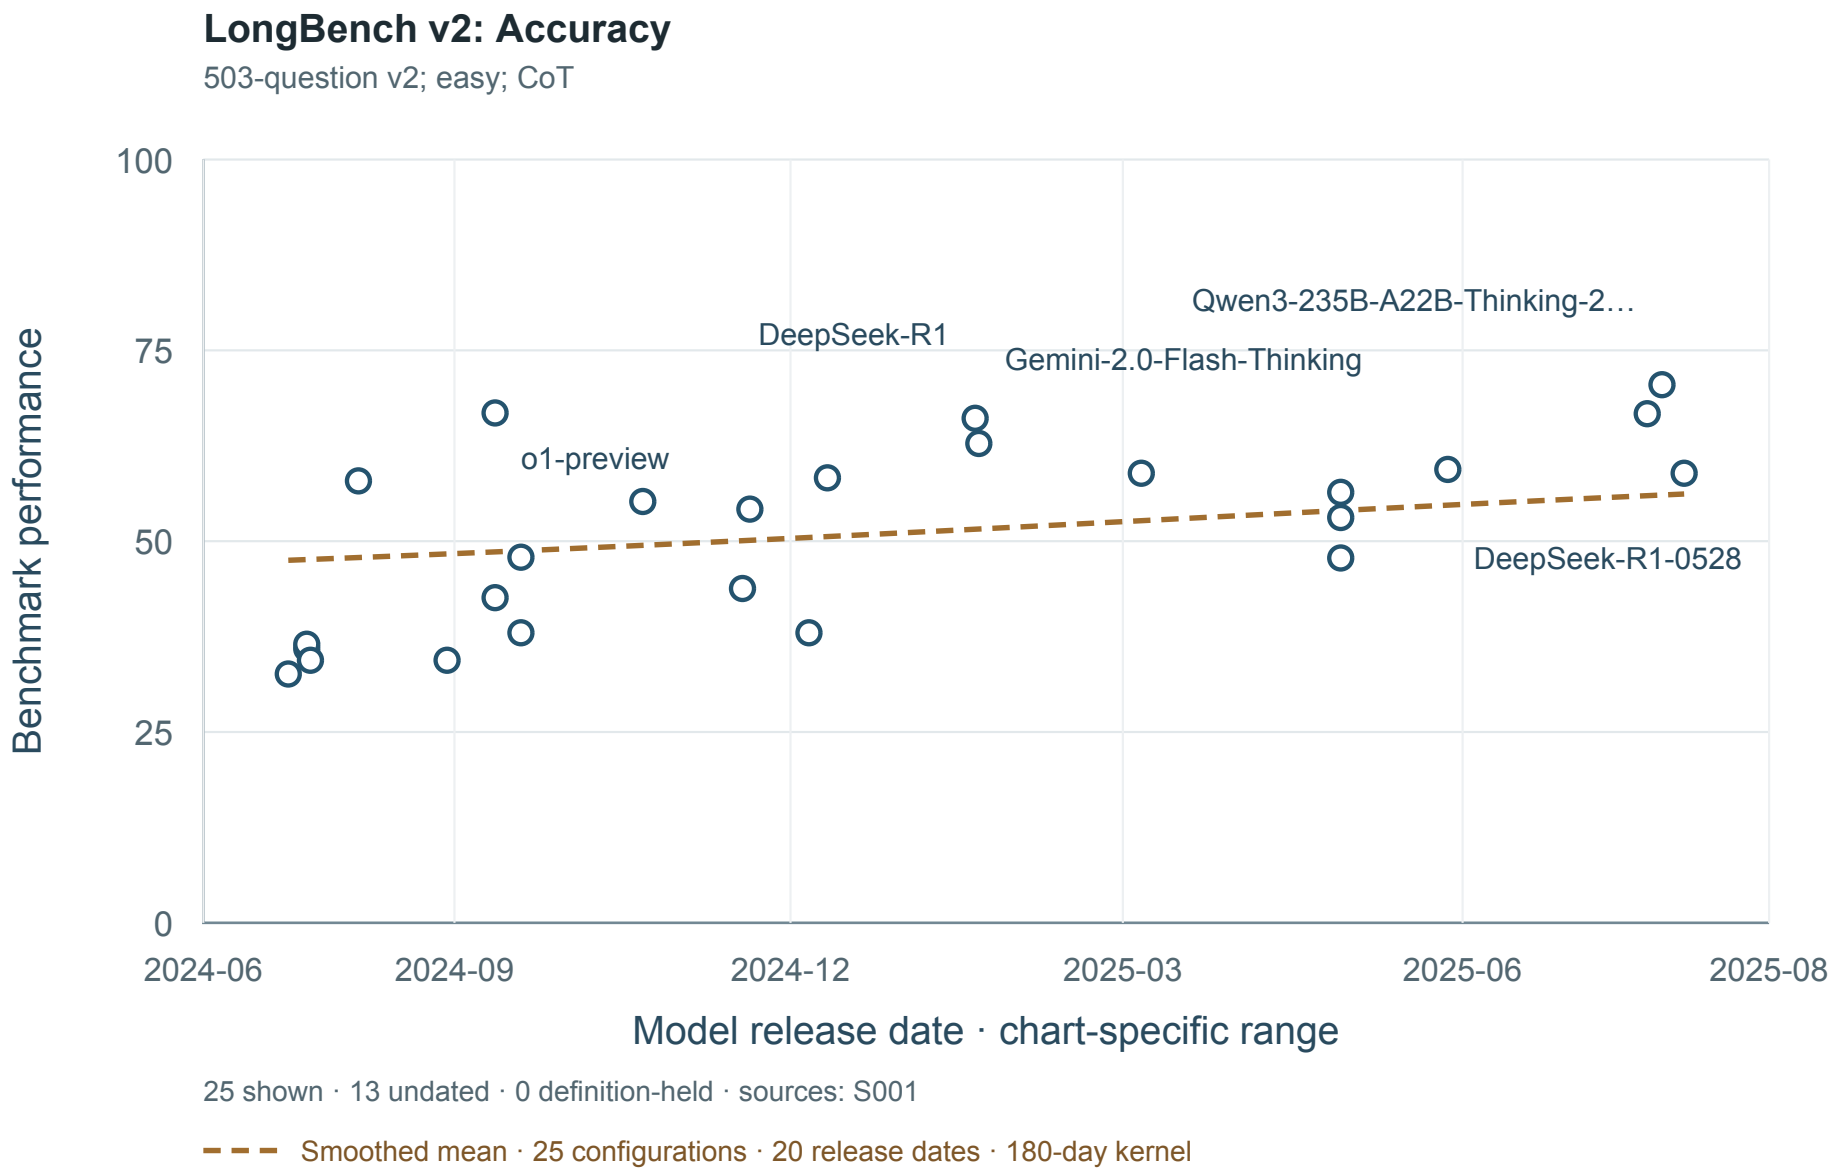

Result-source references: S001. Exact point locators and raw values: data/F020_LongBench_values.csv.

Benchmark reference (APA): Bai, Y., Tu, S., Zhang, J., Peng, H., Wang, X., Lv, X., Cao, S., Xu, J., Hou, L., Dong, Y., Tang, J., & Li, J. (2024). LongBench v2: Towards deeper understanding and reasoning on realistic Long-context multitasks. arXiv. https://arxiv.org/abs/2412.15204

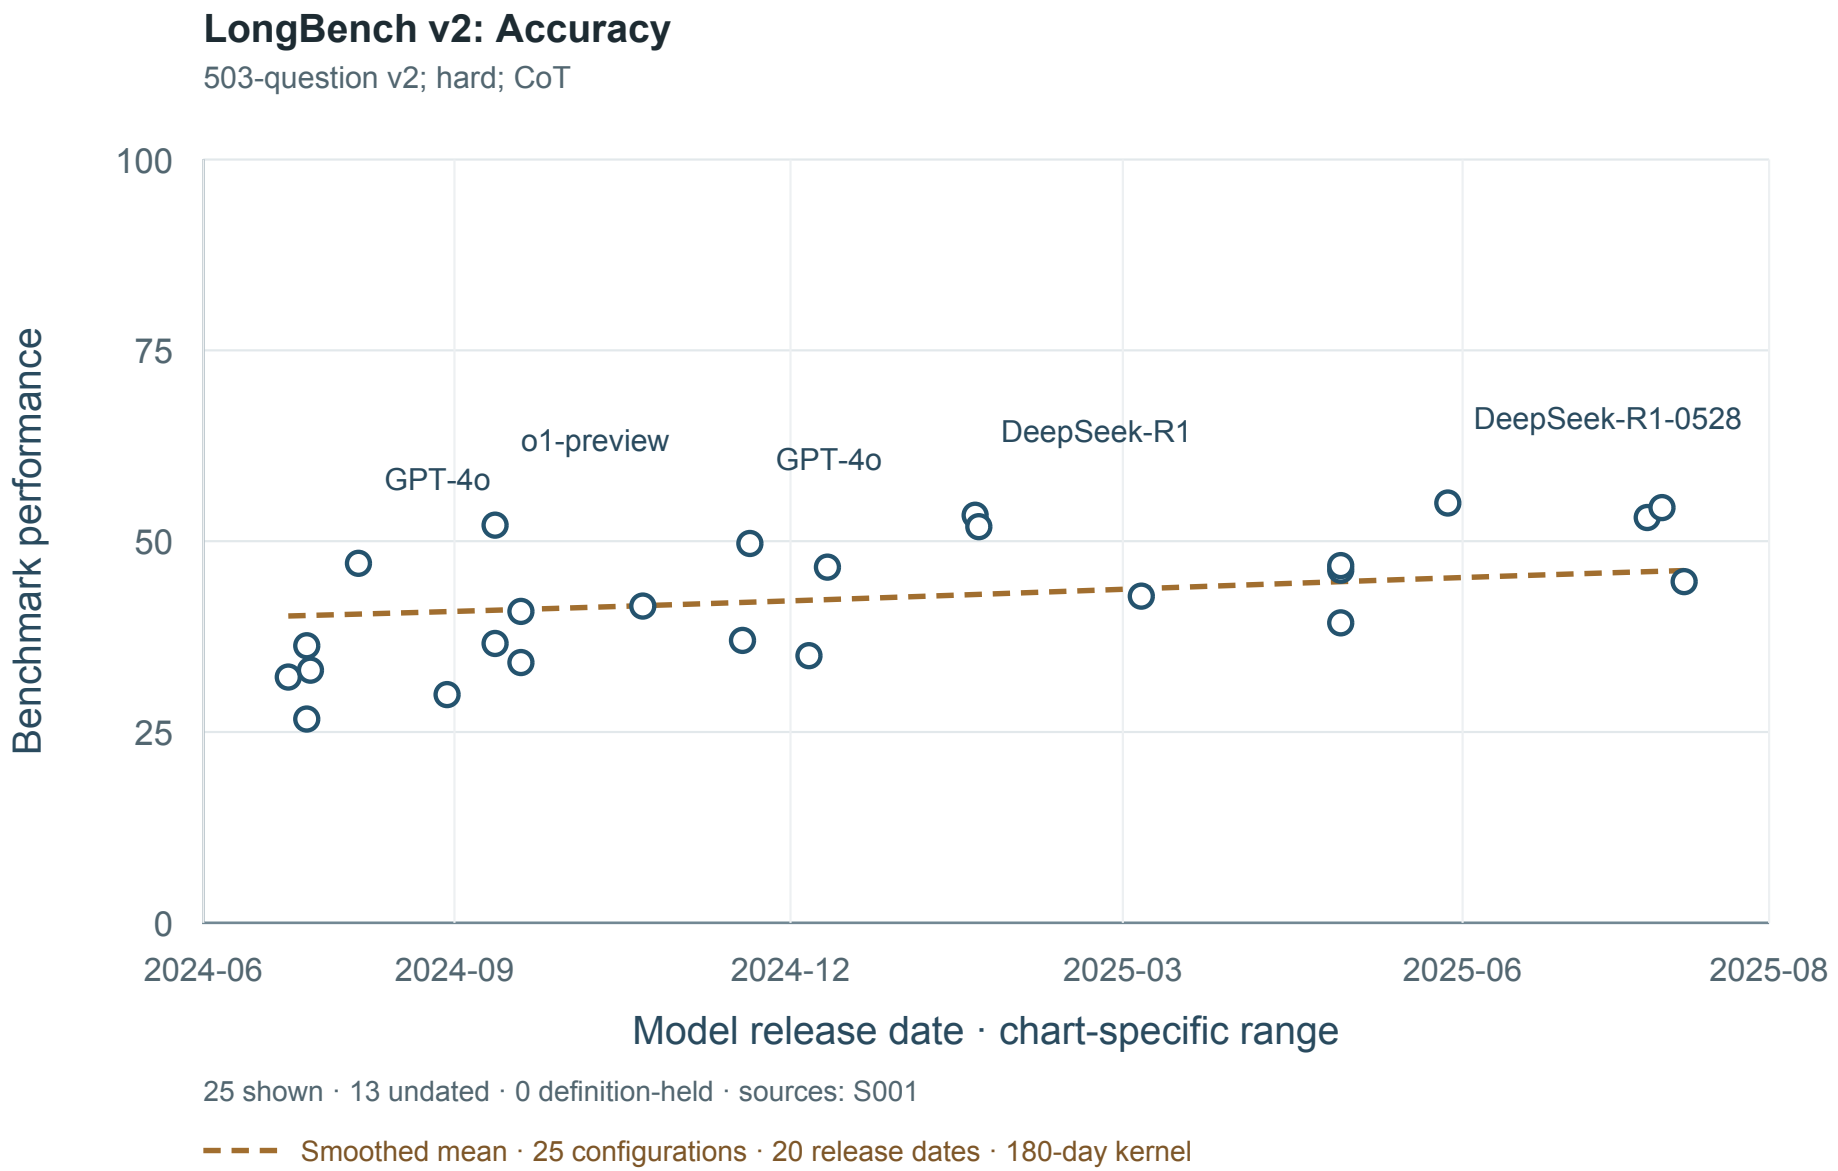


Result-source references: S001. Exact point locators and raw values: data/F020_LongBench_values.csv.

Benchmark reference (APA): Bai, Y., Tu, S., Zhang, J., Peng, H., Wang, X., Lv, X., Cao, S., Xu, J., Hou, L., Dong, Y., Tang, J., & Li, J. (2024). LongBench v2: Towards deeper understanding and reasoning on realistic Long-context multitasks. arXiv. https://arxiv.org/abs/2412.15204

LongBench v2: Accuracy

503-question v2; short; CoT

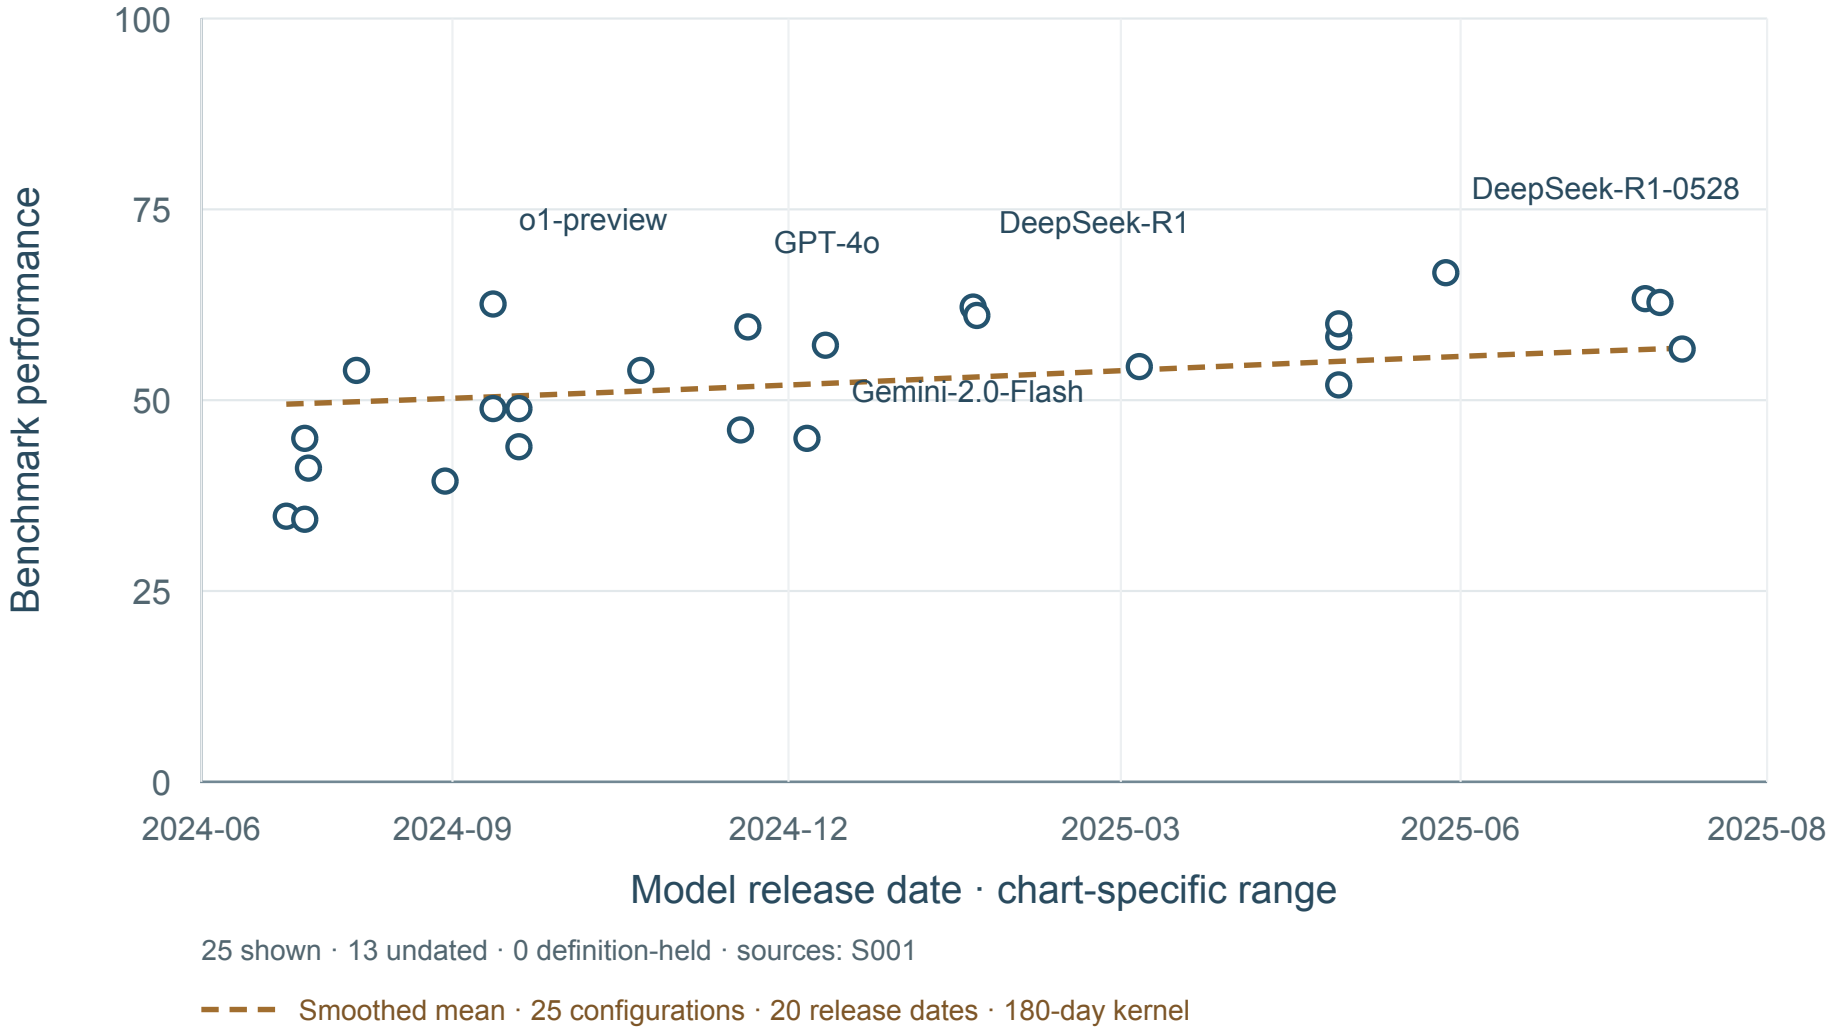

25 shown · 13 undated · 0 definition-held · sources: S001


Smoothed mean · 25 configurations · 20 release dates · 180-day kernel

Result-source references: S001. Exact point locators and raw values: data/F020_LongBench_values.csv.

Benchmark reference (APA): Bai, Y., Tu, S., Zhang, J., Peng, H., Wang, X., Lv, X., Cao, S., Xu, J., Hou, L., Dong, Y., Tang, J., & Li, J. (2024). LongBench v2: Towards deeper understanding and reasoning on realistic Long-context multitasks. arXiv. https://arxiv.org/abs/2412.15204


LongBench v2: Accuracy

503-question v2; medium; CoT

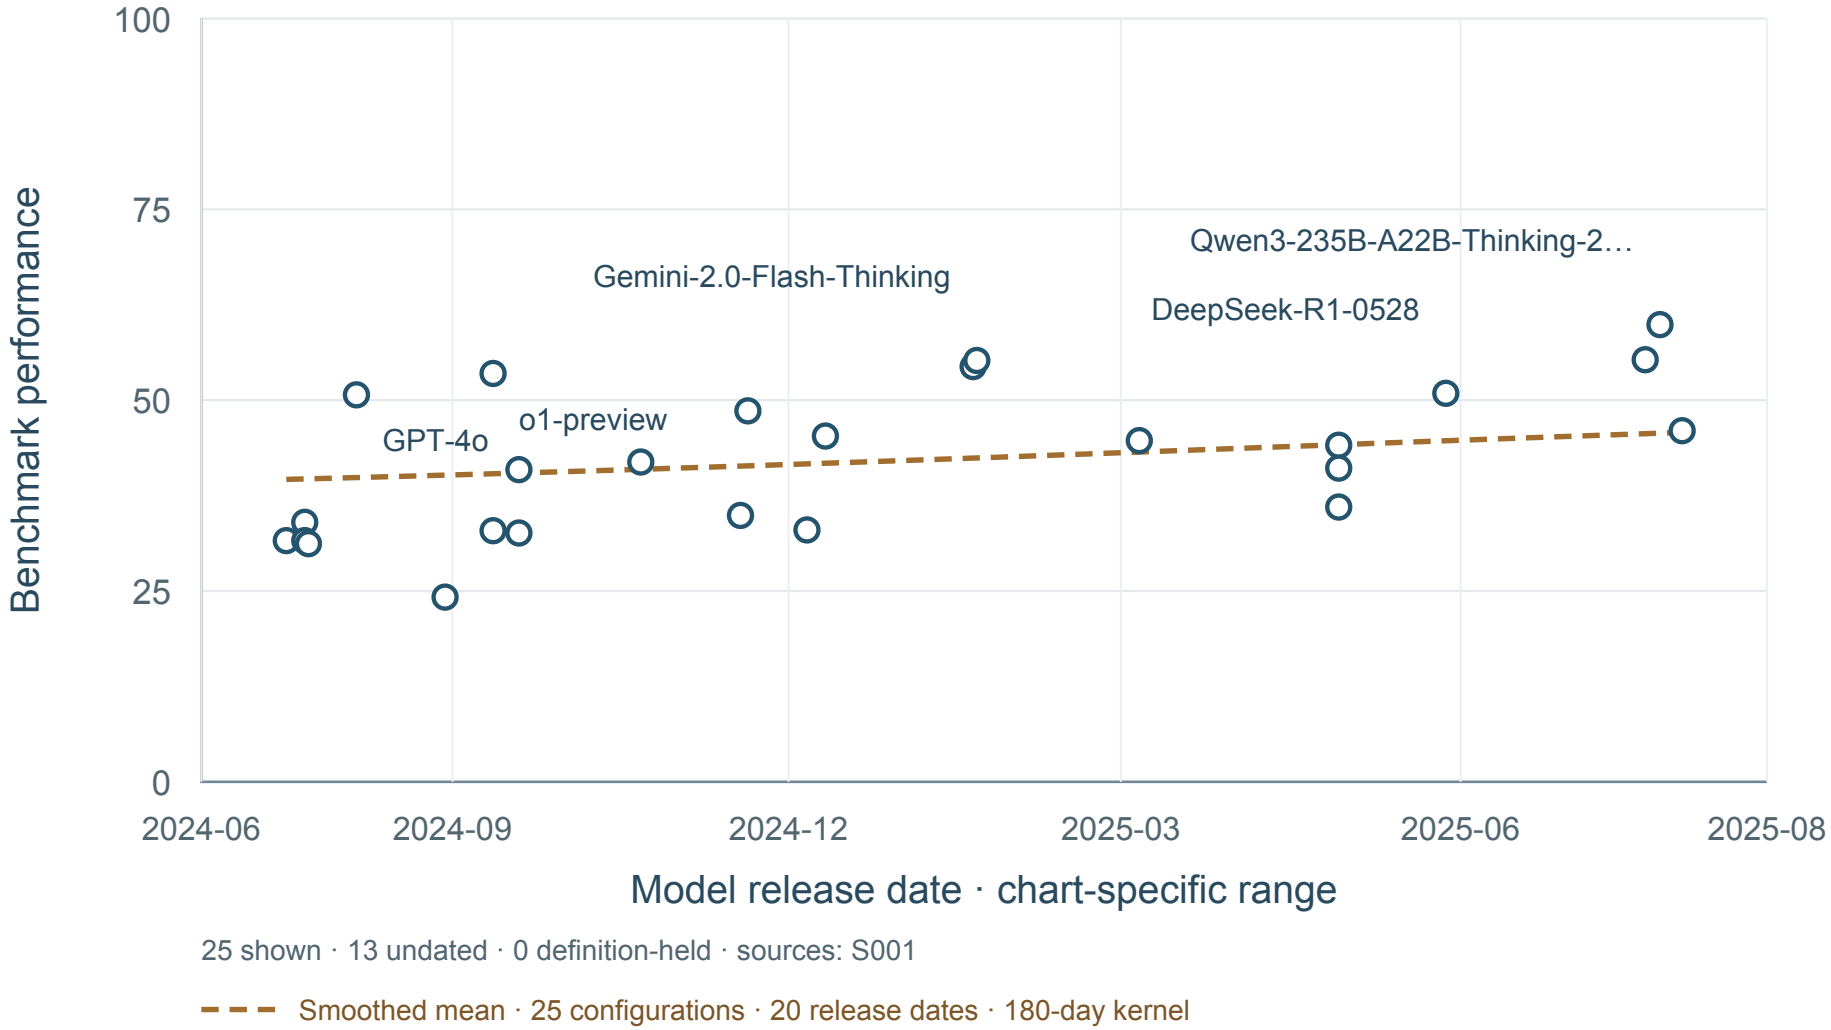


Result-source references: S001. Exact point locators and raw values: data/F020_LongBench_values.csv.

Benchmark reference (APA): Bai, Y., Tu, S., Zhang, J., Peng, H., Wang, X., Lv, X., Cao, S., Xu, J., Hou, L., Dong, Y., Tang, J., & Li, J. (2024). LongBench v2: Towards deeper understanding and reasoning on realistic Long-context multitasks. arXiv. https://arxiv.org/abs/2412.15204

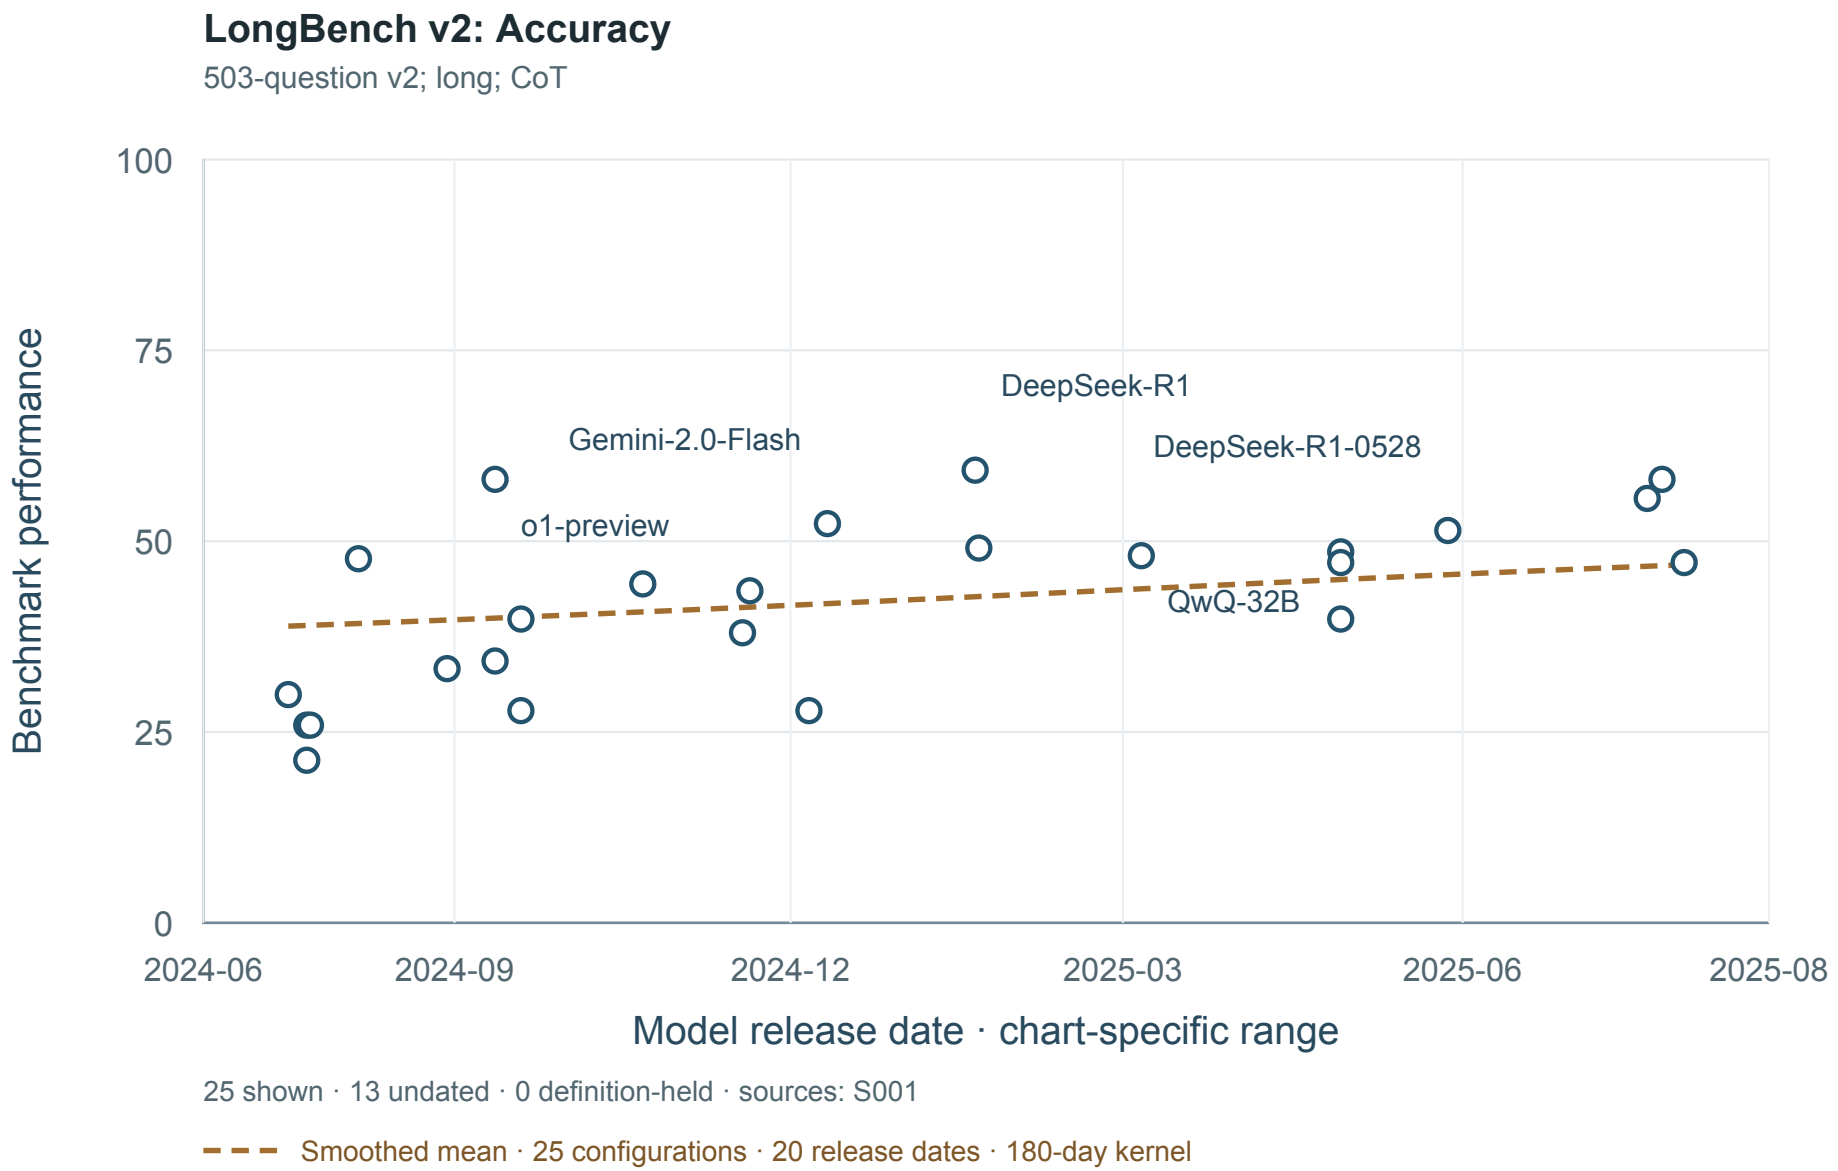


Result-source references: S001. Exact point locators and raw values: data/F020_LongBench_values.csv.

Benchmark reference (APA): Bai, Y., Tu, S., Zhang, J., Peng, H., Wang, X., Lv, X., Cao, S., Xu, J., Hou, L., Dong, Y., Tang, J., & Li, J. (2024). LongBench v2: Towards deeper understanding and reasoning on realistic Long-context multitasks. arXiv. https://arxiv.org/abs/2412.15204

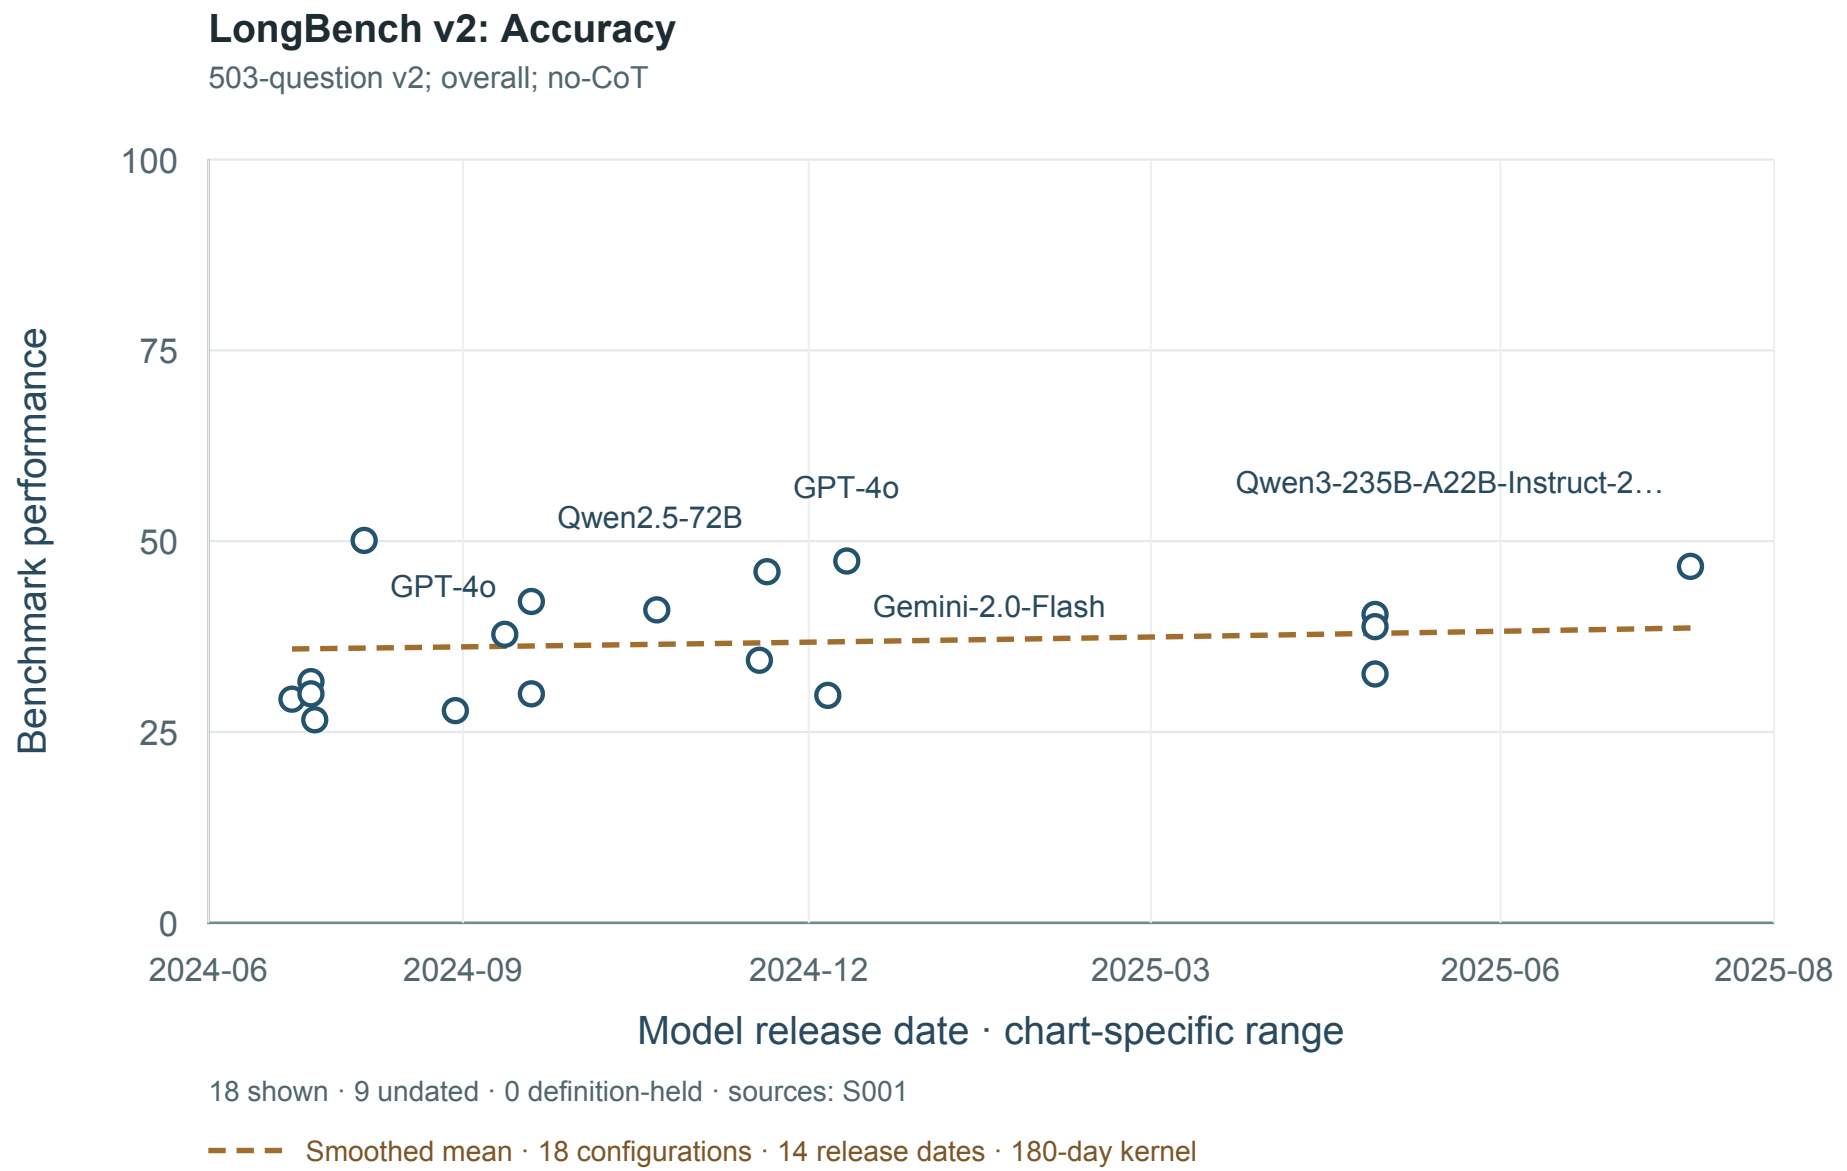


Result-source references: S001. Exact point locators and raw values: data/F020_LongBench_values.csv.

Benchmark reference (APA): Bai, Y., Tu, S., Zhang, J., Peng, H., Wang, X., Lv, X., Cao, S., Xu, J., Hou, L., Dong, Y., Tang, J., & Li, J. (2024). LongBench v2: Towards deeper understanding and reasoning on realistic Long-context multitasks. arXiv. https://arxiv.org/abs/2412.15204

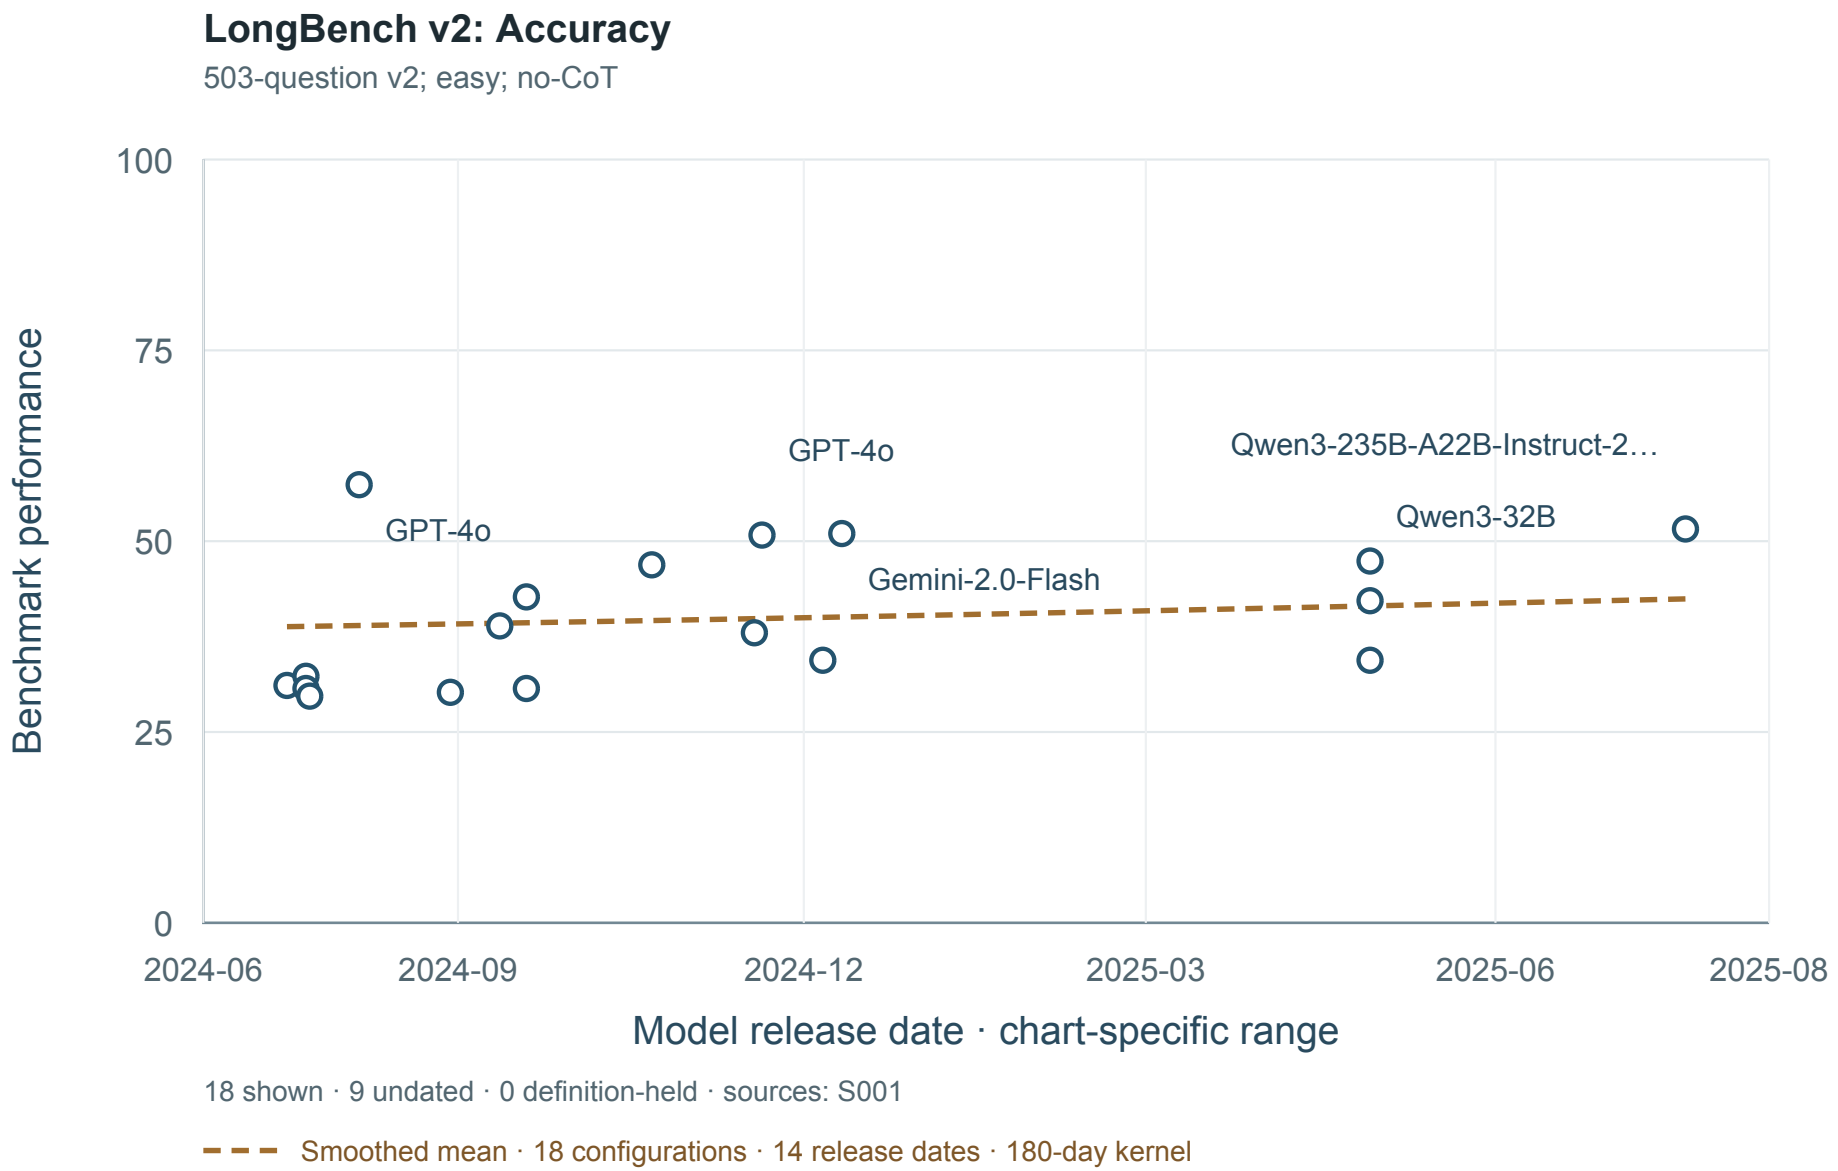

Result-source references: S001. Exact point locators and raw values: data/F020_LongBench_values.csv.

Benchmark reference (APA): Bai, Y., Tu, S., Zhang, J., Peng, H., Wang, X., Lv, X., Cao, S., Xu, J., Hou, L., Dong, Y., Tang, J., & Li, J. (2024). LongBench v2: Towards deeper understanding and reasoning on realistic Long-context multitasks. arXiv. https://arxiv.org/abs/2412.15204

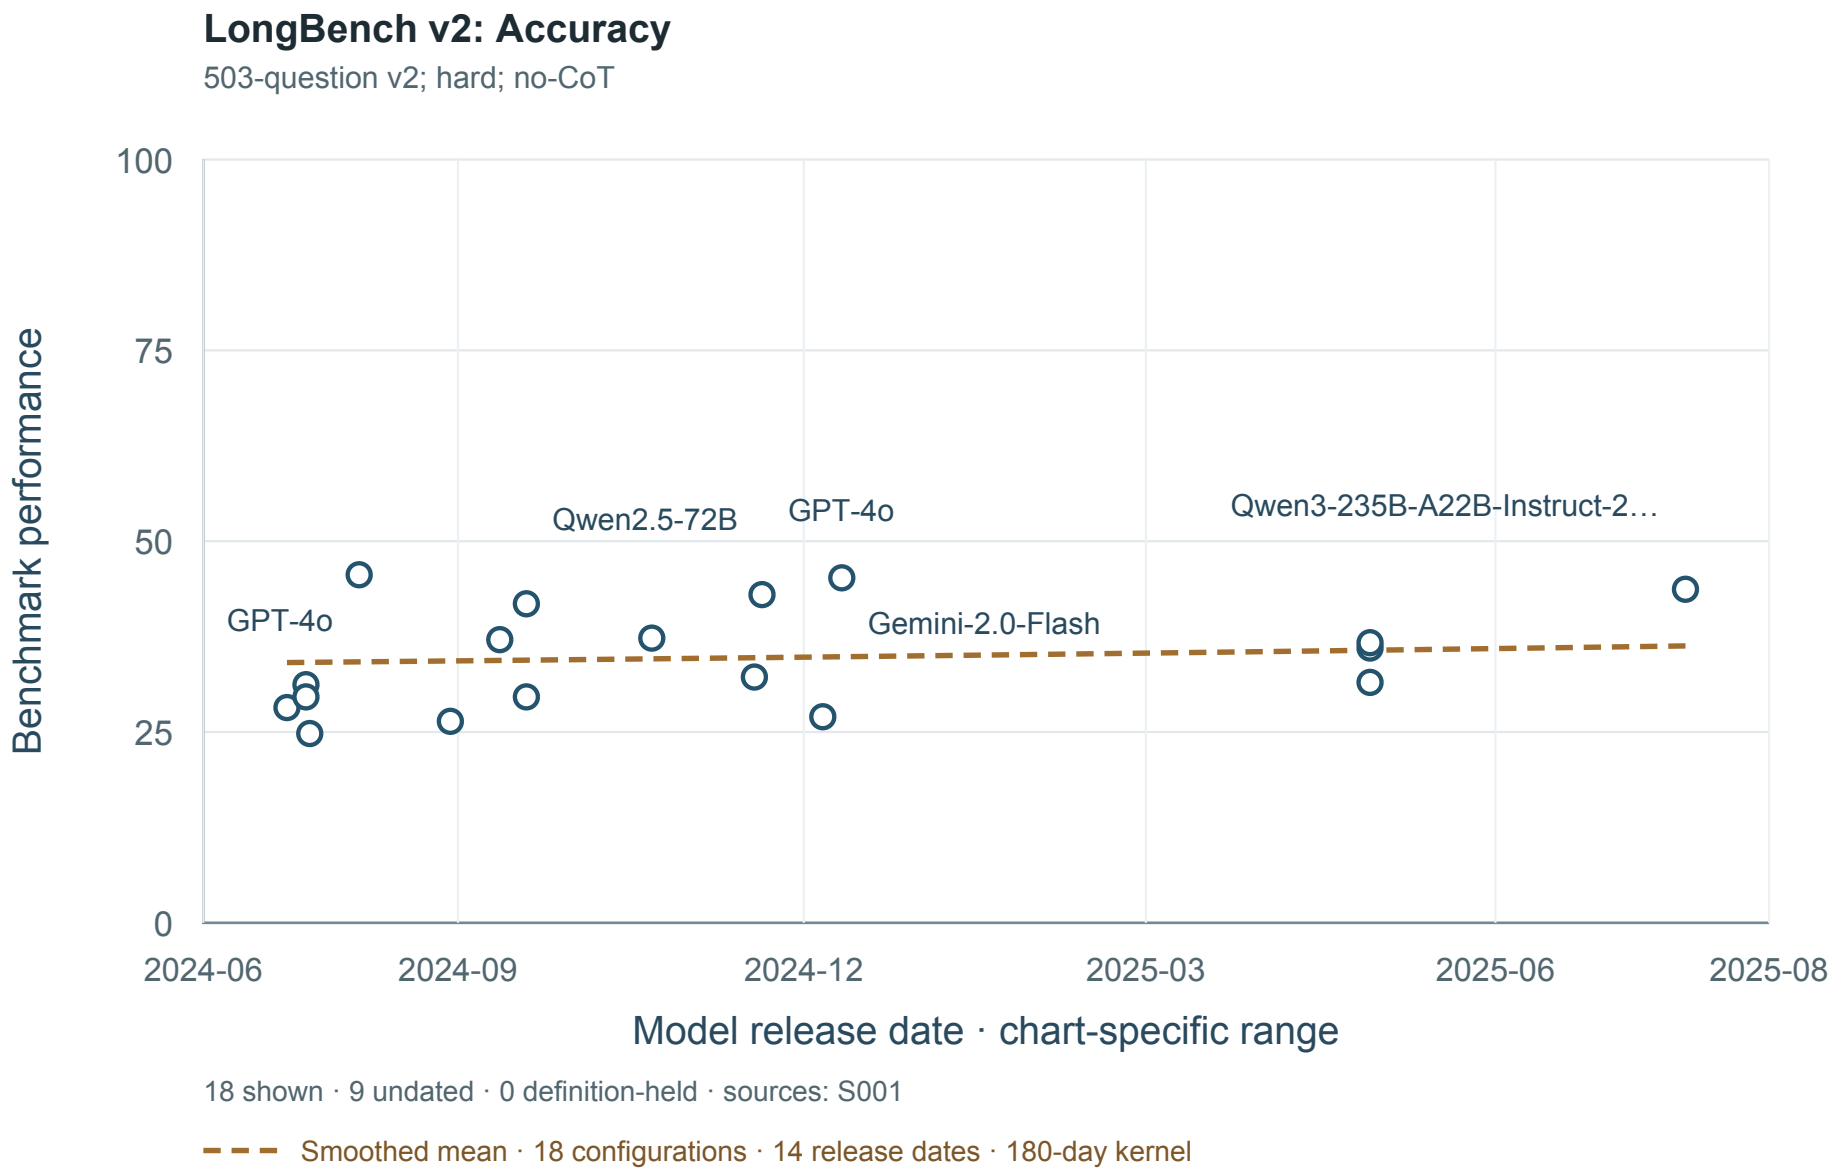


Result-source references: S001. Exact point locators and raw values: data/F020_LongBench_values.csv.

Benchmark reference (APA): Bai, Y., Tu, S., Zhang, J., Peng, H., Wang, X., Lv, X., Cao, S., Xu, J., Hou, L., Dong, Y., Tang, J., & Li, J. (2024). LongBench v2: Towards deeper understanding and reasoning on realistic Long-context multitasks. arXiv. https://arxiv.org/abs/2412.15204

LongBench v2: Accuracy

503-question v2; short; no-CoT

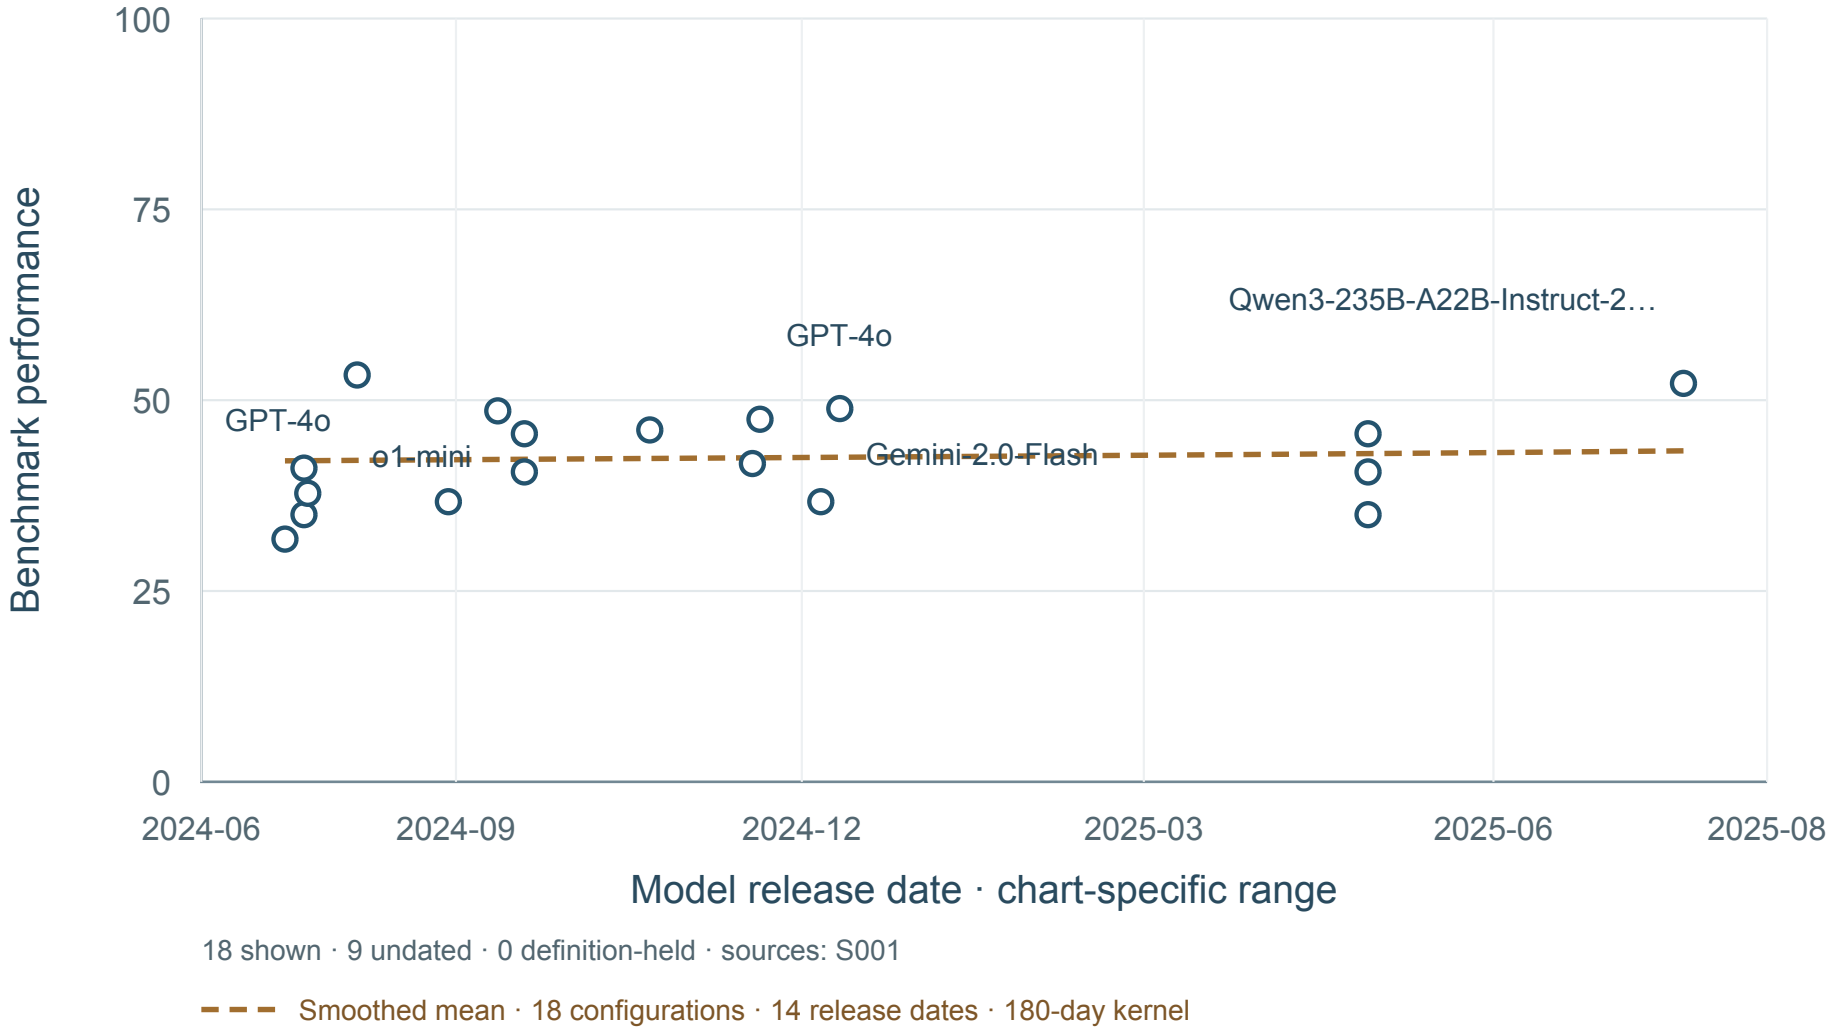


18 shown · 9 undated · 0 definition-held · sources: S001

Smoothed mean · 18 configurations · 14 release dates · 180-day kernel


Result-source references: S001. Exact point locators and raw values: data/F020_LongBench_values.csv.

Benchmark reference (APA): Bai, Y., Tu, S., Zhang, J., Peng, H., Wang, X., Lv, X., Cao, S., Xu, J., Hou, L., Dong, Y., Tang, J., & Li, J. (2024). LongBench v2: Towards deeper understanding and reasoning on realistic Long-context multitasks. arXiv. https://arxiv.org/abs/2412.15204

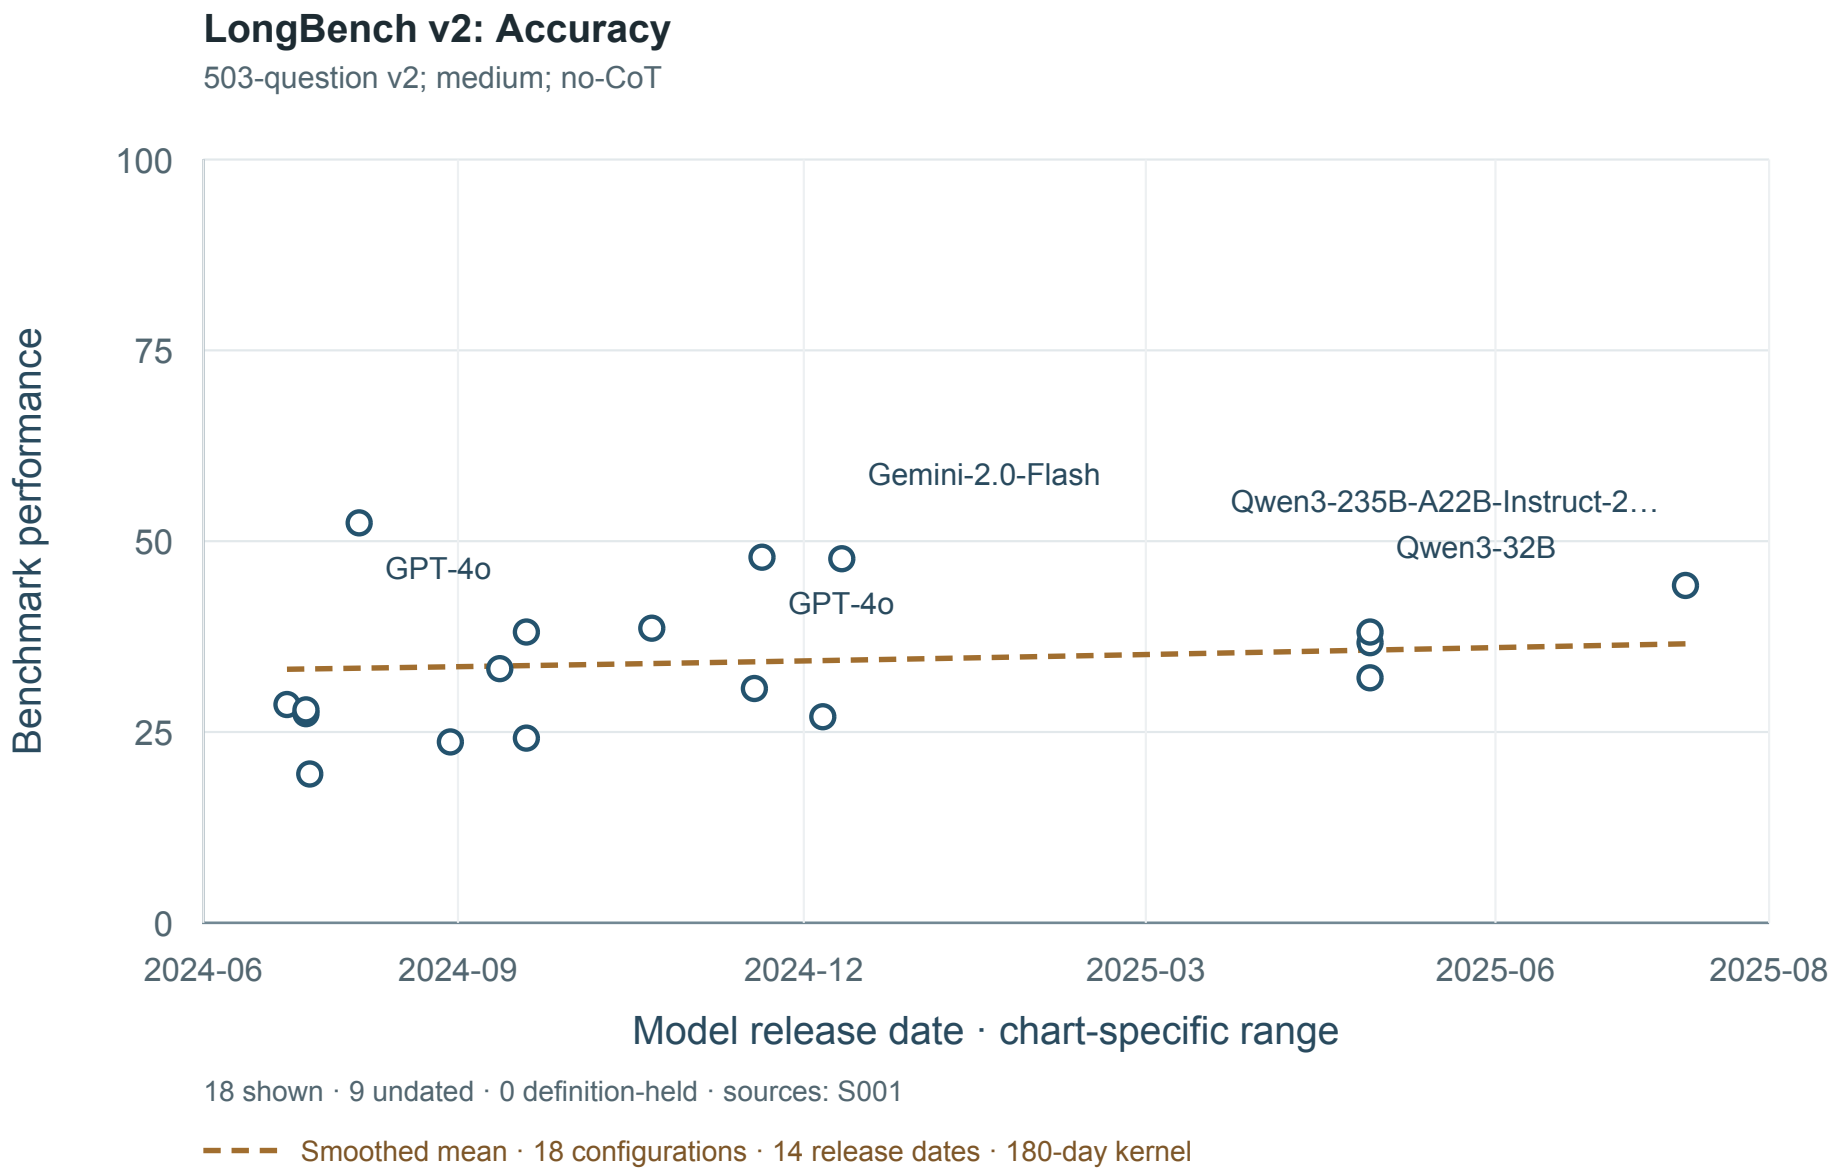


Result-source references: S001. Exact point locators and raw values: data/F020_LongBench_values.csv.

Benchmark reference (APA): Bai, Y., Tu, S., Zhang, J., Peng, H., Wang, X., Lv, X., Cao, S., Xu, J., Hou, L., Dong, Y., Tang, J., & Li, J. (2024). LongBench v2: Towards deeper understanding and reasoning on realistic Long-context multitasks. arXiv. https://arxiv.org/abs/2412.15204

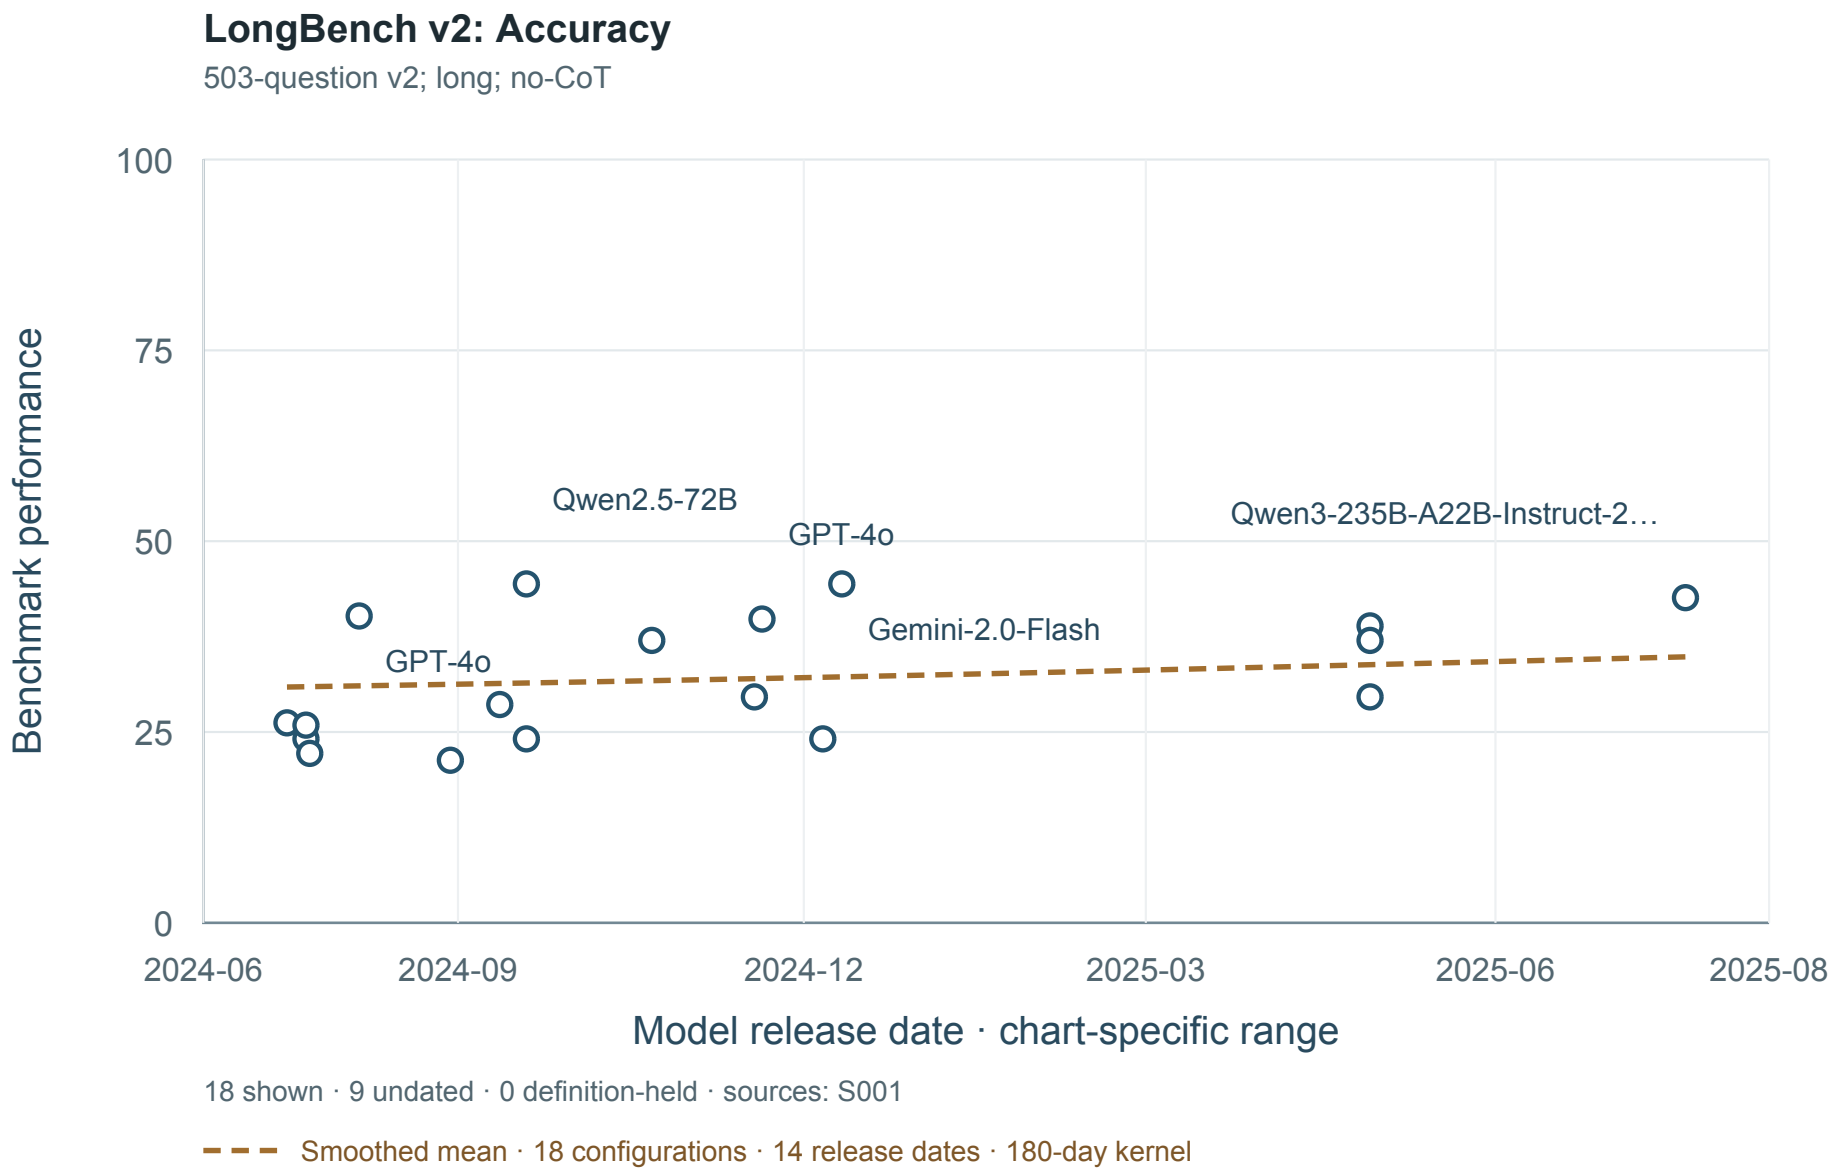

Result-source references: S001. Exact point locators and raw values: data/F020_LongBench_values.csv.

Benchmark reference (APA): Bai, Y., Tu, S., Zhang, J., Peng, H., Wang, X., Lv, X., Cao, S., Xu, J., Hou, L., Dong, Y., Tang, J., & Li, J. (2024). LongBench v2: Towards deeper understanding and reasoning on realistic Long-context multitasks. arXiv. https://arxiv.org/abs/2412.15204

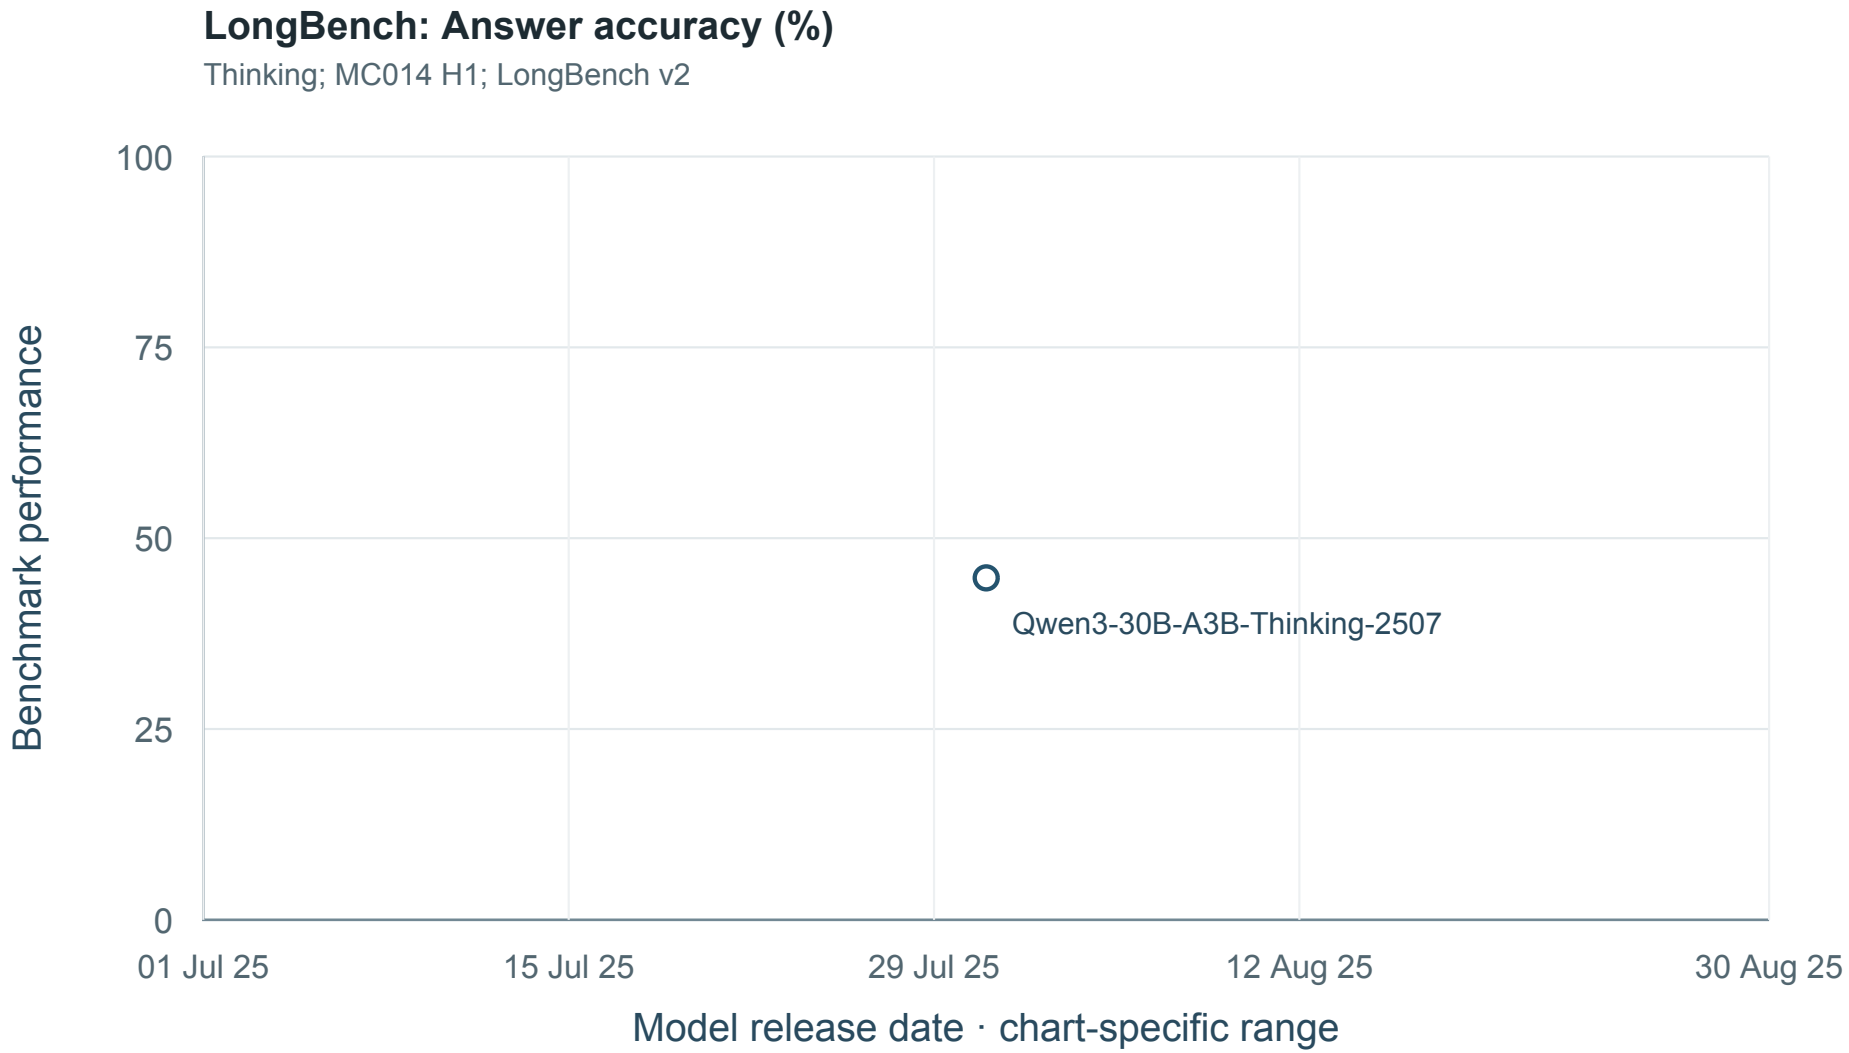


Result-source references: MC014. Exact point locators and raw values: data/F020_LongBench_values.csv.

Benchmark reference (APA): Bai, Y., Tu, S., Zhang, J., Peng, H., Wang, X., Lv, X., Cao, S., Xu, J., Hou, L., Dong, Y., Tang, J., & Li, J. (2024). LongBench v2: Towards deeper understanding and reasoning on realistic Long-context multitasks. arXiv. https://arxiv.org/abs/2412.15204

LongBench: Answer accuracy (%)

Mode not specified; MC014 H1; LongBench v2

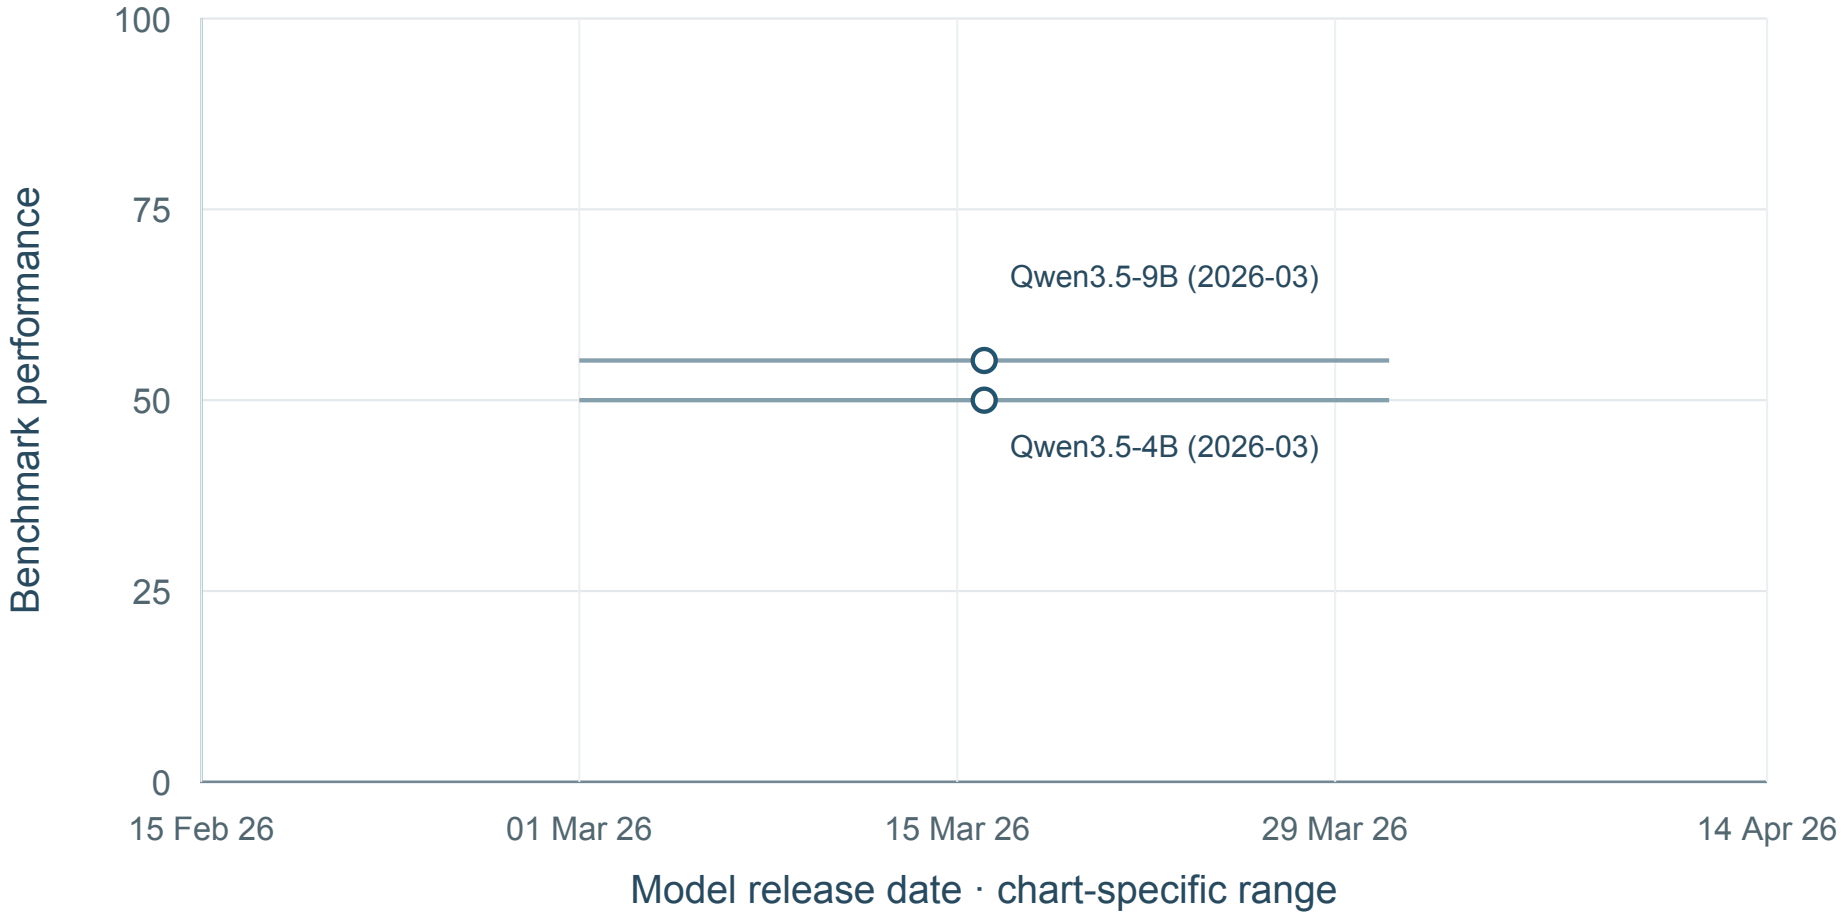

2 shown · 0 undated · 0 definition-held · sources: MC014


No mean curve: Fewer than five dated model configurations.

Result-source references: MC014. Exact point locators and raw values: data/F020_LongBench_values.csv.

Benchmark reference (APA): Bai, Y., Tu, S., Zhang, J., Peng, H., Wang, X., Lv, X., Cao, S., Xu, J., Hou, L., Dong, Y., Tang, J., & Li, J. (2024). LongBench v2: Towards deeper understanding and reasoning on realistic Long-context multitasks. arXiv. https://arxiv.org/abs/2412.15204

LongBench: Answer accuracy (%)

Mode not specified; MC016 M3; LongBench v2

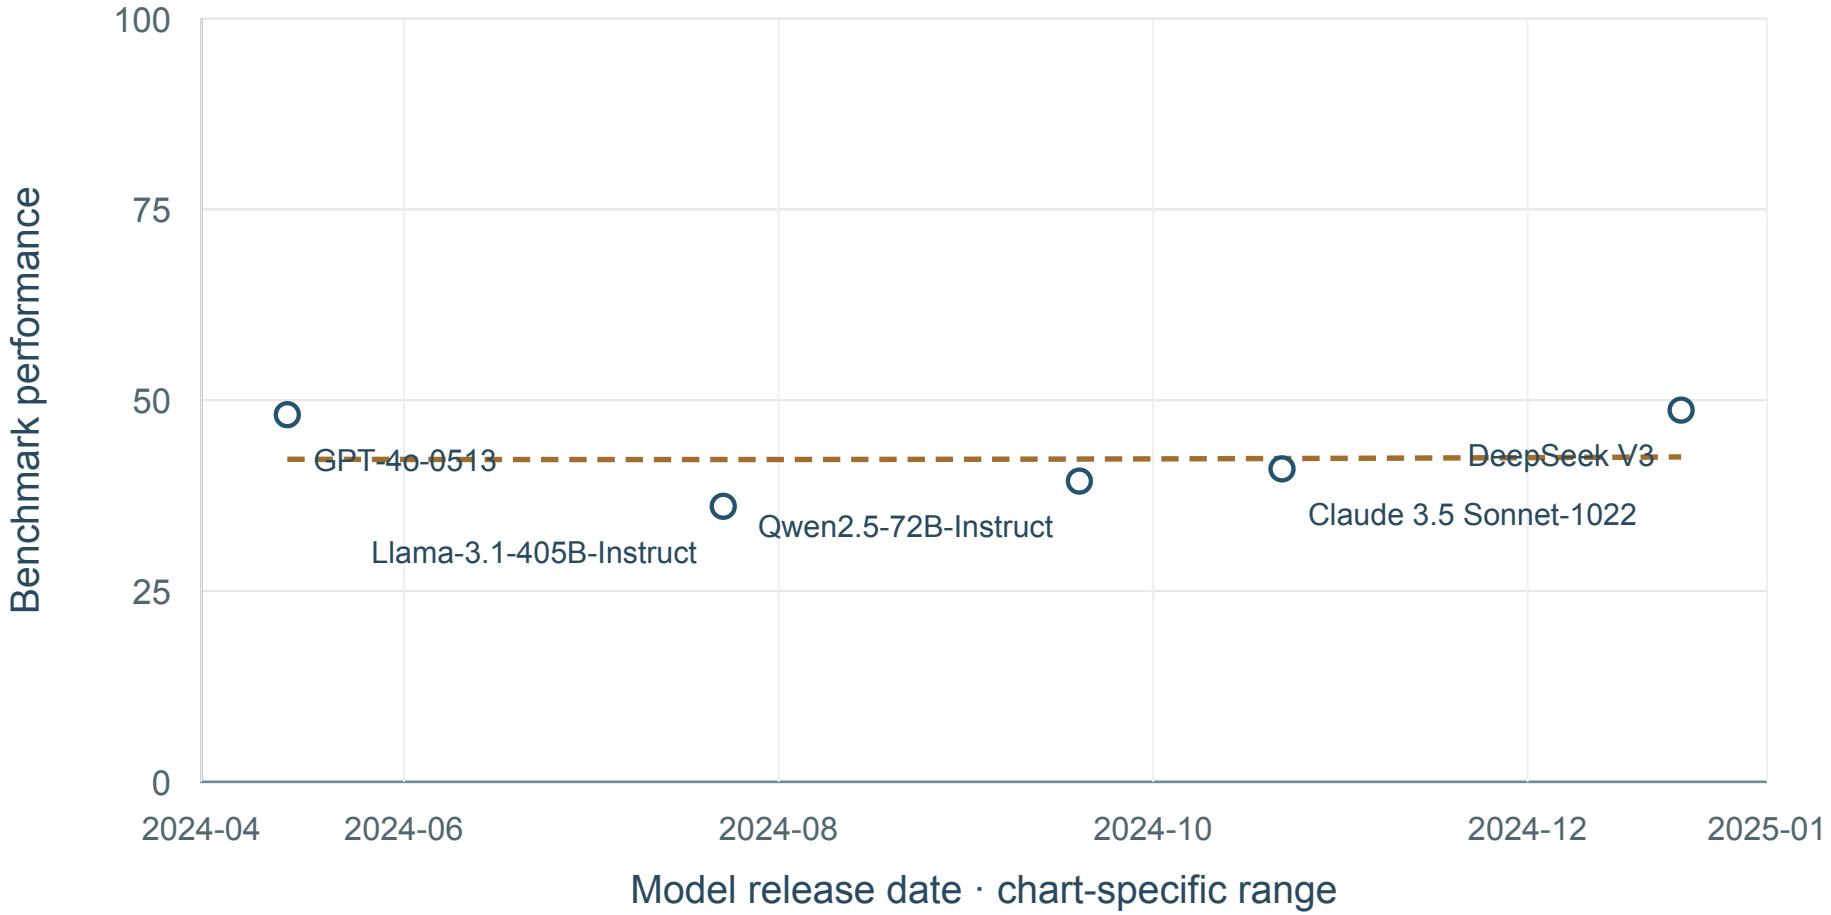

5 shown · 0 undated · 0 definition-held · sources: MC016


Smoothed mean · 5 configurations · 5 release dates · 180-day kernel

Result-source references: MC016. Exact point locators and raw values: data/F020_LongBench_values.csv.

Benchmark reference (APA): Bai, Y., Tu, S., Zhang, J., Peng, H., Wang, X., Lv, X., Cao, S., Xu, J., Hou, L., Dong, Y., Tang, J., & Li, J. (2024). LongBench v2: Towards deeper understanding and reasoning on realistic Long-context multitasks. arXiv. https://arxiv.org/abs/2412.15204

LongBench: Answer accuracy (%)

Mode not specified; effort xhigh; MC033 H1; LongBench v2

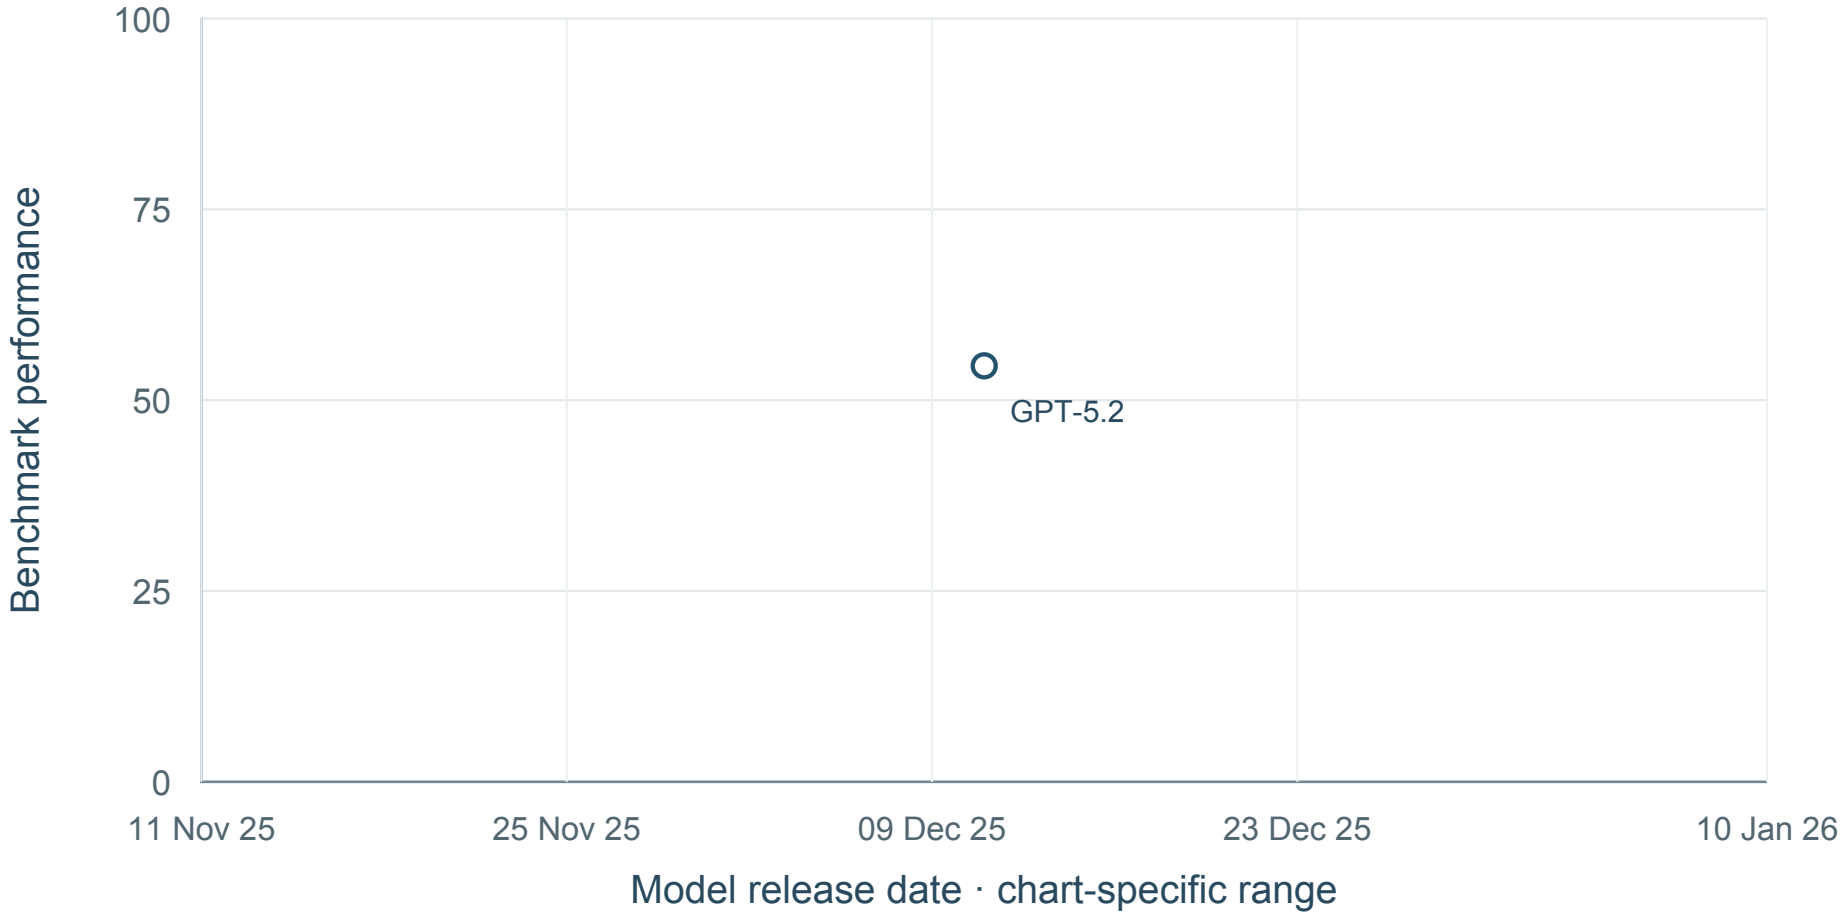


1 shown · 0 undated · 0 definition-held · sources: MC033

No mean curve: Fewer than five dated model configurations.

Result-source references: MC033. Exact point locators and raw values: data/F020_LongBench_values.csv.

Benchmark reference (APA): Bai, Y., Tu, S., Zhang, J., Peng, H., Wang, X., Lv, X., Cao, S., Xu, J., Hou, L., Dong, Y., Tang, J., & Li, J. (2024). LongBench v2: Towards deeper understanding and reasoning on realistic Long-context multitasks. arXiv. https://arxiv.org/abs/2412.15204

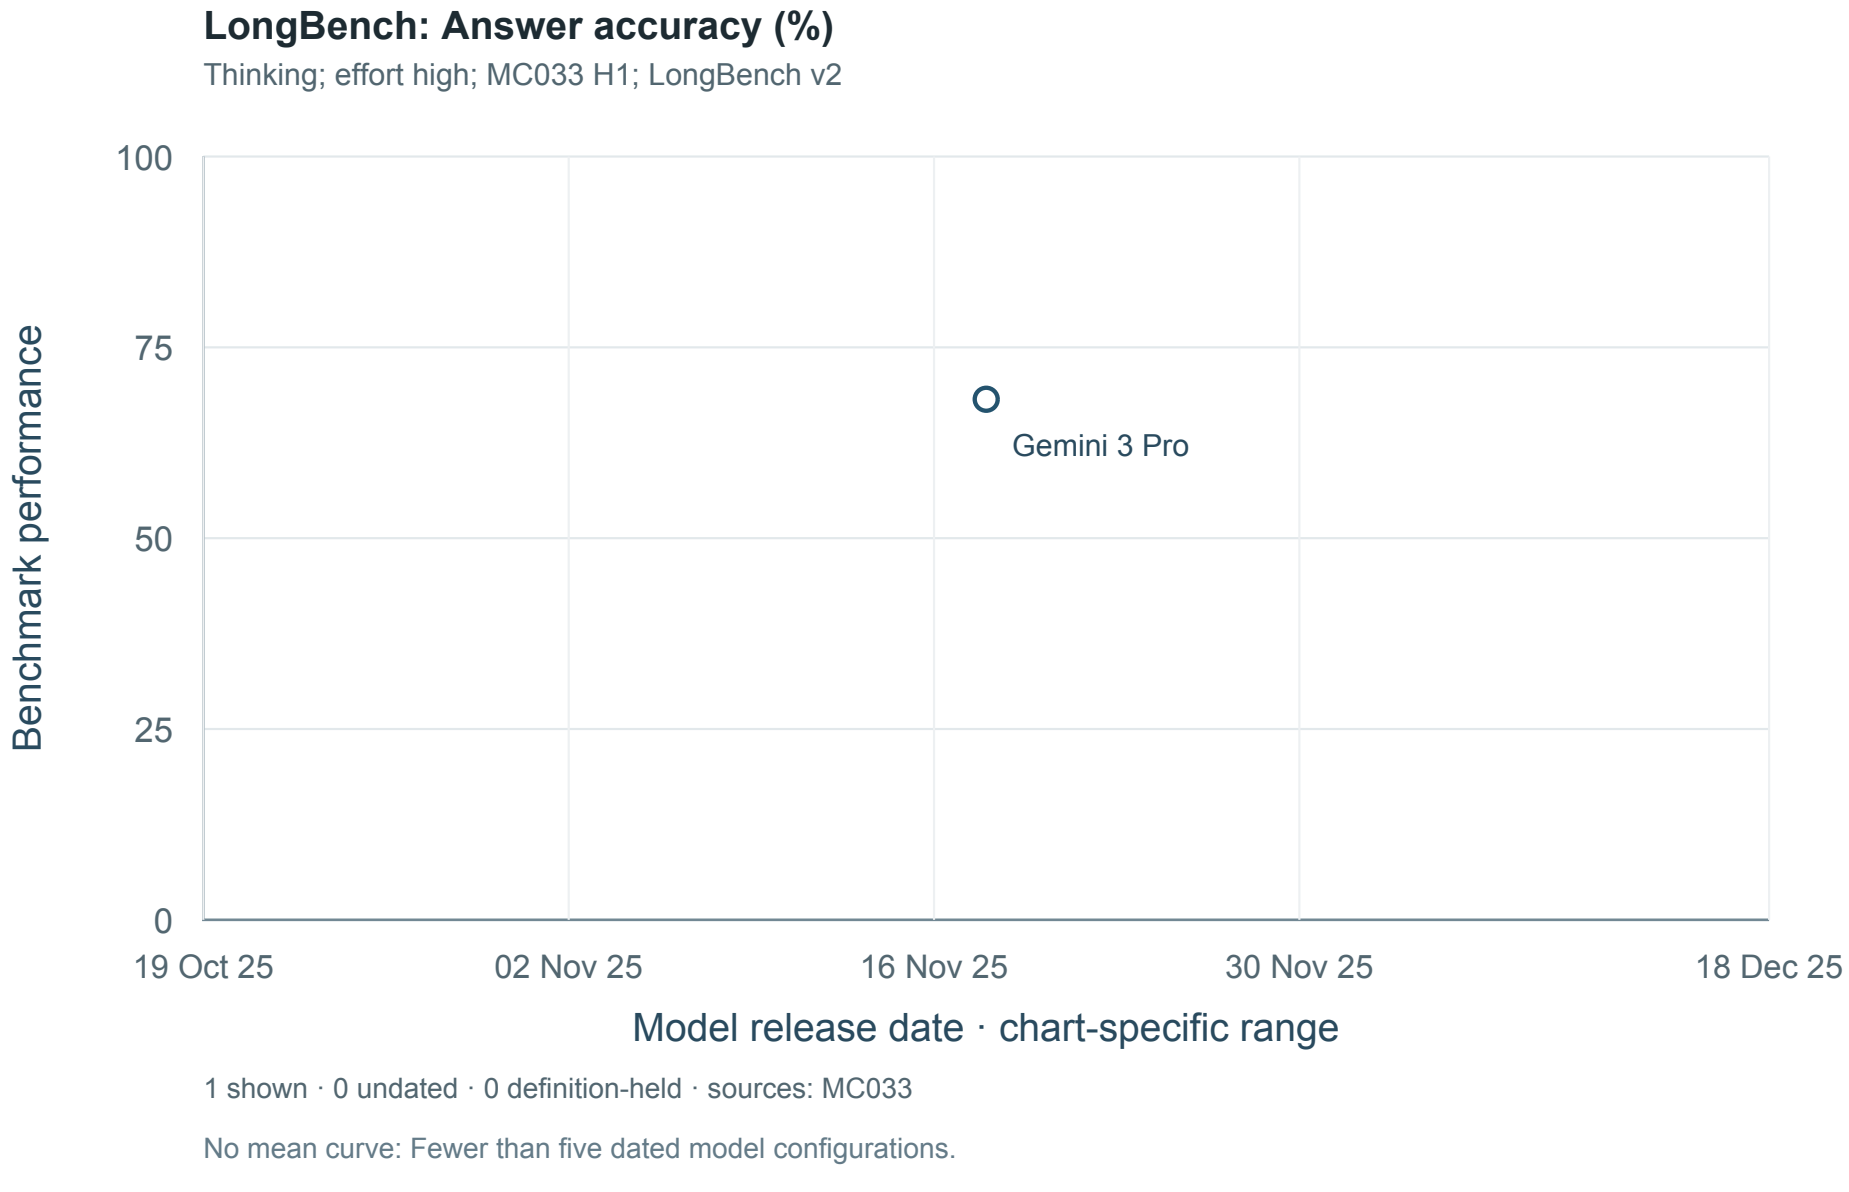


Result-source references: MC033. Exact point locators and raw values: data/F020_LongBench_values.csv.

Benchmark reference (APA): Bai, Y., Tu, S., Zhang, J., Peng, H., Wang, X., Lv, X., Cao, S., Xu, J., Hou, L., Dong, Y., Tang, J., & Li, J. (2024). LongBench v2: Towards deeper understanding and reasoning on realistic Long-context multitasks. arXiv. https://arxiv.org/abs/2412.15204

LongBench: Reported task aggregate score

Non-thinking; MC049 H2; 32B comparison; LongBench v1

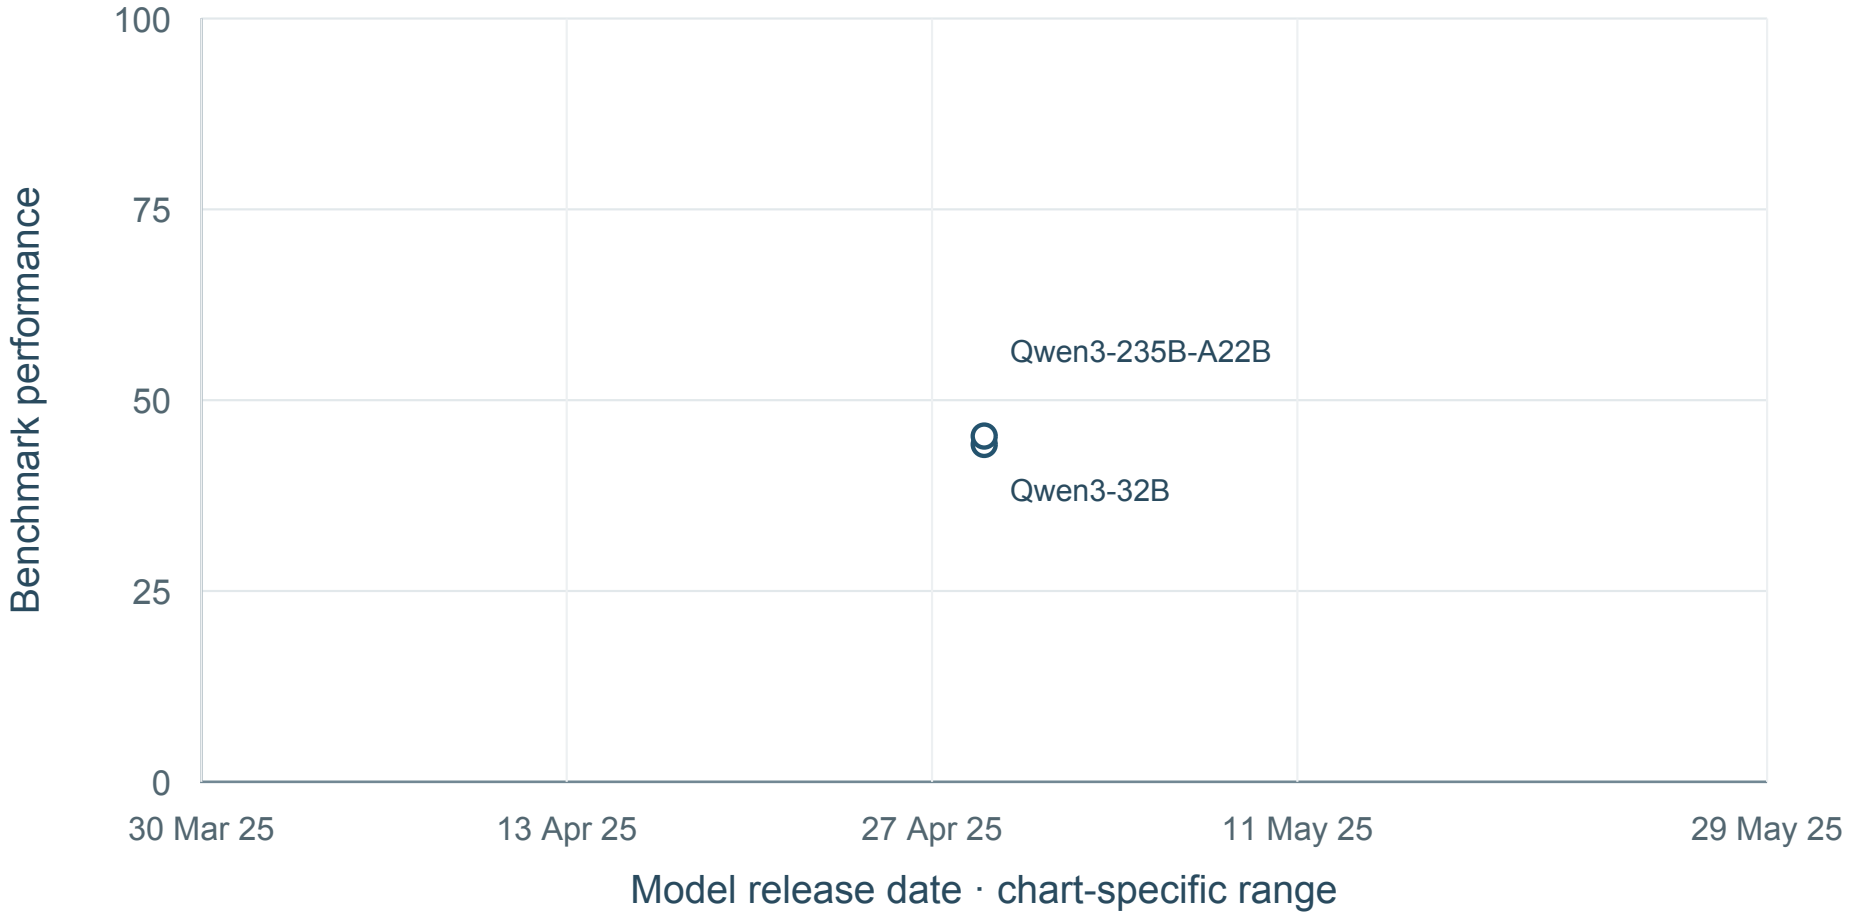

2 shown · 4 undated · 0 definition-held · sources: MC049


No mean curve: Fewer than five dated model configurations.

Result-source references: MC049. Exact point locators and raw values: data/F020_LongBench_values.csv.

Benchmark reference (APA): Bai, Y., Lv, X., Zhang, J., Lyu, H., Tang, J., Huang, Z., Du, Z., Liu, X., Zeng, A., Hou, L., Dong, Y., Tang, J., & Li, J. (2023). LongBench: A bilingual, multitask benchmark for long context understanding. arXiv. https://arxiv.org/abs/2308.14508

LongBench: Reported task aggregate score

Non-thinking; MC049 H4; 1.2B comparison; LongBench v1

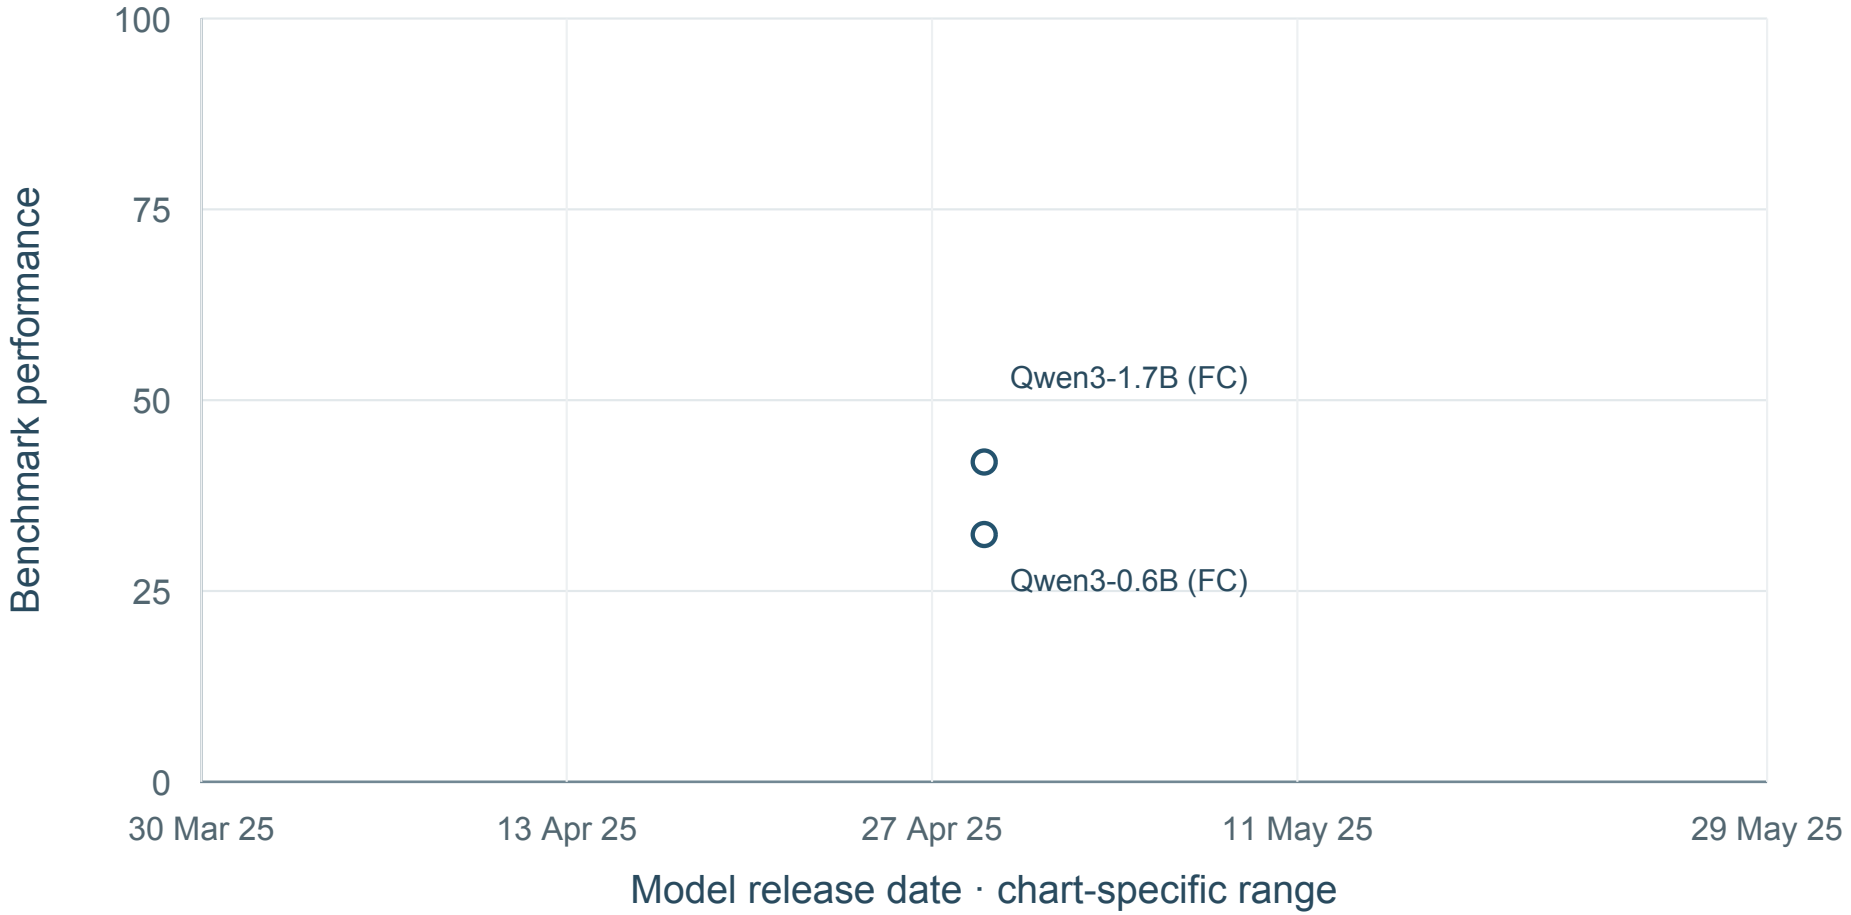

2 shown · 1 undated · 0 definition-held · sources: MC049


No mean curve: Fewer than five dated model configurations.

Result-source references: MC049. Exact point locators and raw values: data/F020_LongBench_values.csv.

Benchmark reference (APA): Bai, Y., Lv, X., Zhang, J., Lyu, H., Tang, J., Huang, Z., Du, Z., Liu, X., Zeng, A., Hou, L., Dong, Y., Tang, J., & Li, J. (2023). LongBench: A bilingual, multitask benchmark for long context understanding. arXiv. https://arxiv.org/abs/2308.14508

LongBench: Answer accuracy (%)

Mode not specified; MC083 H1; LongBench v2

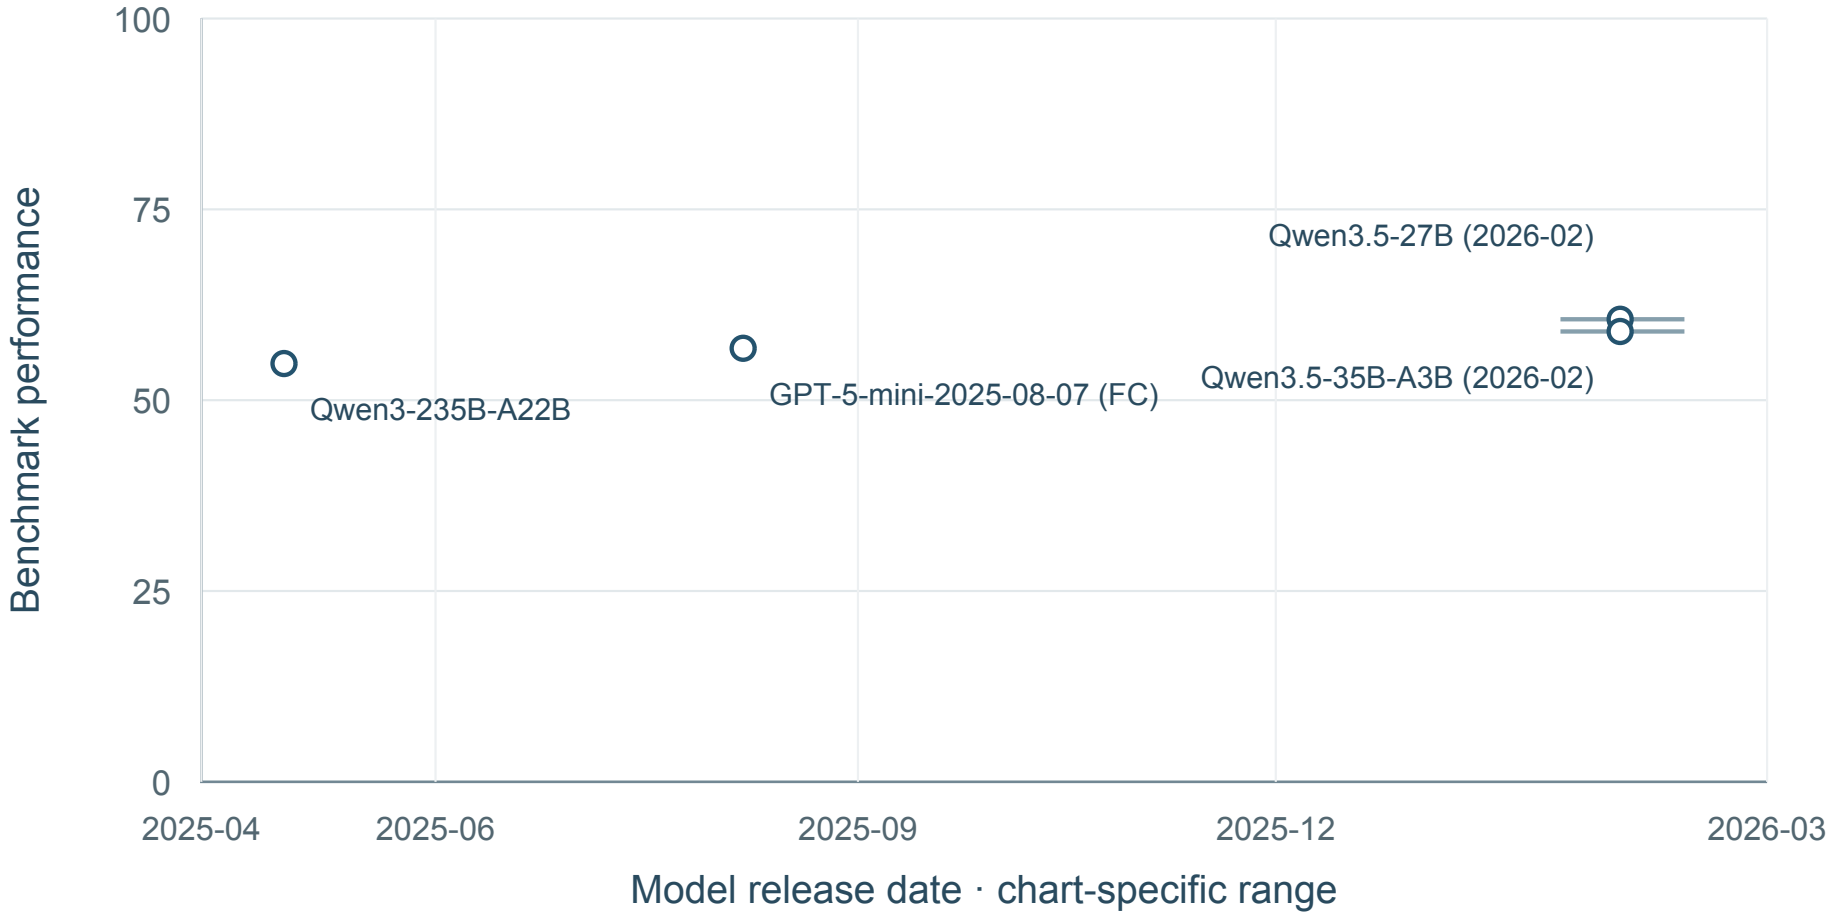

4 shown · 1 undated · 0 definition-held · sources: MC083


No mean curve: Fewer than five dated model configurations.

Result-source references: MC083. Exact point locators and raw values: data/F020_LongBench_values.csv.

Benchmark reference (APA): Bai, Y., Tu, S., Zhang, J., Peng, H., Wang, X., Lv, X., Cao, S., Xu, J., Hou, L., Dong, Y., Tang, J., & Li, J. (2024). LongBench v2: Towards deeper understanding and reasoning on realistic Long-context multitasks. arXiv. https://arxiv.org/abs/2412.15204

LongBench: Answer accuracy (%)

Mode not specified; MC084 H1; LongBench v2

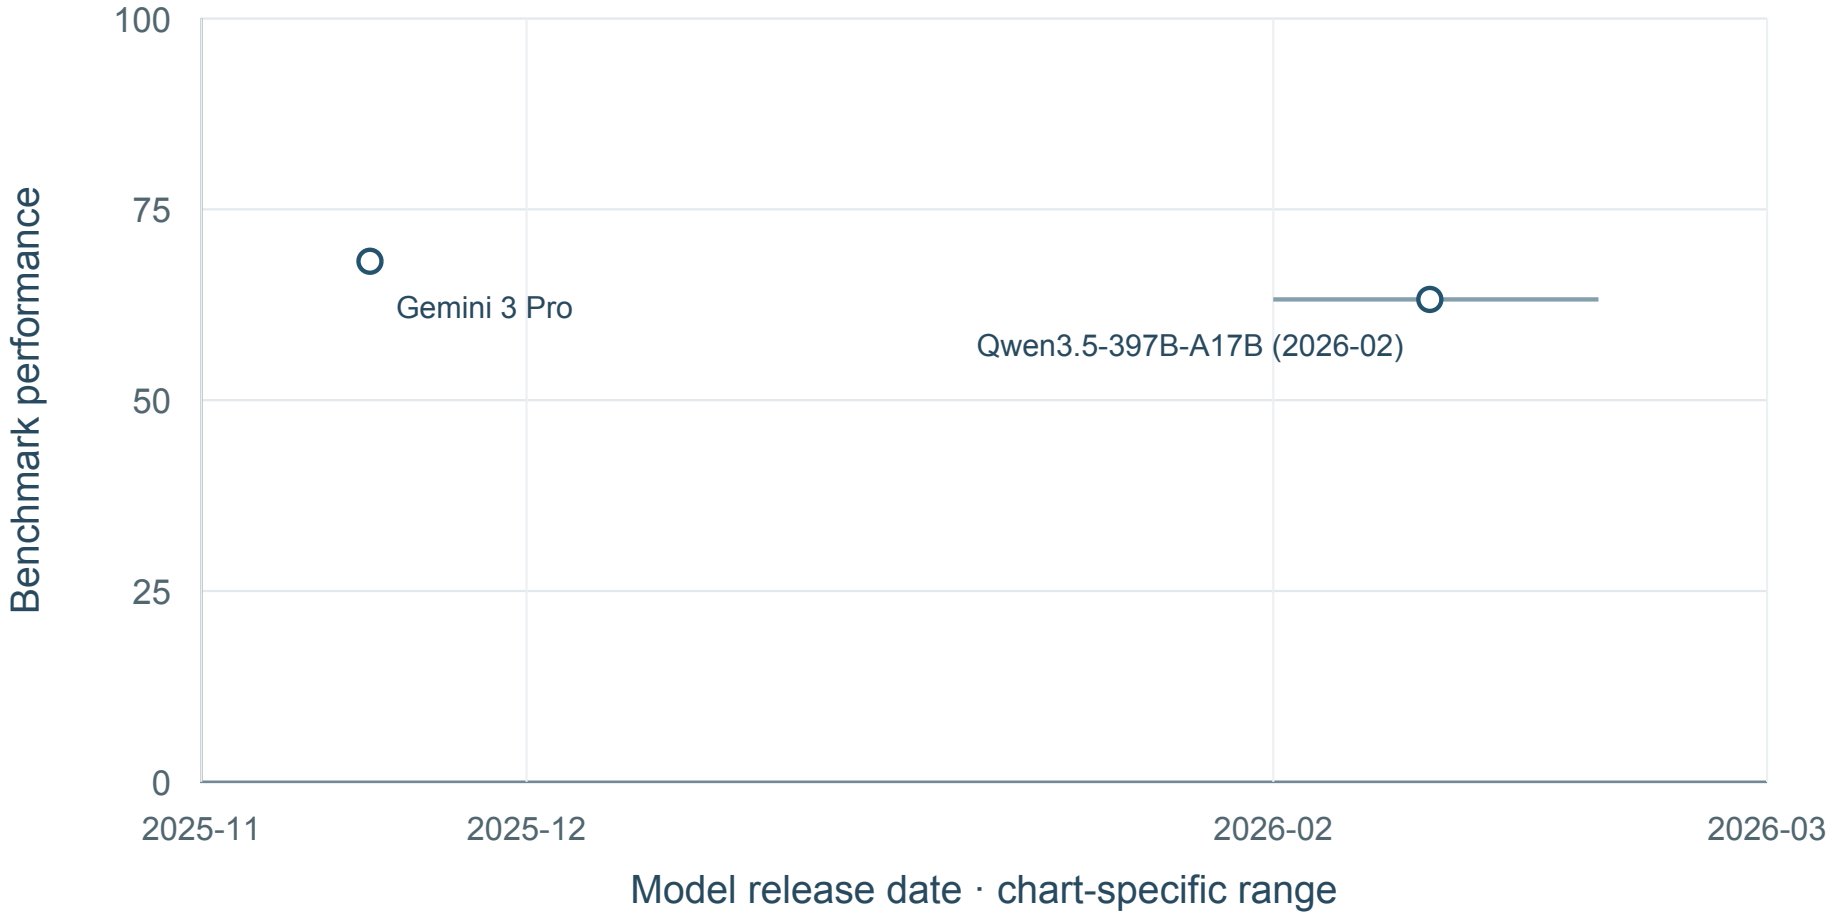

2 shown · 2 undated · 0 definition-held · sources: MC084

No mean curve: Fewer than five dated model configurations.

Result-source references: MC084. Exact point locators and raw values: data/F020_LongBench_values.csv.

Benchmark reference (APA): Bai, Y., Tu, S., Zhang, J., Peng, H., Wang, X., Lv, X., Cao, S., Xu, J., Hou, L., Dong, Y., Tang, J., & Li, J. (2024). LongBench v2: Towards deeper understanding and reasoning on realistic Long-context multitasks. arXiv. https://arxiv.org/abs/2412.15204

F021 RULER

Synthetic retrieval, variable tracking and aggregation

373 source values; 109 new; 30 separate conditions; 218 visible time points; 0 definition-held values; 6 visible mean curves.

Benchmark references (APA)

Hsieh, C.-P., Sun, S., Kriman, S., Acharya, S., Rekesh, D., Jia, F., Zhang, Y., & Ginsburg, B. (2024). RULER: What's the real context size of your long-context language models?. arXiv. https://arxiv.org/abs/2404.06654

Workflow and article scope

Challenges: B; D

Locate relevant evidence; Coordinate retrieval, tools and intermediate steps

Synthetic tasks; claimed context length is not effective context performance.

Manuscript anchors: Source-based step comparisons, manuscript paragraph 31; Lu and Wang, Challenge D; manuscript paragraphs 9, 15–18 and 31

Result-source references: S009; MC049; MC057; MC058; MC076. Full references appear in the final bibliography.

Complete condition inventory

01. Average task score | Original 13-task RULER; 4K tokens
45 values; 22 time points; visible mean curve. Sources: S009.

02. Average task score | Original 13-task RULER; 8K tokens
44 values; 21 time points; visible mean curve. Sources: S009.

03. Average task score | Original 13-task RULER; 16K tokens
44 values; 21 time points; visible mean curve. Sources: S009.

04. Average task score | Original 13-task RULER; 32K tokens
44 values; 21 time points; visible mean curve. Sources: S009.

05. Average task score | Original 13-task RULER; 64K tokens
44 values; 21 time points; visible mean curve. Sources: S009.

06. Average task score | Original 13-task RULER; 128K tokens
43 values; 21 time points; visible mean curve. Sources: S009.

07. Reported task accuracy (%) | Non-thinking; MC049 H2; 32B comparison; RULER; As reported
3 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC049.

08. Reported task accuracy (%) | Non-thinking; MC049 H4; 1.2B comparison; RULER; As reported
2 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC049.

09. Reported task accuracy (%) | Mode not specified; MC057 H23; RULER; Avg.
16 values; 16 time points; no visible mean curve: Fewer than four distinct release dates. Sources: MC057.

10. Reported task accuracy (%) | Mode not specified; MC057 H23; RULER; 4K
9 values; 9 time points; no visible mean curve: Fewer than four distinct release dates. Sources: MC057.

11. Reported task accuracy (%) | Mode not specified; MC057 H23; RULER; 8K
10 values; 10 time points; no visible mean curve: Fewer than four distinct release dates. Sources: MC057.

12. Reported task accuracy (%) | Mode not specified; MC057 H23; RULER; 16K
10 values; 10 time points; no visible mean curve: Fewer than four distinct release dates. Sources: MC057.

13. Reported task accuracy (%) | Mode not specified; MC057 H23; RULER; 32K
10 values; 10 time points; no visible mean curve: Fewer than four distinct release dates. Sources: MC057.

14. Reported task accuracy (%) | Mode not specified; MC057 H23; RULER; 64K
10 values; 10 time points; no visible mean curve: Fewer than four distinct release dates. Sources: MC057.

15. Reported task accuracy (%) | Mode not specified; MC057 H23; RULER; 128K
10 values; 10 time points; no visible mean curve: Fewer than four distinct release dates. Sources: MC057.

16. Reported task accuracy (%) | Mode not specified; MC058 H17; RULER; Avg.
3 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC058.

17. Reported task accuracy (%) | Mode not specified; MC058 H17; RULER; 4K
3 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC058.

18. Reported task accuracy (%) | Mode not specified; MC058 H17; RULER; 8K
3 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC058.

19. Reported task accuracy (%) | Mode not specified; MC058 H17; RULER; 16K
3 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC058.

20. Reported task accuracy (%) | Mode not specified; MC058 H17; RULER; 32K
3 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC058.

21. Reported task accuracy (%) | Mode not specified; MC058 H17; RULER; 64K
3 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC058.

22. Reported task accuracy (%) | Mode not specified; MC058 H17; RULER; 128K
3 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC058.

23. Reported task accuracy (%) | Mode not specified; MC076 Table 21; RULER; 4K
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC076.

24. Reported task accuracy (%) | Mode not specified; MC076 Table 21; RULER; 8K
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC076.

25. Reported task accuracy (%) | Mode not specified; MC076 Table 21; RULER; 16K
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC076.

26. Reported task accuracy (%) | Mode not specified; MC076 Table 21; RULER; 32K
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC076.

27. Reported task accuracy (%) | Mode not specified; MC076 Table 21; RULER; 64K
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC076.


28. Reported task accuracy (%) | Mode not specified; MC076 Table 21; RULER; 128K
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC076.

29. Reported task accuracy (%) | Mode not specified; MC076 Table 21; RULER; 256K
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC076.

30. Reported task accuracy (%) | Mode not specified; MC076 Table 21; RULER; Avg <=128K
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC076.

RULER: Average task score

Original 13-task RULER; 4K tokens

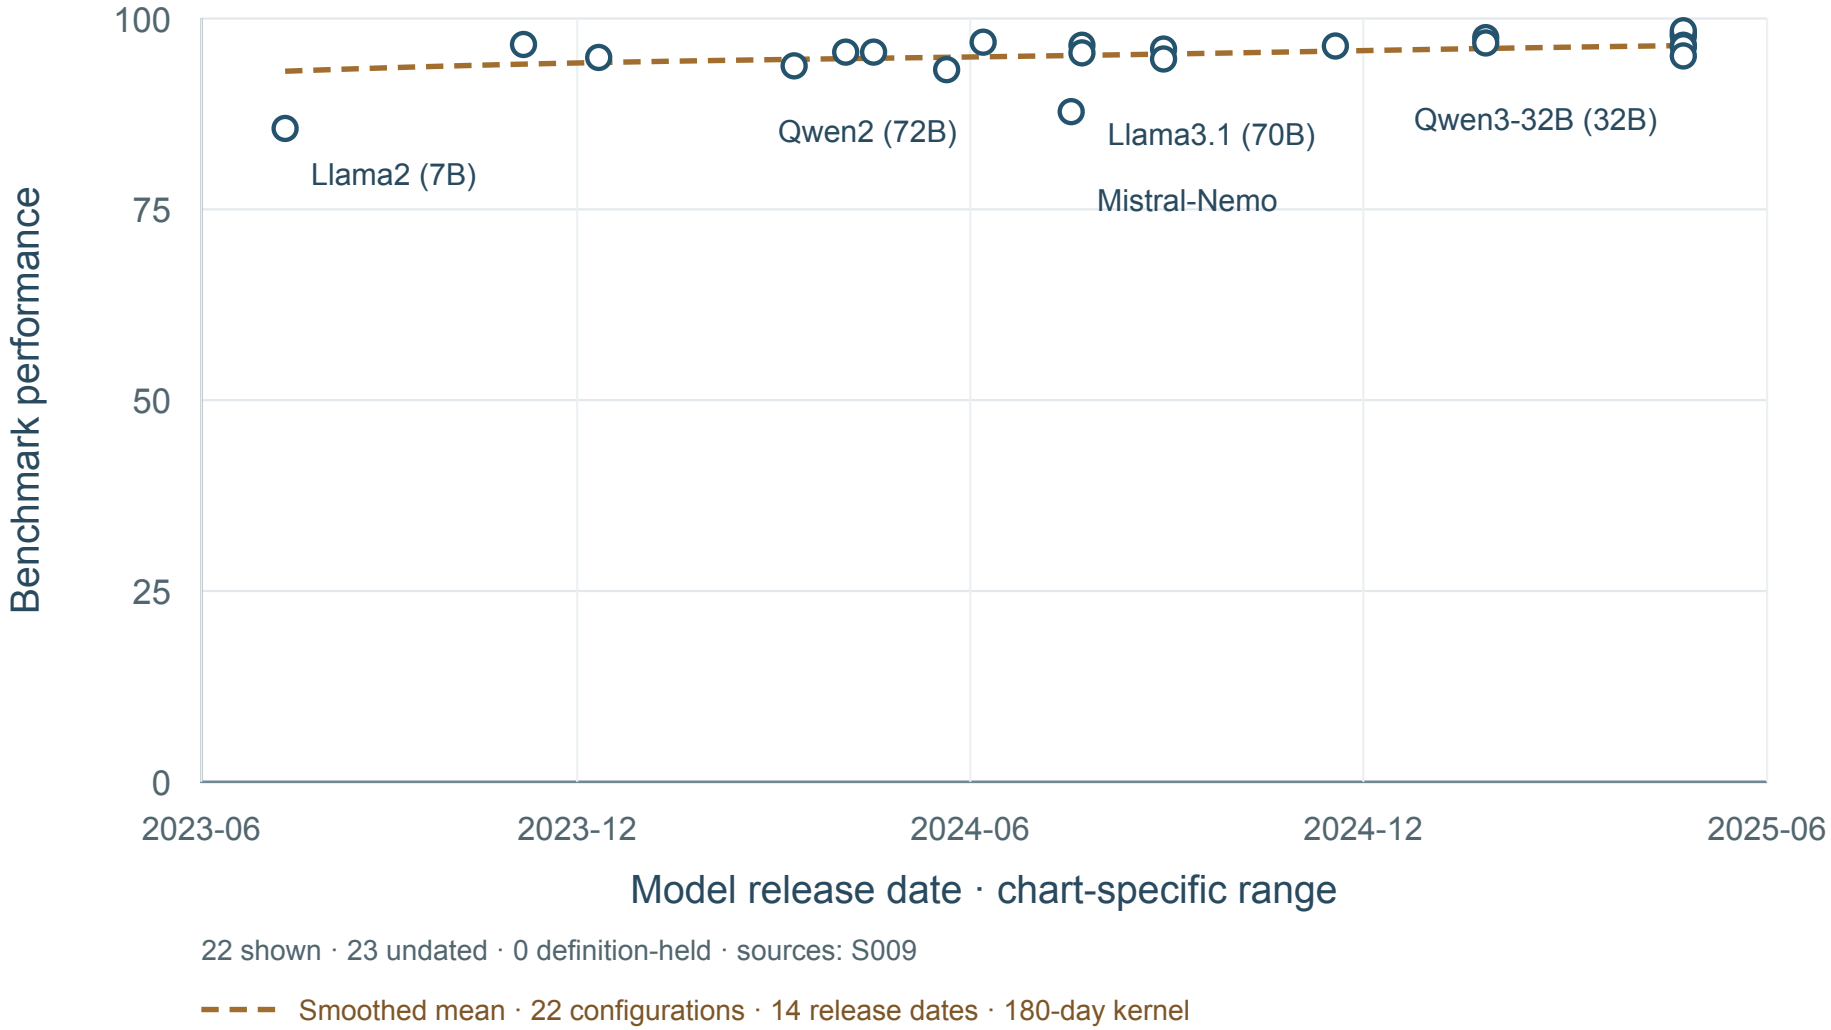

22 shown · 23 undated · 0 definition-held · sources: S009


Smoothed mean · 22 configurations · 14 release dates · 180-day kernel

Result-source references: S009. Exact point locators and raw values: data/F021_RULER_values.csv.

Benchmark reference (APA): Hsieh, C.-P., Sun, S., Kriman, S., Acharya, S., Rekesh, D., Jia, F., Zhang, Y., & Ginsburg, B. (2024). RULER: What's the real context size of your long-context language models?. arXiv. https://arxiv.org/abs/2404.06654


RULER: Average task score

Original 13-task RULER; 8K tokens

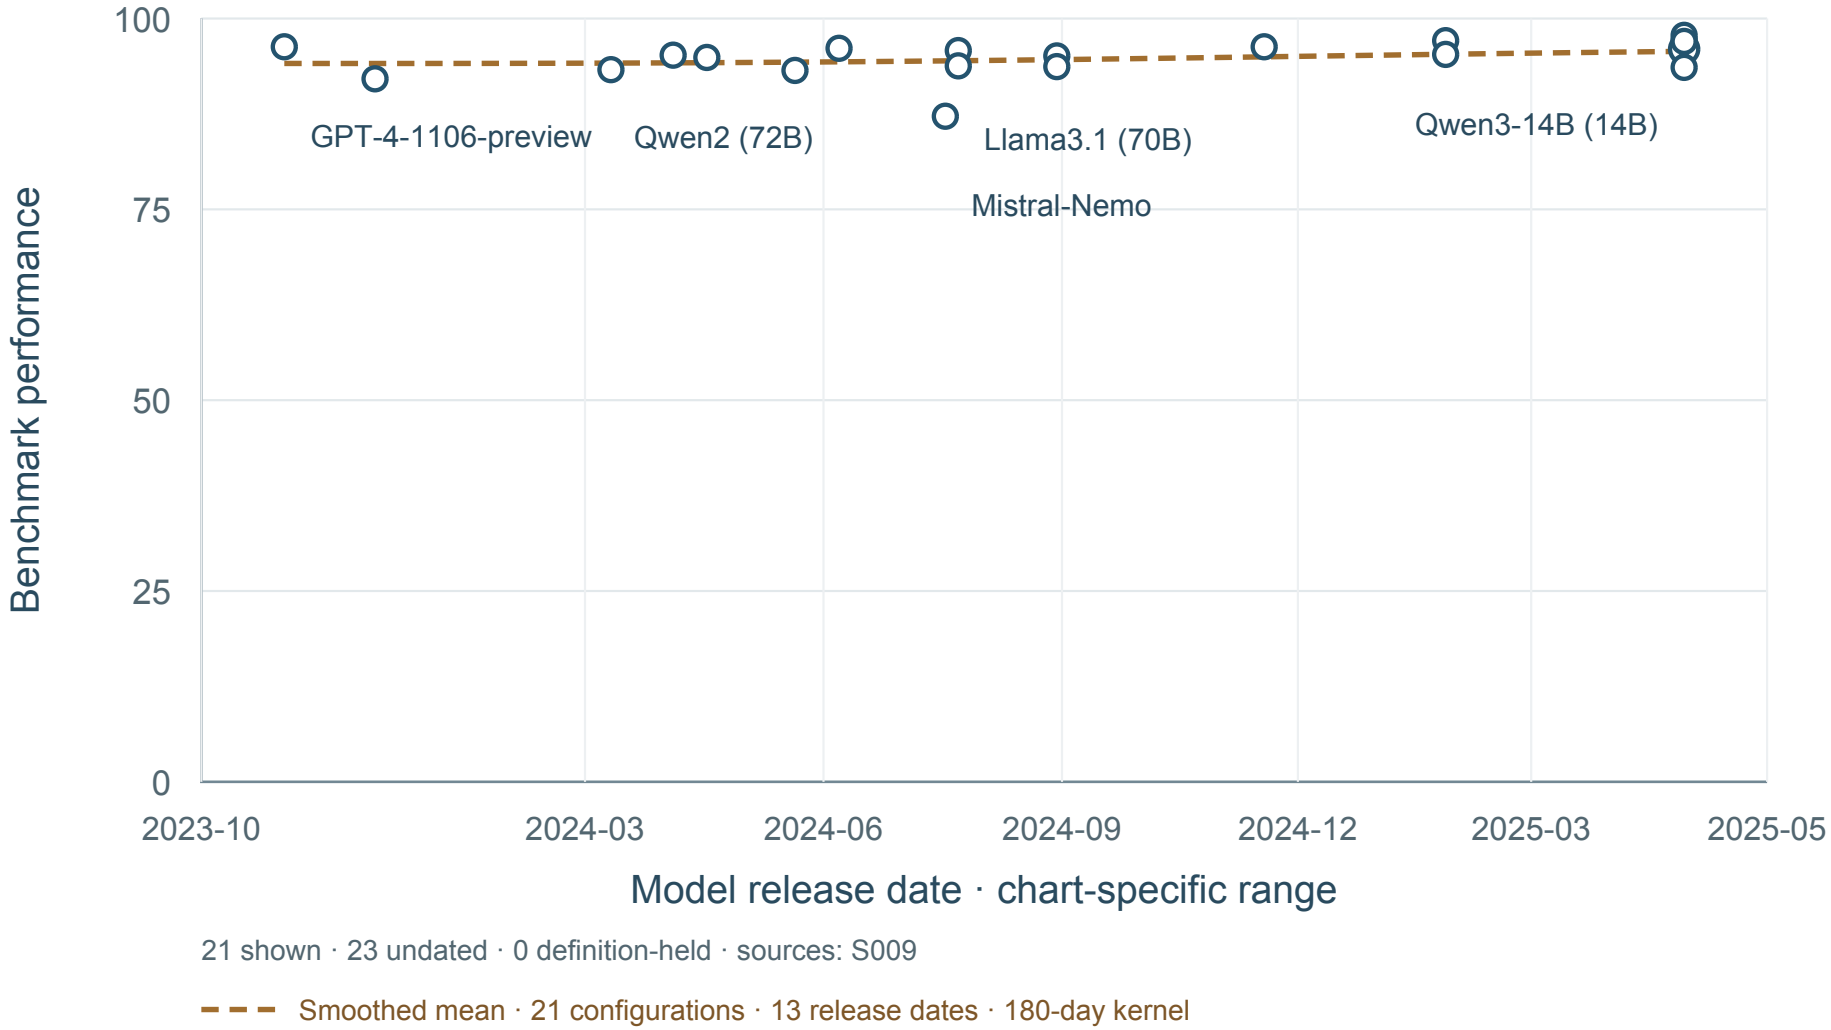


Result-source references: S009. Exact point locators and raw values: data/F021_RULER_values.csv.

Benchmark reference (APA): Hsieh, C.-P., Sun, S., Kriman, S., Acharya, S., Rekesh, D., Jia, F., Zhang, Y., & Ginsburg, B. (2024). RULER: What's the real context size of your long-context language models?. arXiv. https://arxiv.org/abs/2404.06654

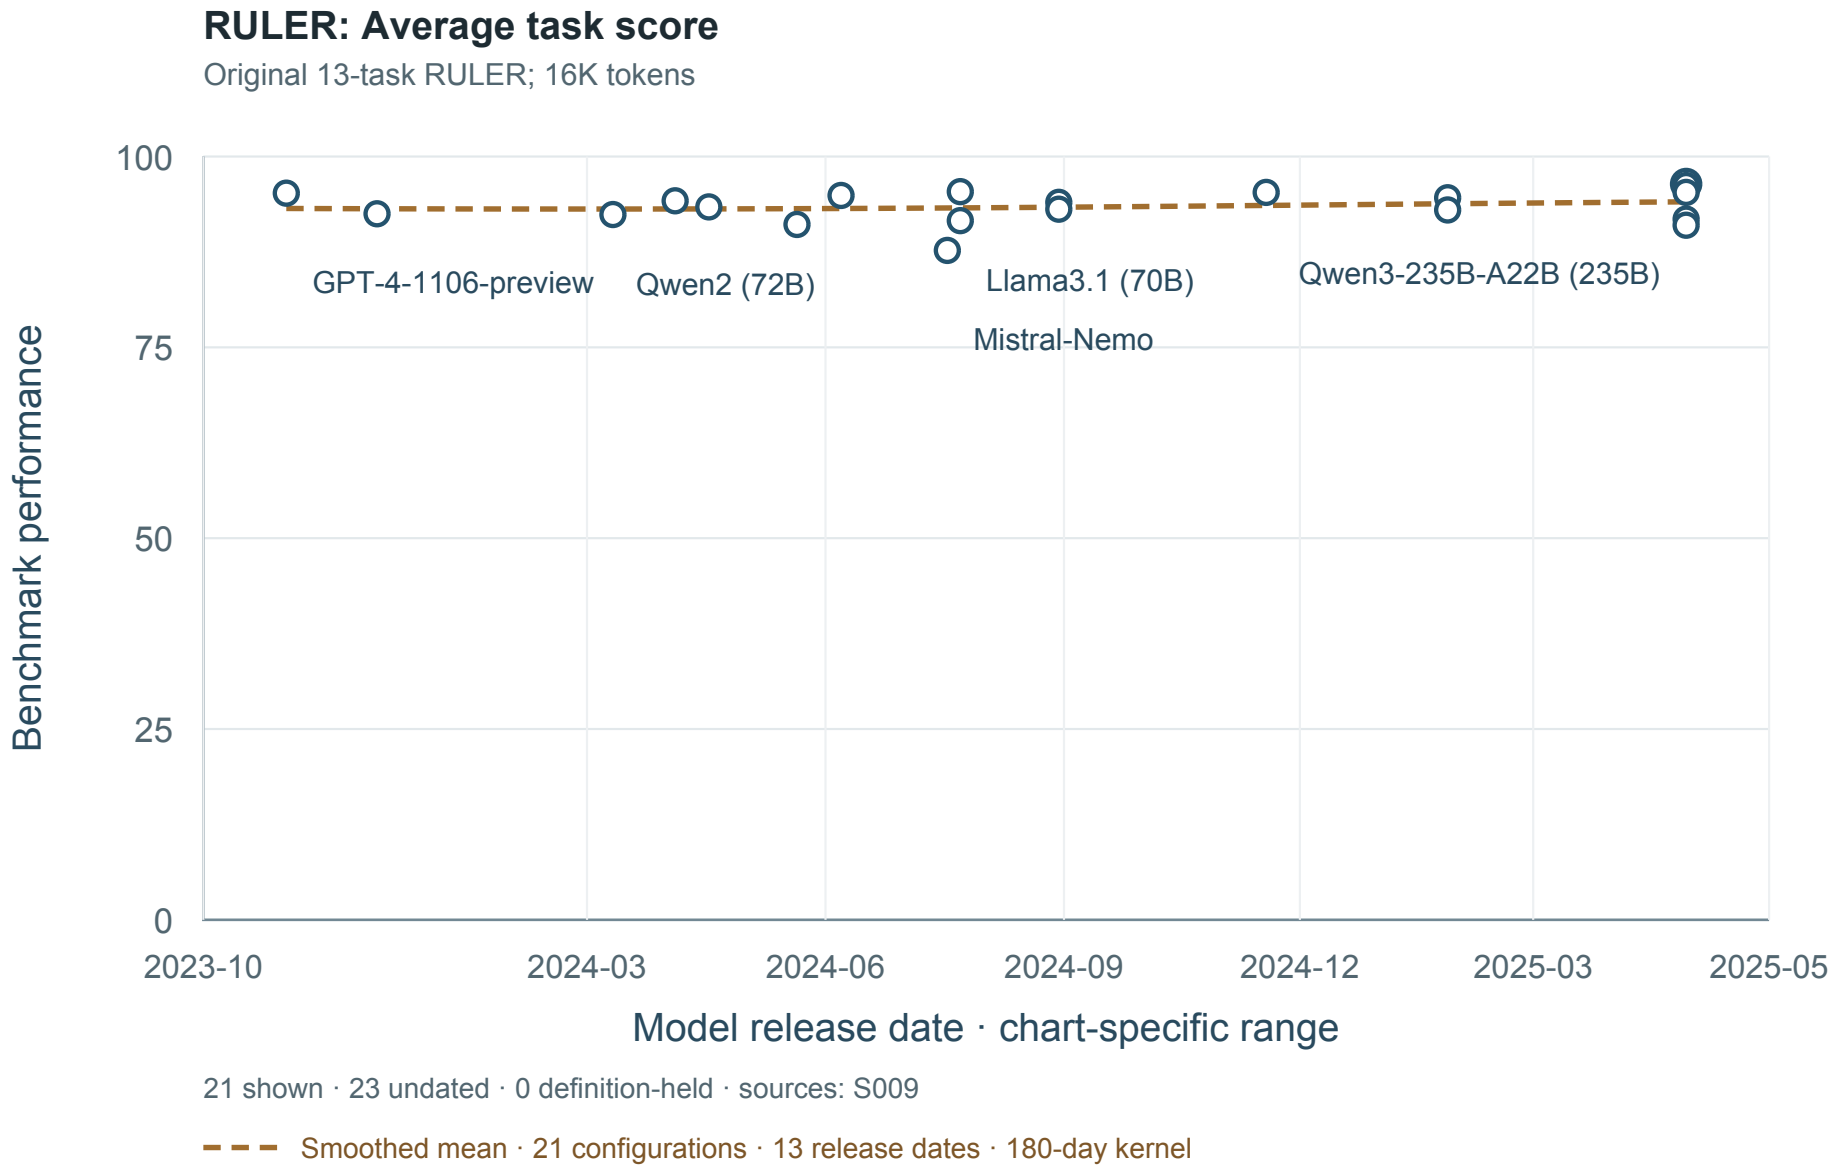

Result-source references: S009. Exact point locators and raw values: data/F021_RULER_values.csv.

Benchmark reference (APA): Hsieh, C.-P., Sun, S., Kriman, S., Acharya, S., Rekesh, D., Jia, F., Zhang, Y., & Ginsburg, B. (2024). RULER: What's the real context size of your long-context language models?. arXiv. https://arxiv.org/abs/2404.06654

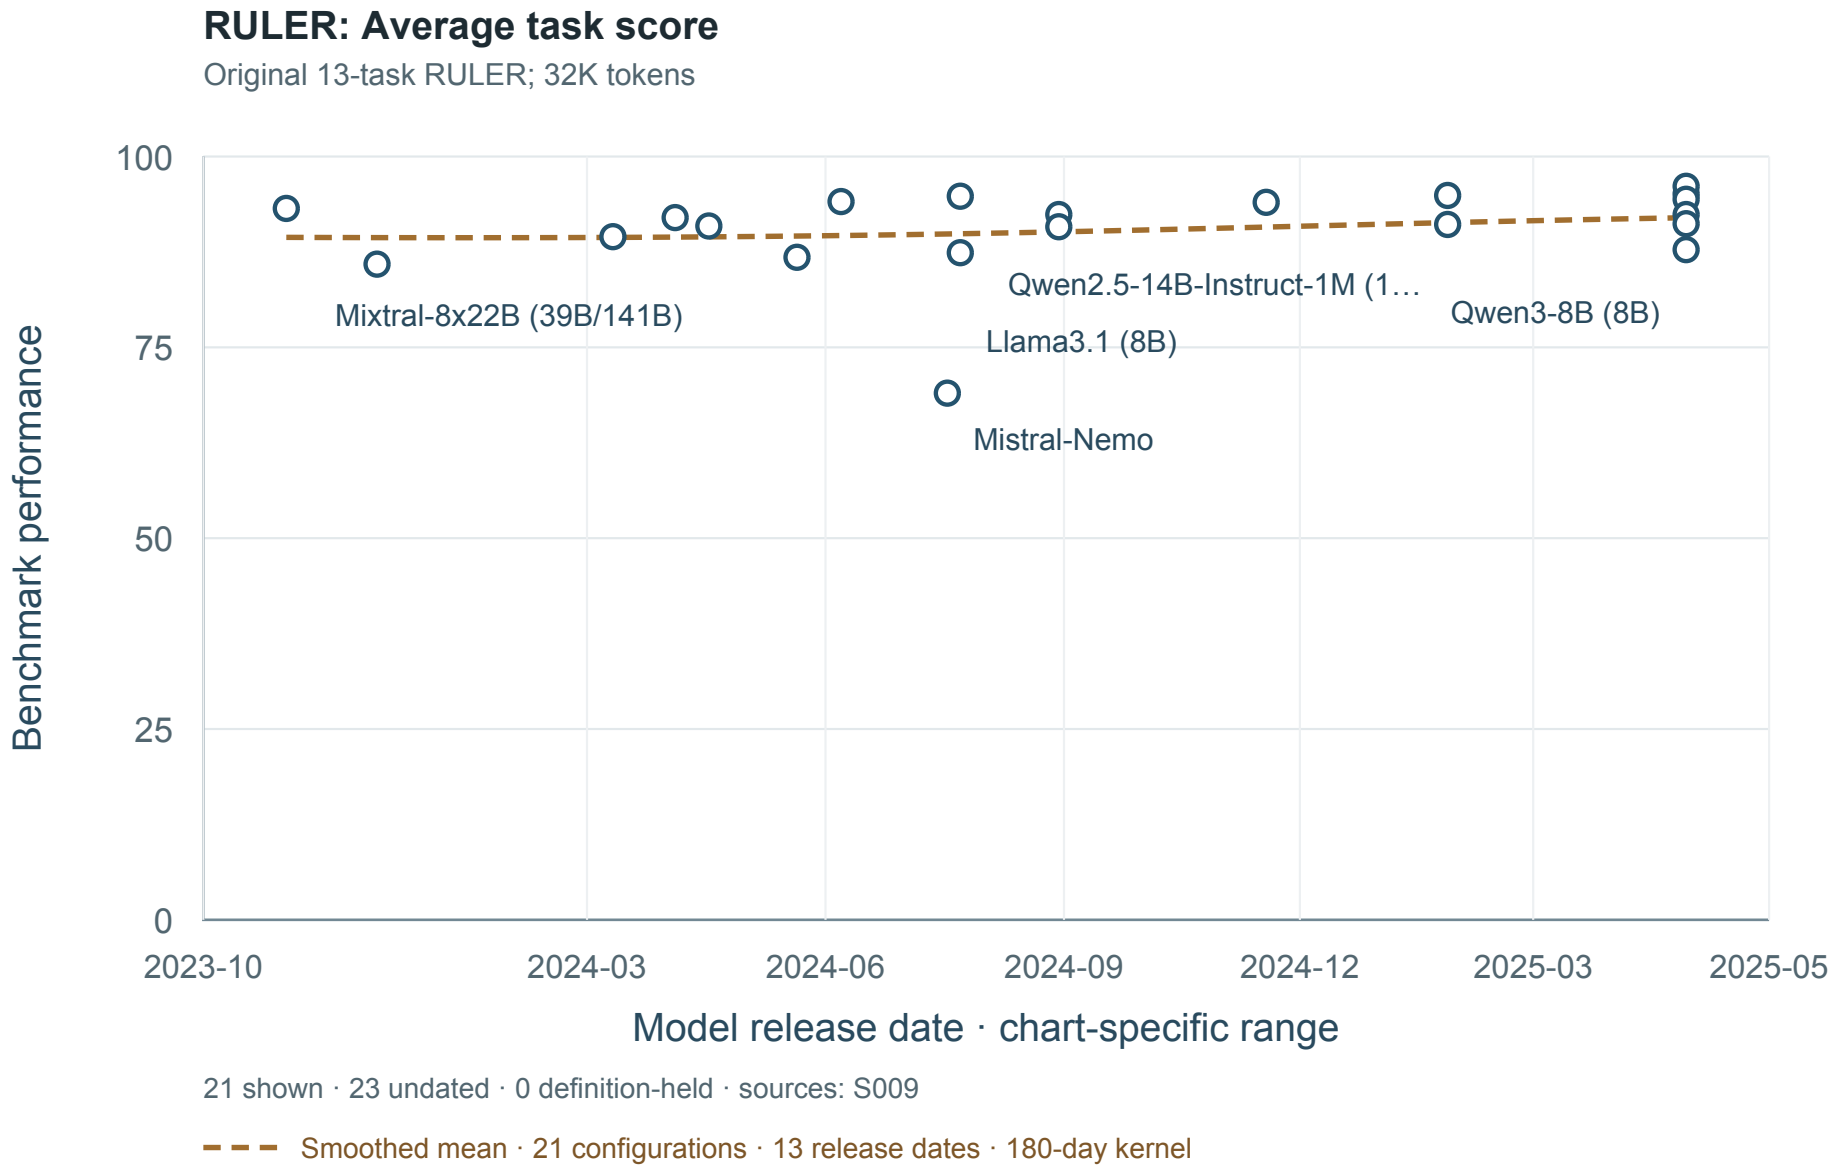


Result-source references: S009. Exact point locators and raw values: data/F021_RULER_values.csv.

Benchmark reference (APA): Hsieh, C.-P., Sun, S., Kriman, S., Acharya, S., Rekesh, D., Jia, F., Zhang, Y., & Ginsburg, B. (2024). RULER: What's the real context size of your long-context language models?. arXiv. https://arxiv.org/abs/2404.06654

RULER: Average task score

Original 13-task RULER; 64K tokens

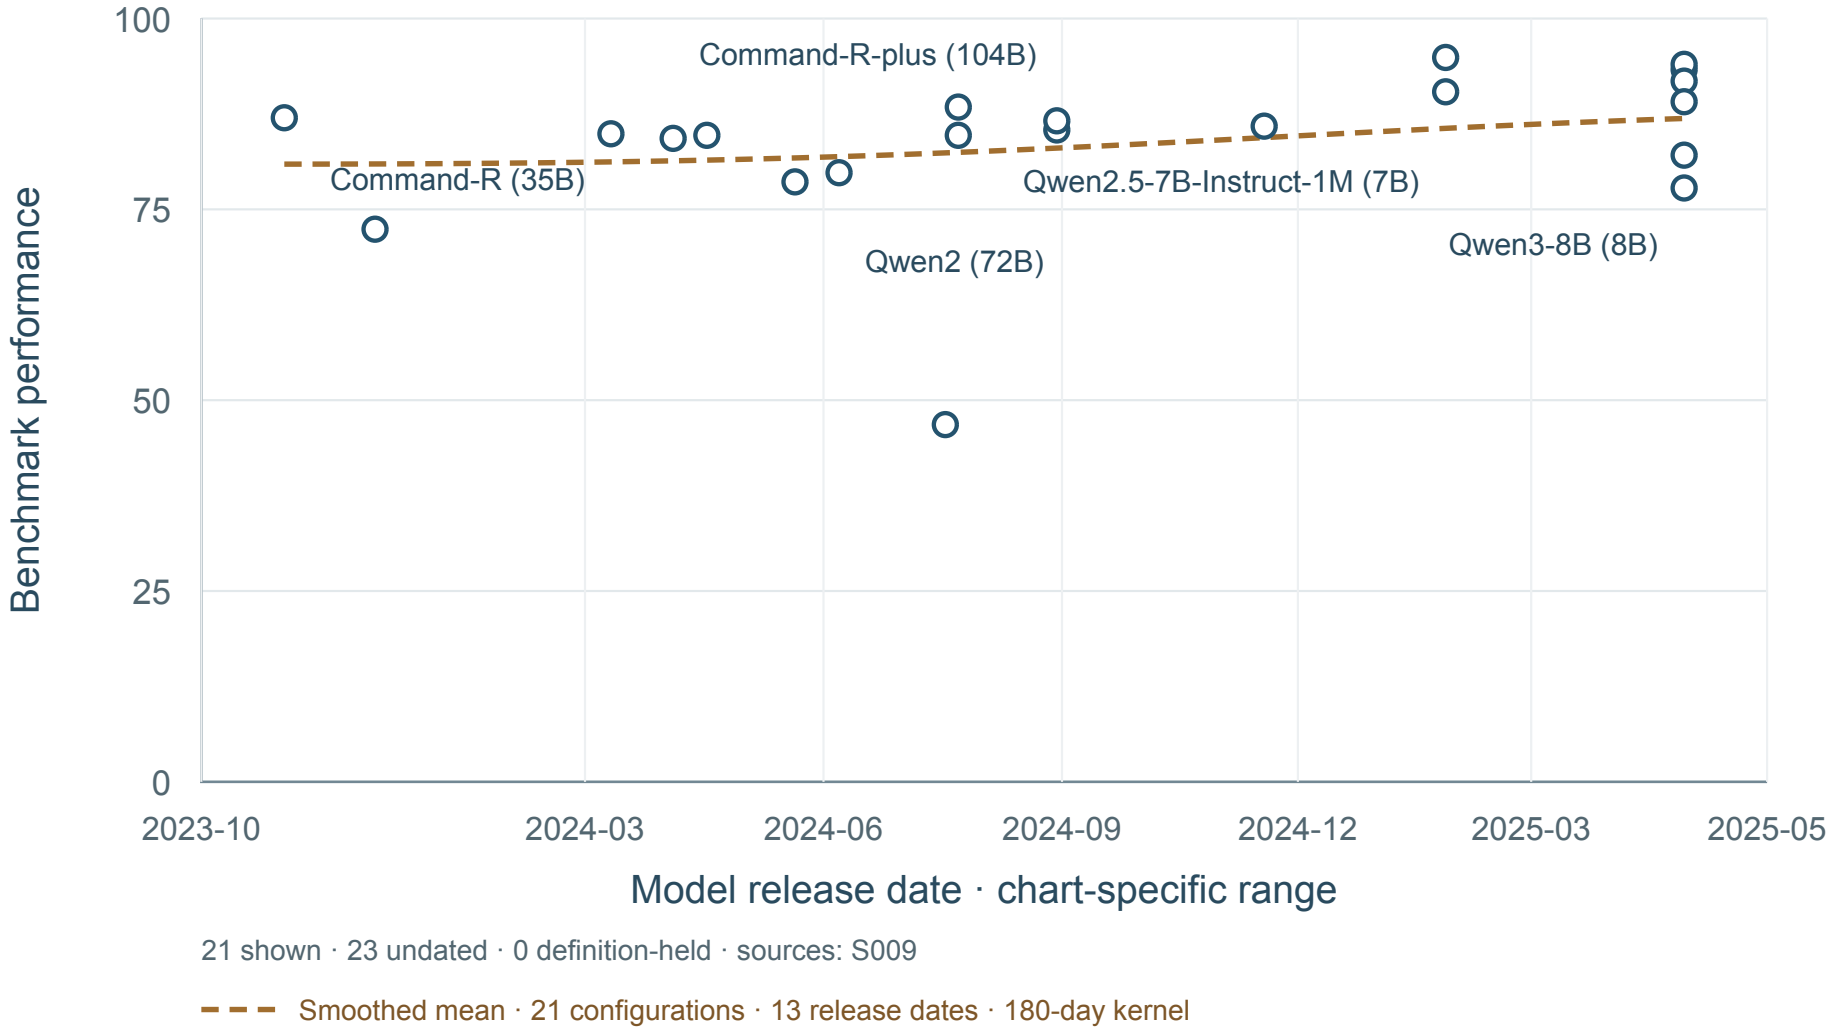

21 shown · 23 undated · 0 definition-held · sources: S009


Smoothed mean · 21 configurations · 13 release dates · 180-day kernel

Result-source references: S009. Exact point locators and raw values: data/F021_RULER_values.csv.

Benchmark reference (APA): Hsieh, C.-P., Sun, S., Kriman, S., Acharya, S., Rekesh, D., Jia, F., Zhang, Y., & Ginsburg, B. (2024). RULER: What's the real context size of your long-context language models?. arXiv. https://arxiv.org/abs/2404.06654

RULER: Average task score

Original 13-task RULER; 128K tokens

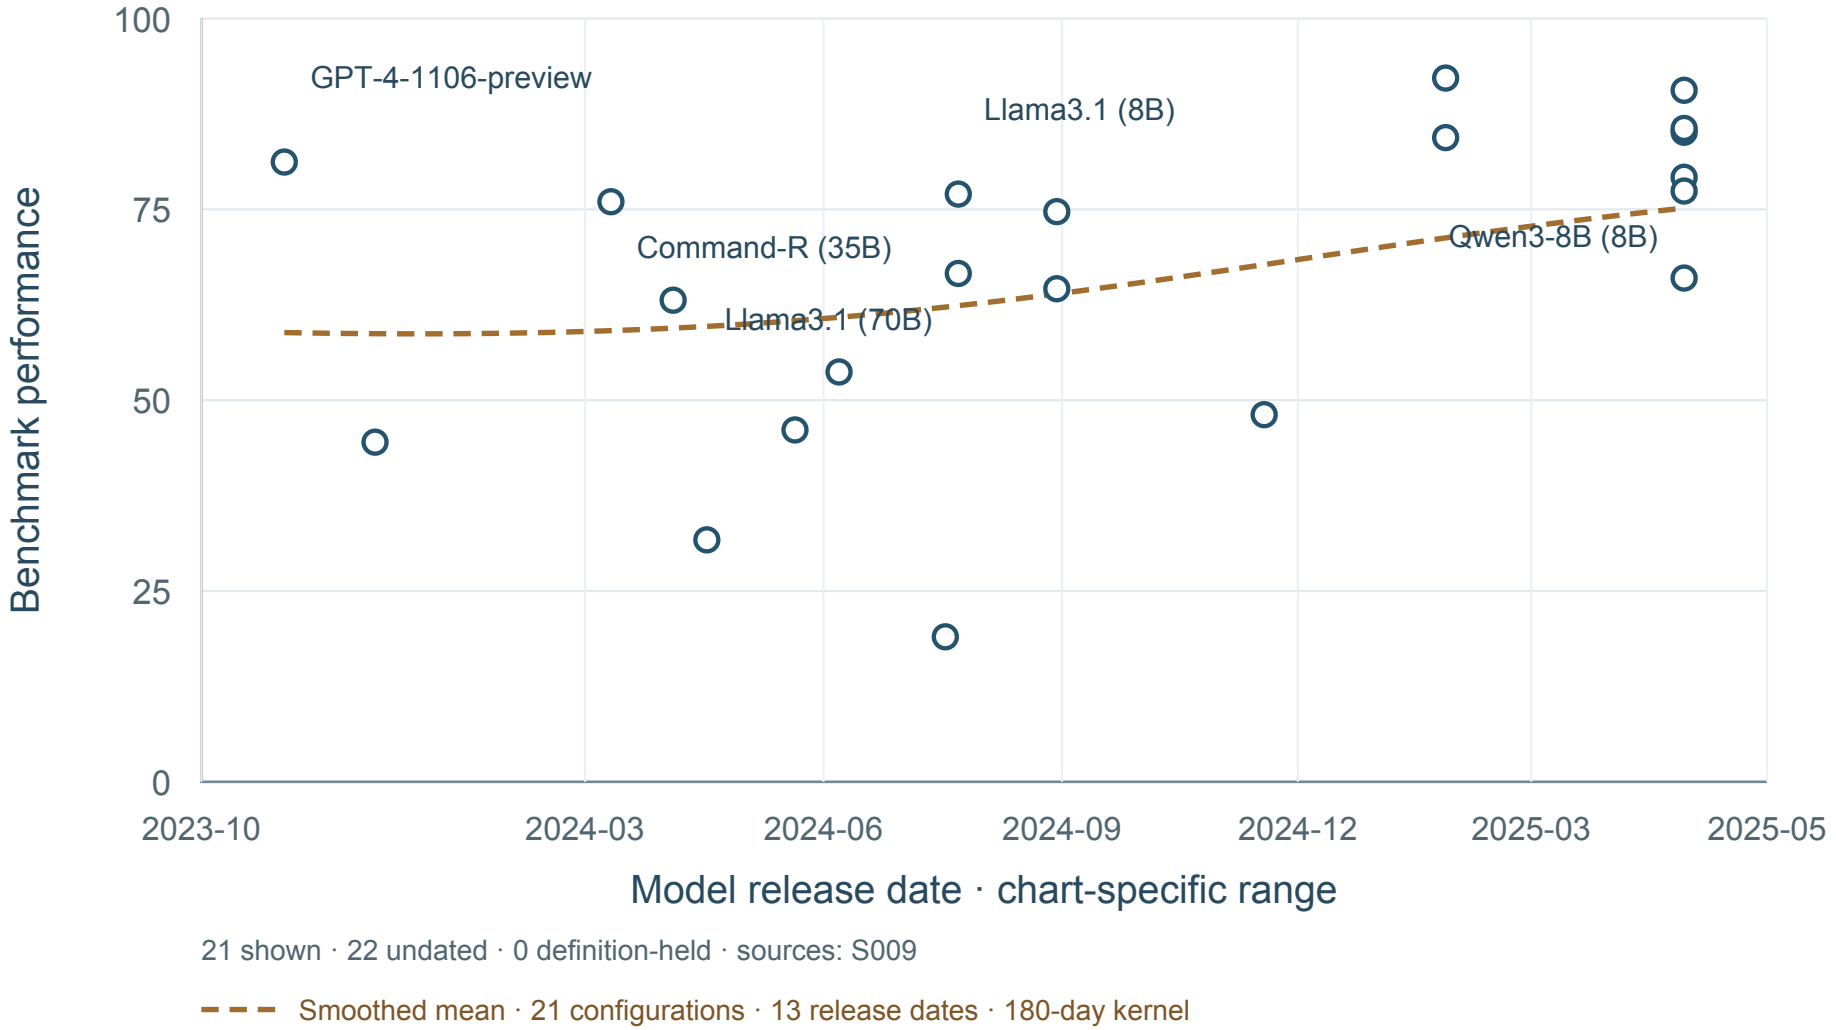

21 shown · 22 undated · 0 definition-held · sources: S009


Smoothed mean · 21 configurations · 13 release dates · 180-day kernel

Result-source references: S009. Exact point locators and raw values: data/F021_RULER_values.csv.

Benchmark reference (APA): Hsieh, C.-P., Sun, S., Kriman, S., Acharya, S., Rekesh, D., Jia, F., Zhang, Y., & Ginsburg, B. (2024). RULER: What's the real context size of your long-context language models?. arXiv. https://arxiv.org/abs/2404.06654

RULER: Reported task accuracy (%)

Non-thinking; MC049 H4; 1.2B comparison; RULER; As reported

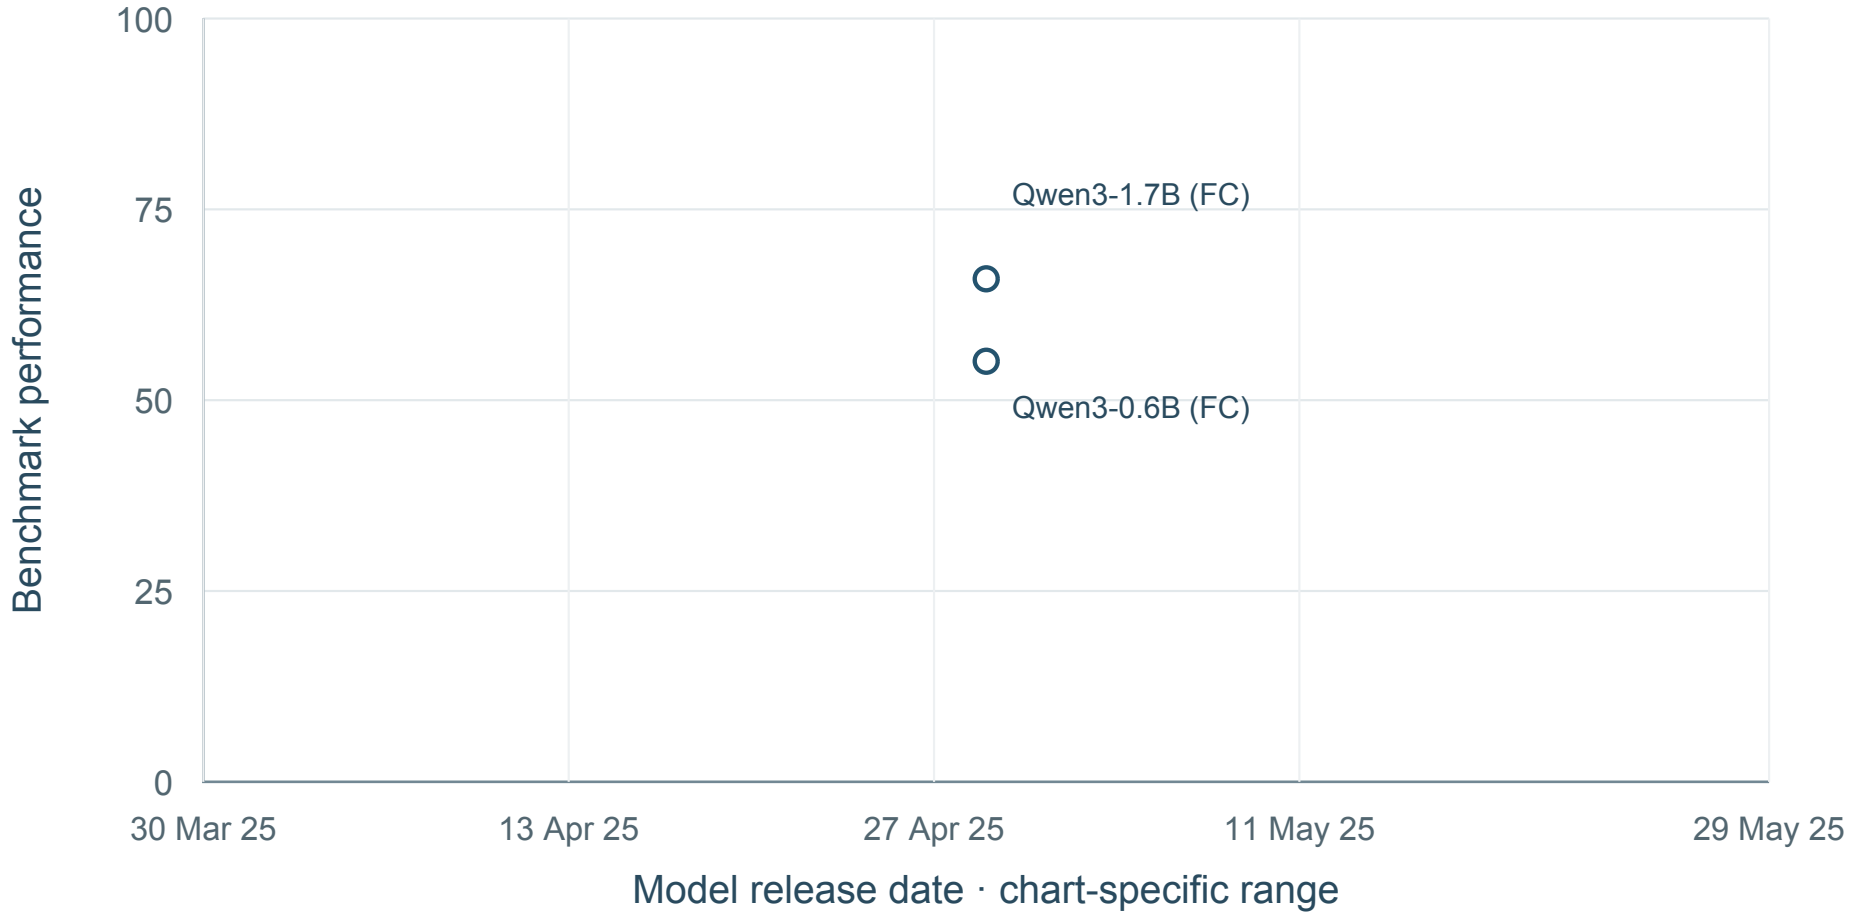

2 shown · 0 undated · 0 definition-held · sources: MC049


No mean curve: Fewer than five dated model configurations.

Result-source references: MC049. Exact point locators and raw values: data/F021_RULER_values.csv.

Benchmark reference (APA): Hsieh, C.-P., Sun, S., Kriman, S., Acharya, S., Rekesh, D., Jia, F., Zhang, Y., & Ginsburg, B. (2024). RULER: What's the real context size of your long-context language models?. arXiv. https://arxiv.org/abs/2404.06654

RULER: Reported task accuracy (%)

Mode not specified; MC057 H23; RULER; Avg.

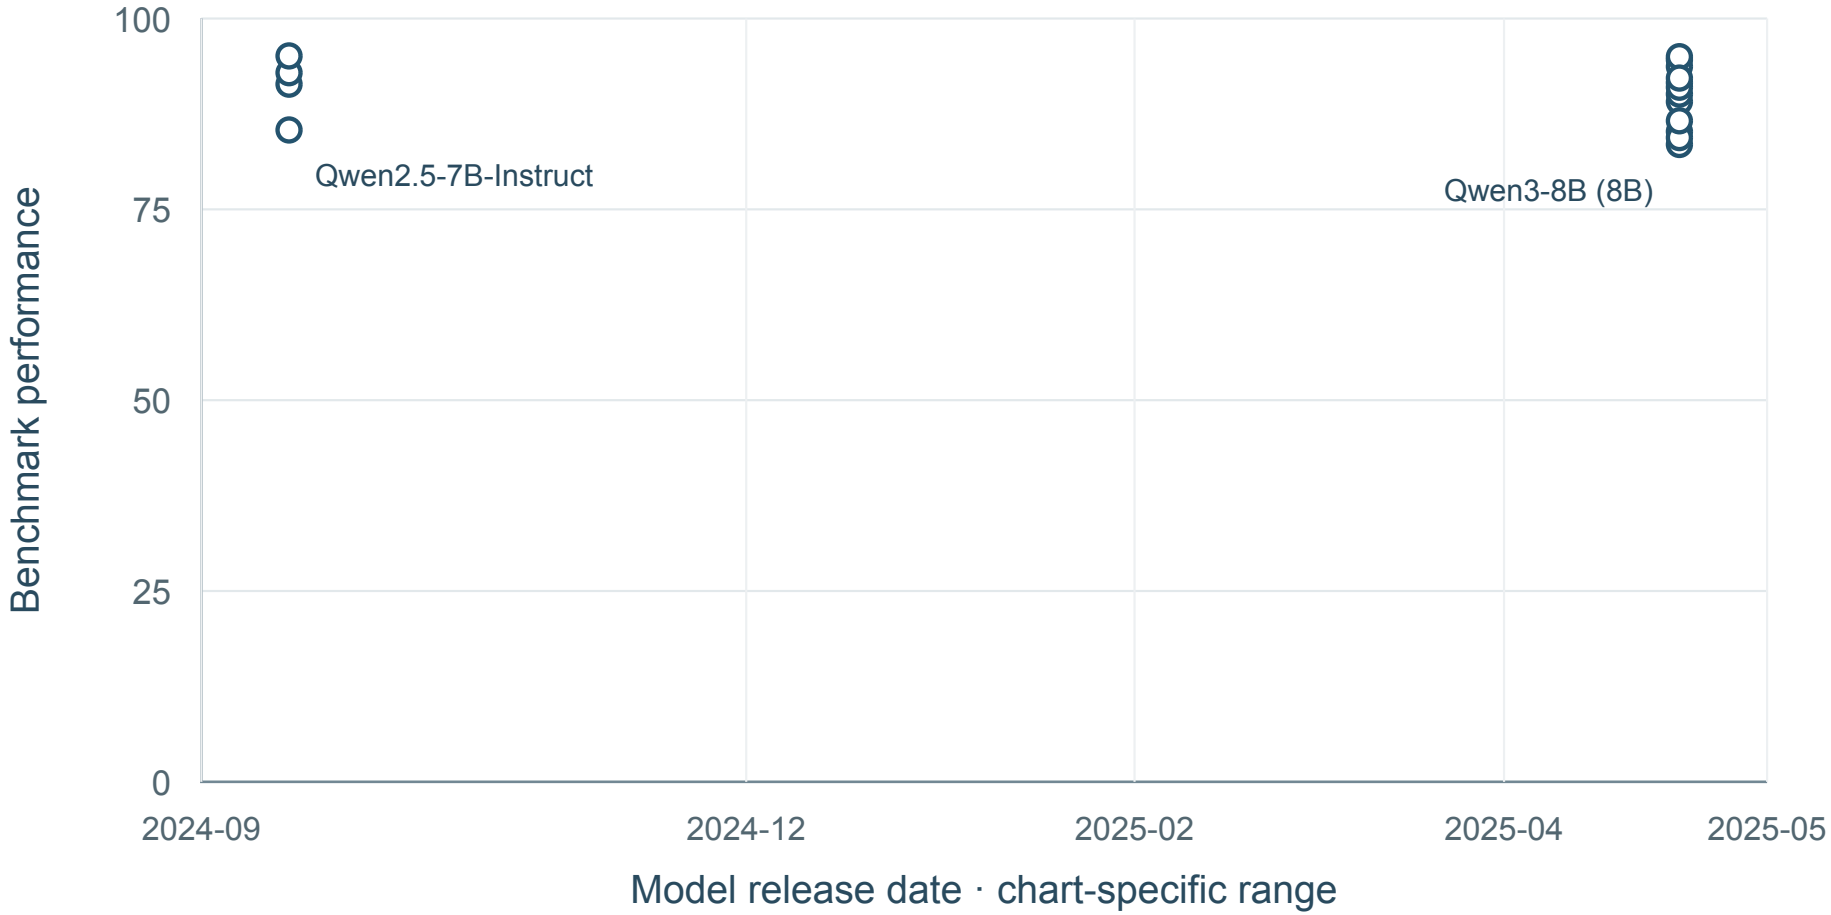

16 shown · 0 undated · 0 definition-held · sources: MC057


No mean curve: Fewer than four distinct release dates.

Result-source references: MC057. Exact point locators and raw values: data/F021_RULER_values.csv.

Benchmark reference (APA): Hsieh, C.-P., Sun, S., Kriman, S., Acharya, S., Rekesh, D., Jia, F., Zhang, Y., & Ginsburg, B. (2024). RULER: What's the real context size of your long-context language models?. arXiv. https://arxiv.org/abs/2404.06654

RULER: Reported task accuracy (%)

Mode not specified; MC057 H23; RULER; 4K

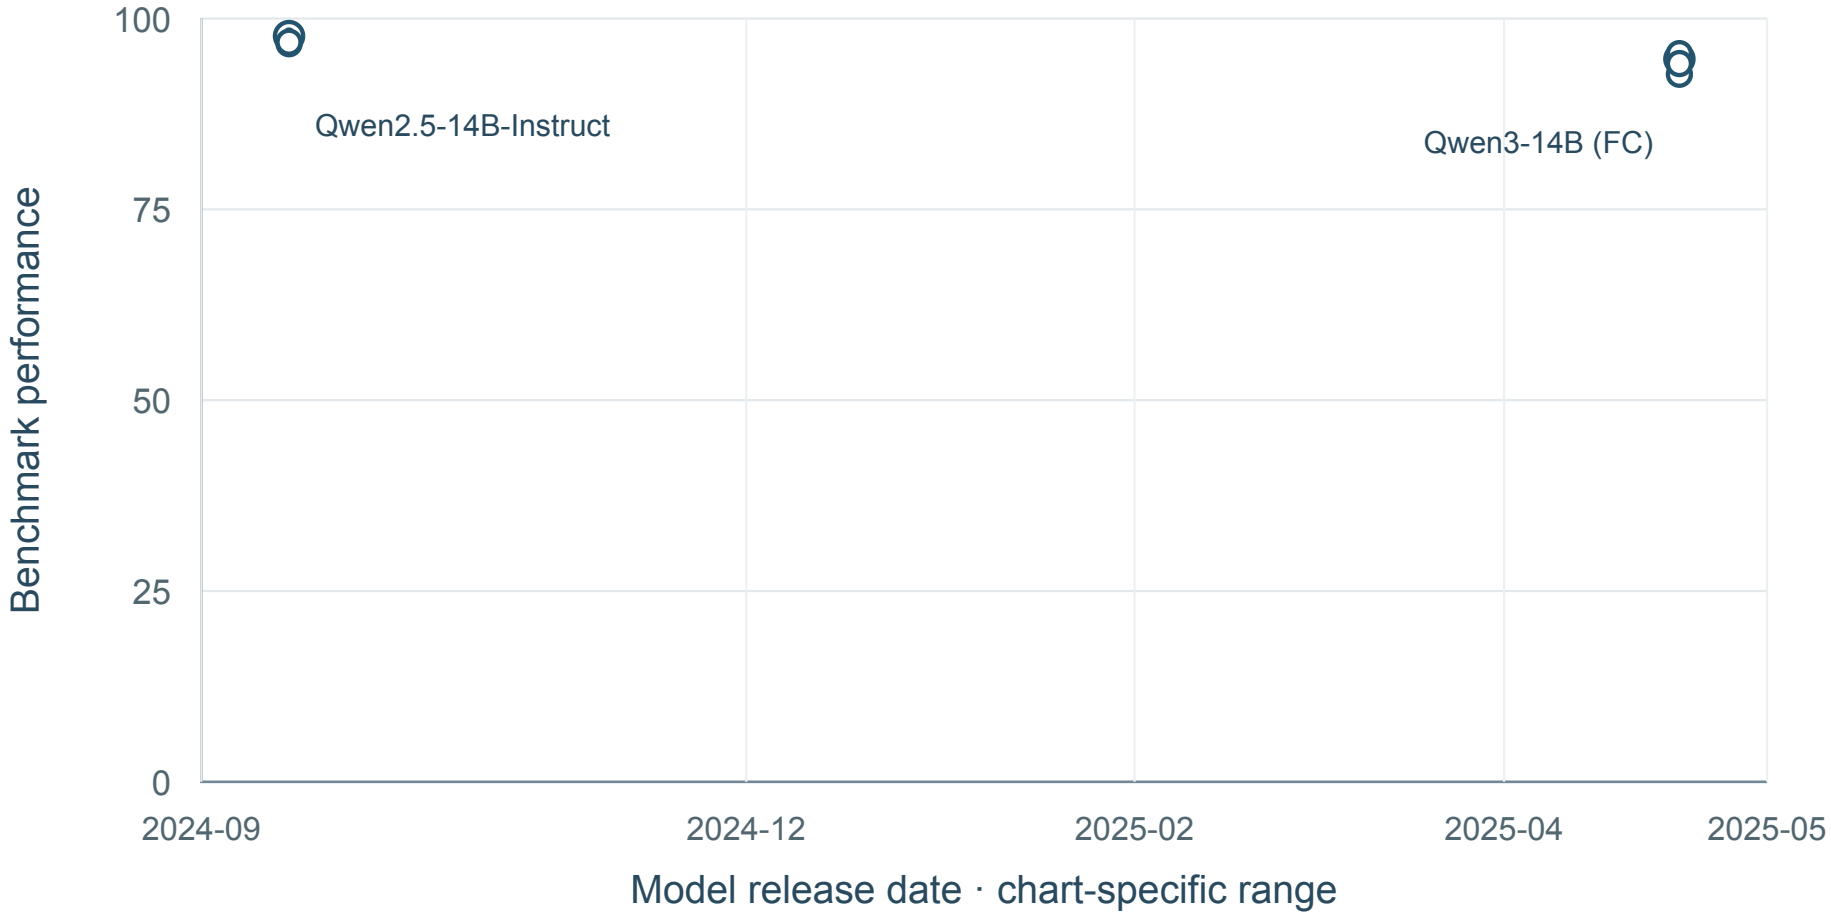

9 shown · 0 undated · 0 definition-held · sources: MC057


No mean curve: Fewer than four distinct release dates.

Result-source references: MC057. Exact point locators and raw values: data/F021_RULER_values.csv.

Benchmark reference (APA): Hsieh, C.-P., Sun, S., Kriman, S., Acharya, S., Rekesh, D., Jia, F., Zhang, Y., & Ginsburg, B. (2024). RULER: What's the real context size of your long-context language models?. arXiv. https://arxiv.org/abs/2404.06654

RULER: Reported task accuracy (%)

Mode not specified; MC057 H23; RULER; 8K

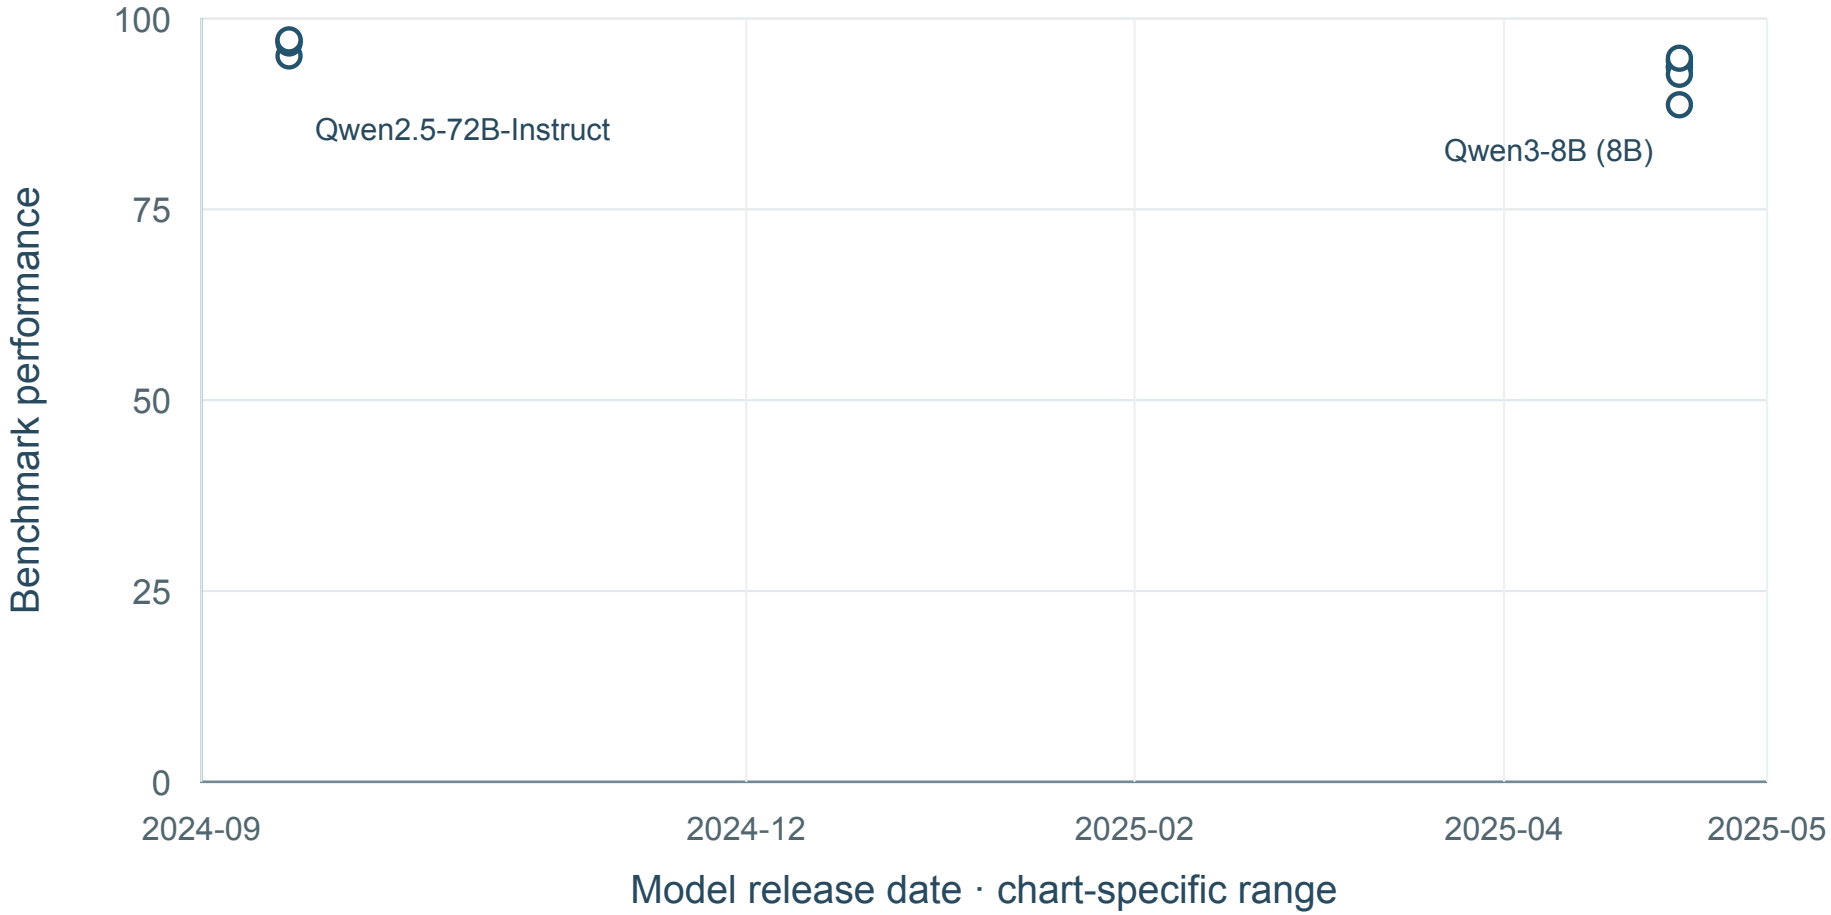

10 shown · 0 undated · 0 definition-held · sources: MC057


No mean curve: Fewer than four distinct release dates.

Result-source references: MC057. Exact point locators and raw values: data/F021_RULER_values.csv.

Benchmark reference (APA): Hsieh, C.-P., Sun, S., Kriman, S., Acharya, S., Rekesh, D., Jia, F., Zhang, Y., & Ginsburg, B. (2024). RULER: What's the real context size of your long-context language models?. arXiv. https://arxiv.org/abs/2404.06654

RULER: Reported task accuracy (%)

Mode not specified; MC057 H23; RULER; 16K

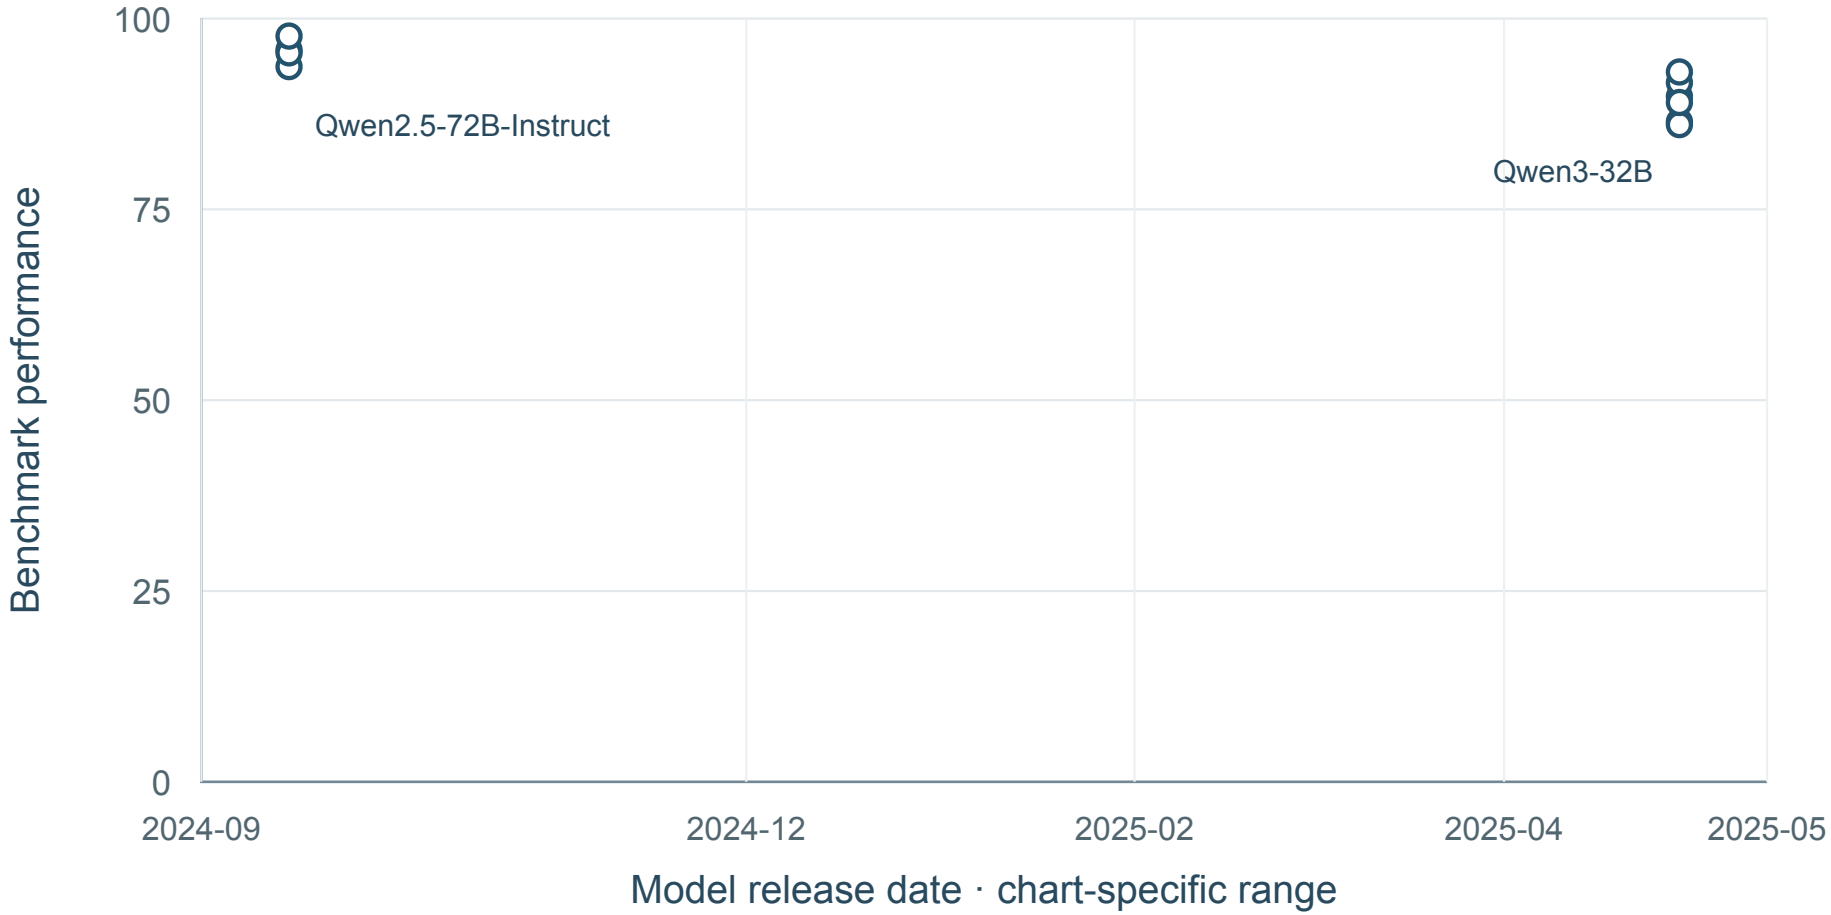

10 shown · 0 undated · 0 definition-held · sources: MC057


No mean curve: Fewer than four distinct release dates.

Result-source references: MC057. Exact point locators and raw values: data/F021_RULER_values.csv.

Benchmark reference (APA): Hsieh, C.-P., Sun, S., Kriman, S., Acharya, S., Rekesh, D., Jia, F., Zhang, Y., & Ginsburg, B. (2024). RULER: What's the real context size of your long-context language models?. arXiv. https://arxiv.org/abs/2404.06654

RULER: Reported task accuracy (%)

Mode not specified; MC057 H23; RULER; 32K

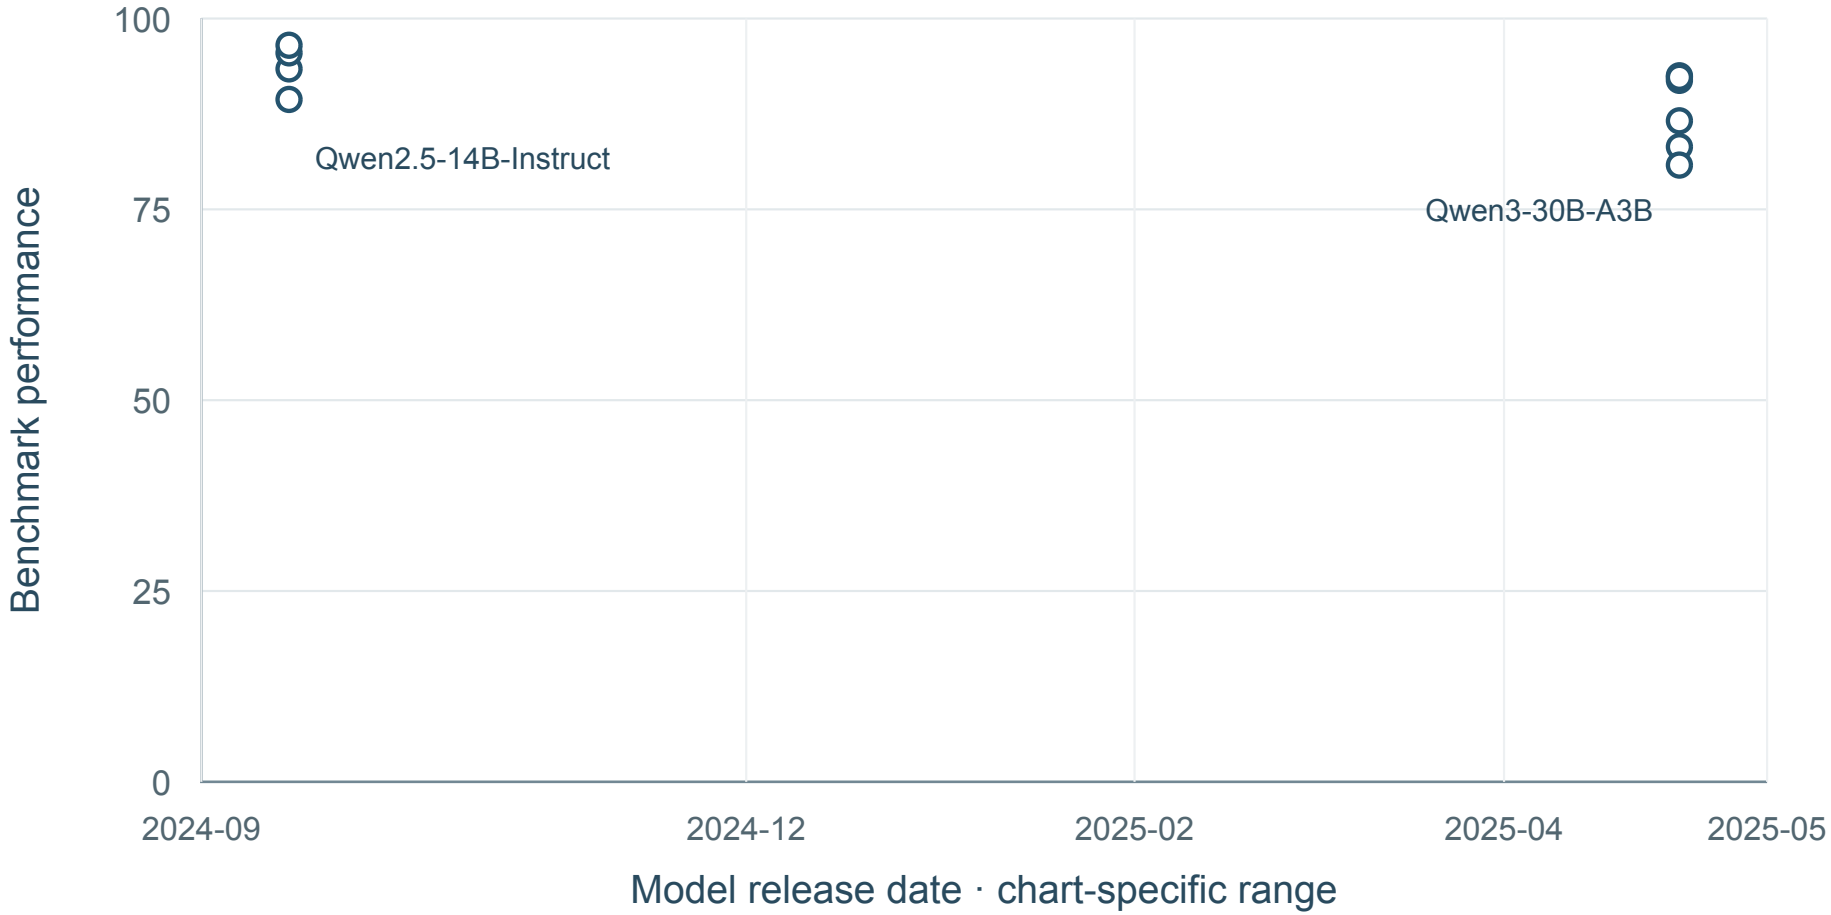

10 shown · 0 undated · 0 definition-held · sources: MC057


No mean curve: Fewer than four distinct release dates.

Result-source references: MC057. Exact point locators and raw values: data/F021_RULER_values.csv.

Benchmark reference (APA): Hsieh, C.-P., Sun, S., Kriman, S., Acharya, S., Rekesh, D., Jia, F., Zhang, Y., & Ginsburg, B. (2024). RULER: What's the real context size of your long-context language models?. arXiv. https://arxiv.org/abs/2404.06654

RULER: Reported task accuracy (%)

Mode not specified; MC057 H23; RULER; 64K

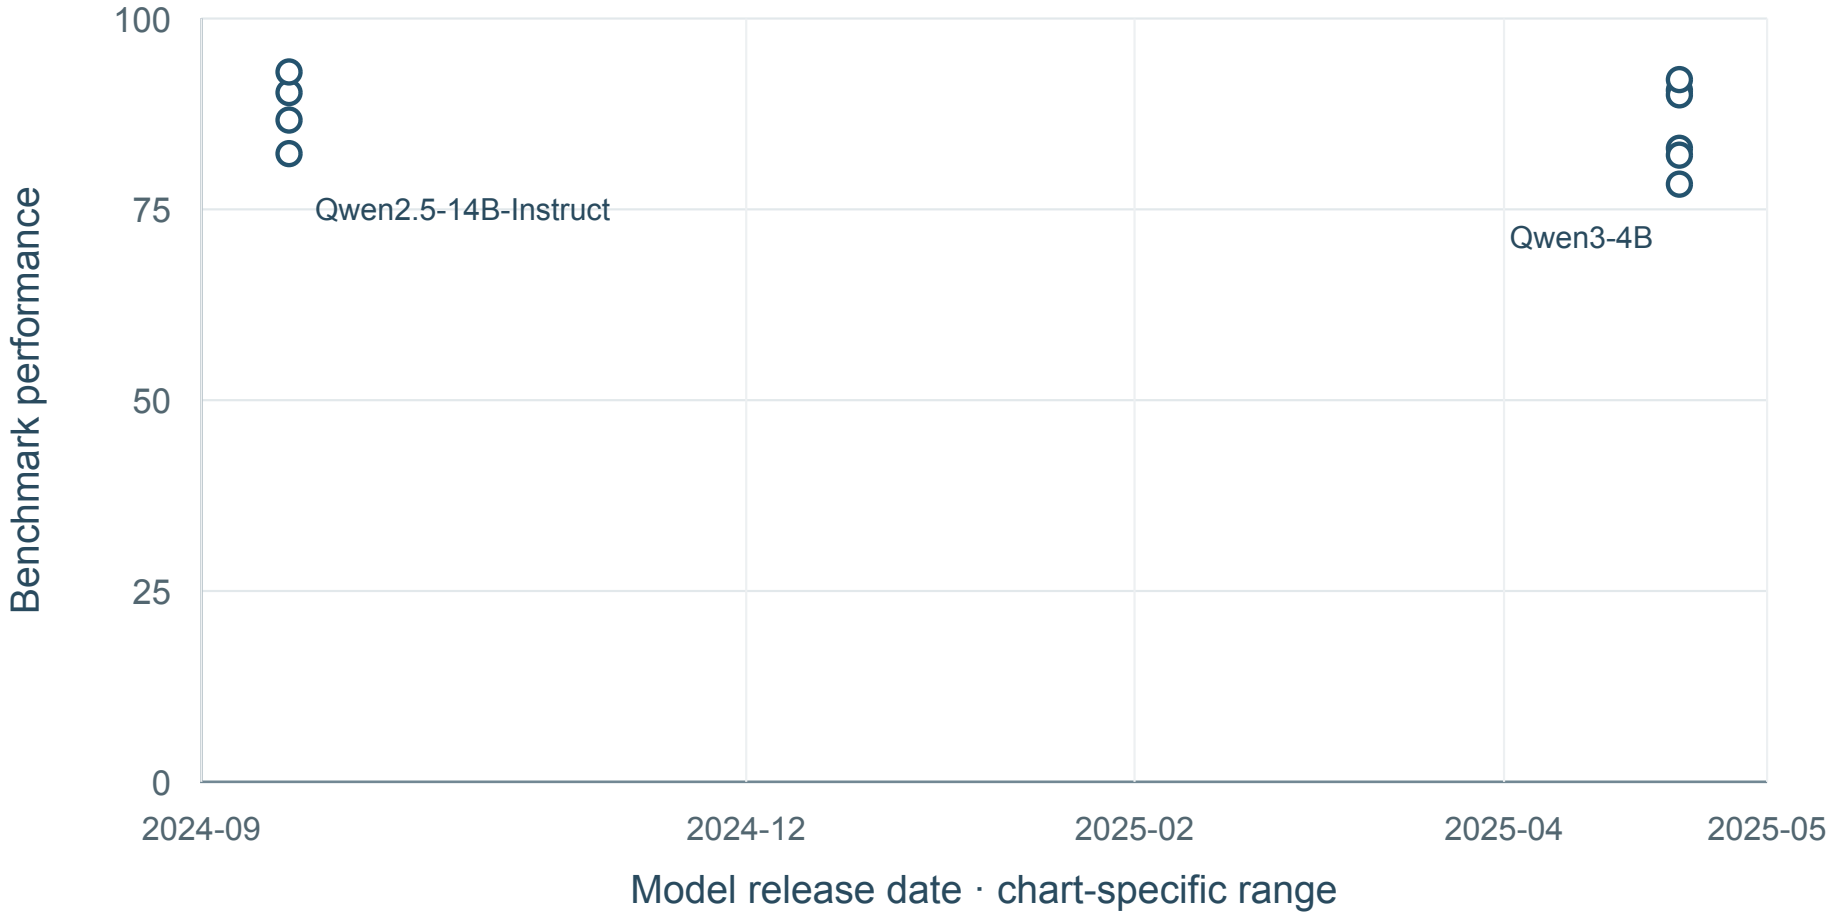

10 shown · 0 undated · 0 definition-held · sources: MC057


No mean curve: Fewer than four distinct release dates.

Result-source references: MC057. Exact point locators and raw values: data/F021_RULER_values.csv.

Benchmark reference (APA): Hsieh, C.-P., Sun, S., Kriman, S., Acharya, S., Rekesh, D., Jia, F., Zhang, Y., & Ginsburg, B. (2024). RULER: What's the real context size of your long-context language models?. arXiv. https://arxiv.org/abs/2404.06654

RULER: Reported task accuracy (%)

Mode not specified; MC057 H23; RULER; 128K

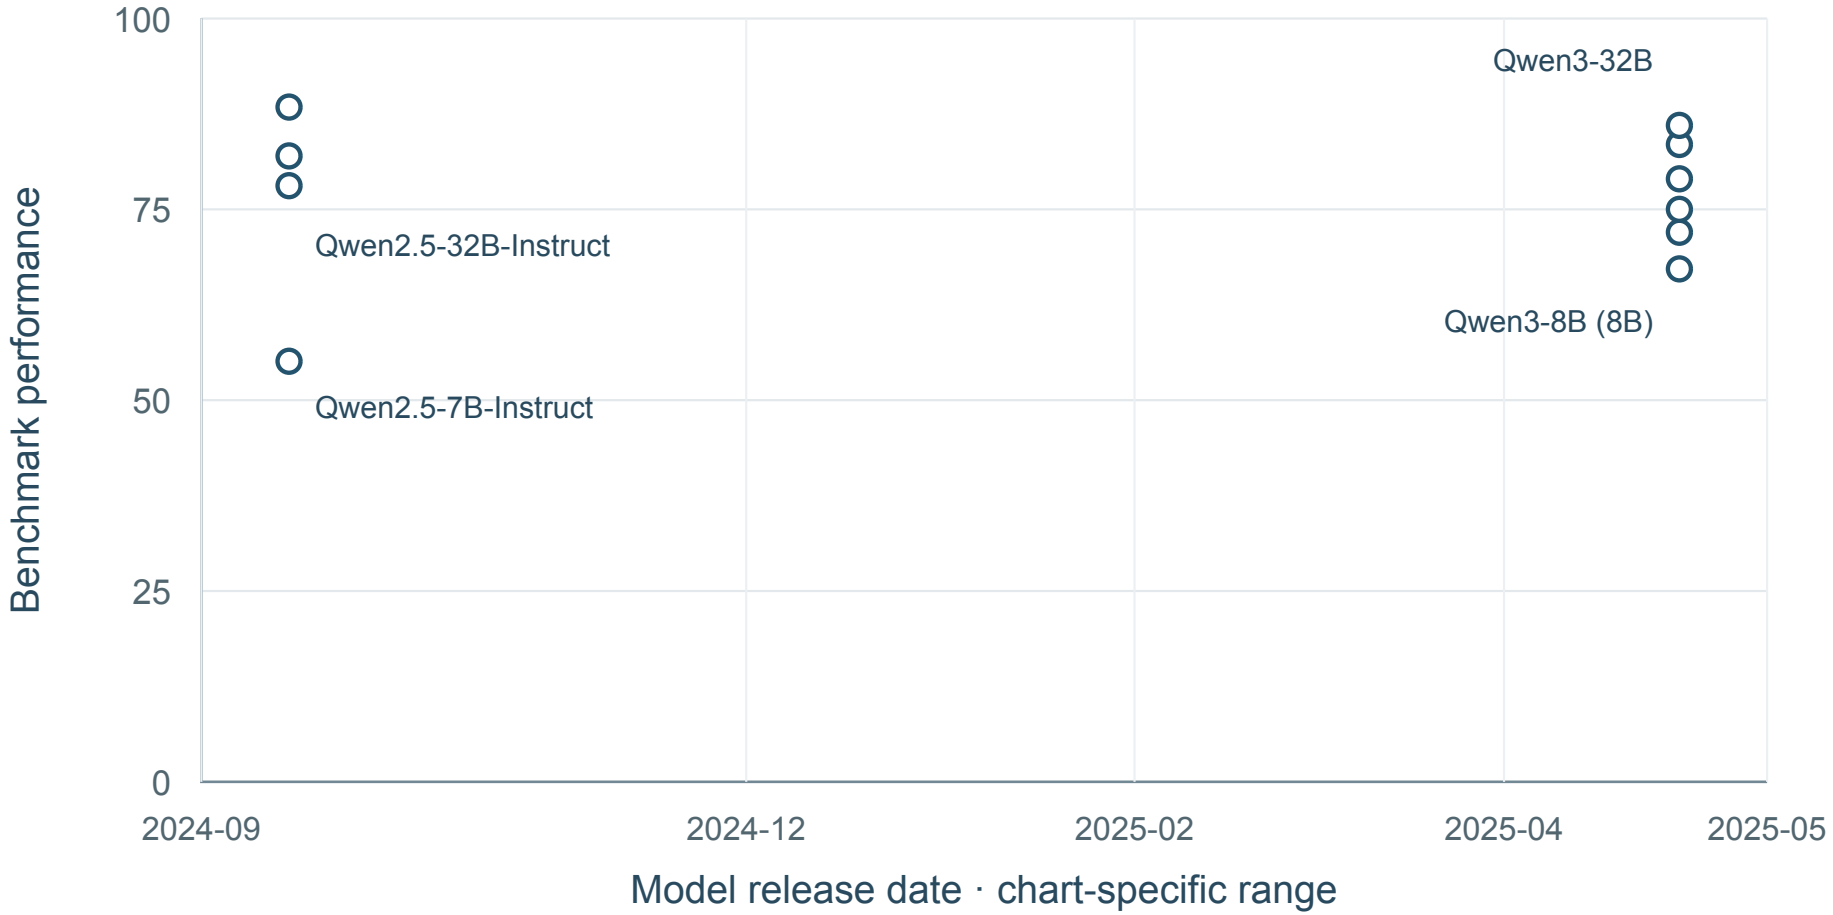

10 shown · 0 undated · 0 definition-held · sources: MC057


No mean curve: Fewer than four distinct release dates.

Result-source references: MC057. Exact point locators and raw values: data/F021_RULER_values.csv.

Benchmark reference (APA): Hsieh, C.-P., Sun, S., Kriman, S., Acharya, S., Rekesh, D., Jia, F., Zhang, Y., & Ginsburg, B. (2024). RULER: What's the real context size of your long-context language models?. arXiv. https://arxiv.org/abs/2404.06654

RULER: Reported task accuracy (%)

Mode not specified; MC058 H17; RULER; Avg.

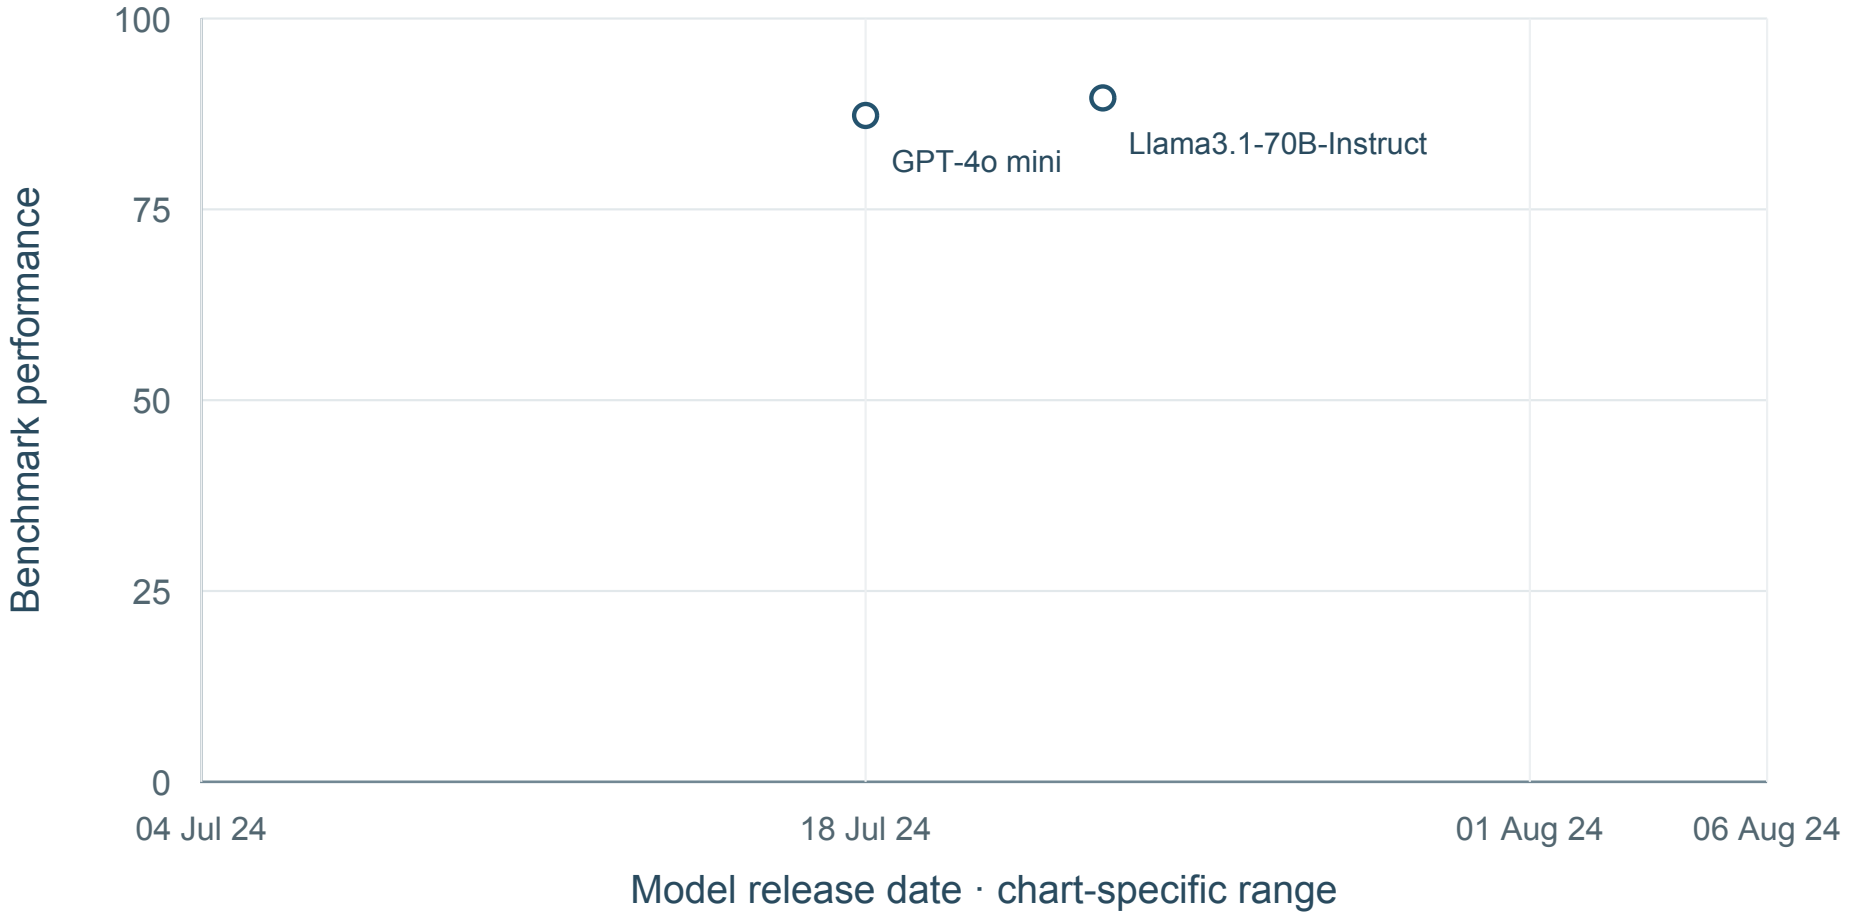

2 shown · 1 undated · 0 definition-held · sources: MC058


No mean curve: Fewer than five dated model configurations.

Result-source references: MC058. Exact point locators and raw values: data/F021_RULER_values.csv.

Benchmark reference (APA): Hsieh, C.-P., Sun, S., Kriman, S., Acharya, S., Rekesh, D., Jia, F., Zhang, Y., & Ginsburg, B. (2024). RULER: What's the real context size of your long-context language models?. arXiv. https://arxiv.org/abs/2404.06654

RULER: Reported task accuracy (%)

Mode not specified; MC058 H17; RULER; 4K

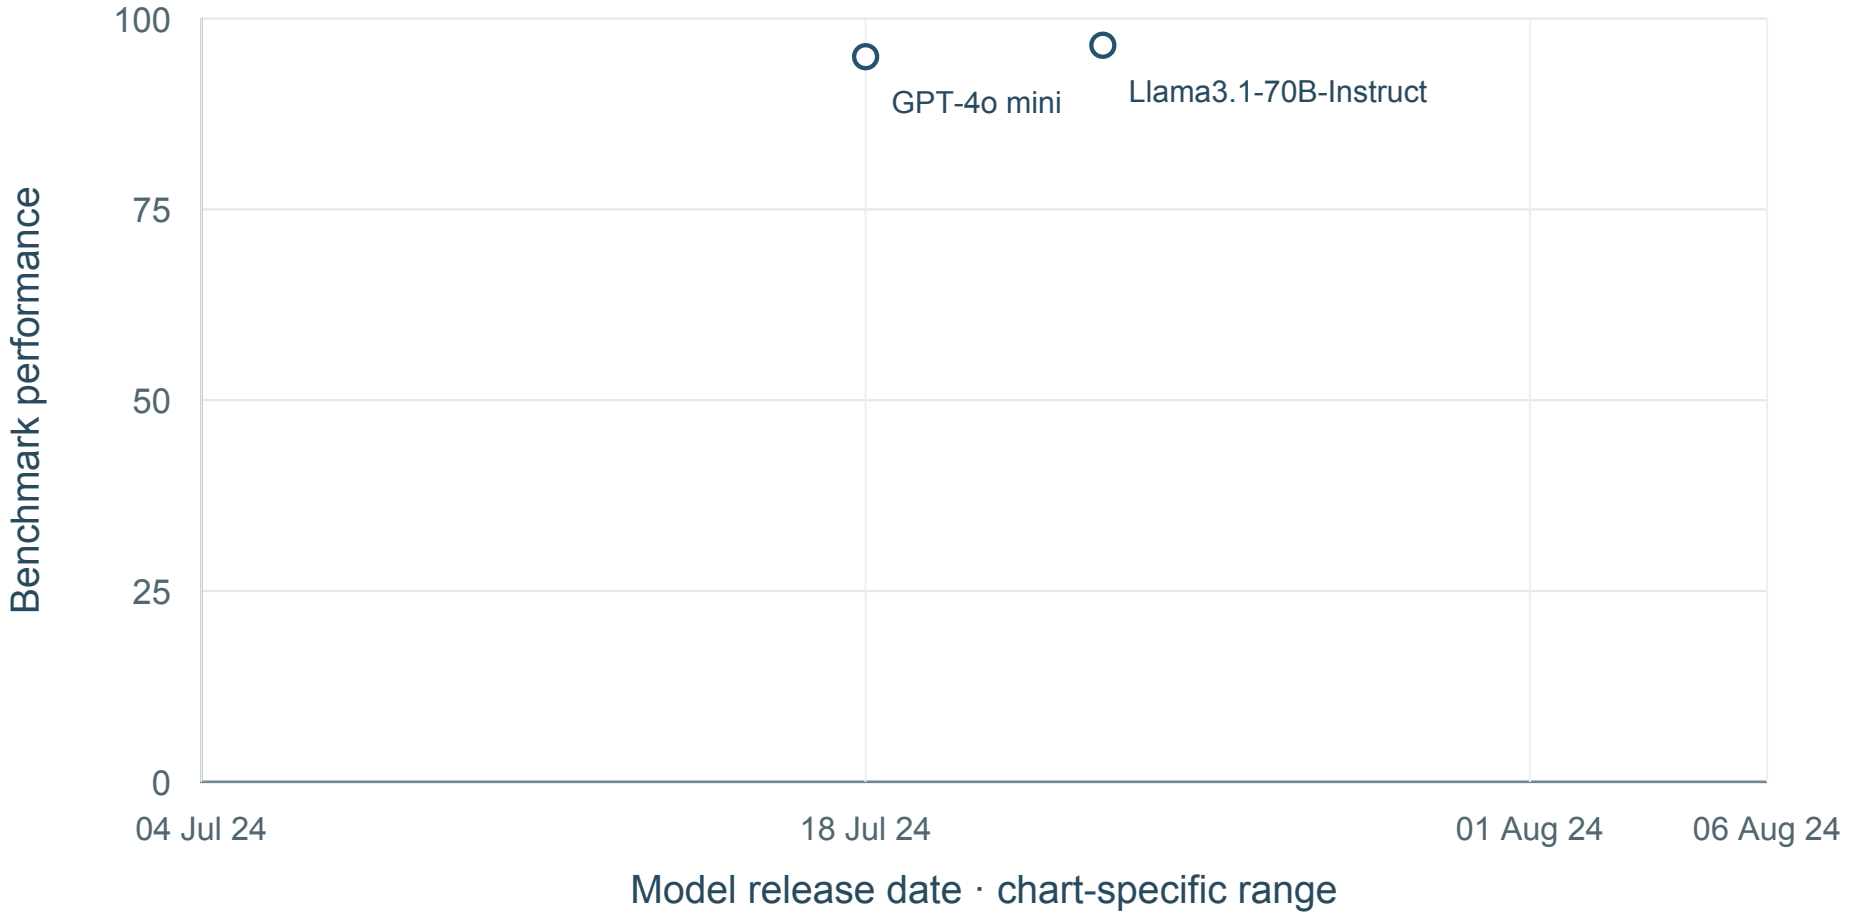

2 shown · 1 undated · 0 definition-held · sources: MC058


No mean curve: Fewer than five dated model configurations.

Result-source references: MC058. Exact point locators and raw values: data/F021_RULER_values.csv.

Benchmark reference (APA): Hsieh, C.-P., Sun, S., Kriman, S., Acharya, S., Rekesh, D., Jia, F., Zhang, Y., & Ginsburg, B. (2024). RULER: What's the real context size of your long-context language models?. arXiv. https://arxiv.org/abs/2404.06654

RULER: Reported task accuracy (%)

Mode not specified; MC058 H17; RULER; 8K

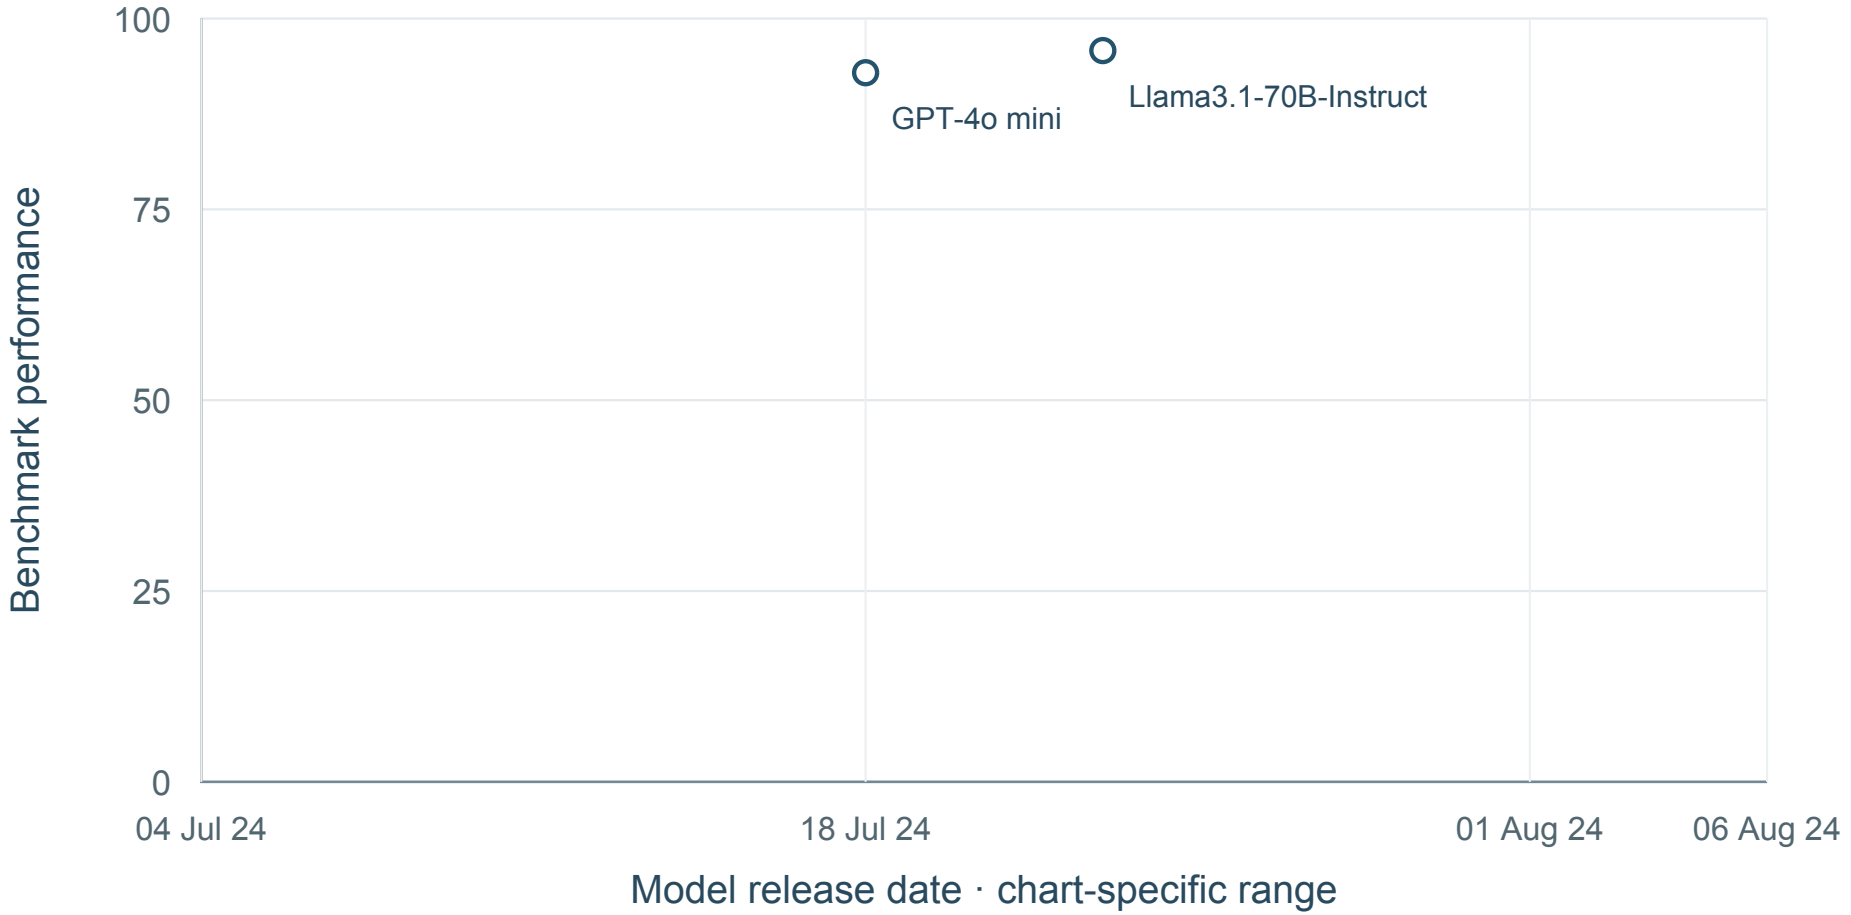

2 shown · 1 undated · 0 definition-held · sources: MC058


No mean curve: Fewer than five dated model configurations.

Result-source references: MC058. Exact point locators and raw values: data/F021_RULER_values.csv.

Benchmark reference (APA): Hsieh, C.-P., Sun, S., Kriman, S., Acharya, S., Rekesh, D., Jia, F., Zhang, Y., & Ginsburg, B. (2024). RULER: What's the real context size of your long-context language models?. arXiv. https://arxiv.org/abs/2404.06654

RULER: Reported task accuracy (%)

Mode not specified; MC058 H17; RULER; 16K

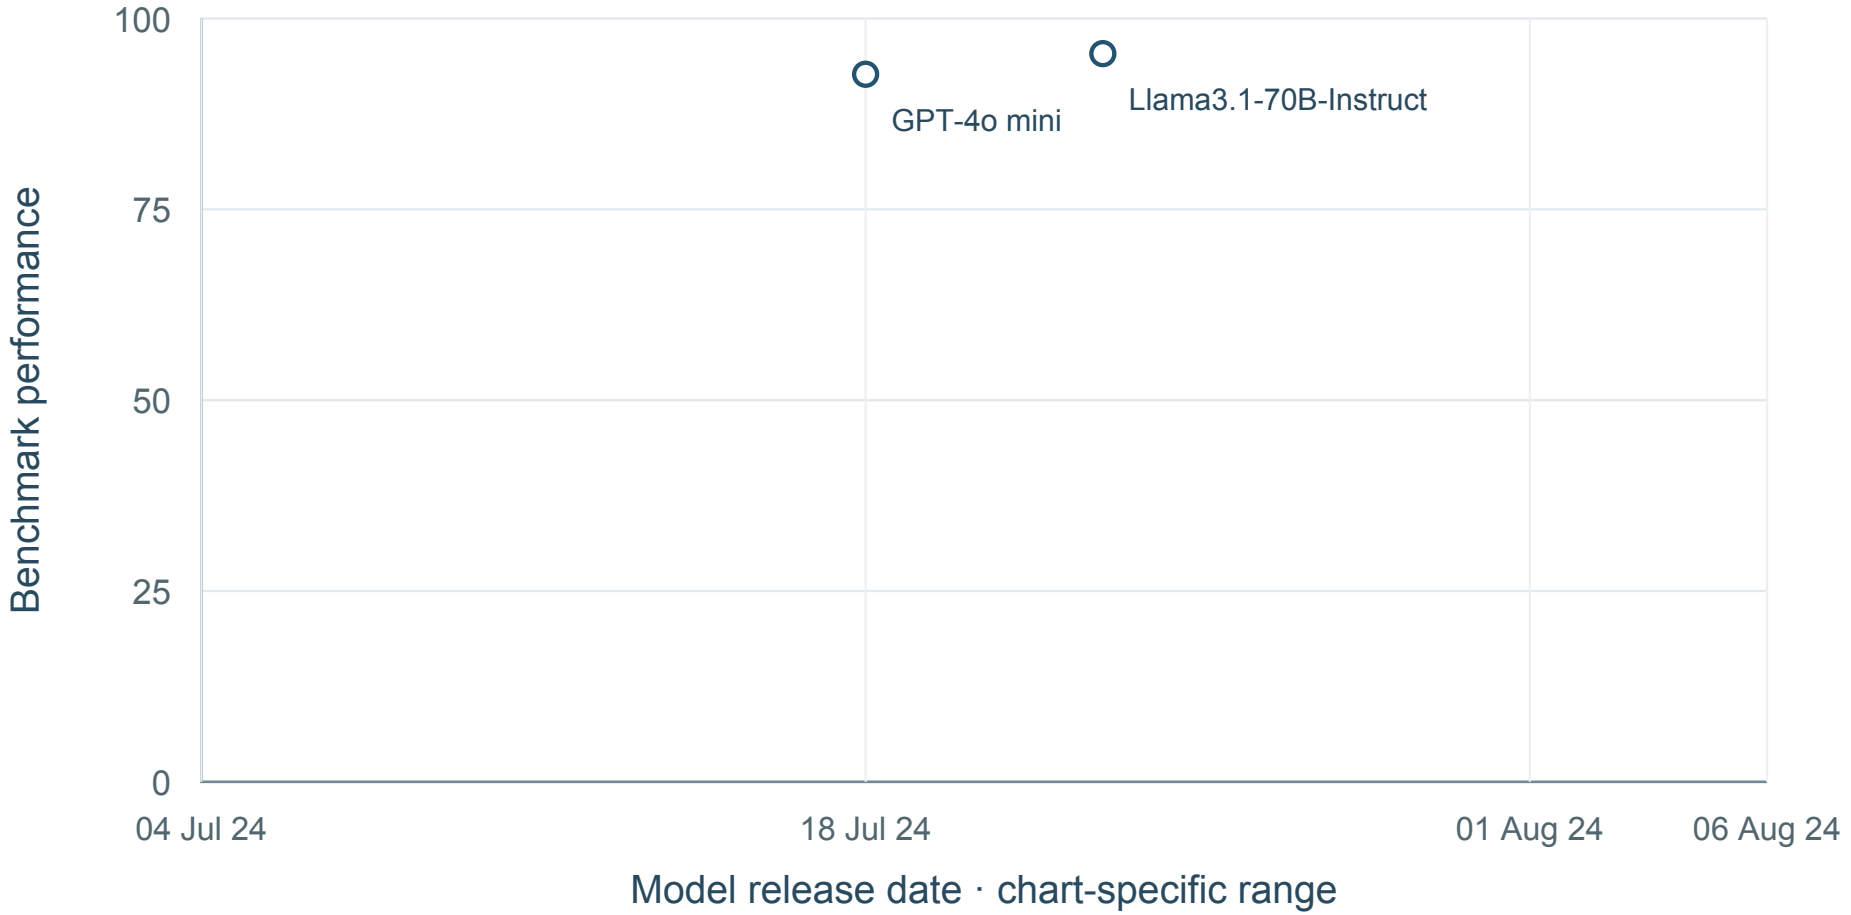

2 shown · 1 undated · 0 definition-held · sources: MC058


No mean curve: Fewer than five dated model configurations.

Result-source references: MC058. Exact point locators and raw values: data/F021_RULER_values.csv.

Benchmark reference (APA): Hsieh, C.-P., Sun, S., Kriman, S., Acharya, S., Rekesh, D., Jia, F., Zhang, Y., & Ginsburg, B. (2024). RULER: What's the real context size of your long-context language models?. arXiv. https://arxiv.org/abs/2404.06654

RULER: Reported task accuracy (%)

Mode not specified; MC058 H17; RULER; 32K

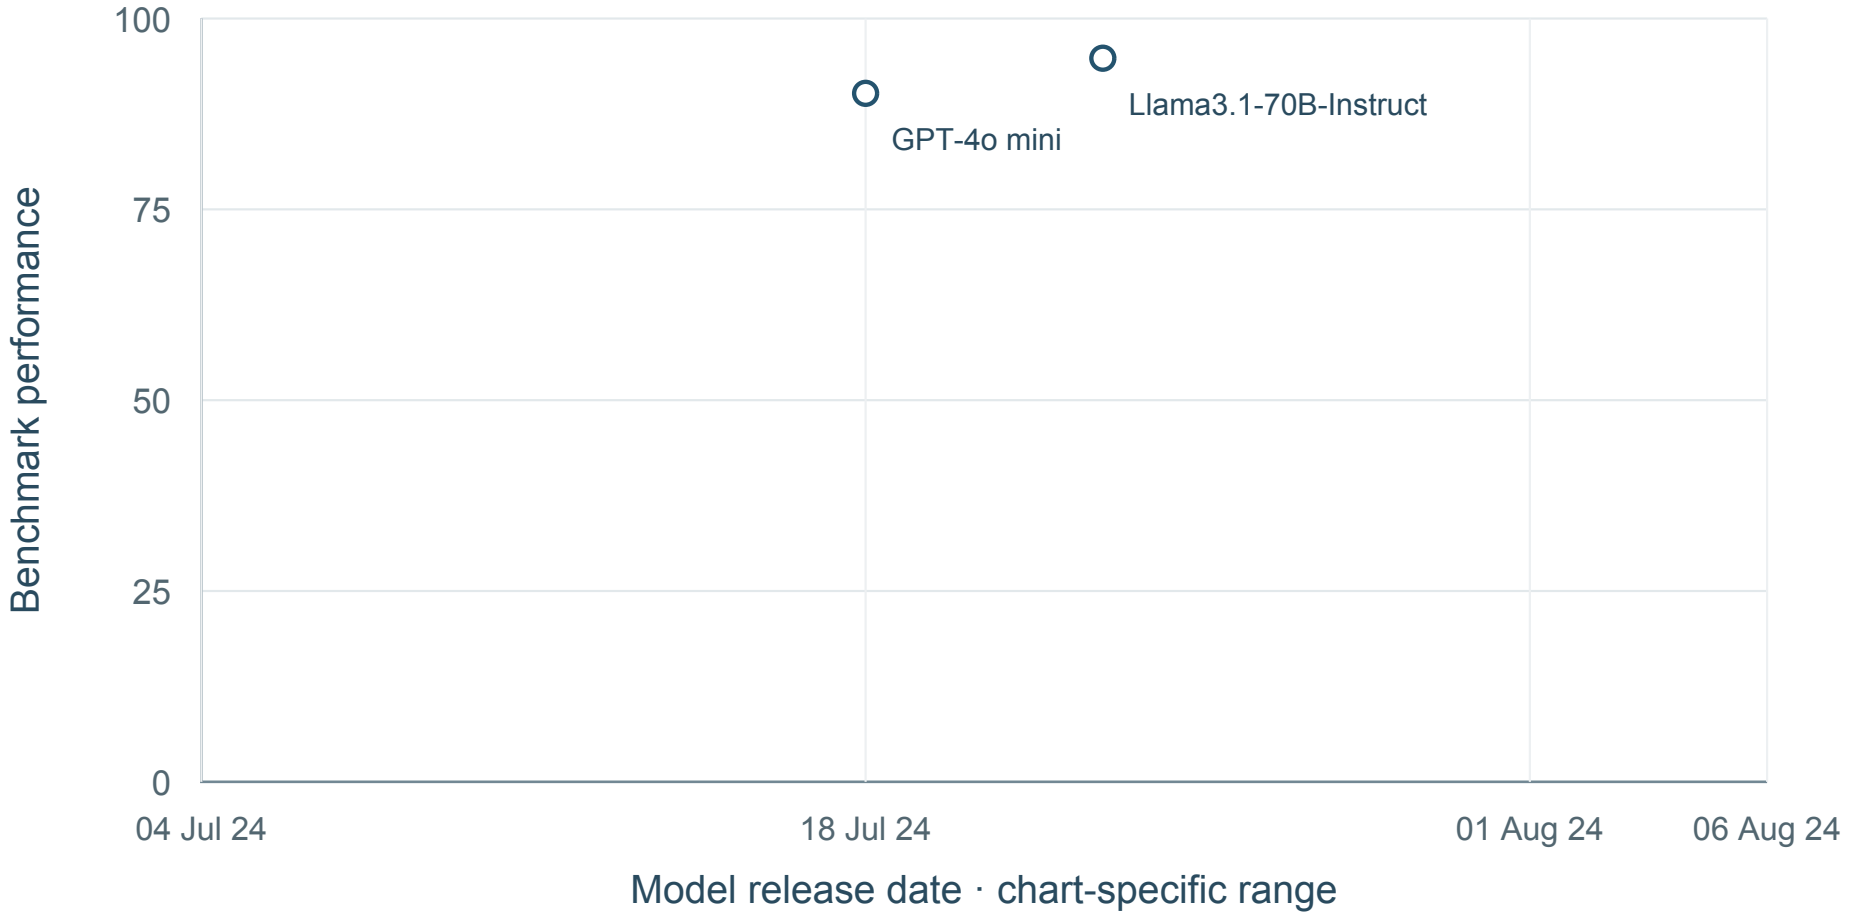

2 shown · 1 undated · 0 definition-held · sources: MC058


No mean curve: Fewer than five dated model configurations.

Result-source references: MC058. Exact point locators and raw values: data/F021_RULER_values.csv.

Benchmark reference (APA): Hsieh, C.-P., Sun, S., Kriman, S., Acharya, S., Rekesh, D., Jia, F., Zhang, Y., & Ginsburg, B. (2024). RULER: What's the real context size of your long-context language models?. arXiv. https://arxiv.org/abs/2404.06654

RULER: Reported task accuracy (%)

Mode not specified; MC058 H17; RULER; 64K

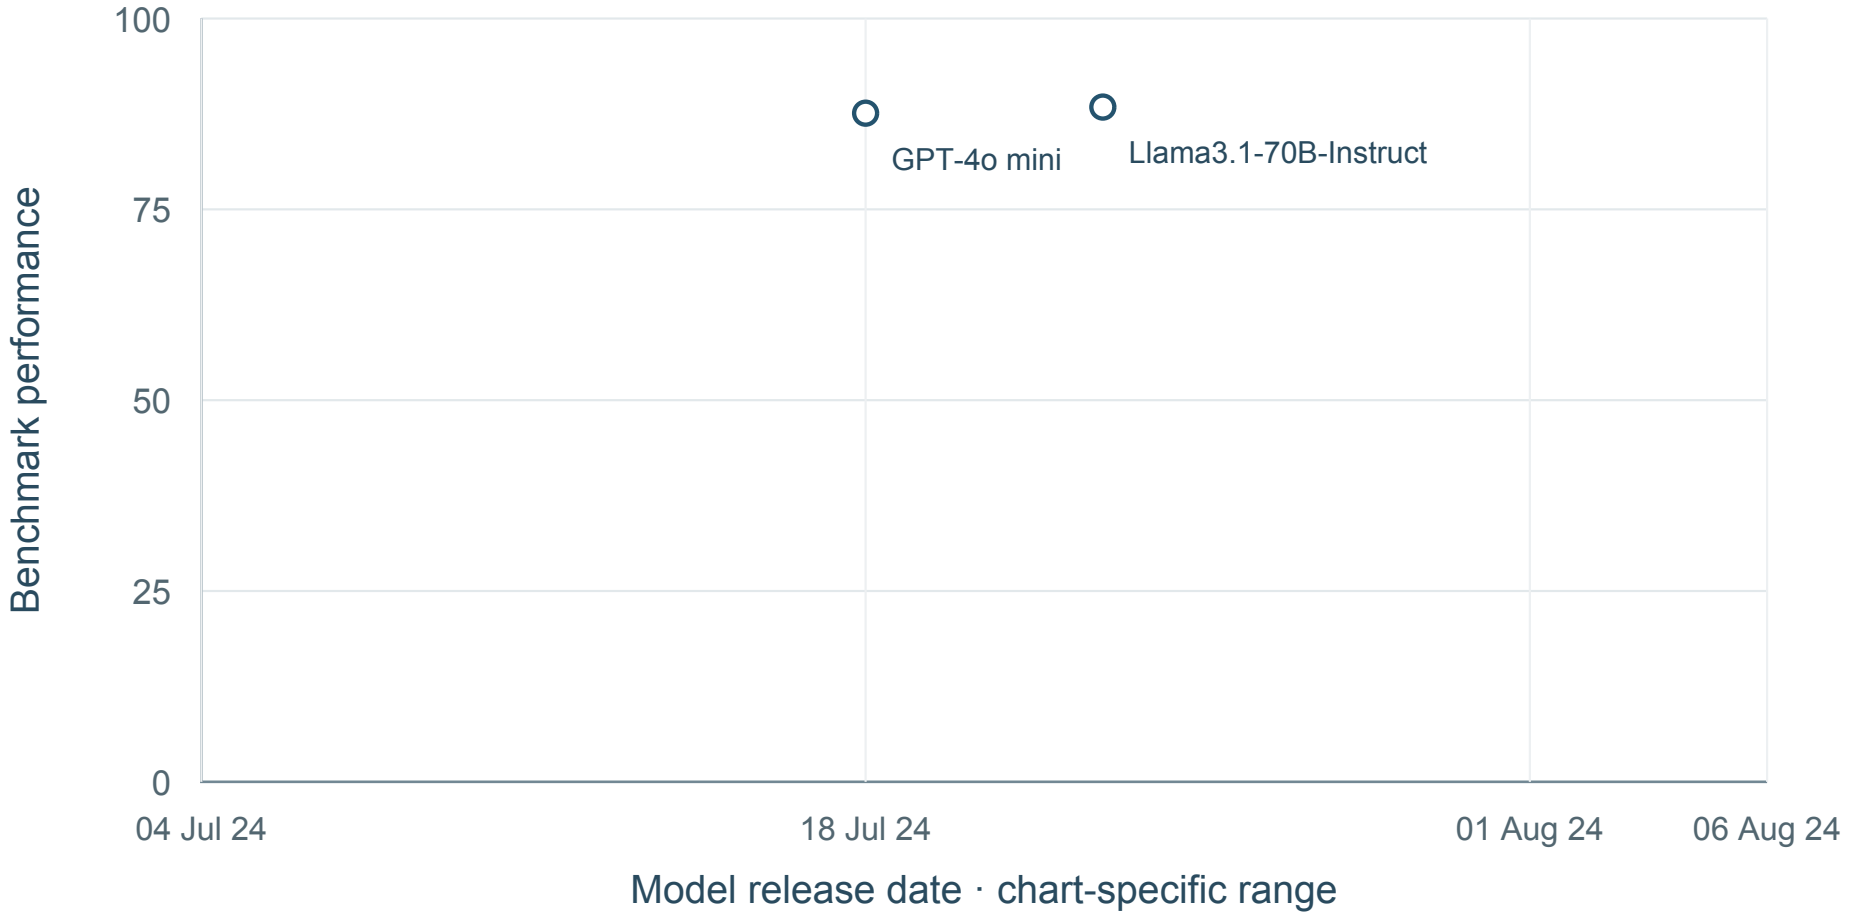

2 shown · 1 undated · 0 definition-held · sources: MC058


No mean curve: Fewer than five dated model configurations.

Result-source references: MC058. Exact point locators and raw values: data/F021_RULER_values.csv.

Benchmark reference (APA): Hsieh, C.-P., Sun, S., Kriman, S., Acharya, S., Rekesh, D., Jia, F., Zhang, Y., & Ginsburg, B. (2024). RULER: What's the real context size of your long-context language models?. arXiv. https://arxiv.org/abs/2404.06654

RULER: Reported task accuracy (%)

Mode not specified; MC058 H17; RULER; 128K

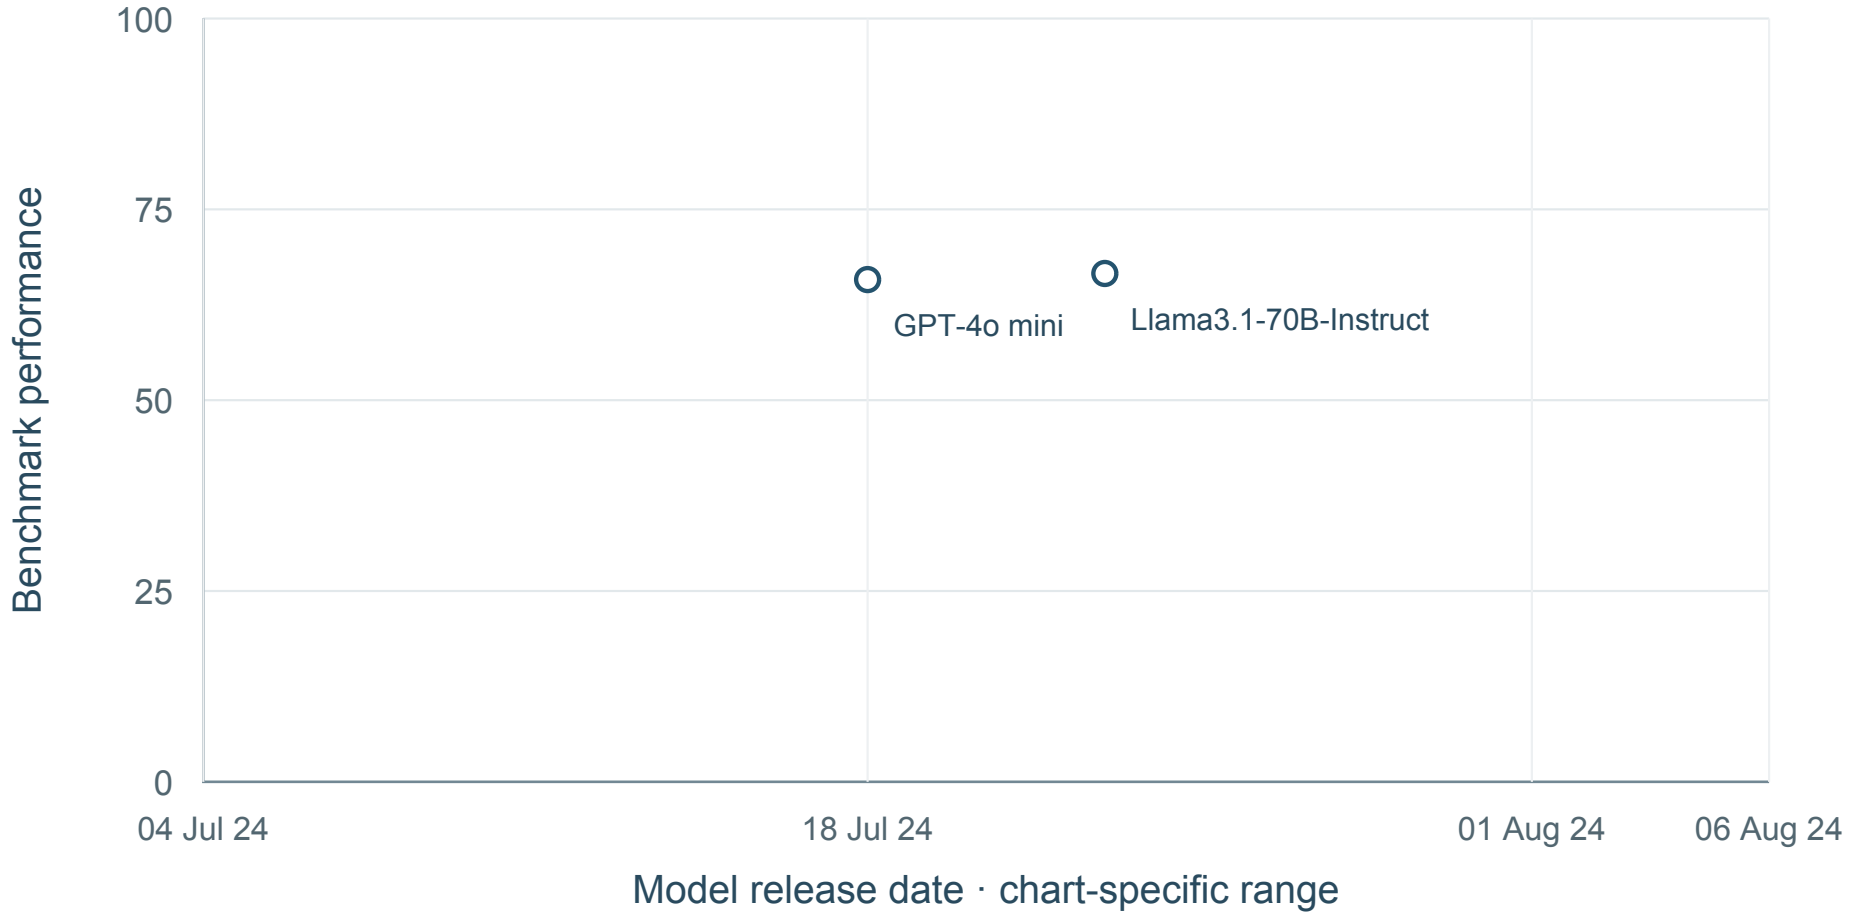

2 shown · 1 undated · 0 definition-held · sources: MC058

No mean curve: Fewer than five dated model configurations.

Result-source references: MC058. Exact point locators and raw values: data/F021_RULER_values.csv.

Benchmark reference (APA): Hsieh, C.-P., Sun, S., Kriman, S., Acharya, S., Rekesh, D., Jia, F., Zhang, Y., & Ginsburg, B. (2024). RULER: What's the real context size of your long-context language models?. arXiv. https://arxiv.org/abs/2404.06654

F022 HELMET

Diverse long-context retrieval, QA, summarization and citation tasks

6 source values; 0 new; 1 separate conditions; 6 visible time points; 0 definition-held values; 0 visible mean curves.

Benchmark references (APA)

Yen, H., Gao, T., Hou, M., Ding, K., Fleischer, D., Izsak, P., Wasserblat, M., & Chen, D. (2025). HELMET: How to evaluate long-context language models effectively and thoroughly. International Conference on Learning Representations (ICLR). https://arxiv.org/abs/2410.02694

Workflow and article scope

Challenges: B; D

Locate relevant evidence; Coordinate retrieval, tools and intermediate steps; Verify source support and detect errors

Contains other benchmark components; avoid independent-evidence double counting.

Manuscript anchors: Source-based step comparisons, manuscript paragraph 31; Lu and Wang, Challenge D; manuscript paragraphs 9, 15–18 and 31; Product accuracy and auditability, manuscript paragraphs 28–29


Result-source references: S035. Full references appear in the final bibliography.

Complete condition inventory

01. HELMET aggregate score | 128K input; original Table 5
6 values; 6 time points; no visible mean curve: Release-date coverage shorter than 90 days. Sources: S035.

HELMET: HELMET aggregate score

128K input; original Table 5

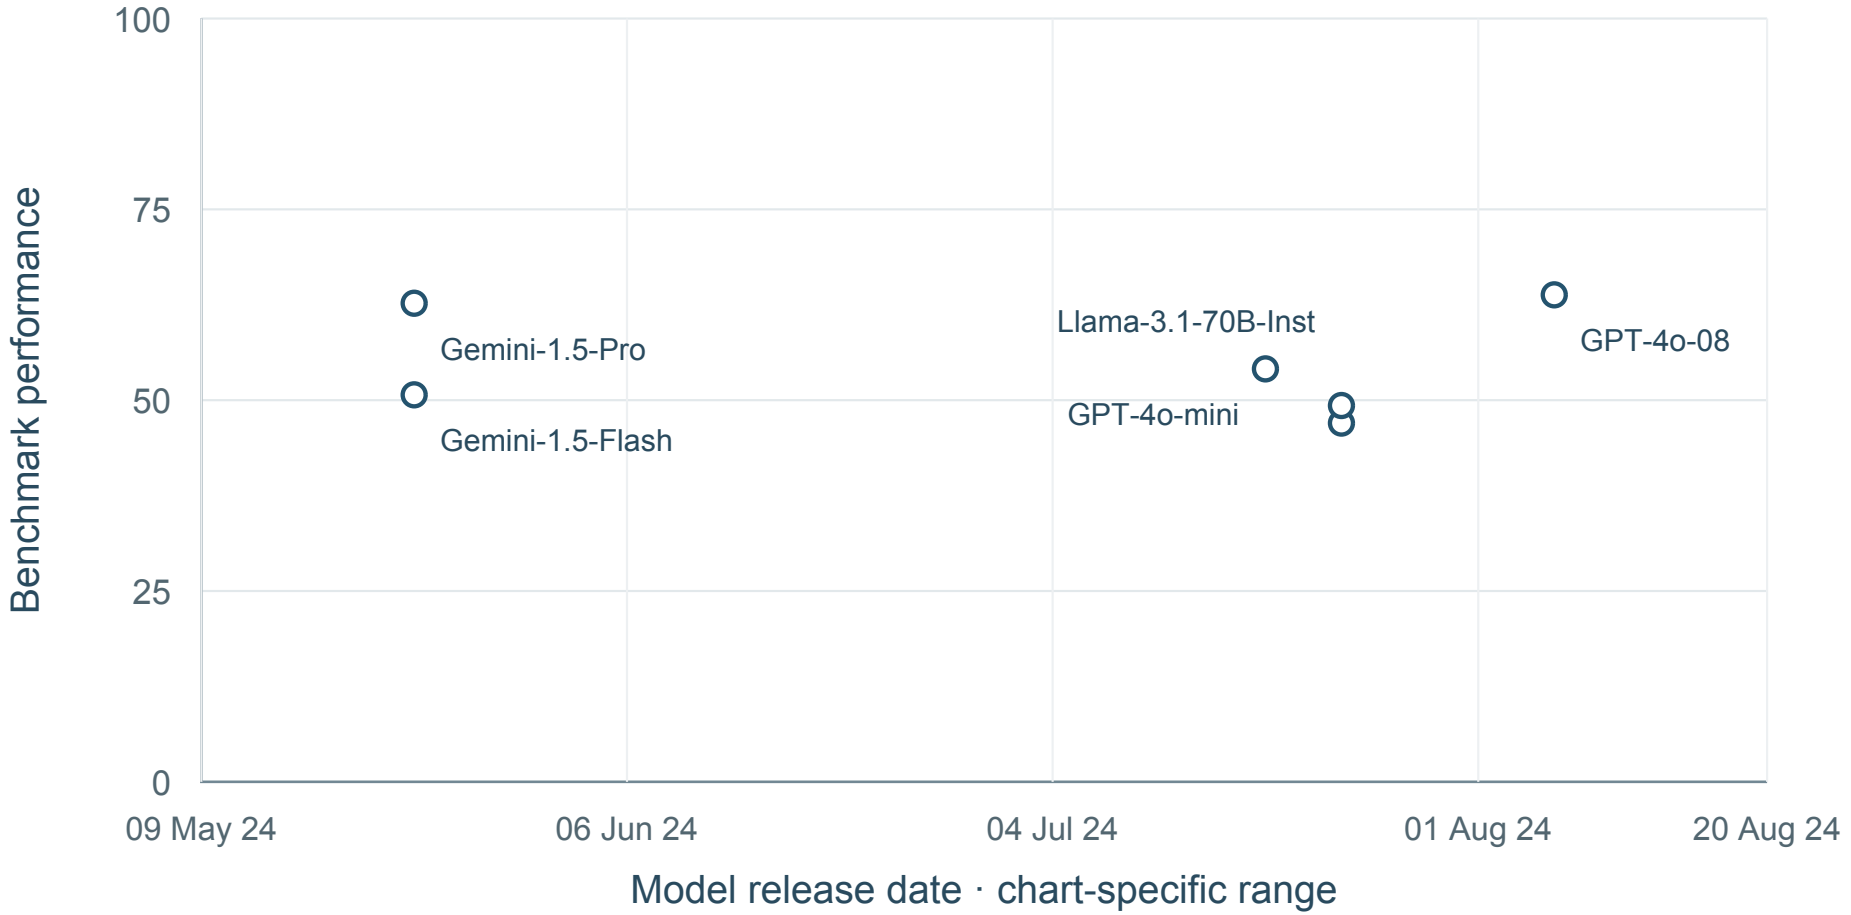

6 shown · 0 undated · 0 definition-held · sources: S035

No mean curve: Release-date coverage shorter than 90 days.

Result-source references: S035. Exact point locators and raw values: data/F022_HELMET_values.csv.

Benchmark reference (APA): Yen, H., Gao, T., Hou, M., Ding, K., Fleischer, D., Izsak, P., Wasserblat, M., & Chen, D. (2025). HELMET: How to evaluate long-context language models effectively and thoroughly. International Conference on Learning Representations (ICLR). https://arxiv.org/abs/2410.02694

F023 NoLiMa

Non-literal retrieval with low lexical overlap

138 source values; 0 new; 8 separate conditions; 50 visible time points; 0 definition-held values; 6 visible mean curves.

Benchmark references (APA)

Modarressi, A., Deilamsalehy, H., Dernoncourt, F., Bui, T., Rossi, R. A., Yoon, S., & Schütze, H. (2025). NoLiMa: Long-context evaluation beyond literal matching. Forty-second International Conference on Machine Learning. https://arxiv.org/abs/2502.05167

Workflow and article scope

Challenges: B; D

Locate relevant evidence; Coordinate retrieval, tools and intermediate steps

A stronger diagnostic than literal retrieval, still not codebook-based extraction.

Manuscript anchors: Source-based step comparisons, manuscript paragraph 31; Lu and Wang, Challenge D; manuscript paragraphs 9, 15–18 and 31

Result-source references: S010. Full references appear in the final bibliography.

Complete condition inventory

01. Accuracy | Original NoLiMa; 1K tokens
22 values; 8 time points; visible mean curve. Sources: S010.

02. Accuracy | Original NoLiMa; 2K tokens
22 values; 8 time points; visible mean curve. Sources: S010.

03. Accuracy | Original NoLiMa; 4K tokens
22 values; 8 time points; visible mean curve. Sources: S010.

04. Accuracy | Original NoLiMa; 8K tokens
22 values; 8 time points; visible mean curve. Sources: S010.

05. Accuracy | Original NoLiMa; 16K tokens
22 values; 8 time points; visible mean curve. Sources: S010.


06. Accuracy | Original NoLiMa; 32K tokens
22 values; 8 time points; visible mean curve. Sources: S010.

07. Accuracy | Original NoLiMa; 64K tokens
3 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S010.

08. Accuracy | Original NoLiMa; 128K tokens
3 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S010.

NoLiMa: Accuracy

Original NoLiMa; 1K tokens

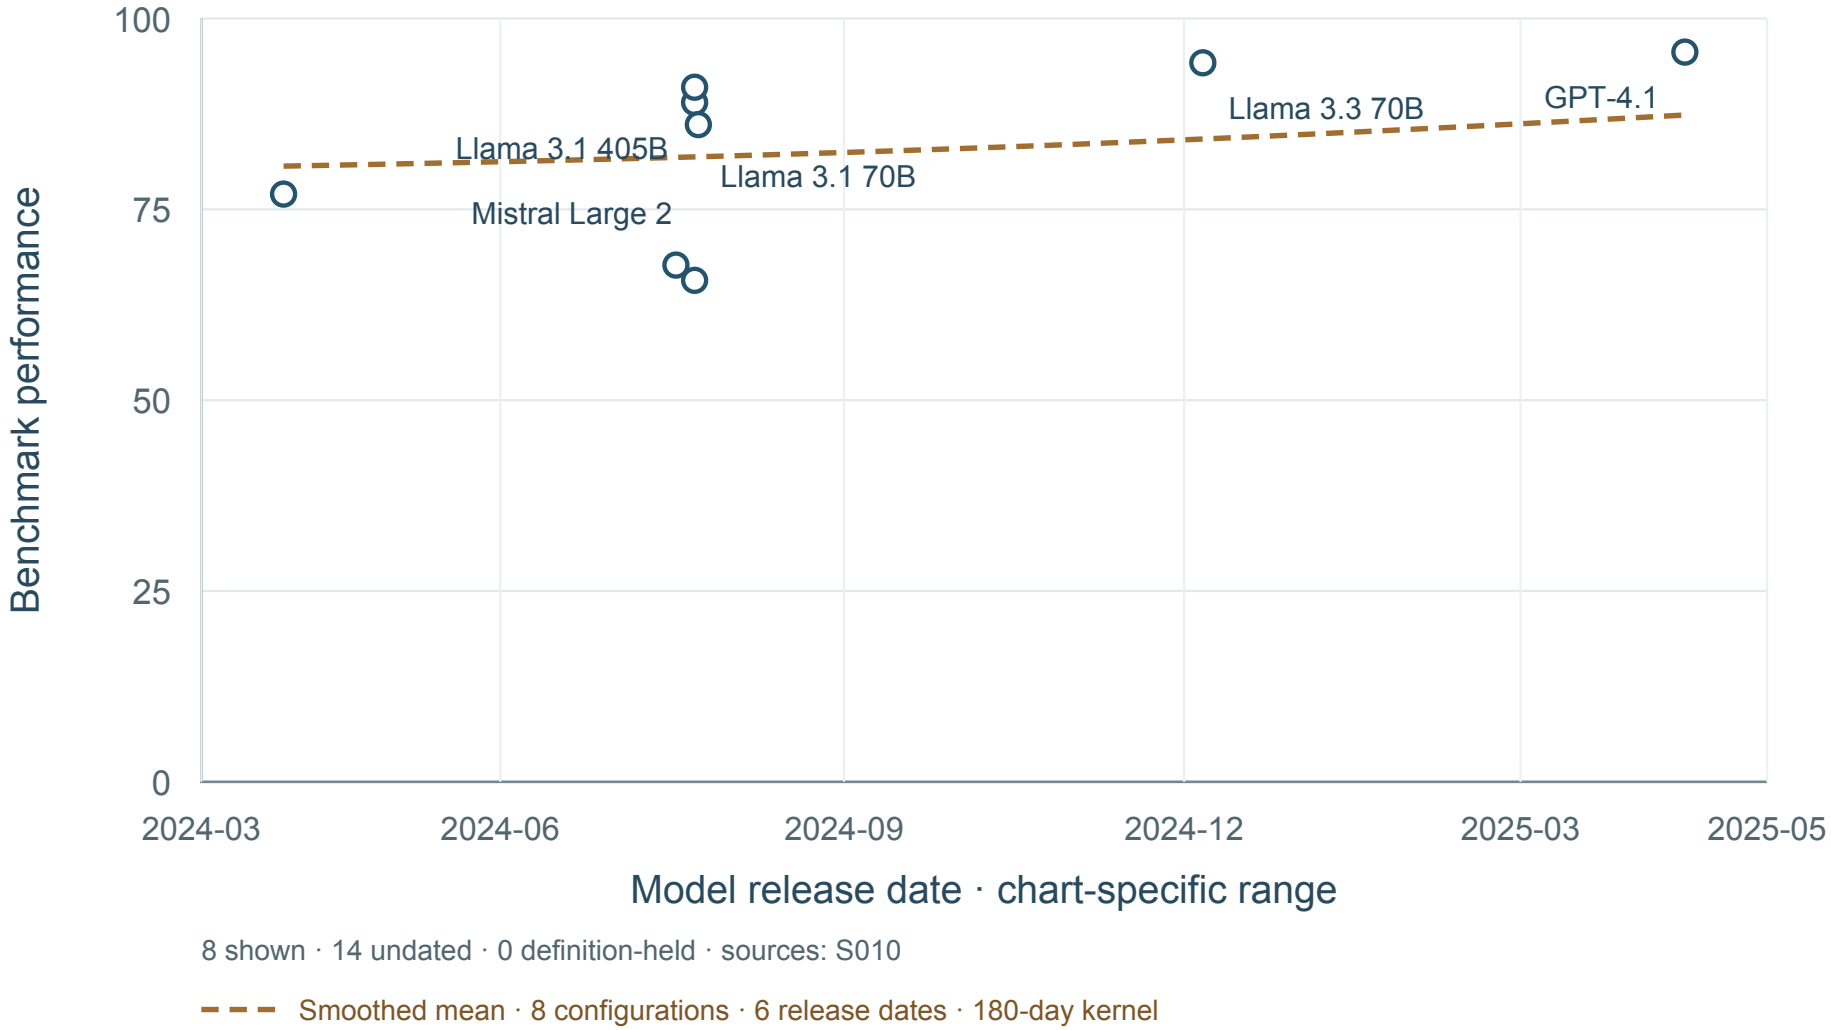


8 shown · 14 undated · 0 definition-held · sources: S010

Smoothed mean · 8 configurations · 6 release dates · 180-day kernel

Result-source references: S010. Exact point locators and raw values: data/F023_NoLiMa_values.csv.

Benchmark reference (APA): Modarressi, A., Deilamsalehy, H., Dernoncourt, F., Bui, T., Rossi, R. A., Yoon, S., & Schütze, H. (2025). NoLiMa: Long-context evaluation beyond literal matching. Forty-second International Conference on Machine Learning. https://arxiv.org/abs/2502.05167

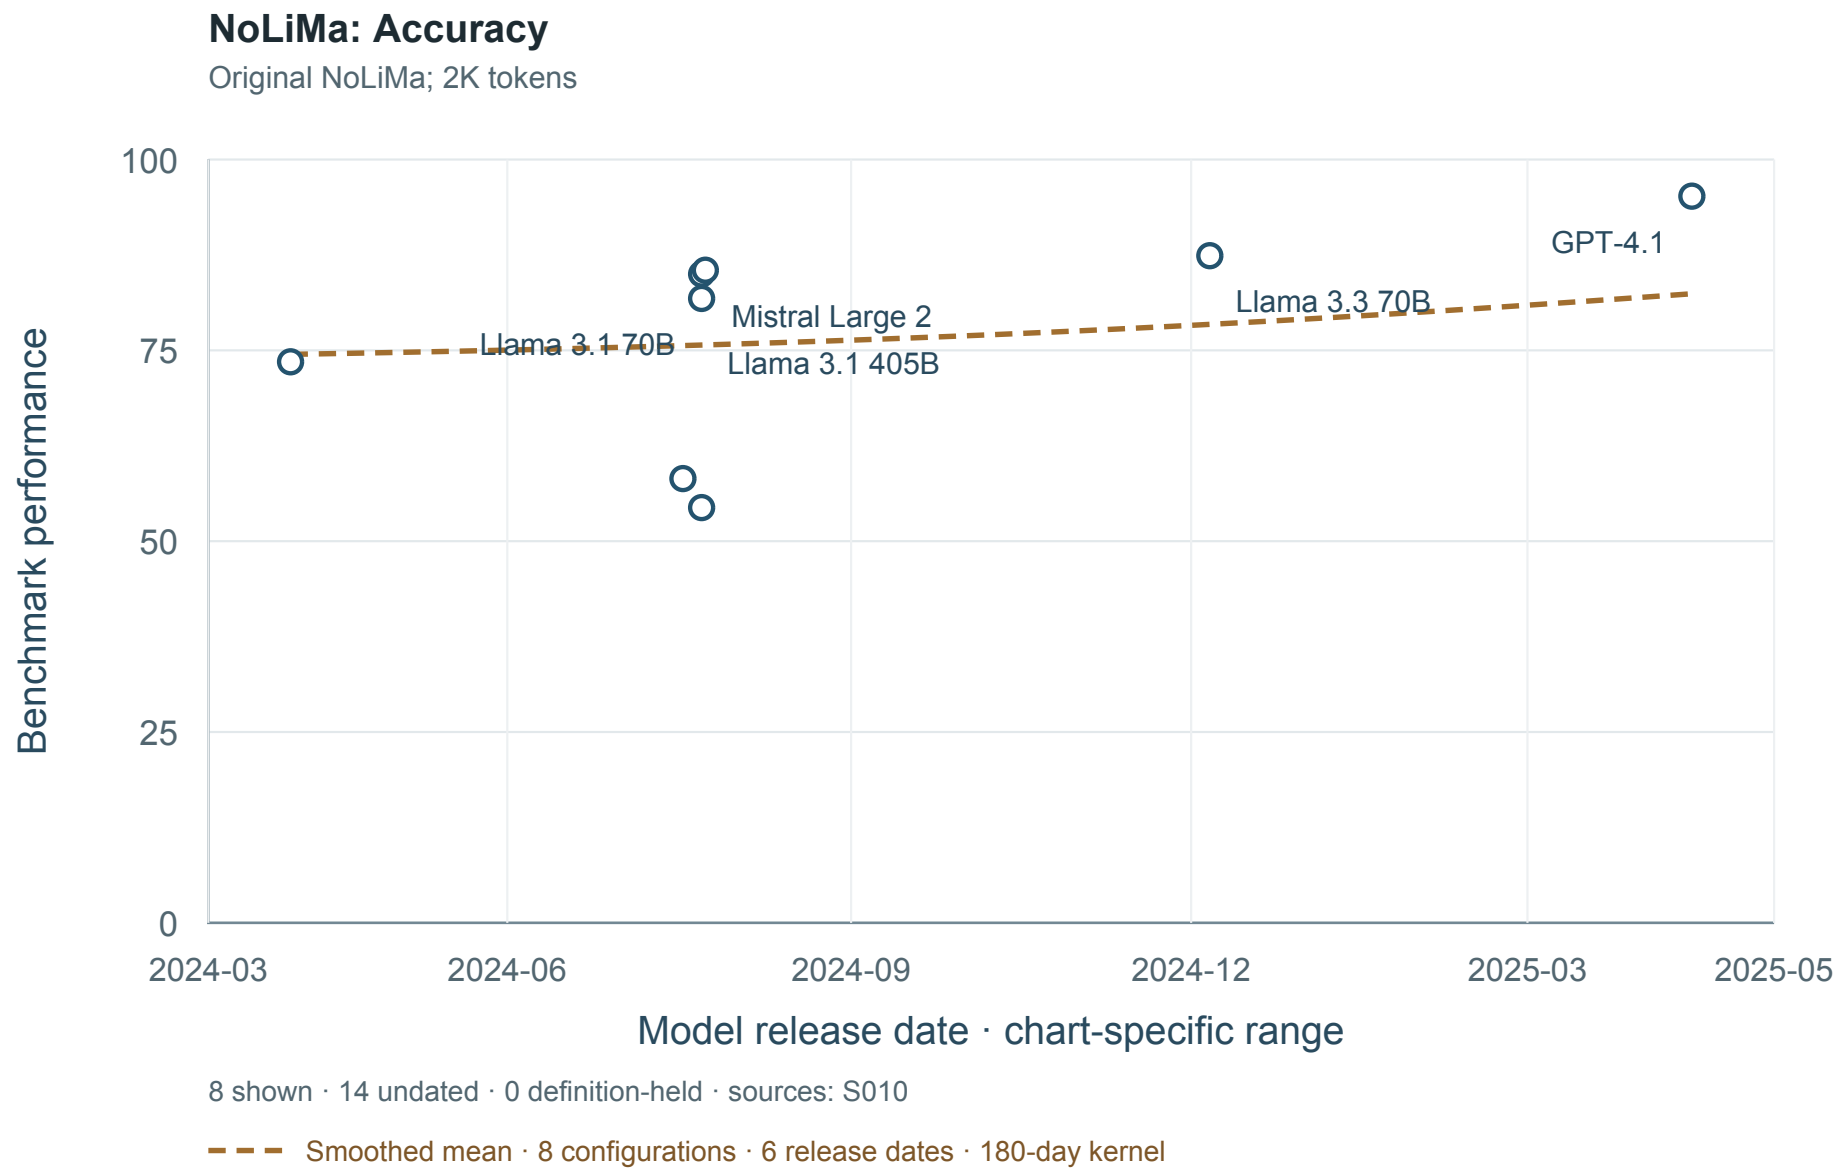


Result-source references: S010. Exact point locators and raw values: data/F023_NoLiMa_values.csv.

Benchmark reference (APA): Modarressi, A., Deilamsalehy, H., Dernoncourt, F., Bui, T., Rossi, R. A., Yoon, S., & Schütze, H. (2025). NoLiMa: Long-context evaluation beyond literal matching. Forty-second International Conference on Machine Learning. https://arxiv.org/abs/2502.05167

NoLiMa: Accuracy

Original NoLiMa; 4K tokens

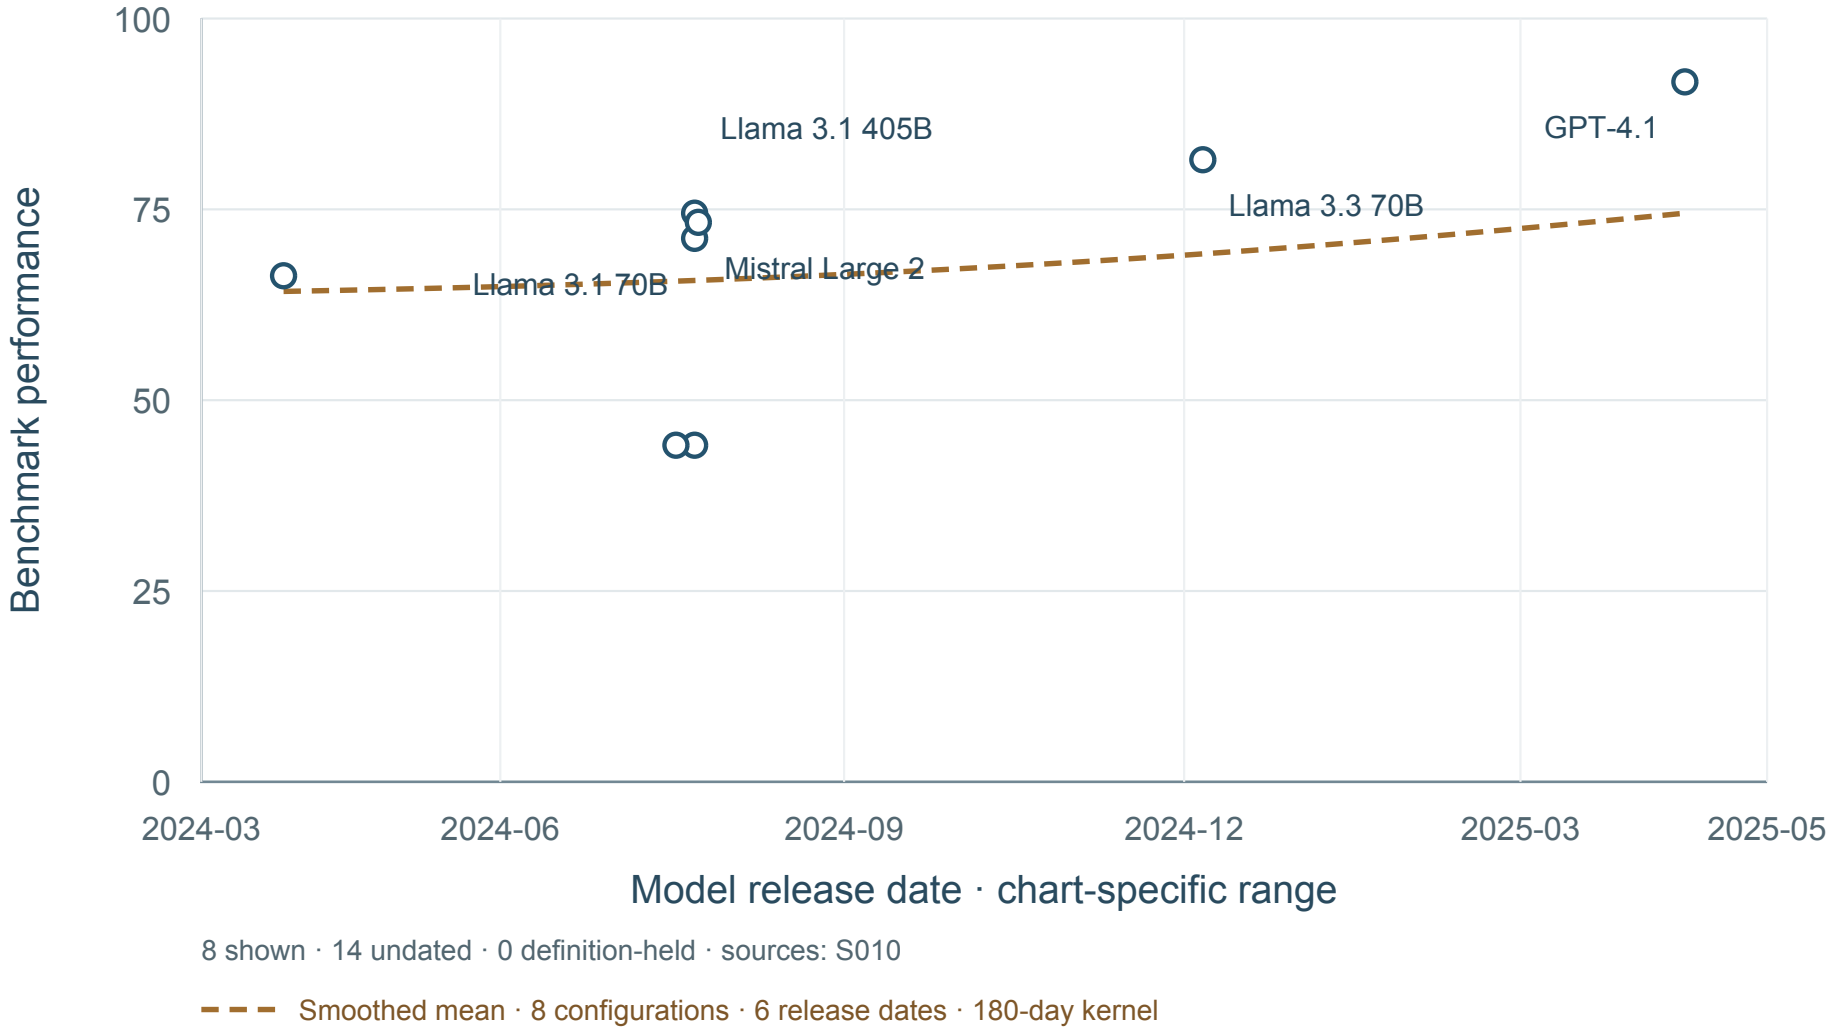

8 shown · 14 undated · 0 definition-held · sources: S010


Smoothed mean · 8 configurations · 6 release dates · 180-day kernel

Result-source references: S010. Exact point locators and raw values: data/F023_NoLiMa_values.csv.

Benchmark reference (APA): Modarressi, A., Deilamsalehy, H., Dernoncourt, F., Bui, T., Rossi, R. A., Yoon, S., & Schütze, H. (2025). NoLiMa: Long-context evaluation beyond literal matching. Forty-second International Conference on Machine Learning. https://arxiv.org/abs/2502.05167

NoLiMa: Accuracy

Original NoLiMa; 8K tokens

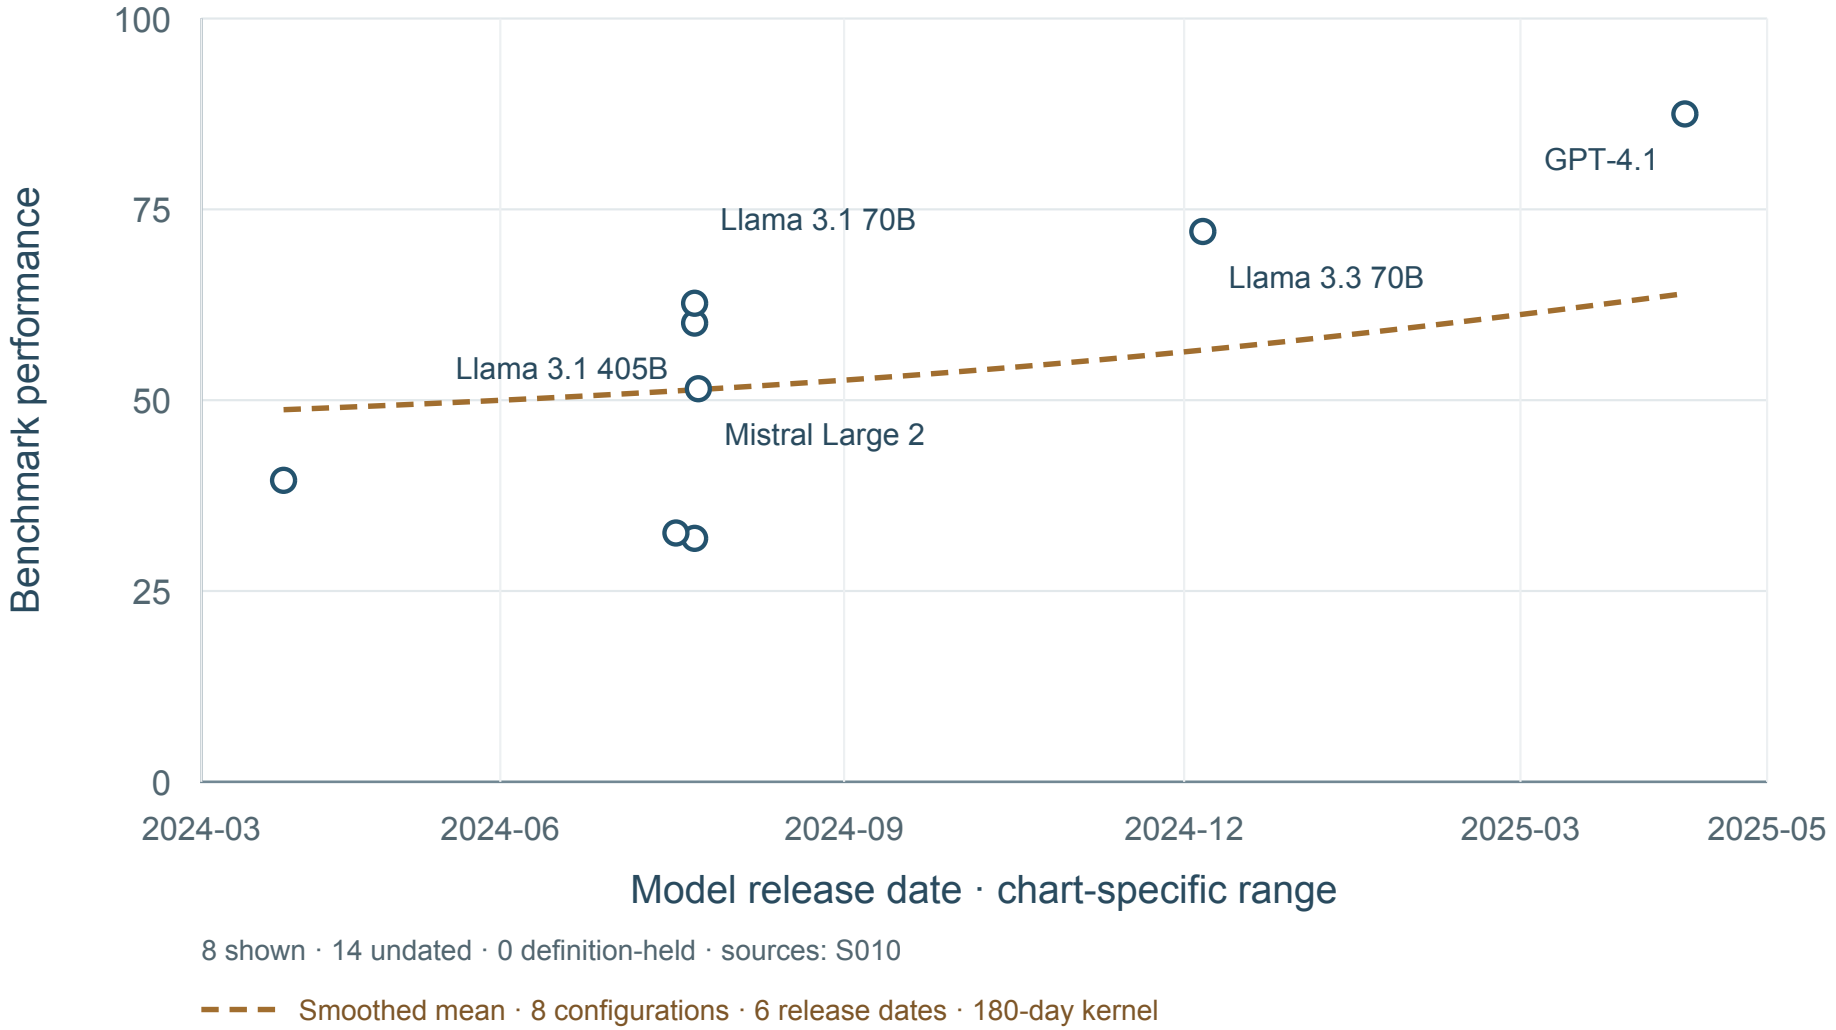

8 shown · 14 undated · 0 definition-held · sources: S010


Smoothed mean · 8 configurations · 6 release dates · 180-day kernel

Result-source references: S010. Exact point locators and raw values: data/F023_NoLiMa_values.csv.

Benchmark reference (APA): Modarressi, A., Deilamsalehy, H., Dernoncourt, F., Bui, T., Rossi, R. A., Yoon, S., & Schütze, H. (2025). NoLiMa: Long-context evaluation beyond literal matching. Forty-second International Conference on Machine Learning. https://arxiv.org/abs/2502.05167

NoLiMa: Accuracy

Original NoLiMa; 16K tokens

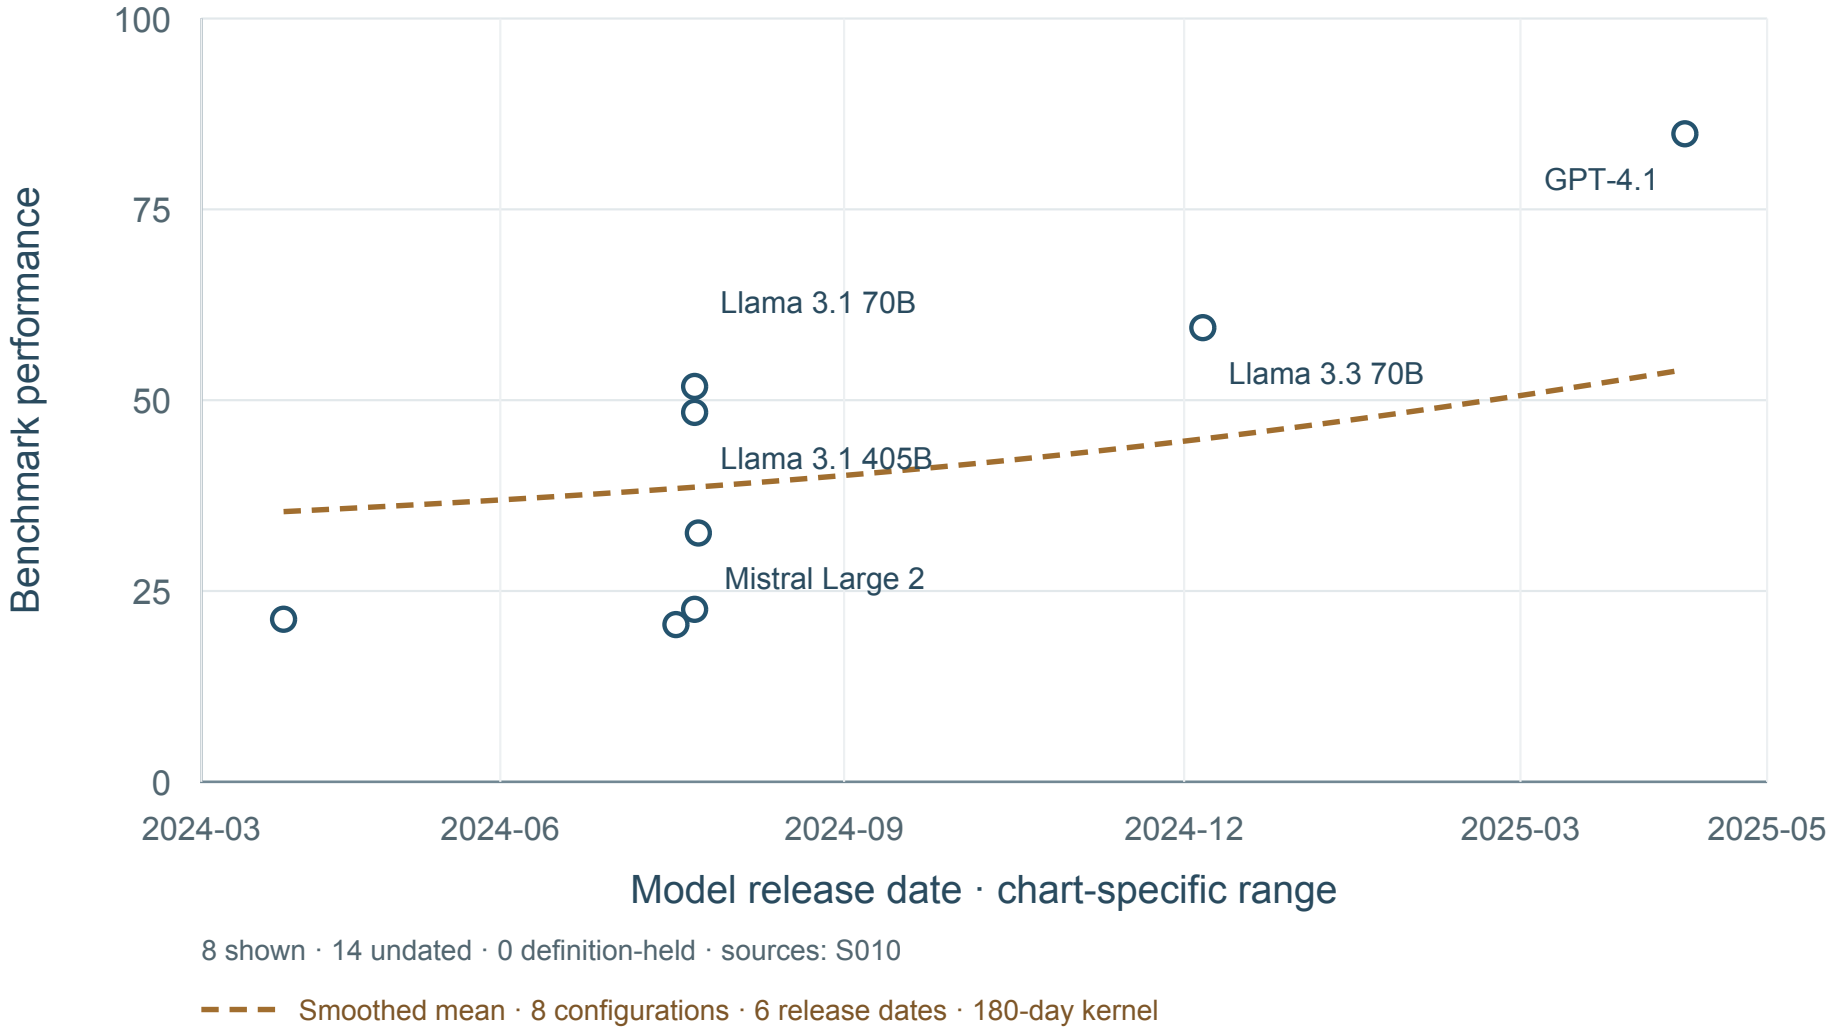

8 shown · 14 undated · 0 definition-held · sources: S010


Smoothed mean · 8 configurations · 6 release dates · 180-day kernel

Result-source references: S010. Exact point locators and raw values: data/F023_NoLiMa_values.csv.

Benchmark reference (APA): Modarressi, A., Deilamsalehy, H., Dernoncourt, F., Bui, T., Rossi, R. A., Yoon, S., & Schütze, H. (2025). NoLiMa: Long-context evaluation beyond literal matching. Forty-second International Conference on Machine Learning. https://arxiv.org/abs/2502.05167

NoLiMa: Accuracy

Original NoLiMa; 32K tokens

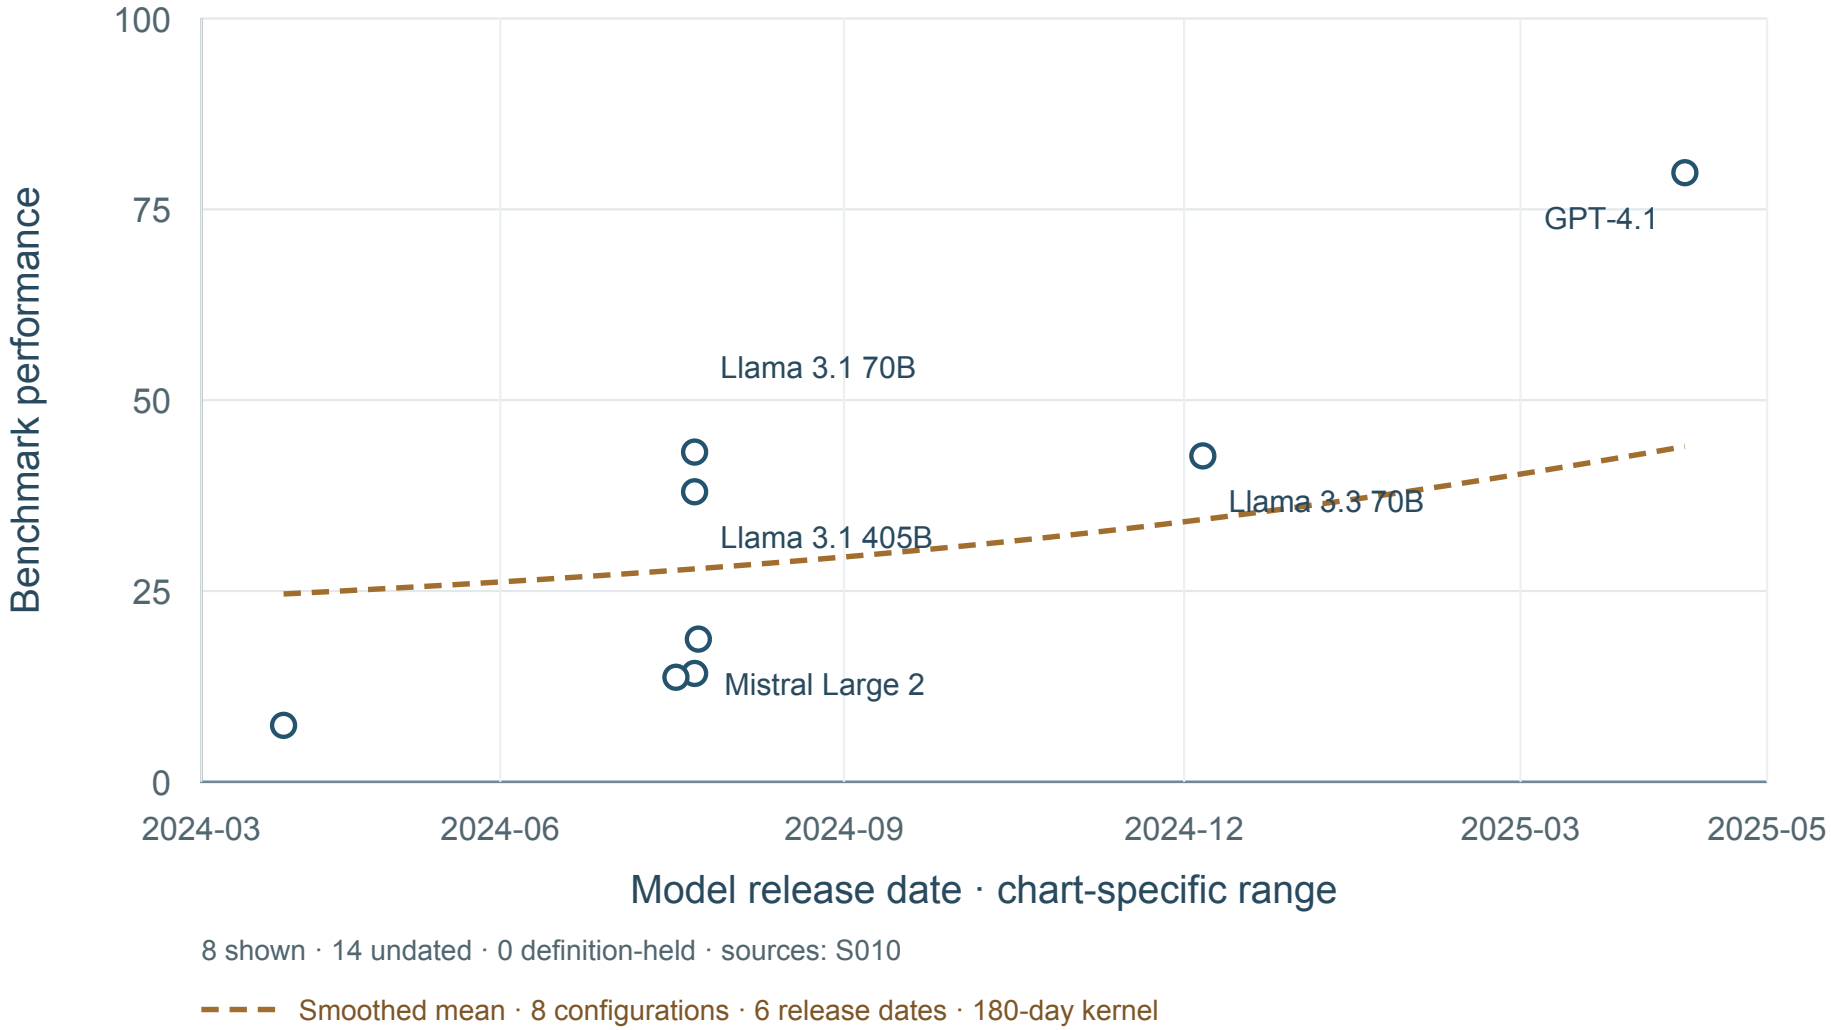


Result-source references: S010. Exact point locators and raw values: data/F023_NoLiMa_values.csv.

Benchmark reference (APA): Modarressi, A., Deilamsalehy, H., Dernoncourt, F., Bui, T., Rossi, R. A., Yoon, S., & Schütze, H. (2025). NoLiMa: Long-context evaluation beyond literal matching. Forty-second International Conference on Machine Learning. https://arxiv.org/abs/2502.05167

NoLiMa: Accuracy

Original NoLiMa; 64K tokens

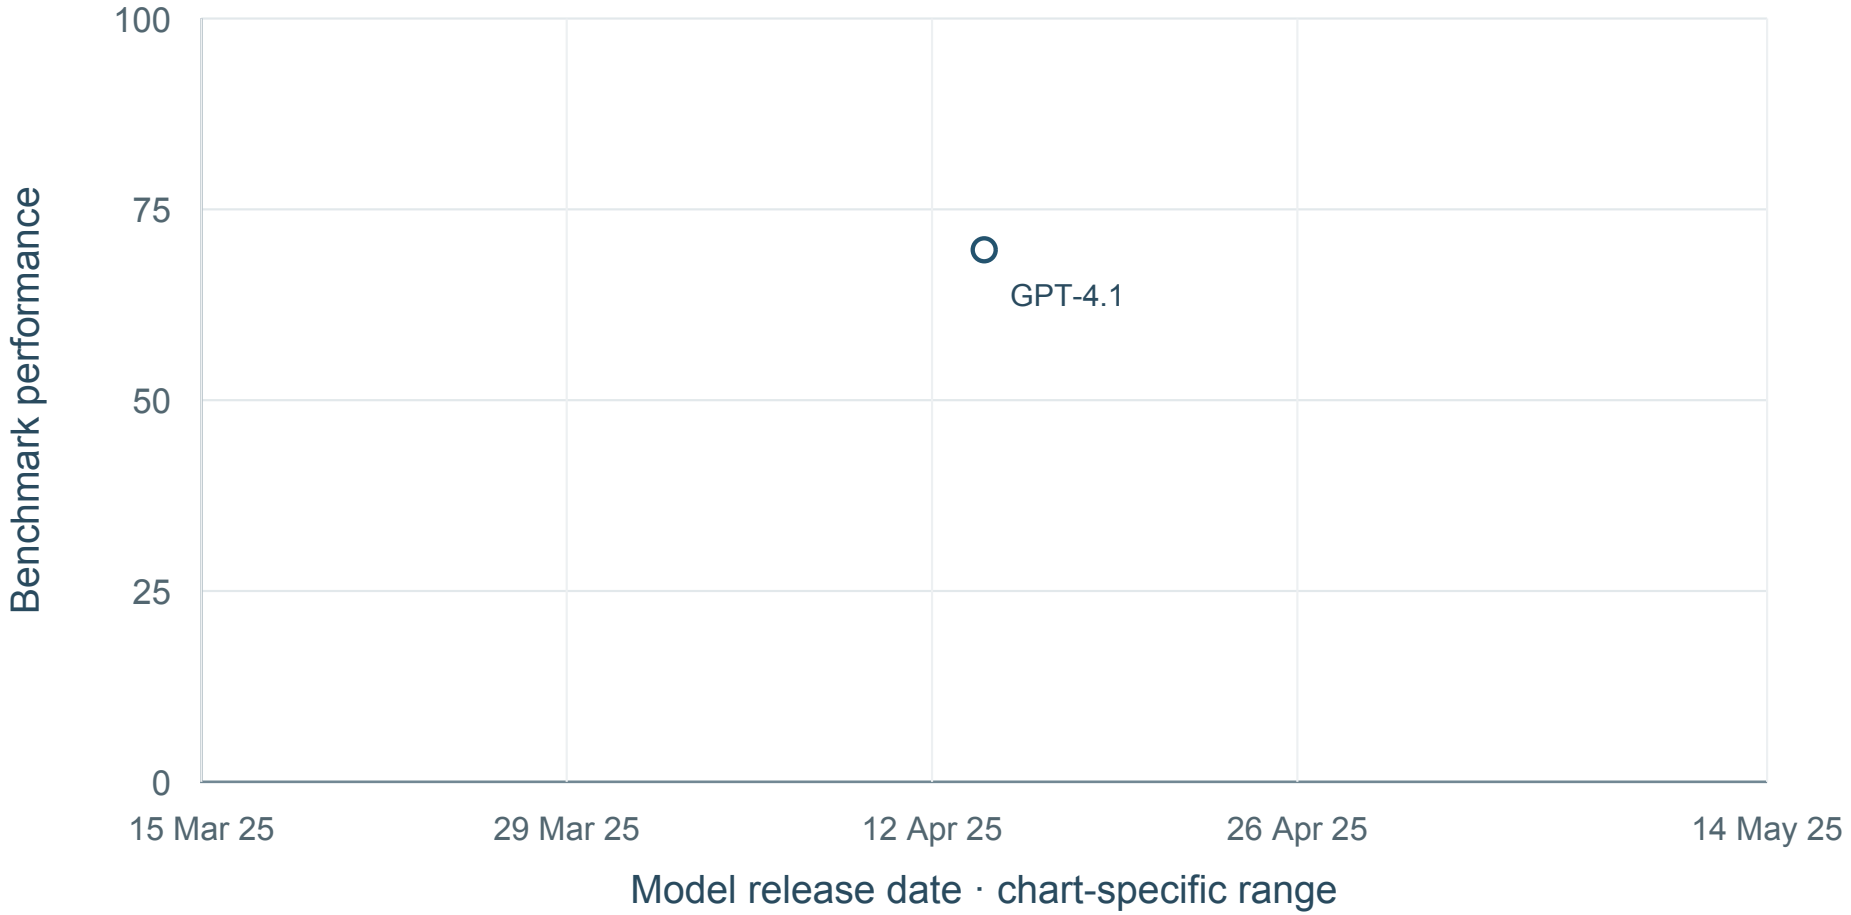

1 shown · 2 undated · 0 definition-held · sources: S010


No mean curve: Fewer than five dated model configurations.

Result-source references: S010. Exact point locators and raw values: data/F023_NoLiMa_values.csv.

Benchmark reference (APA): Modarressi, A., Deilamsalehy, H., Dernoncourt, F., Bui, T., Rossi, R. A., Yoon, S., & Schütze, H. (2025). NoLiMa: Long-context evaluation beyond literal matching. Forty-second International Conference on Machine Learning. https://arxiv.org/abs/2502.05167

NoLiMa: Accuracy

Original NoLiMa; 128K tokens

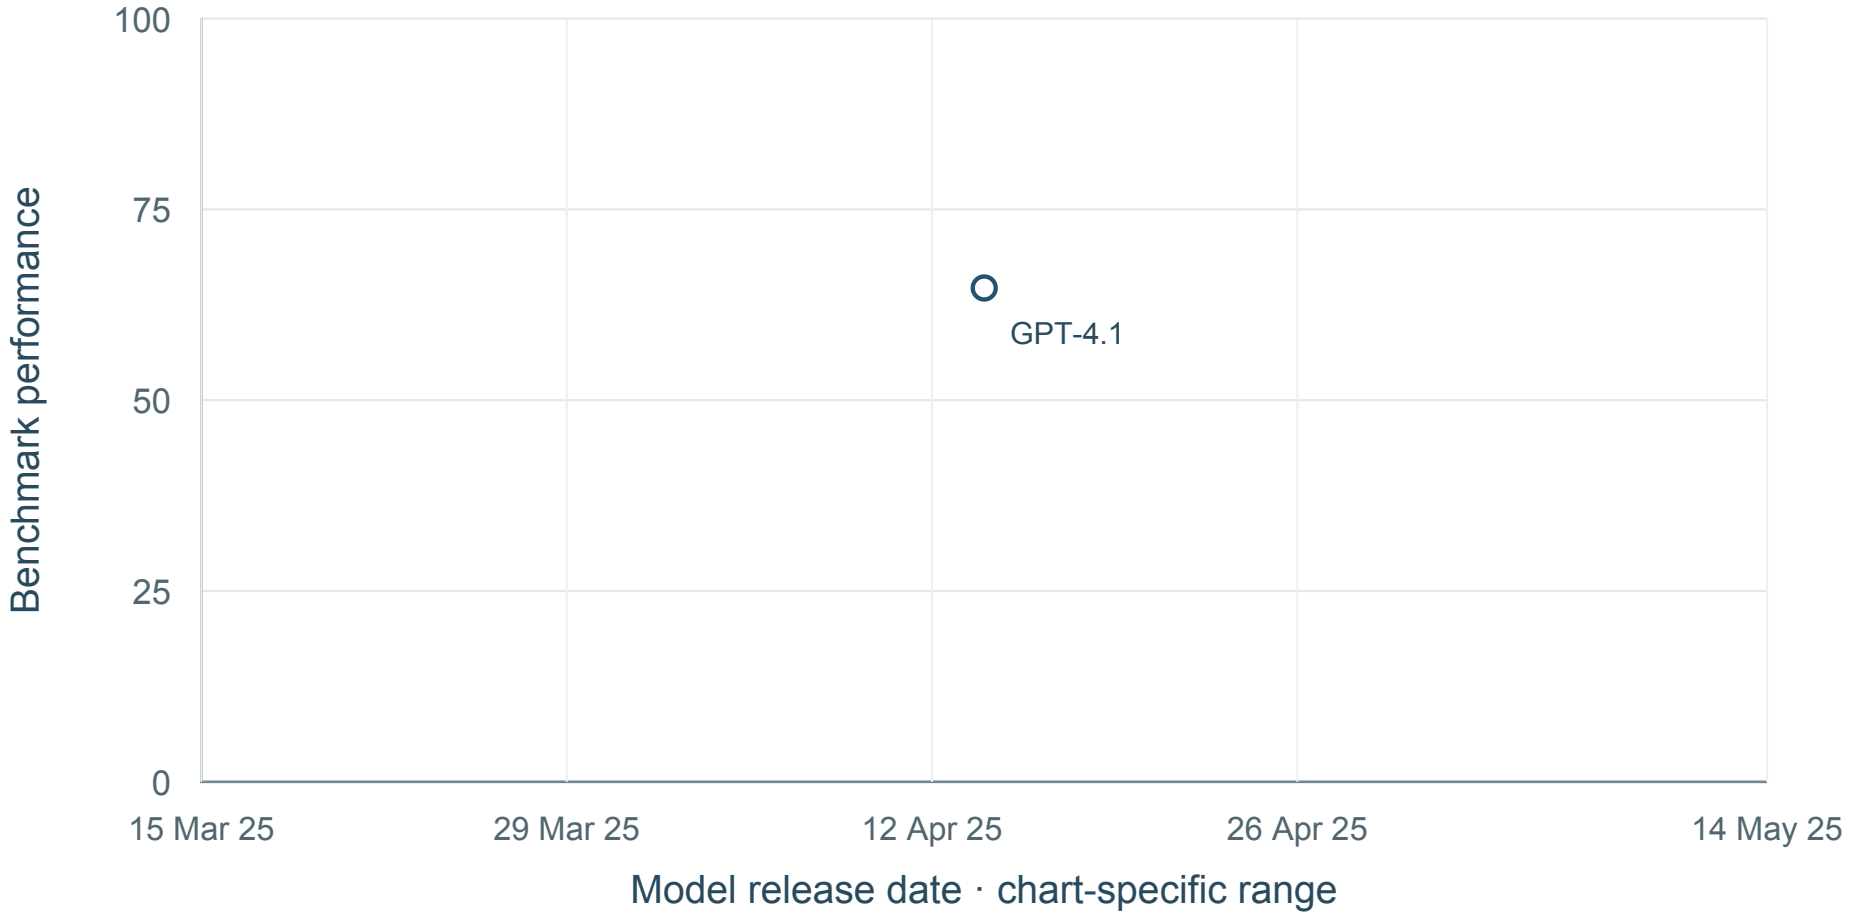

1 shown · 2 undated · 0 definition-held · sources: S010

No mean curve: Fewer than five dated model configurations.

Result-source references: S010. Exact point locators and raw values: data/F023_NoLiMa_values.csv.

Benchmark reference (APA): Modarressi, A., Deilamsalehy, H., Dernoncourt, F., Bui, T., Rossi, R. A., Yoon, S., & Schütze, H. (2025). NoLiMa: Long-context evaluation beyond literal matching. Forty-second International Conference on Machine Learning. https://arxiv.org/abs/2502.05167

F024 InfiniteBench

Long-context tasks above 100K tokens

12 source values; 0 new; 3 separate conditions; 3 visible time points; 0 definition-held values; 0 visible mean curves.

Benchmark references (APA)

Zhang, X., Chen, Y., Hu, S., Xu, Z., Chen, J., Hao, M. K., Han, X., Thai, Z. L., Wang, S., Liu, Z., & Sun, M. (2024). ∞bench: Extending long context evaluation beyond 100k tokens. Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers). https://arxiv.org/abs/2402.13718

Workflow and article scope

Challenges: B; C; D

Locate relevant evidence; Coordinate retrieval, tools and intermediate steps; Transform and calculate values

Mixed real and synthetic tasks; not a common accuracy scale.

Manuscript anchors: Source-based step comparisons, manuscript paragraph 31; Lu and Wang, Challenge D; manuscript paragraphs 9, 15–18 and 31; Lu and Wang, Challenge C; manuscript paragraphs 15, 17–18 and 33

Result-source references: S036. Full references appear in the final bibliography.

Complete condition inventory


01. Retrieval accuracy | Original InfiniteBench; Retrieve.PassKey
4 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S036.

02. Answer F1 | Original InfiniteBench; En.QA
4 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S036.

03. Answer accuracy | Original InfiniteBench; Math.Find
4 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S036.

InfiniteBench: Retrieval accuracy

Original InfiniteBench; Retrieve.PassKey

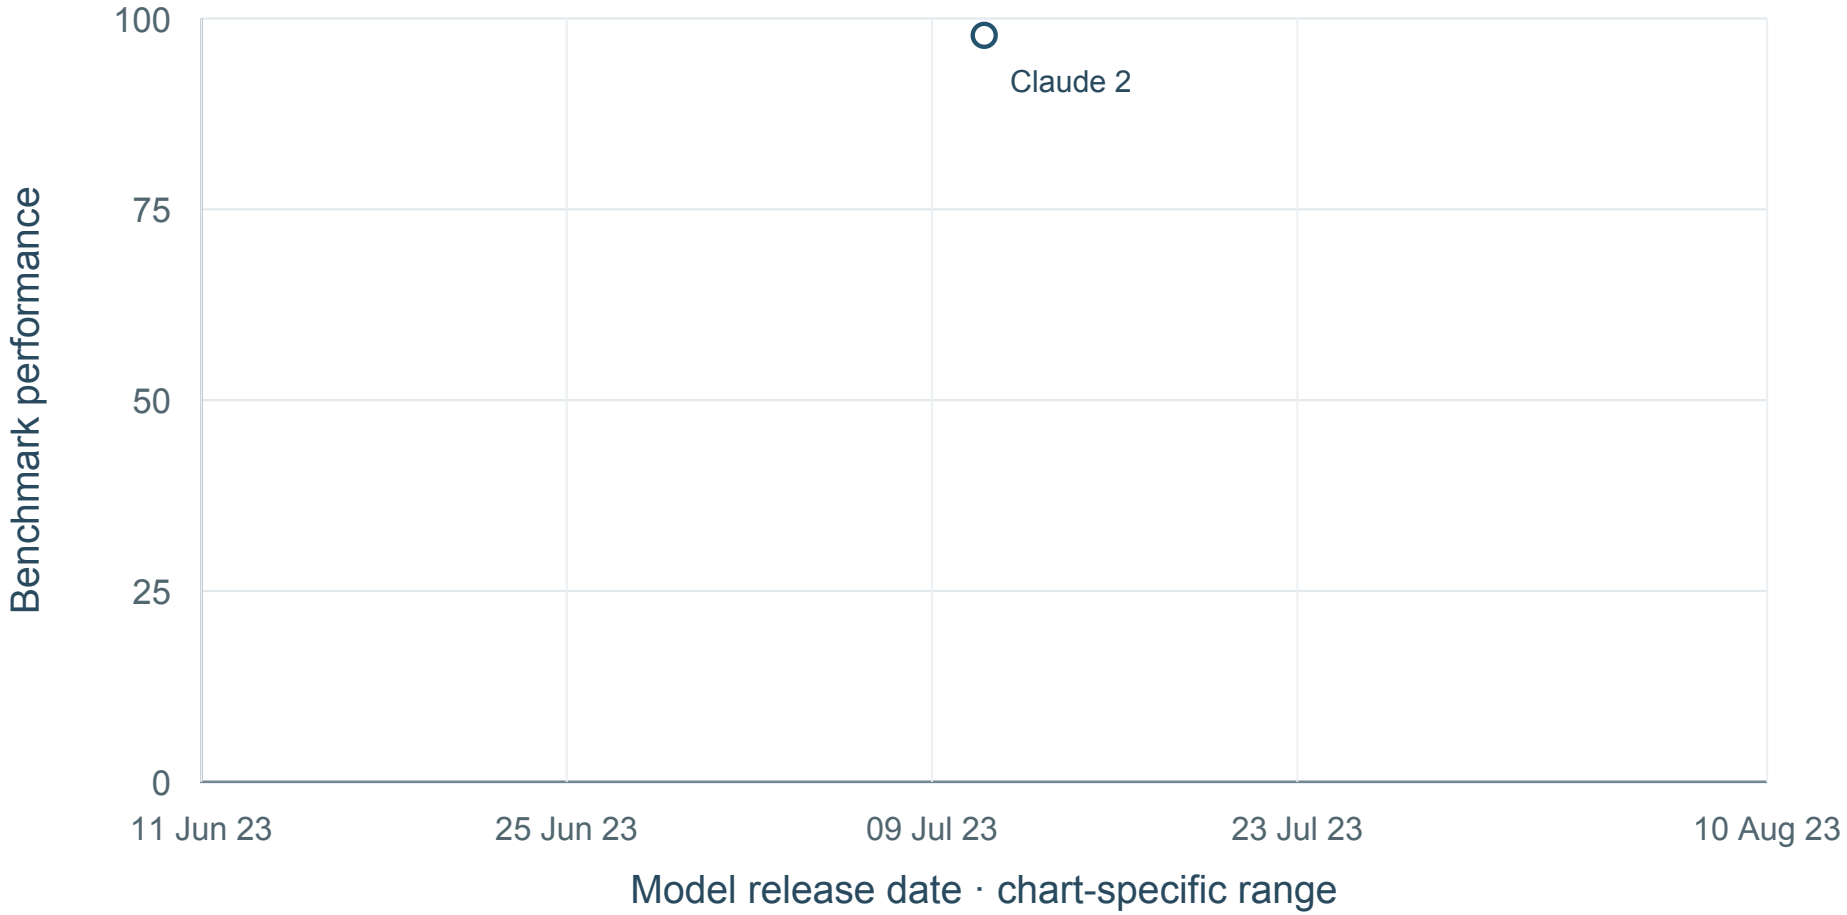

1 shown · 3 undated · 0 definition-held · sources: S036


No mean curve: Fewer than five dated model configurations.

Result-source references: S036. Exact point locators and raw values: data/F024_InfiniteBench_values.csv.

Benchmark reference (APA): Zhang, X., Chen, Y., Hu, S., Xu, Z., Chen, J., Hao, M. K., Han, X., Thai, Z. L., Wang, S., Liu, Z., & Sun, M. (2024). ∞bench: Extending long context evaluation beyond 100k tokens. Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers). https://arxiv.org/abs/2402.13718

InfiniteBench: Answer F1

Original InfiniteBench; En.QA

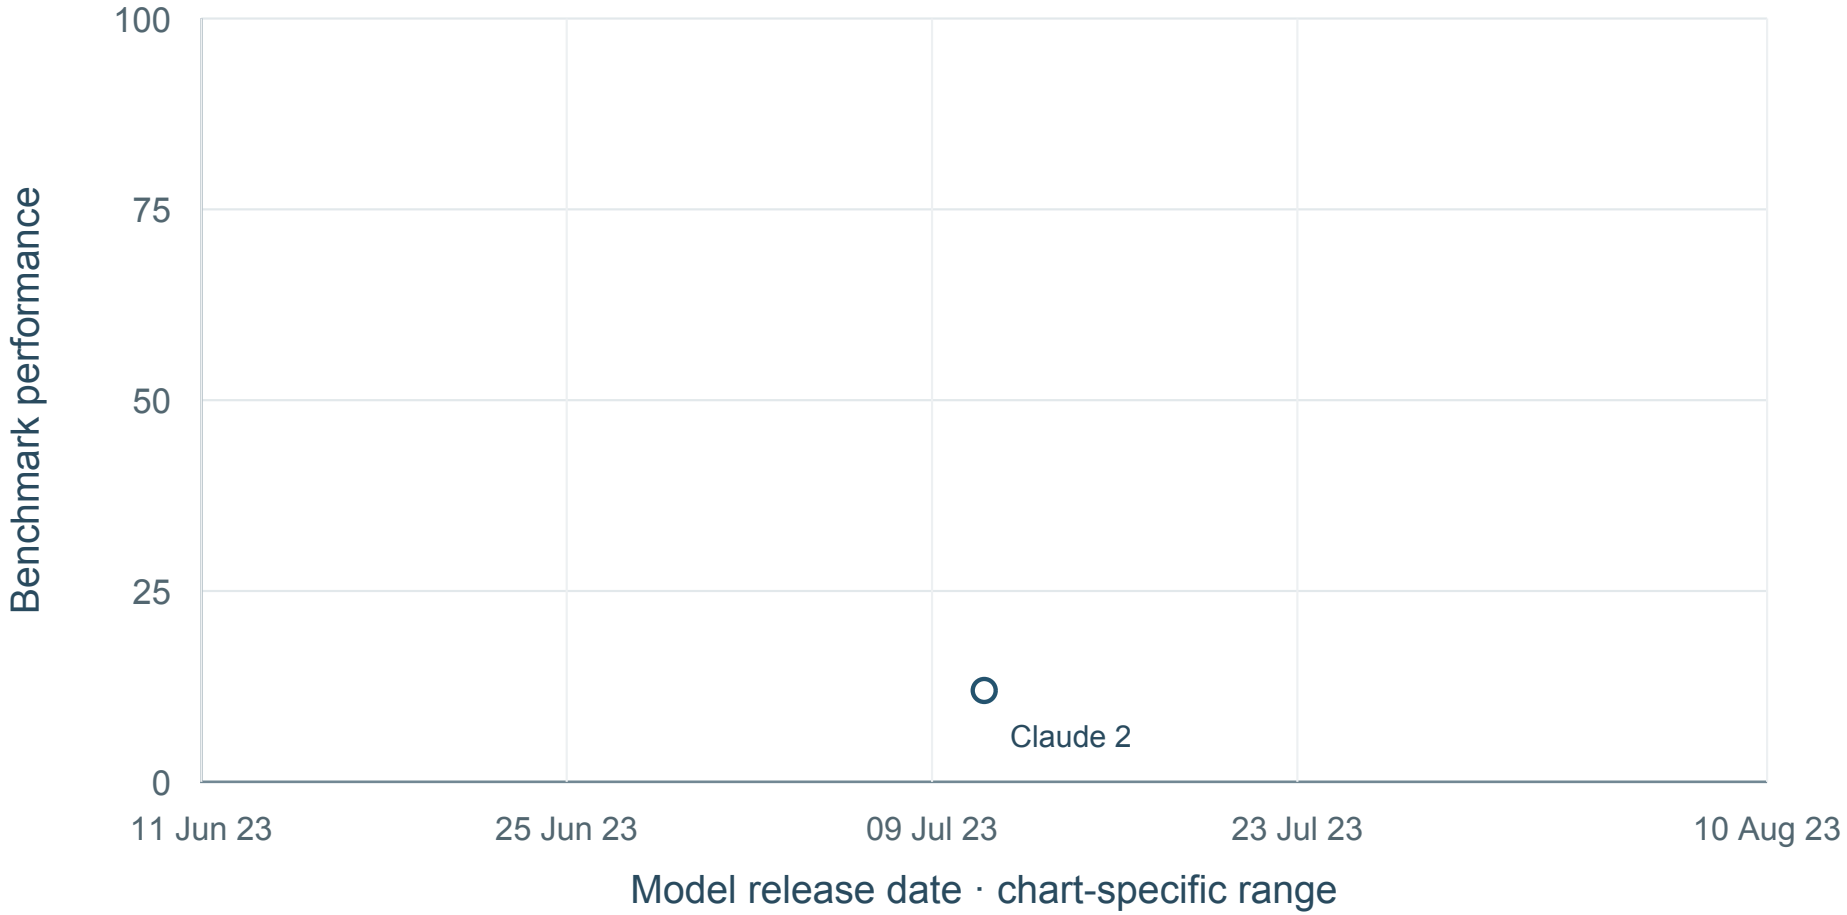

1 shown · 3 undated · 0 definition-held · sources: S036


No mean curve: Fewer than five dated model configurations.

Result-source references: S036. Exact point locators and raw values: data/F024_InfiniteBench_values.csv.

Benchmark reference (APA): Zhang, X., Chen, Y., Hu, S., Xu, Z., Chen, J., Hao, M. K., Han, X., Thai, Z. L., Wang, S., Liu, Z., & Sun, M. (2024). ∞bench: Extending long context evaluation beyond 100k tokens. Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers). https://arxiv.org/abs/2402.13718

InfiniteBench: Answer accuracy

Original InfiniteBench; Math.Find

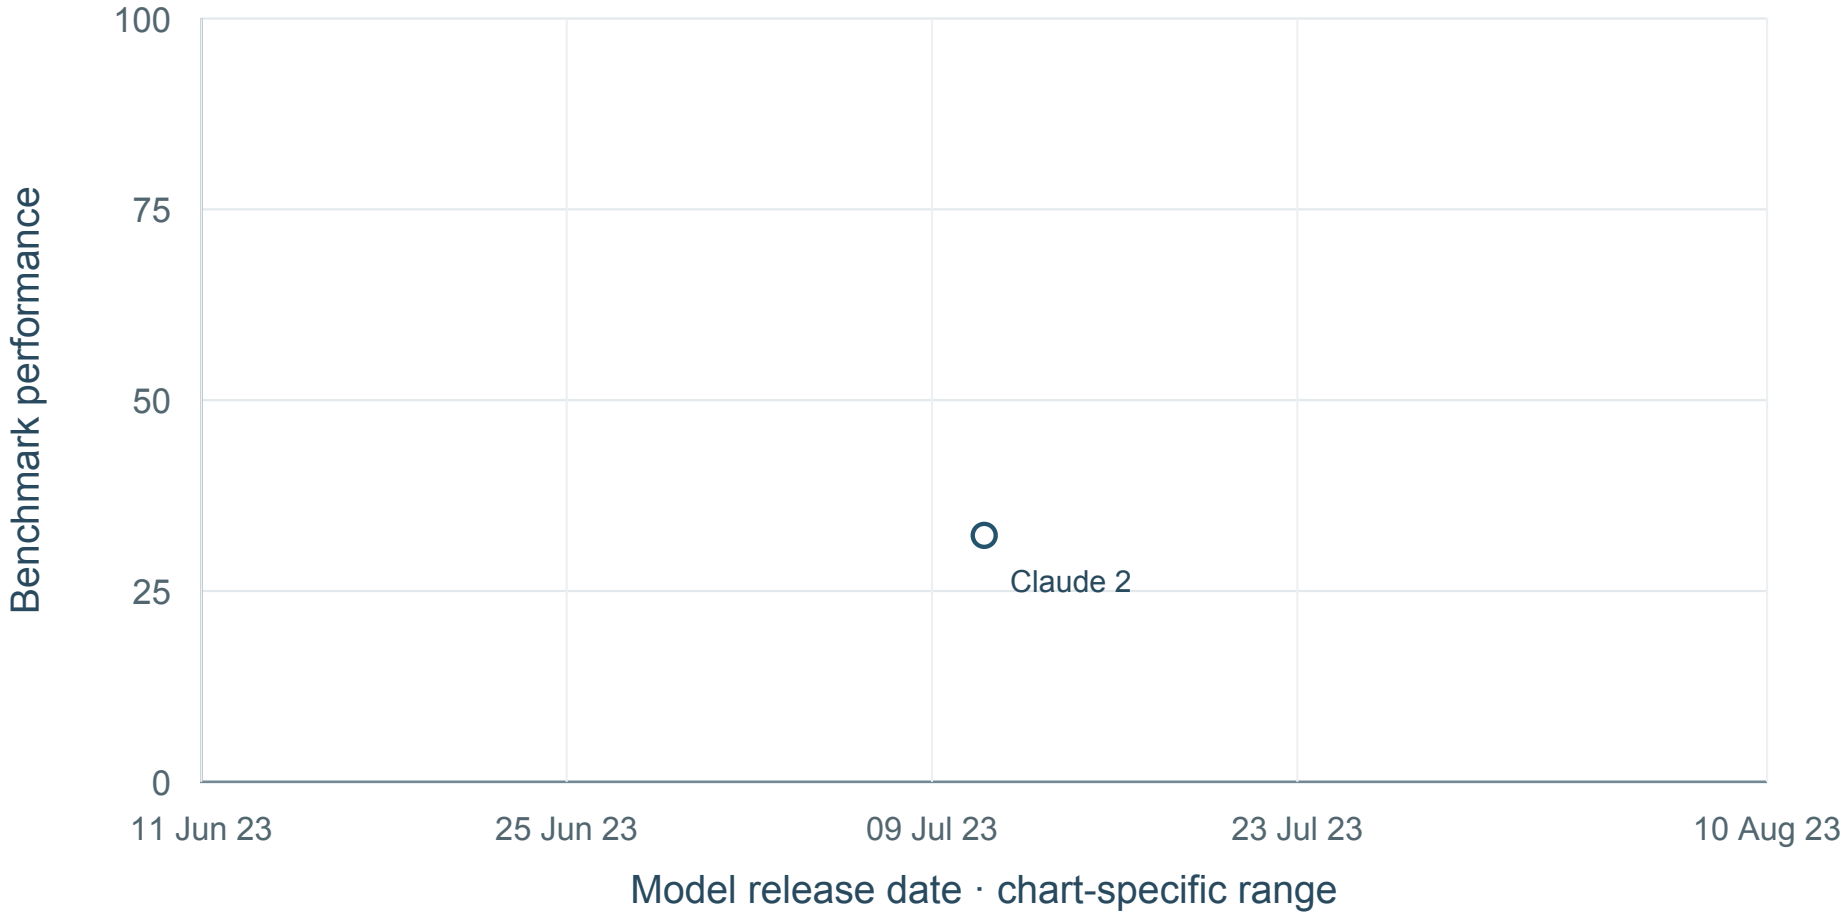

1 shown · 3 undated · 0 definition-held · sources: S036

No mean curve: Fewer than five dated model configurations.

Result-source references: S036. Exact point locators and raw values: data/F024_InfiniteBench_values.csv.

Benchmark reference (APA): Zhang, X., Chen, Y., Hu, S., Xu, Z., Chen, J., Hao, M. K., Han, X., Thai, Z. L., Wang, S., Liu, Z., & Sun, M. (2024). ∞bench: Extending long context evaluation beyond 100k tokens. Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers). https://arxiv.org/abs/2402.13718

F026 MRCR

Disambiguate repeated, similar long-context requests

28 source values; 17 new; 17 separate conditions; 28 visible time points; 0 definition-held values; 0 visible mean curves.

Benchmark references (APA)

OpenAI. (n.d.). MRCR: Multi-round coreference resolution [Data set]. Hugging Face. Retrieved October 30, 2026, from https://huggingface.co/datasets/openai/mrcr

Workflow and article scope

Challenges: B

Locate relevant evidence

Original v1 digitizations are approximate; not a direct reasoning/extraction benchmark.

Manuscript anchors: Source-based step comparisons, manuscript paragraph 31

Result-source references: S003; S004; S005; S006; MC069; MC096; MC061; MC062. Full references appear in the final bibliography.

Complete condition inventory

01. Cumulative match score | MRCR v1 (2 needles, 128K)
4 values; 4 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S003.

02. Cumulative average | MRCR v2 (8 needles, 128K)
4 values; 4 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S004; S005.

03. Long-context bucket score | MRCR v2 (8 needles, 256K-512K)
3 values; 3 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S006.

04. Match score (%) | Mode not specified; MC069 H10; MRCR v2; OpenAI MRCR v2 8-needle 256K-512K; ; section: ; table row context: OpenAI MRCR v2 8-needle 256K-512K
1 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC069.

05. Match score (%) | Mode not specified; MC069 H10; MRCR v2; OpenAI MRCR v2 8-needle 512K-1M; ; section: ; table row context: OpenAI MRCR v2 8-needle 512K-1M
4 values; 4 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC069.

06. Match score (%) | Mode not specified; MC096 H8; MRCR v2; OpenAI MRCR v2 8-needle 256K-512K; ; section: ; table row context: OpenAI MRCR v2 8-needle 256K-512K
1 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC096.

07. Match score (%) | Mode not specified; MC096 H8; MRCR v2; OpenAI MRCR v2 8-needle 512K-1M; ; section: ; table row context: OpenAI MRCR v2 8-needle 512K-1M
1 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC096.

08. Match score (%) | 64K extended thinking; MC061 Table 2.16.A; MRCR v2; 8 needles; MRCR v2; 8 needles; (128K,256K] input tokens; 64K extended thinking; mean of five trials. The 1M-bin score includes prompts beyond the public API limit; not a cumulative 128K score
1 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC061.

09. Match score (%) | Adaptive thinking; max effort; MC061 Table 2.16.A; MRCR v2; 8 needles; MRCR v2; 8 needles; (128K,256K] input tokens; Adaptive thinking, max effort; mean of five trials. The 1M-bin score includes prompts beyond the public API limit; not a cumulative 128K score
1 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC061.

10. Match score (%) | 64K extended thinking; MC061 Table 2.16.A; MRCR v2; 8 needles; MRCR v2; 8 needles; (524K,1024K] input tokens; 64K extended thinking; mean of five trials. The 1M-bin score includes prompts beyond the public API limit; not a cumulative 128K score
1 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC061.

11. Match score (%) | Adaptive thinking; max effort; MC061 Table 2.16.A; MRCR v2; 8 needles; MRCR v2; 8 needles; (524K,1024K] input tokens; Adaptive thinking, max effort; mean of five trials. The 1M-bin score includes prompts beyond the public API limit; not a cumulative 128K score
1 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC061.

12. Match score (%) | 64K extended thinking; MC062 Long-context table, Section 2.18; MRCR v2; 8 needles; MRCR v2; 8 needles; (128K,256K] input tokens; 64K extended thinking; mean of five trials. The 1M-bin score includes prompts beyond the public API limit; not a cumulative 128K score
1 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC062.

13. Match score (%) | Adaptive thinking; max effort; MC062 Long-context table, Section 2.18; MRCR v2; 8 needles; MRCR v2; 8 needles; (128K,256K] input tokens; Adaptive thinking, max effort; mean of five trials. The 1M-bin score includes prompts beyond the public API limit; not a cumulative 128K score
1 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC062.

14. Match score (%) | 64K extended thinking; MC062 Long-context table, Section 2.18; MRCR v2; 8 needles; MRCR v2; 8 needles; (524K,1024K] input tokens; 64K extended thinking; mean of five trials. The 1M-bin score includes prompts beyond the public API limit; not a cumulative 128K score
1 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC062.


15. Match score (%) | Adaptive thinking; max effort; MC062 Long-context table, Section 2.18; MRCR v2; 8 needles; MRCR v2; 8 needles; (524K,1024K] input tokens; Adaptive thinking, max effort; mean of five trials. The 1M-bin score includes prompts beyond the public API limit; not a cumulative 128K score
1 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC062.

16. Match score (%) | 64K extended thinking; MC061 Footnote 15; MRCR v2; 8 needles; API-reproducible subset; MRCR v2; 8 needles; API-reproducible subset; Subset within public 1M token API limit; n=54 problems; 64K extended thinking; separate from full 1M bin
1 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC061.

17. Match score (%) | Adaptive thinking; max effort; MC061 Footnote 15; MRCR v2; 8 needles; API-reproducible subset; MRCR v2; 8 needles; API-reproducible subset; Subset within public 1M token API limit; n=29 problems; Adaptive thinking, max effort; separate from full 1M bin
1 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC061.

MRCR: Cumulative match score

MRCR v1 (2 needles, 128K)

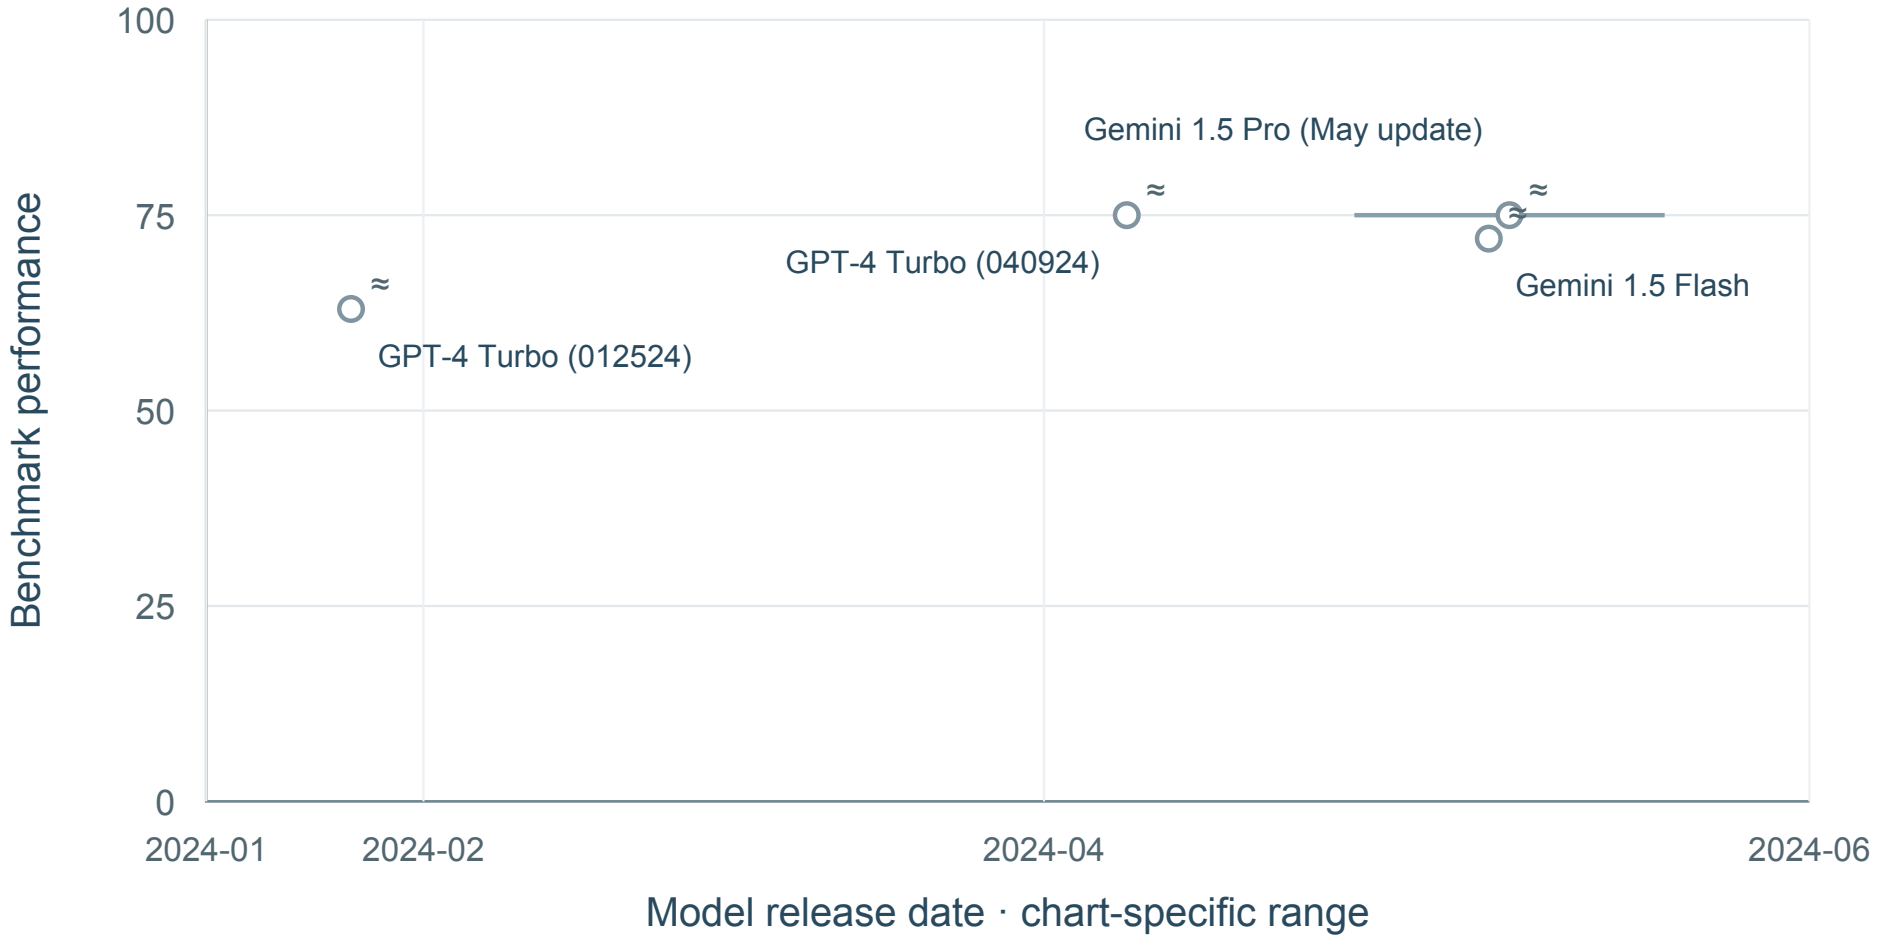

4 shown · 0 undated · 0 definition-held · sources: S003


No mean curve: Fewer than five dated model configurations.

Result-source references: S003. Exact point locators and raw values: data/F026_MRCR_values.csv.

Benchmark reference (APA): OpenAI. (n.d.). MRCR: Multi-round coreference resolution [Data set]. Hugging Face. Retrieved October 30, 2026, from https://huggingface.co/datasets/openai/mrcr

MRCR: Cumulative average

MRCR v2 (8 needles, 128K)

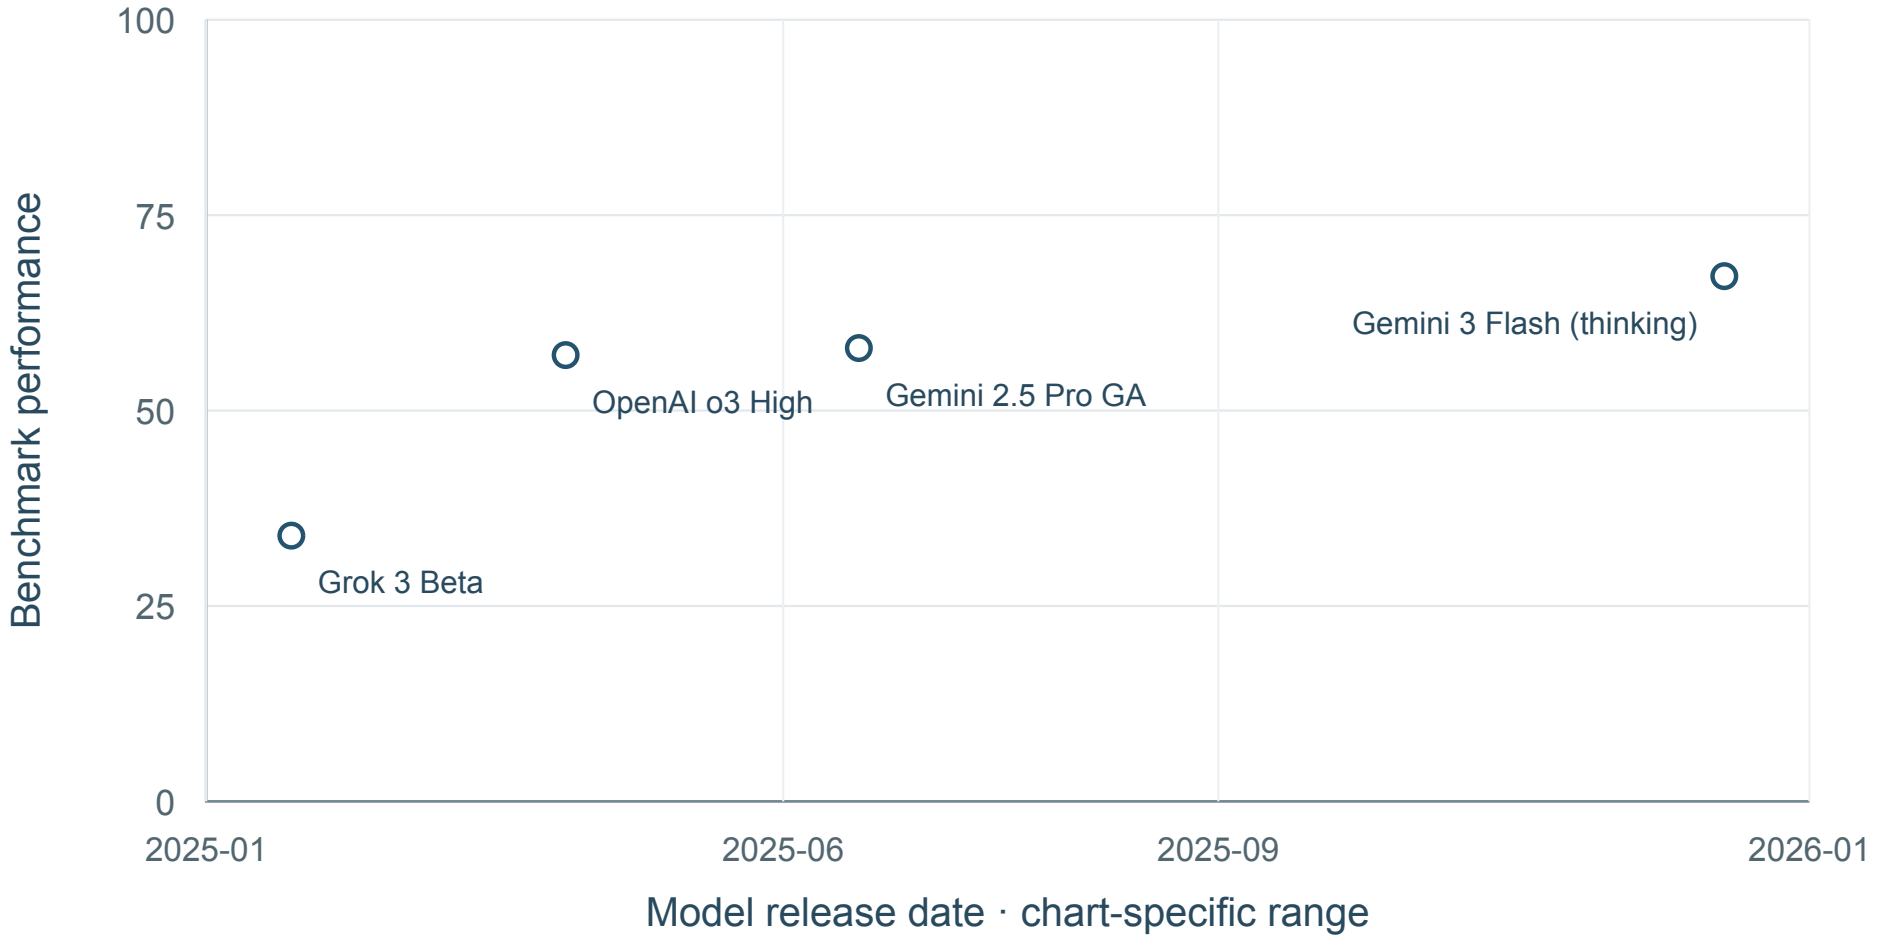

4 shown · 0 undated · 0 definition-held · sources: S004, S005


No mean curve: Fewer than five dated model configurations.

Result-source references: S004; S005. Exact point locators and raw values: data/F026_MRCR_values.csv.

Benchmark reference (APA): OpenAI. (n.d.). MRCR: Multi-round coreference resolution [Data set]. Hugging Face. Retrieved October 30, 2026, from https://huggingface.co/datasets/openai/mrcr

MRCR: Long-context bucket score

MRCR v2 (8 needles, 256K-512K)

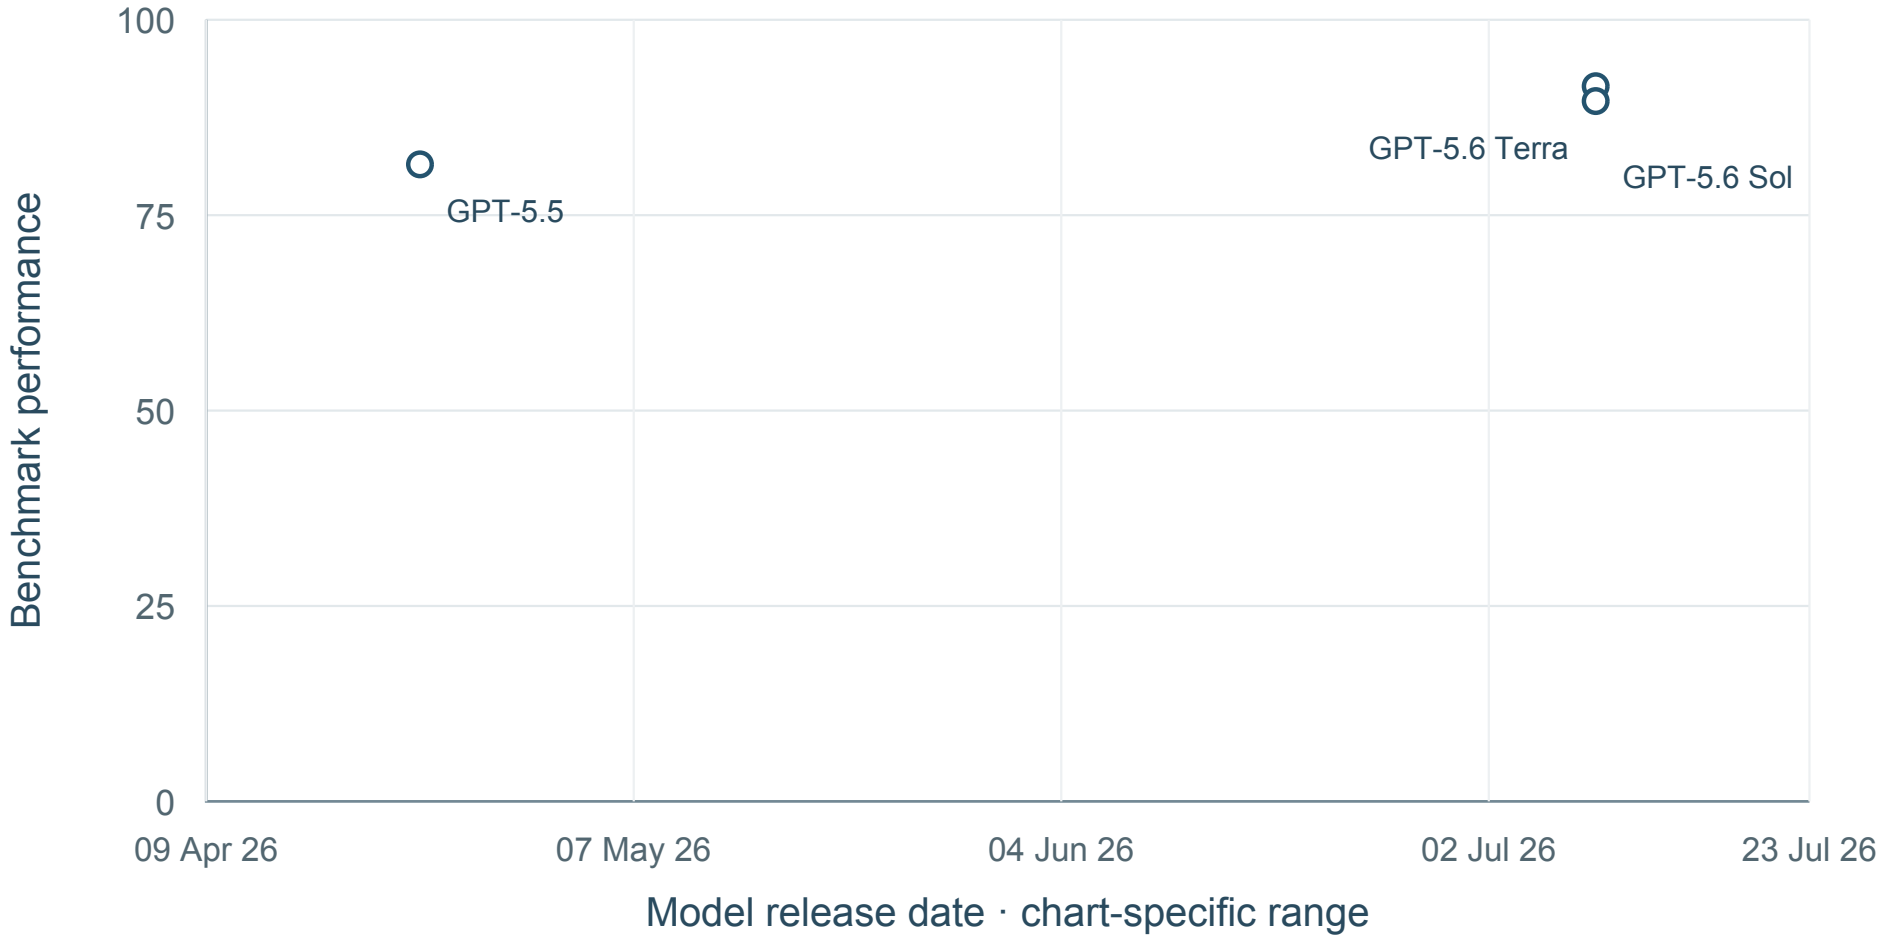

3 shown · 0 undated · 0 definition-held · sources: S006


No mean curve: Fewer than five dated model configurations.

Result-source references: S006. Exact point locators and raw values: data/F026_MRCR_values.csv.

Benchmark reference (APA): OpenAI. (n.d.). MRCR: Multi-round coreference resolution [Data set]. Hugging Face. Retrieved October 30, 2026, from https://huggingface.co/datasets/openai/mrcr

MRCR: Match score (%)

Mode not specified; MC069 H10; MRCR v2; OpenAI MRCR v2 8-needle 256K-512K; ; section: ; table row context: OpenAI MRCR v2 8-needle 256K-512K

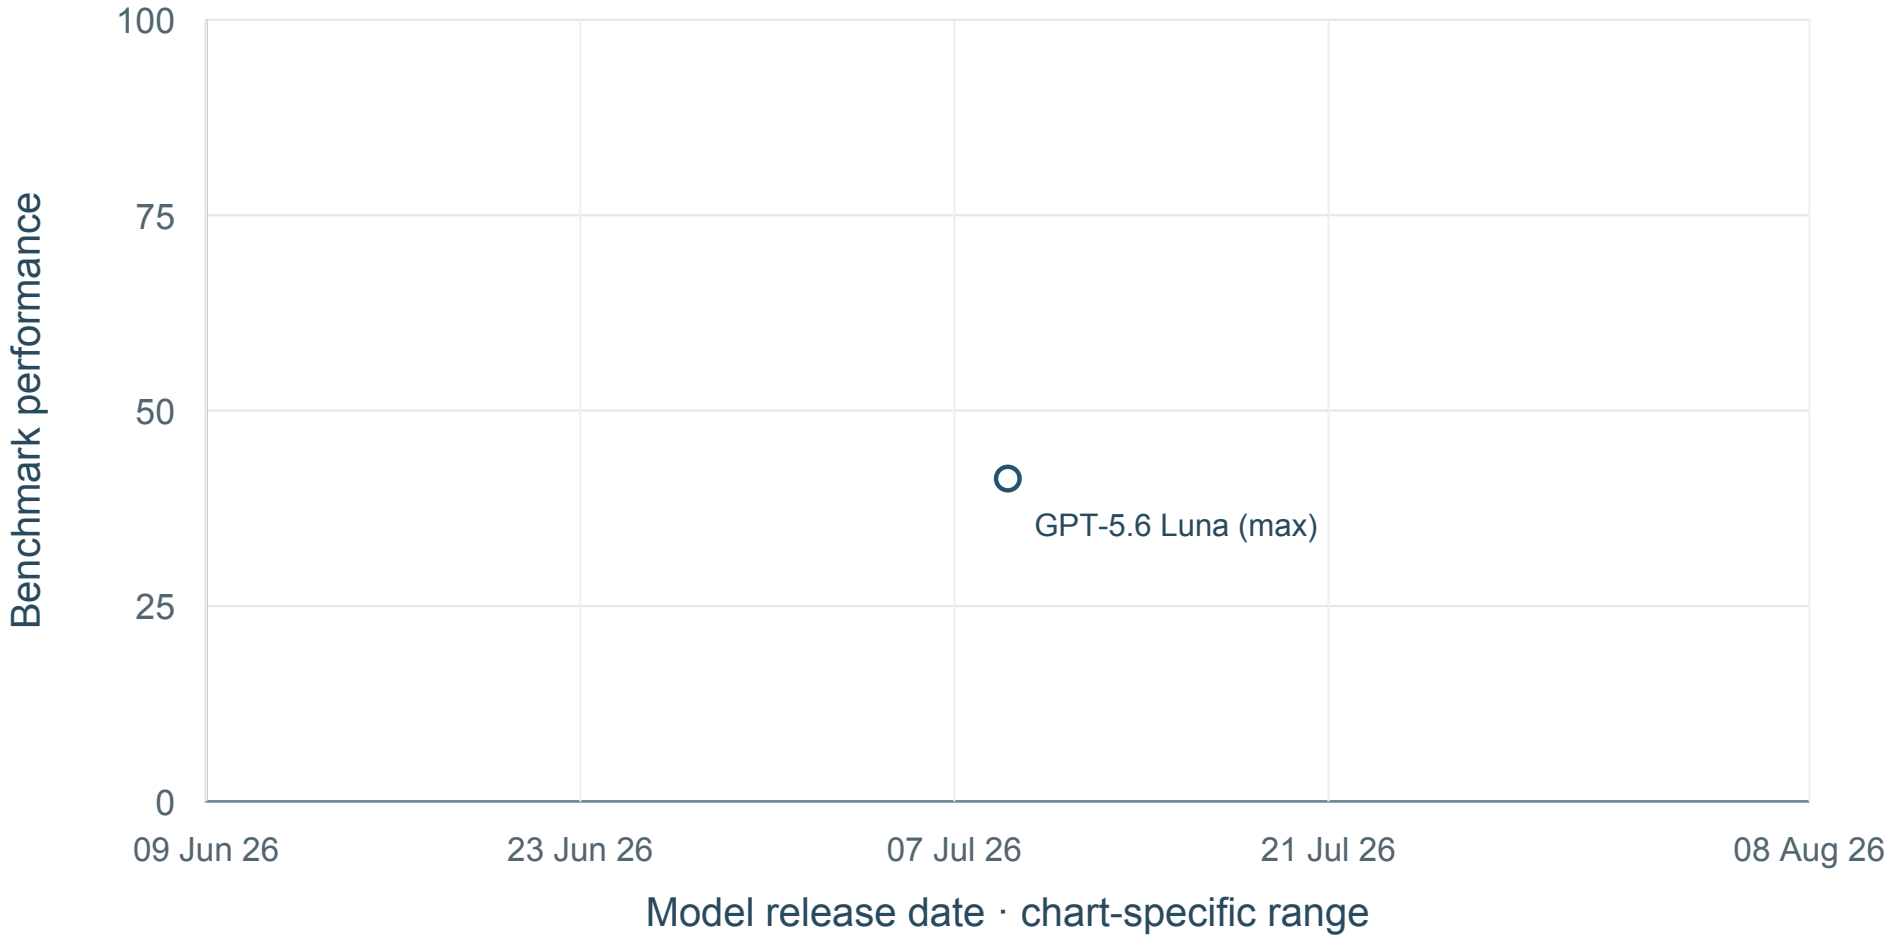

1 shown · 0 undated · 0 definition-held · sources: MC069


No mean curve: Fewer than five dated model configurations.

Result-source references: MC069. Exact point locators and raw values: data/F026_MRCR_values.csv.

Benchmark reference (APA): OpenAI. (n.d.). MRCR: Multi-round coreference resolution [Data set]. Hugging Face. Retrieved October 30, 2026, from https://huggingface.co/datasets/openai/mrcr

MRCR: Match score (%)

Mode not specified; MC069 H10; MRCR v2; OpenAI MRCR v2 8-needle 512K-1M; ; section: ; table row context: OpenAI MRCR v2 8-needle 512K-1M

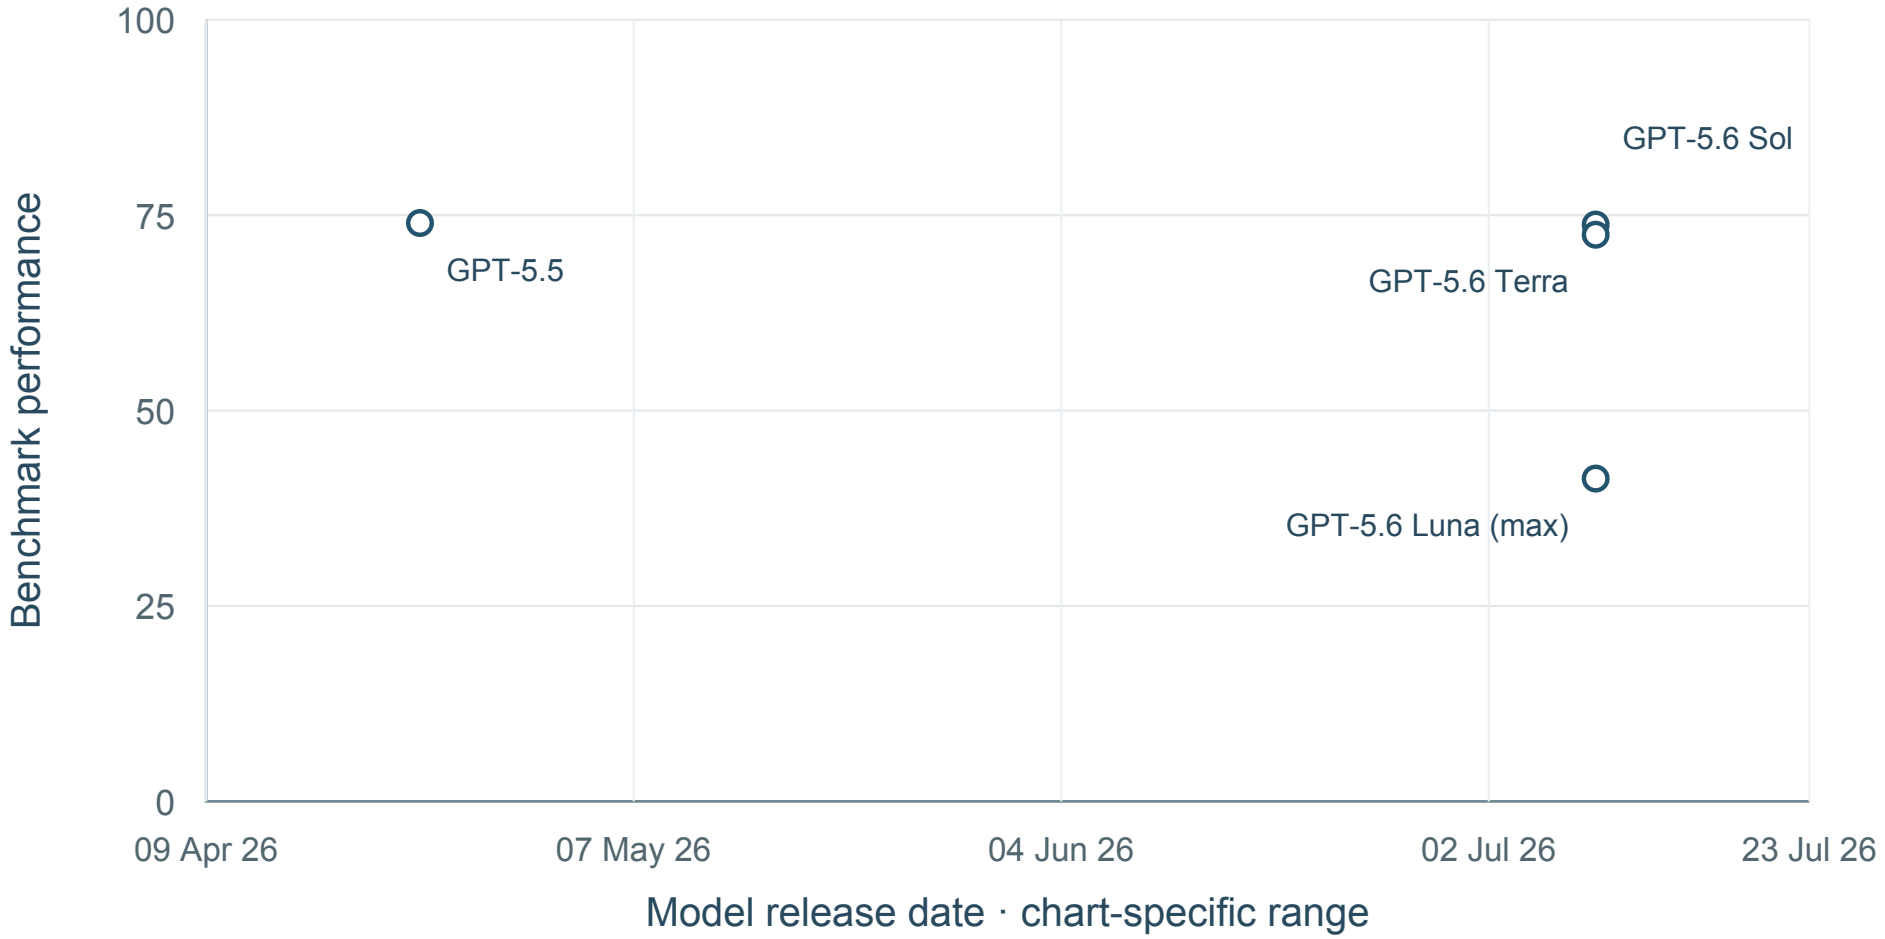

4 shown · 0 undated · 0 definition-held · sources: MC069

No mean curve: Fewer than five dated model configurations.

Result-source references: MC069. Exact point locators and raw values: data/F026_MRCR_values.csv.

Benchmark reference (APA): OpenAI. (n.d.). MRCR: Multi-round coreference resolution [Data set]. Hugging Face. Retrieved October 30, 2026, from https://huggingface.co/datasets/openai/mrcr

MRCR: Match score (%)

Mode not specified; MC096 H8; MRCR v2; OpenAI MRCR v2 8-needle 256K-512K; ; section: ; table row context: OpenAI MRCR v2 8-needle 256K-512K



1 shown · 0 undated · 0 definition-held · sources: MC096


No mean curve: Fewer than five dated model configurations.

Result-source references: MC096. Exact point locators and raw values: data/F026_MRCR_values.csv.

Benchmark reference (APA): OpenAI. (n.d.). MRCR: Multi-round coreference resolution [Data set]. Hugging Face. Retrieved October 30, 2026, from https://huggingface.co/datasets/openai/mrcr

MRCR: Match score (%)

Mode not specified; MC096 H8; MRCR v2; OpenAI MRCR v2 8-needle 512K-1M; ; section: ; table row context: OpenAI MRCR v2 8-needle 512K-1M

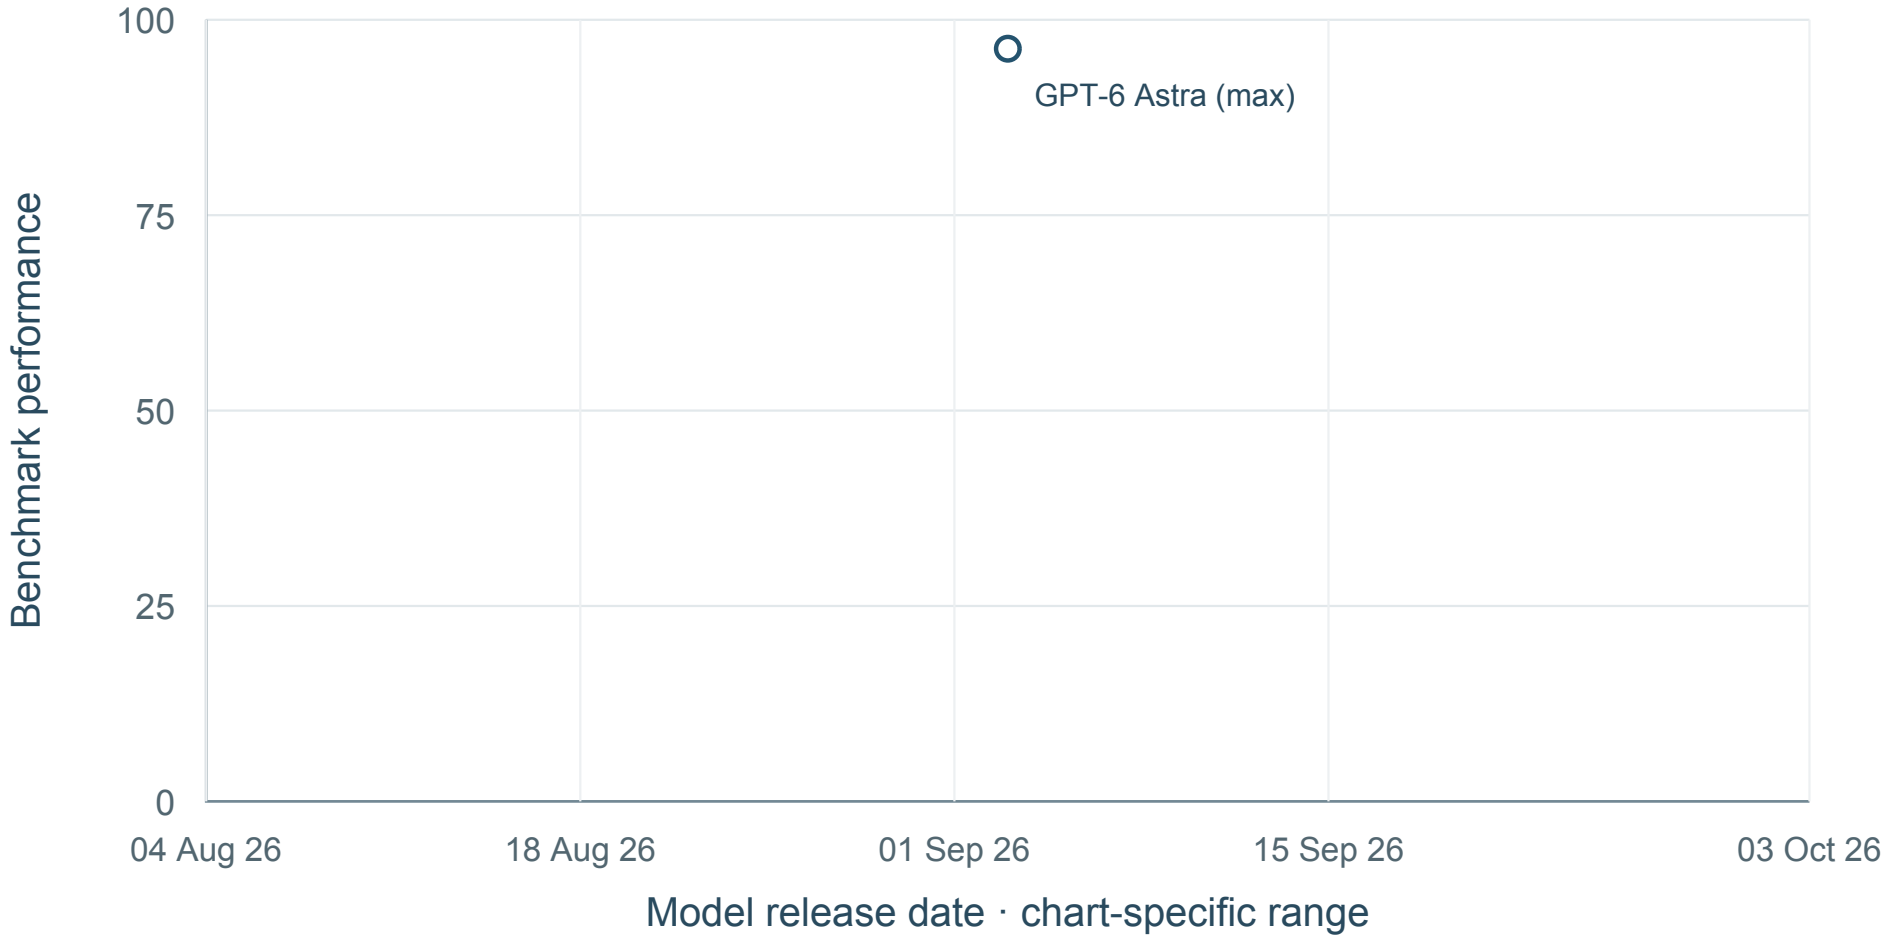

1 shown · 0 undated · 0 definition-held · sources: MC096


No mean curve: Fewer than five dated model configurations.

Result-source references: MC096. Exact point locators and raw values: data/F026_MRCR_values.csv.

Benchmark reference (APA): OpenAI. (n.d.). MRCR: Multi-round coreference resolution [Data set]. Hugging Face. Retrieved October 30, 2026, from https://huggingface.co/datasets/openai/mrcr

MRCR: Match score (%)

64K extended thinking; MC061 Table 2.16.A; MRCR v2; 8 needles; MRCR v2; 8 needles; (128K,256K] input tokens; 64K extended thinking; mean of five trials. The 1M-bin score includes prompts beyond

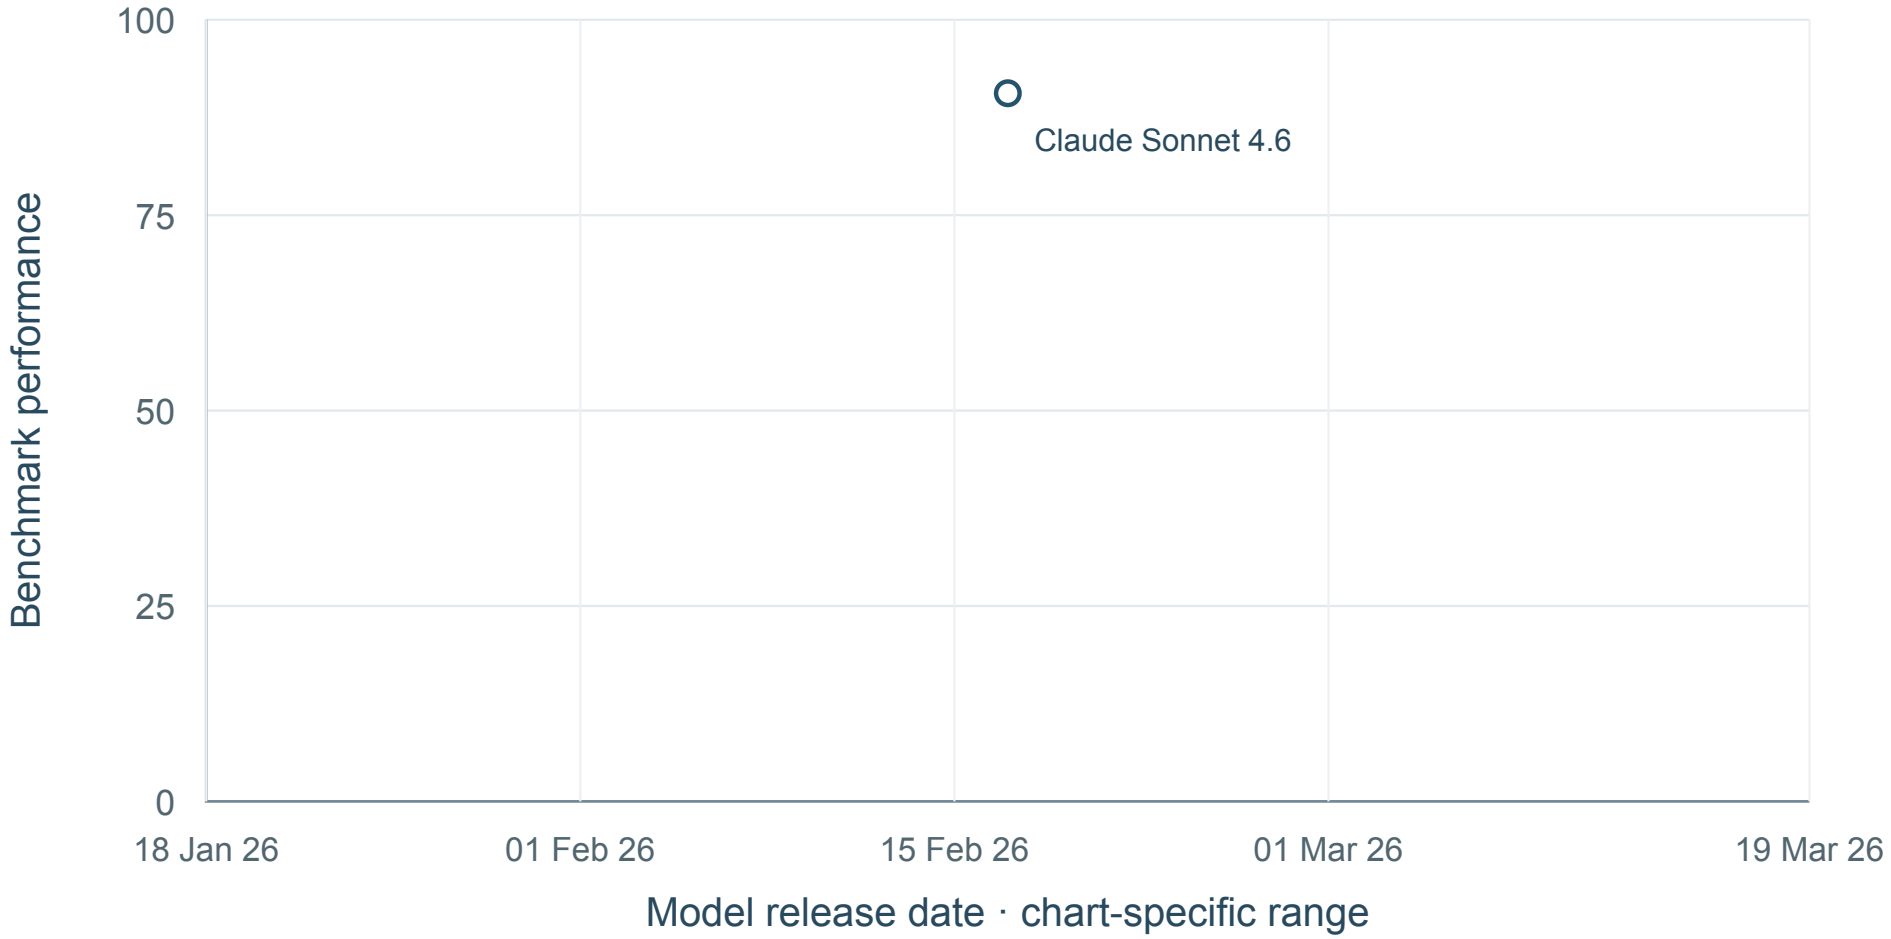

1 shown · 0 undated · 0 definition-held · sources: MC061


No mean curve: Fewer than five dated model configurations.

Result-source references: MC061. Exact point locators and raw values: data/F026_MRCR_values.csv.

Benchmark reference (APA): OpenAI. (n.d.). MRCR: Multi-round coreference resolution [Data set]. Hugging Face. Retrieved October 30, 2026, from https://huggingface.co/datasets/openai/mrcr

MRCR: Match score (%)

Adaptive thinking; max effort; MC061 Table 2.16.A; MRCR v2; 8 needles; MRCR v2; 8 needles; (128K,256K] input tokens; Adaptive thinking, max effort; mean of five trials. The 1M-bin score

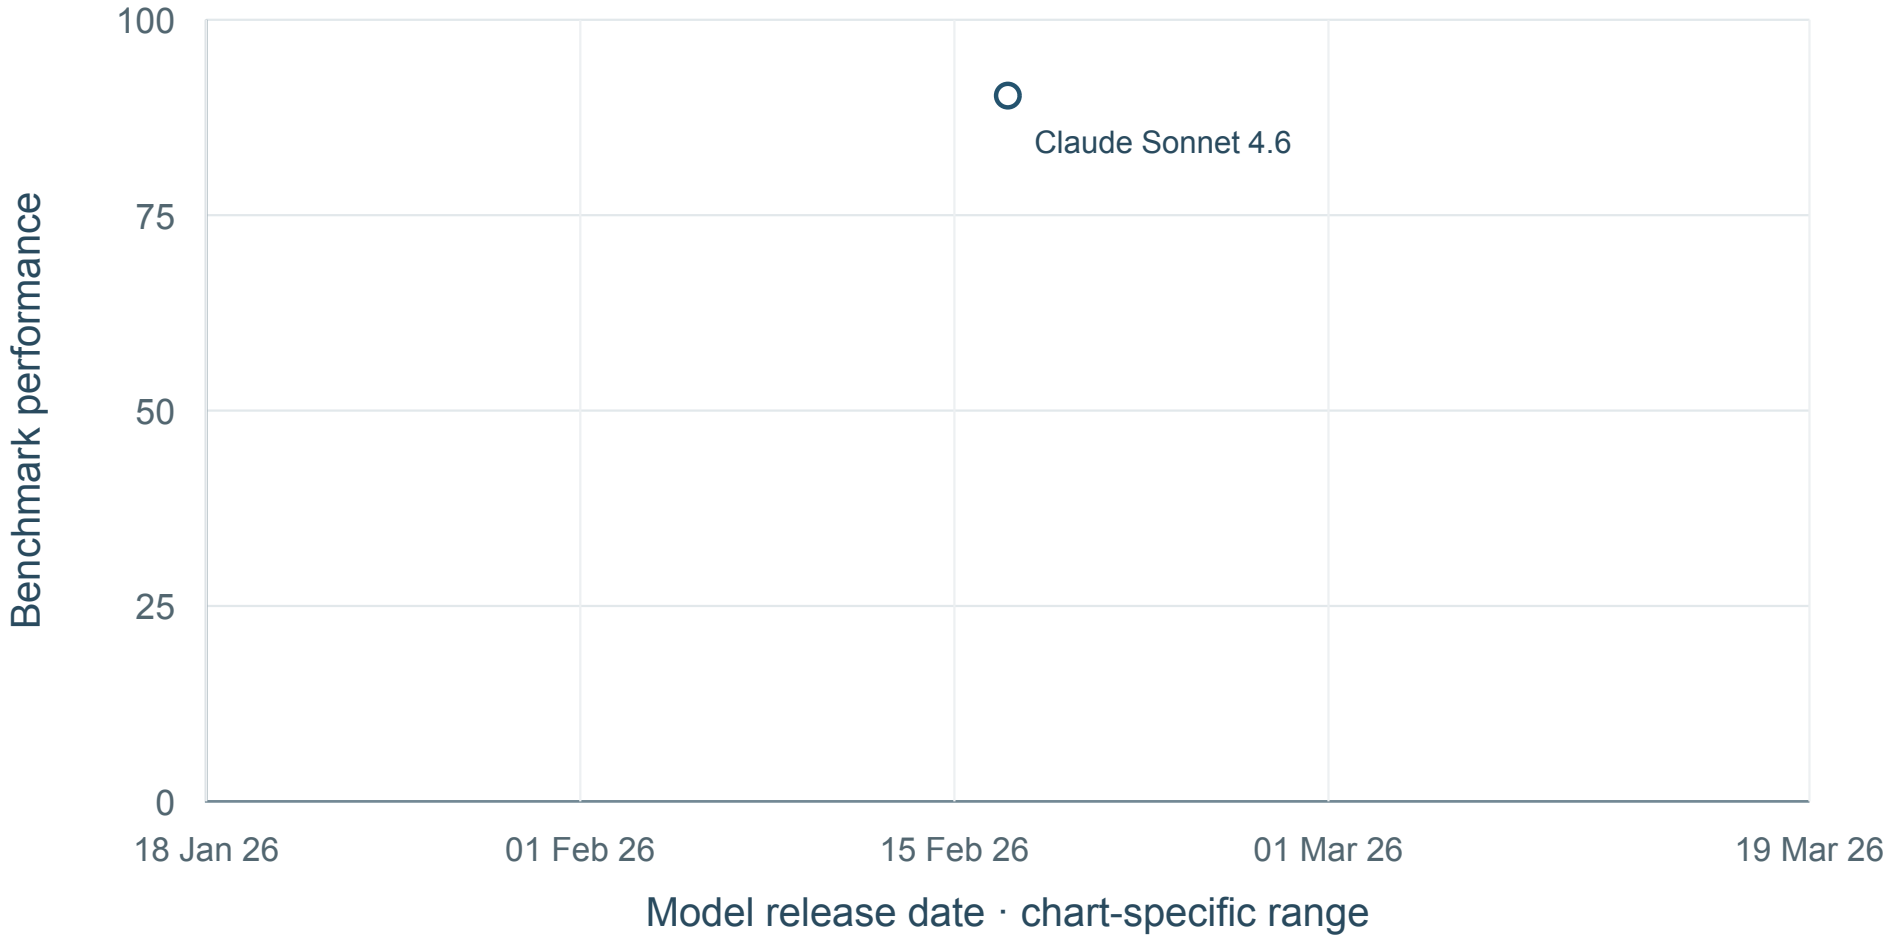

1 shown · 0 undated · 0 definition-held · sources: MC061


No mean curve: Fewer than five dated model configurations.

Result-source references: MC061. Exact point locators and raw values: data/F026_MRCR_values.csv.

Benchmark reference (APA): OpenAI. (n.d.). MRCR: Multi-round coreference resolution [Data set]. Hugging Face. Retrieved October 30, 2026, from https://huggingface.co/datasets/openai/mrcr

MRCR: Match score (%)

64K extended thinking; MC061 Table 2.16.A; MRCR v2; 8 needles; MRCR v2; 8 needles; (524K,1024K] input tokens; 64K extended thinking; mean of five trials. The 1M-bin score includes prompts beyond

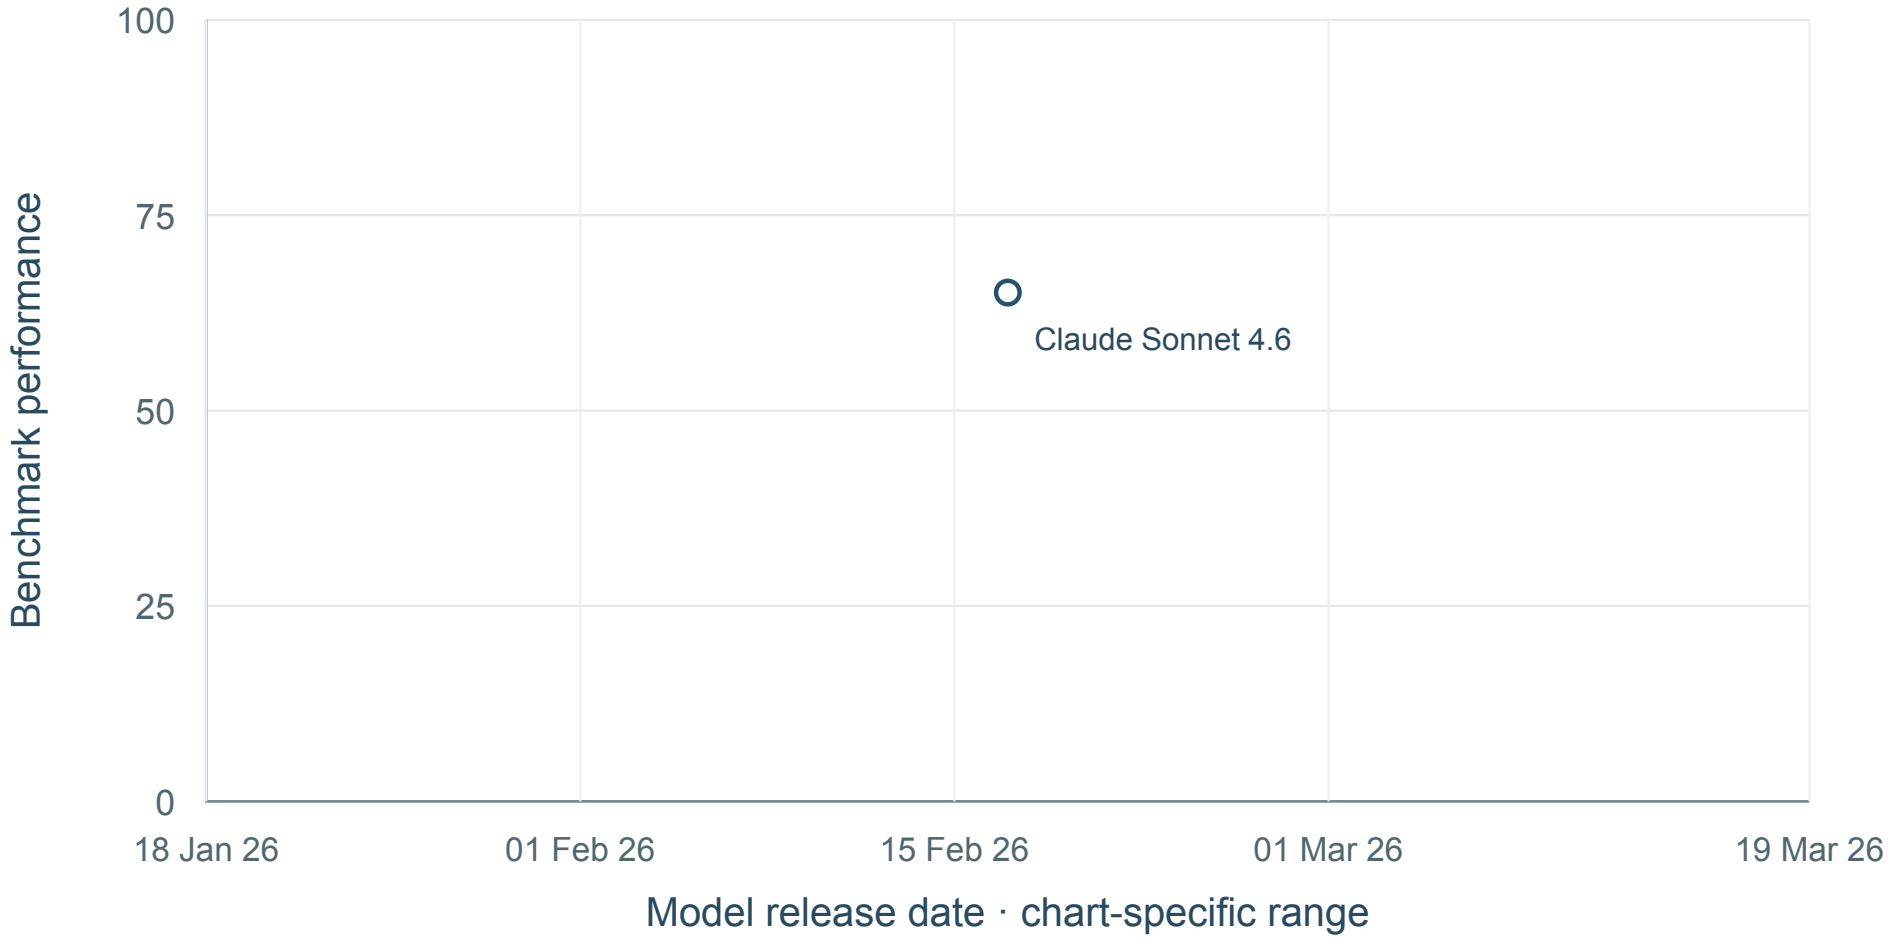

1 shown · 0 undated · 0 definition-held · sources: MC061


No mean curve: Fewer than five dated model configurations.

Result-source references: MC061. Exact point locators and raw values: data/F026_MRCR_values.csv.

Benchmark reference (APA): OpenAI. (n.d.). MRCR: Multi-round coreference resolution [Data set]. Hugging Face. Retrieved October 30, 2026, from https://huggingface.co/datasets/openai/mrcr

MRCR: Match score (%)

Adaptive thinking; max effort; MC061 Table 2.16.A; MRCR v2; 8 needles; MRCR v2; 8 needles; (524K,1024K] input tokens; Adaptive thinking, max effort; mean of five trials. The 1M-bin score

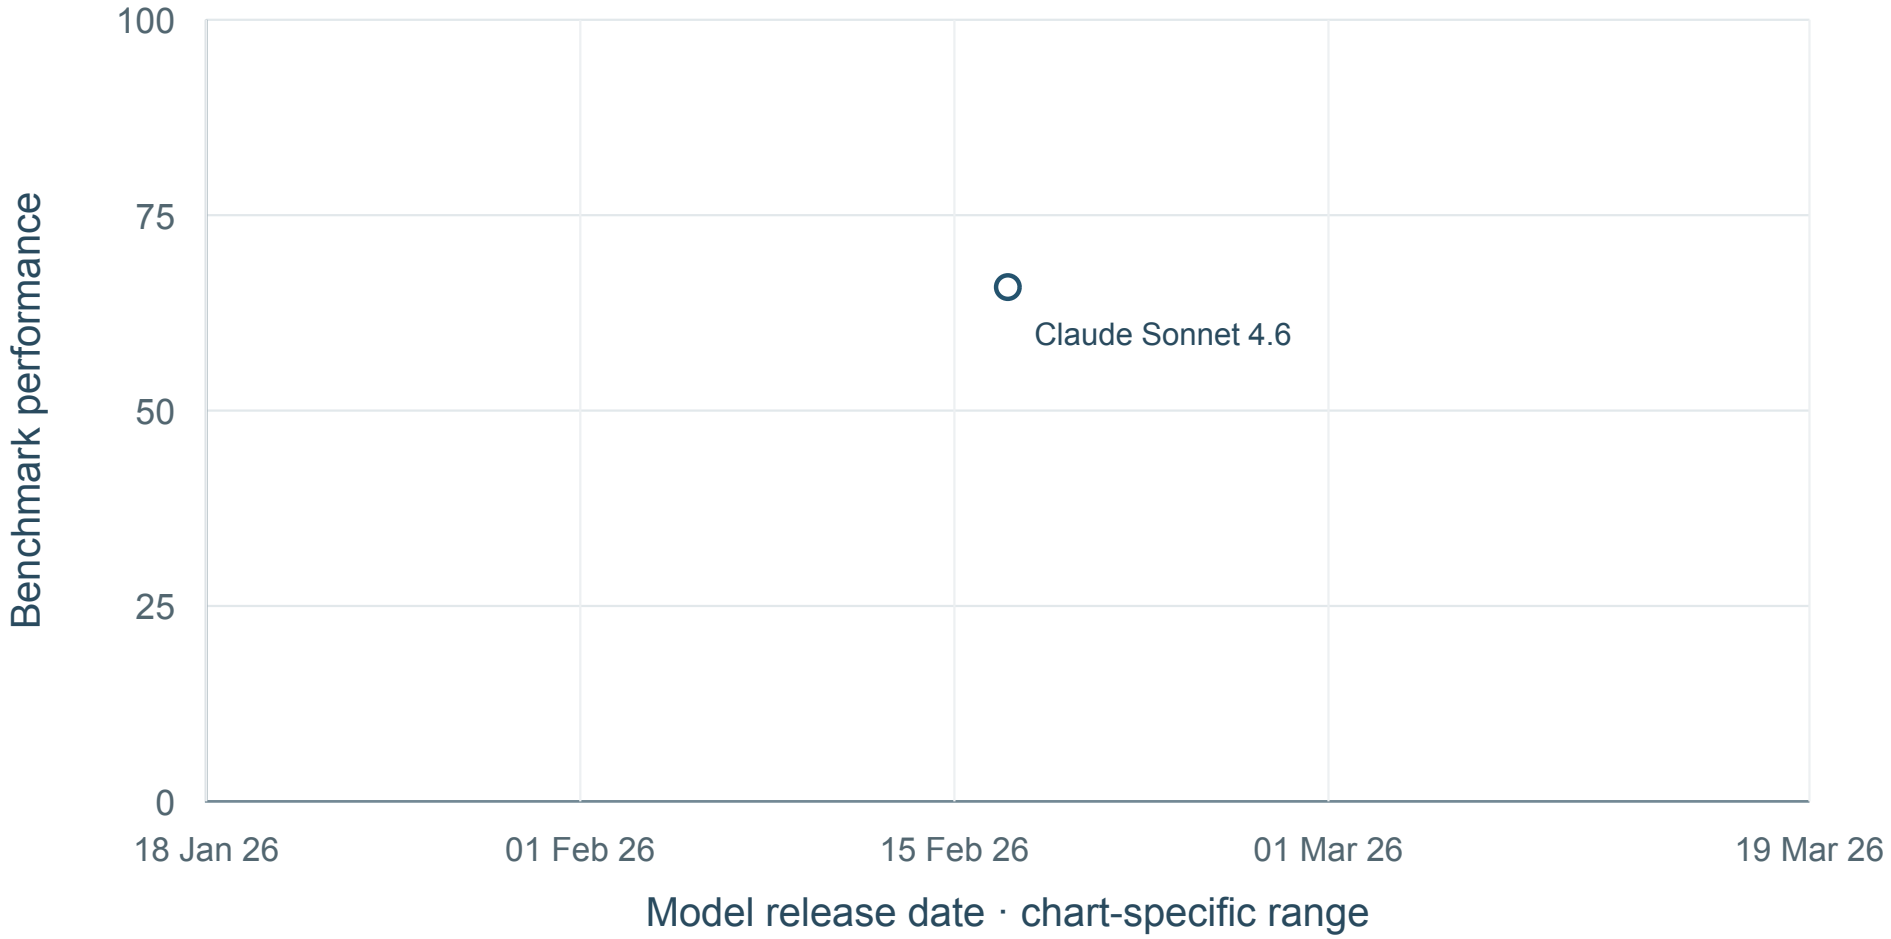

1 shown · 0 undated · 0 definition-held · sources: MC061


No mean curve: Fewer than five dated model configurations.

Result-source references: MC061. Exact point locators and raw values: data/F026_MRCR_values.csv.

Benchmark reference (APA): OpenAI. (n.d.). MRCR: Multi-round coreference resolution [Data set]. Hugging Face. Retrieved October 30, 2026, from https://huggingface.co/datasets/openai/mrcr

MRCR: Match score (%)

64K extended thinking; MC062 Long-context table, Section 2.18; MRCR v2; 8 needles; MRCR v2; 8 needles; (128K,256K] input tokens; 64K extended thinking; mean of five trials. The 1M-bin score

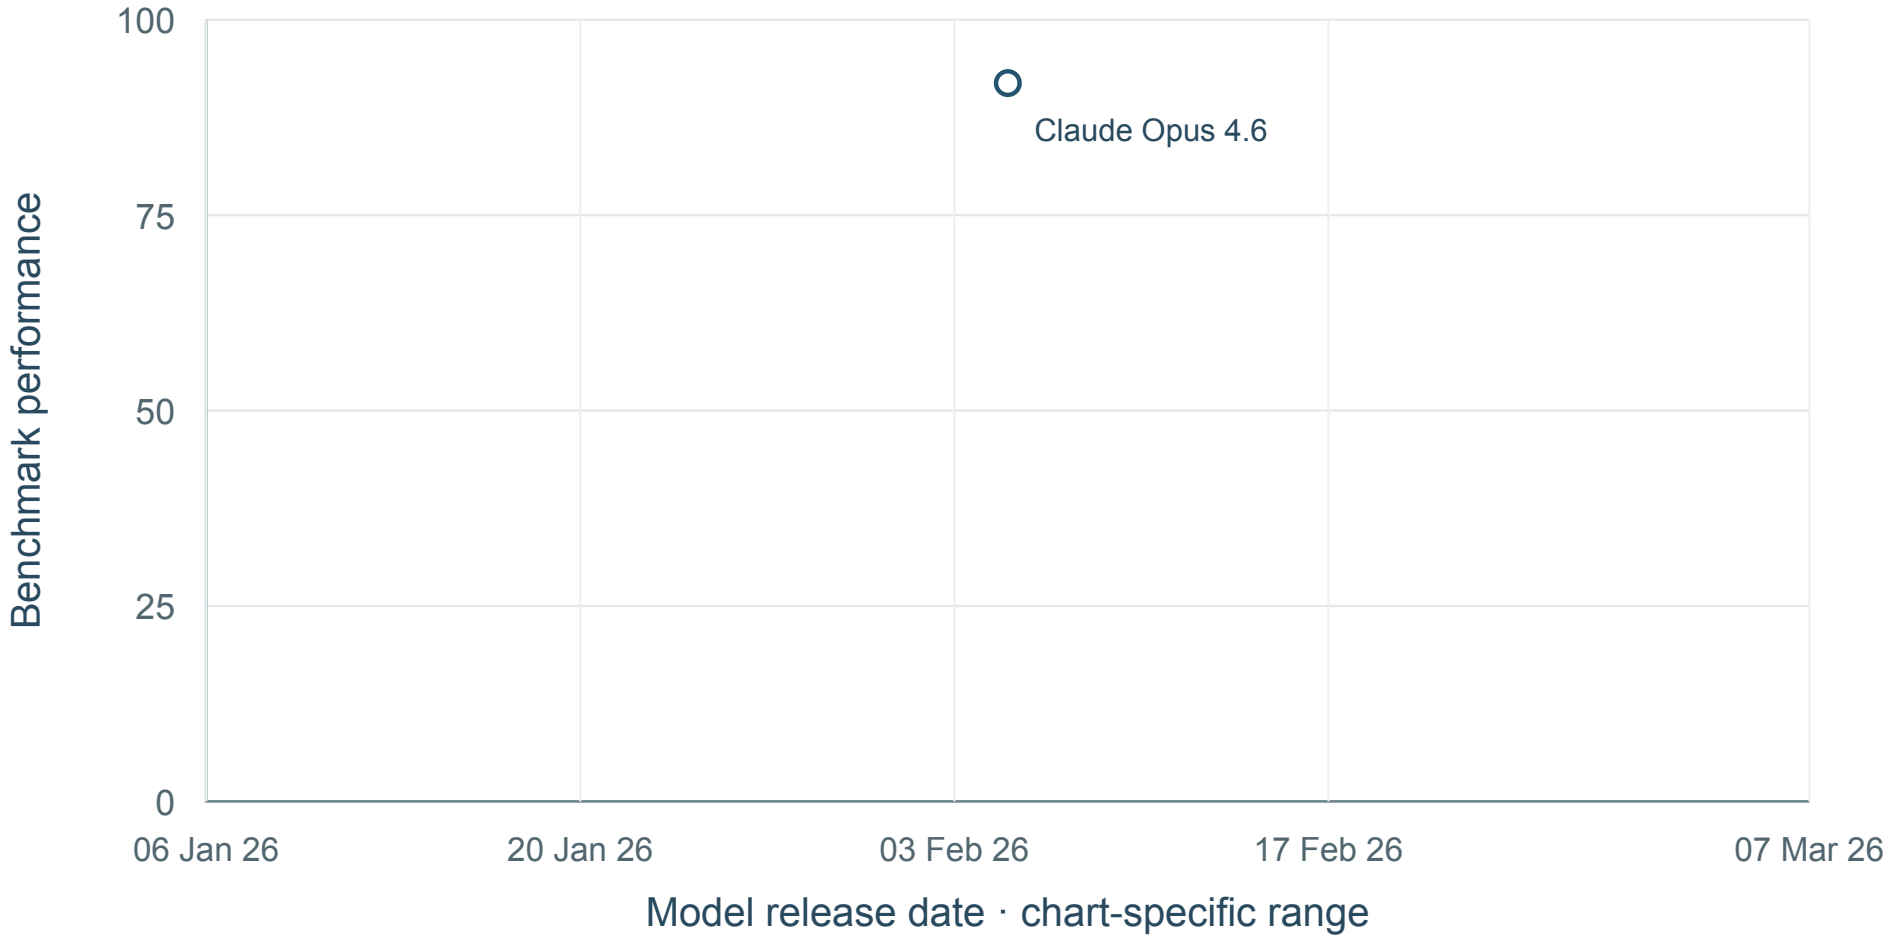

1 shown · 0 undated · 0 definition-held · sources: MC062


No mean curve: Fewer than five dated model configurations.

Result-source references: MC062. Exact point locators and raw values: data/F026_MRCR_values.csv.

Benchmark reference (APA): OpenAI. (n.d.). MRCR: Multi-round coreference resolution [Data set]. Hugging Face. Retrieved October 30, 2026, from https://huggingface.co/datasets/openai/mrcr

MRCR: Match score (%)

Adaptive thinking; max effort; MC062 Long-context table, Section 2.18; MRCR v2; 8 needles; MRCR v2; 8 needles; (128K,256K] input tokens; Adaptive thinking, max effort; mean of five trials. The

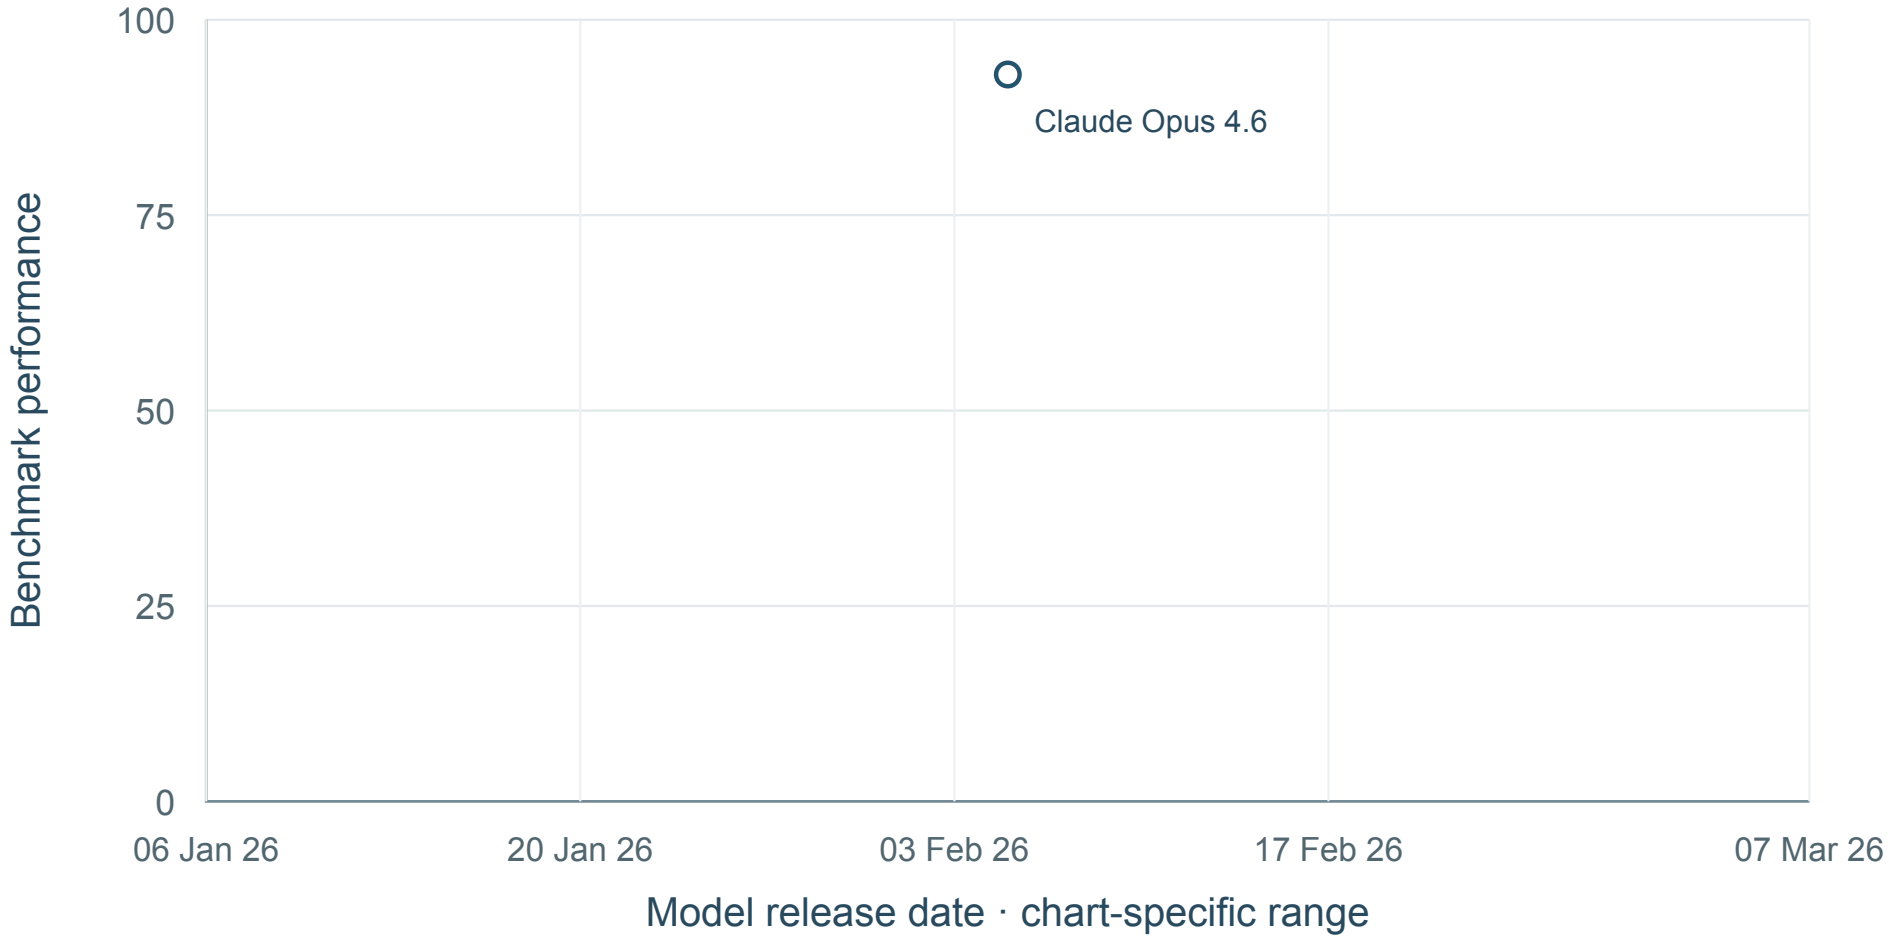

1 shown · 0 undated · 0 definition-held · sources: MC062


No mean curve: Fewer than five dated model configurations.

Result-source references: MC062. Exact point locators and raw values: data/F026_MRCR_values.csv.

Benchmark reference (APA): OpenAI. (n.d.). MRCR: Multi-round coreference resolution [Data set]. Hugging Face. Retrieved October 30, 2026, from https://huggingface.co/datasets/openai/mrcr

MRCR: Match score (%)

64K extended thinking; MC062 Long-context table, Section 2.18; MRCR v2; 8 needles; MRCR v2; 8 needles; (524K,1024K] input tokens; 64K extended thinking; mean of five trials. The 1M-bin score

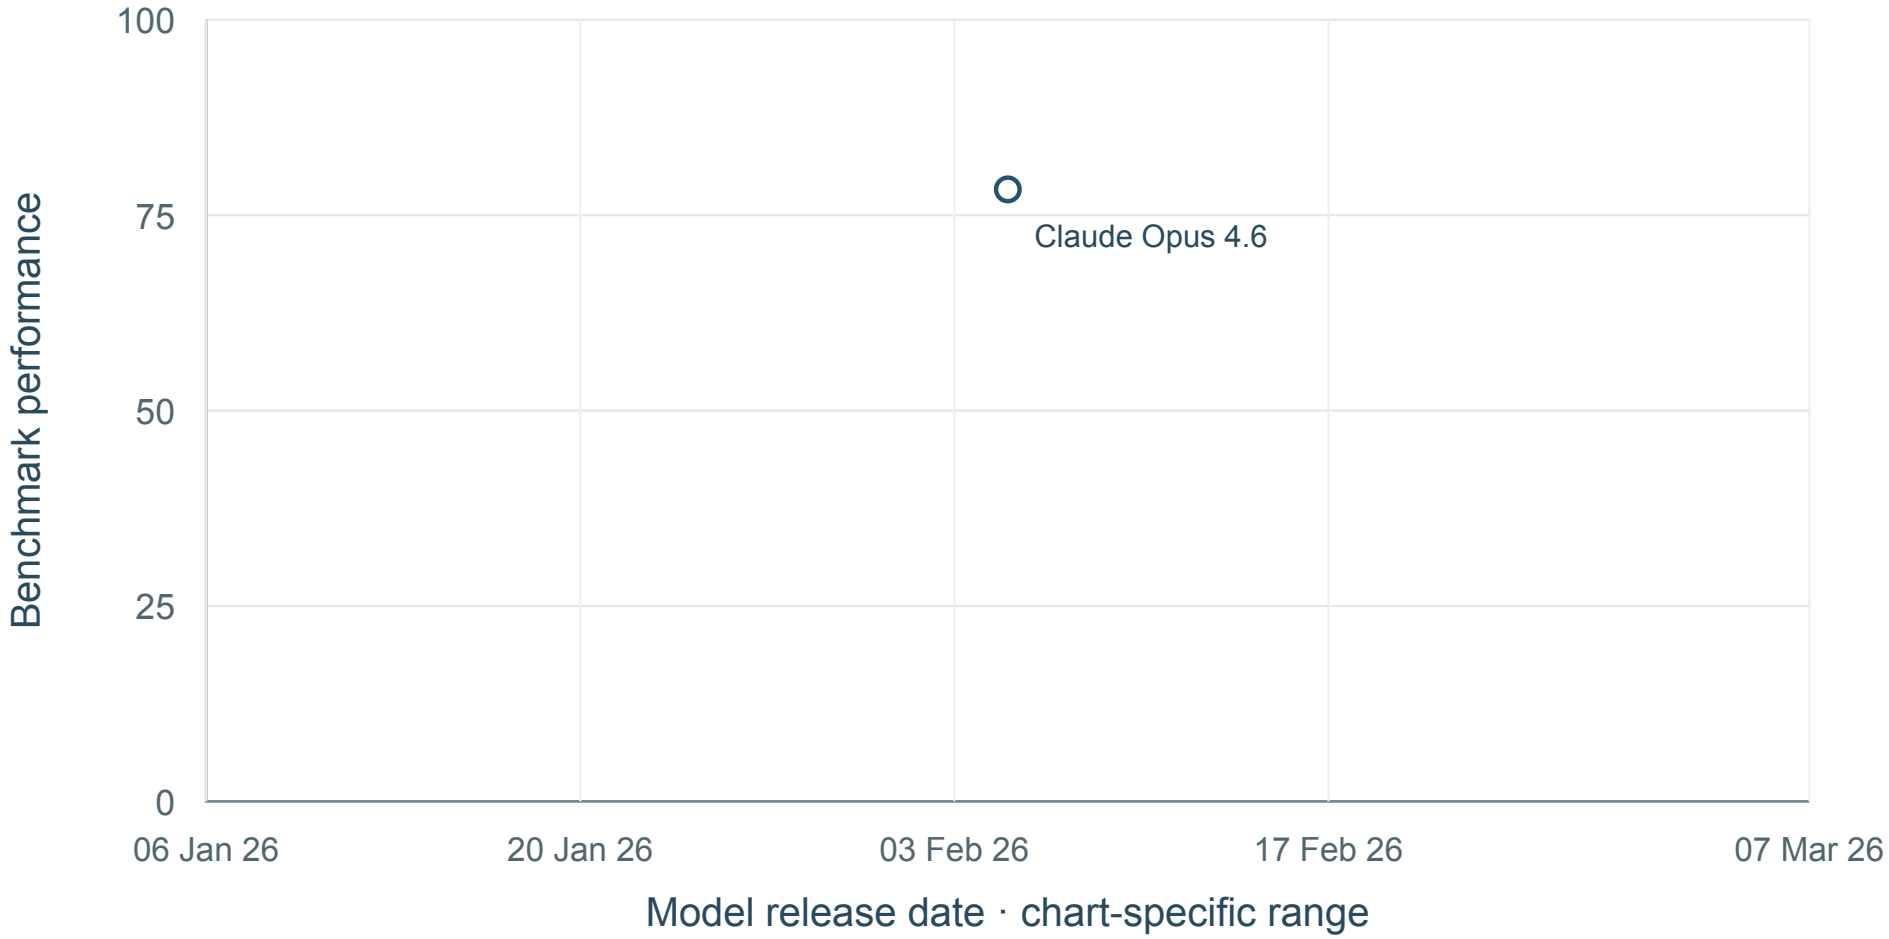

1 shown · 0 undated · 0 definition-held · sources: MC062


No mean curve: Fewer than five dated model configurations.

Result-source references: MC062. Exact point locators and raw values: data/F026_MRCR_values.csv.

Benchmark reference (APA): OpenAI. (n.d.). MRCR: Multi-round coreference resolution [Data set]. Hugging Face. Retrieved October 30, 2026, from https://huggingface.co/datasets/openai/mrcr

MRCR: Match score (%)

Adaptive thinking; max effort; MC062 Long-context table, Section 2.18; MRCR v2; 8 needles; MRCR v2; 8 needles; (524K,1024K] input tokens; Adaptive thinking, max effort; mean of five trials. The

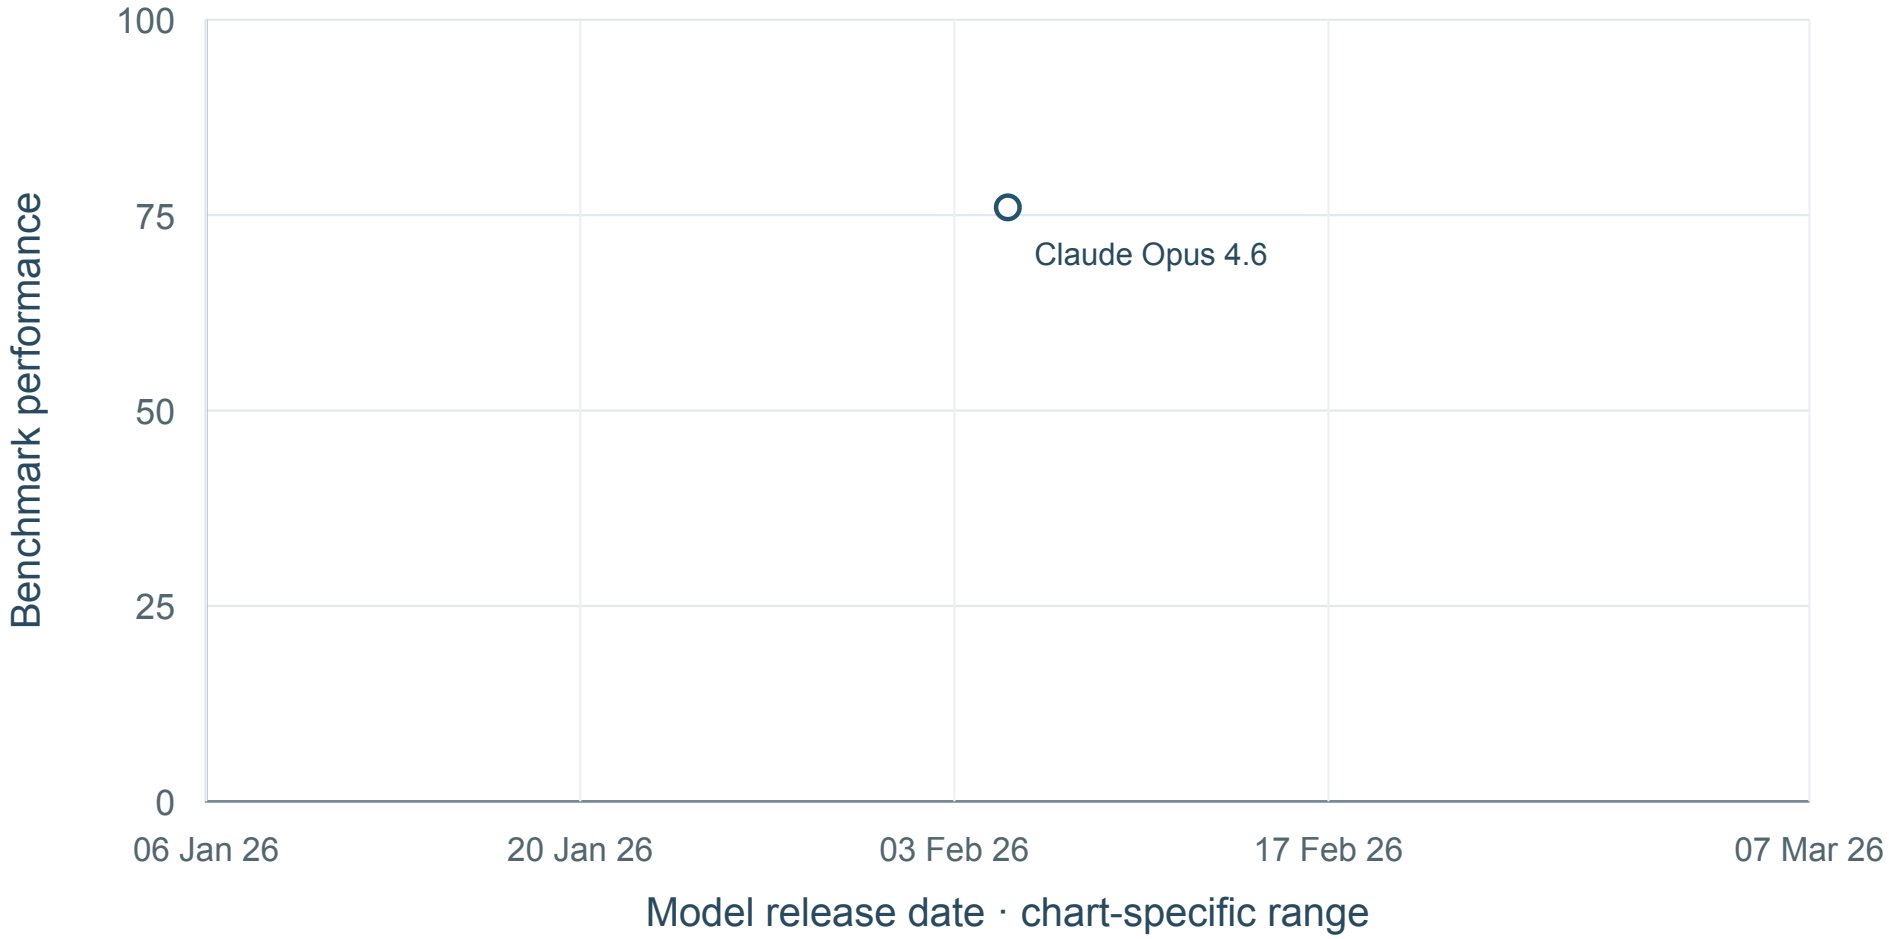

1 shown · 0 undated · 0 definition-held · sources: MC062


No mean curve: Fewer than five dated model configurations.

Result-source references: MC062. Exact point locators and raw values: data/F026_MRCR_values.csv.

Benchmark reference (APA): OpenAI. (n.d.). MRCR: Multi-round coreference resolution [Data set]. Hugging Face. Retrieved October 30, 2026, from https://huggingface.co/datasets/openai/mrcr

MRCR: Match score (%)

64K extended thinking; MC061 Footnote 15; MRCR v2; 8 needles; API-reproducible subset; MRCR v2; 8 needles; API-reproducible subset; Subset within public 1M token API limit; n=54 problems; 64K

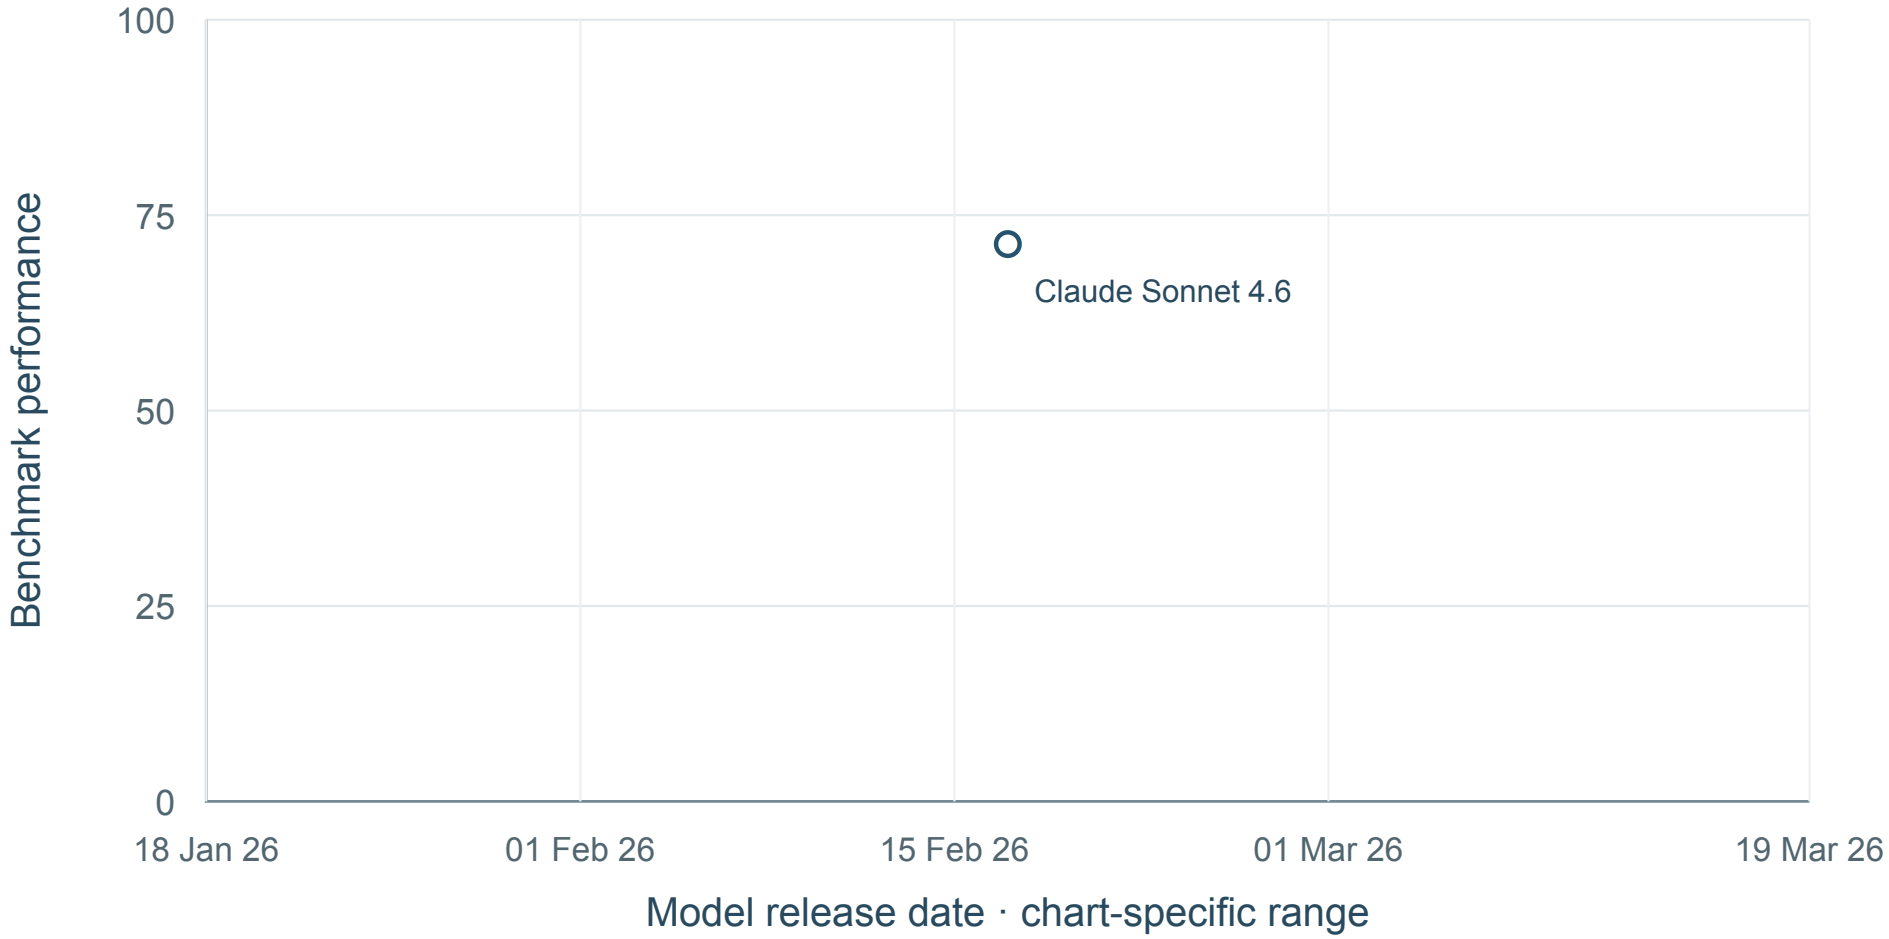

1 shown · 0 undated · 0 definition-held · sources: MC061


No mean curve: Fewer than five dated model configurations.

Result-source references: MC061. Exact point locators and raw values: data/F026_MRCR_values.csv.

Benchmark reference (APA): OpenAI. (n.d.). MRCR: Multi-round coreference resolution [Data set]. Hugging Face. Retrieved October 30, 2026, from https://huggingface.co/datasets/openai/mrcr

MRCR: Match score (%)

Adaptive thinking; max effort; MC061 Footnote 15; MRCR v2; 8 needles; API-reproducible subset;
MRCR v2; 8 needles; API-reproducible subset; Subset within public 1M token API limit; n=29

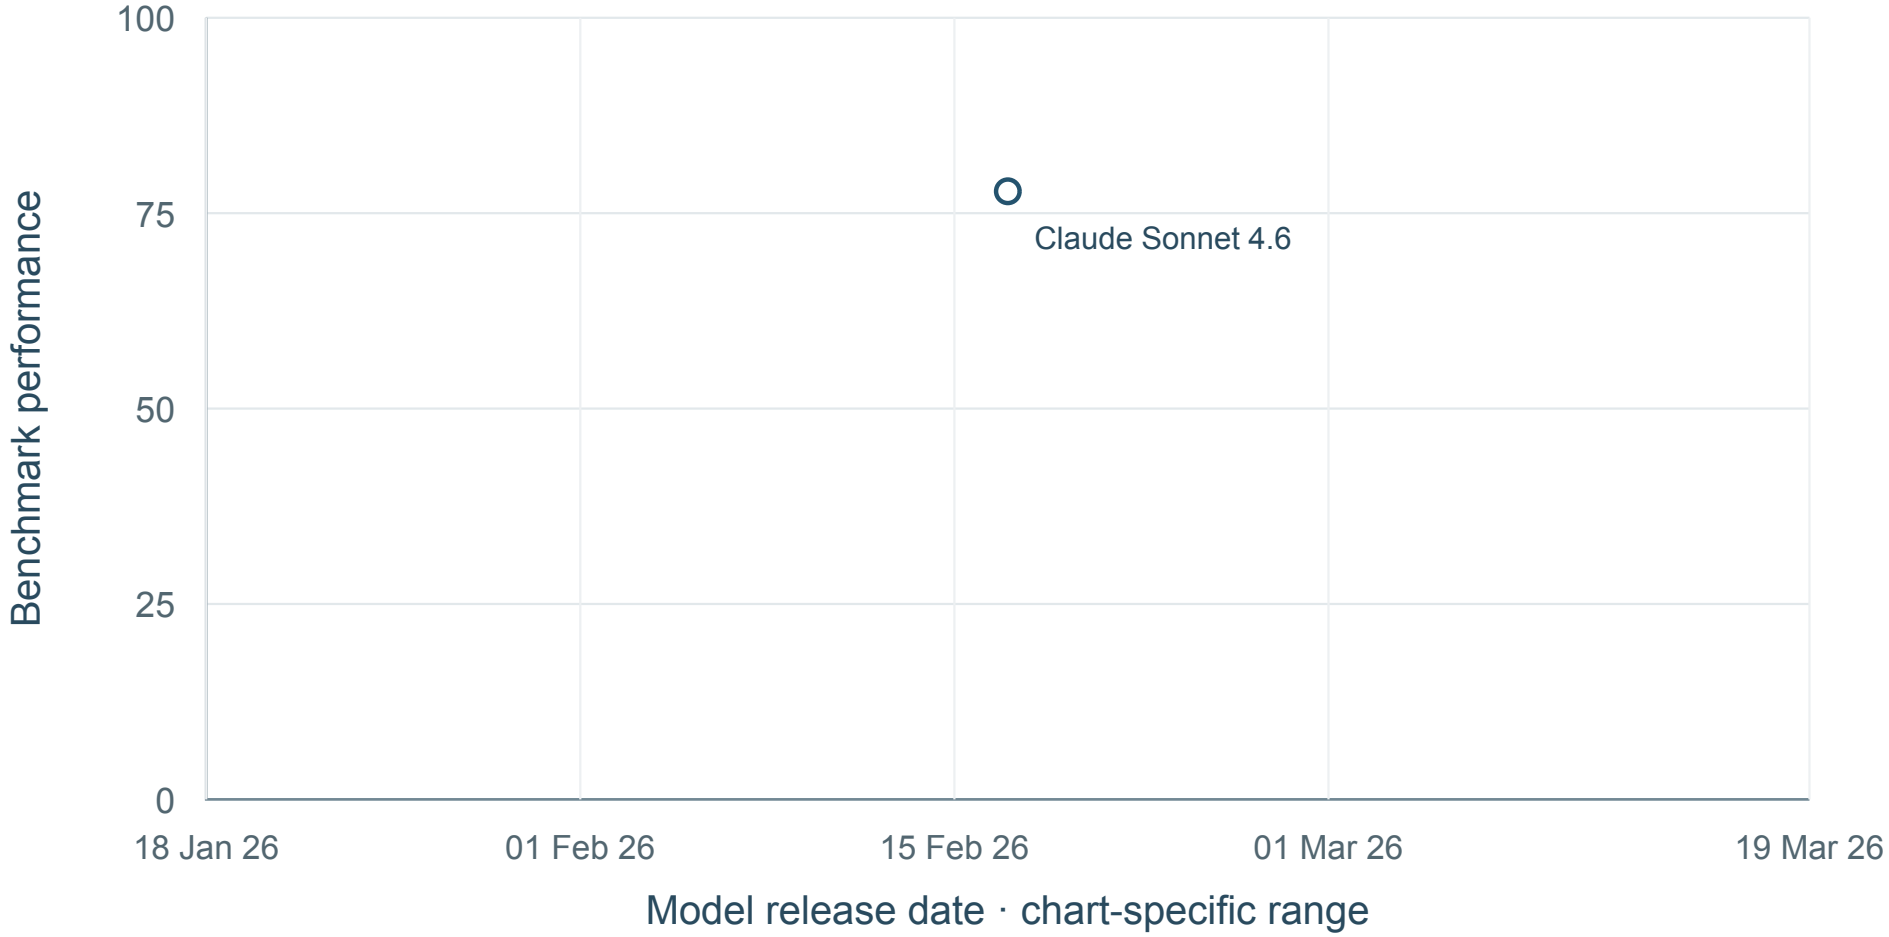

1 shown · 0 undated · 0 definition-held · sources: MC061

No mean curve: Fewer than five dated model configurations.

Result-source references: MC061. Exact point locators and raw values: data/F026_MRCR_values.csv.

Benchmark reference (APA): OpenAI. (n.d.). MRCR: Multi-round coreference resolution [Data set]. Hugging Face. Retrieved October 30, 2026, from https://huggingface.co/datasets/openai/mrcr

F031 GSM-Symbolic

Arithmetic robustness under symbolic and numerical perturbations

50 source values; 0 new; 2 separate conditions; 36 visible time points; 0 definition-held values; 2 visible mean curves.

Benchmark references (APA)

Mirzadeh, I., Alizadeh, K., Shahrokhi, H., Tuzel, O., Bengio, S., & Farajtabar, M. (2024). GSM-Symbolic: Understanding the limitations of mathematical reasoning in large language models. arXiv. https://arxiv.org/abs/2410.05229

Workflow and article scope

Challenges: C

Define variables and coding rules; Interpret evidence and apply coding rules; Transform and calculate values

Template perturbation does not reproduce scientific extraction conditions.

Manuscript anchors: Preparation and reporting, manuscript paragraph 33; Lu and Wang, Challenge E; manuscript paragraphs 20 and 31; Lu and Wang, Challenge C; manuscript paragraphs 15, 17–18 and 33

Result-source references: S039. Full references appear in the final bibliography.


Complete condition inventory

01. Answer accuracy | Original Symbolic; 8-shot
25 values; 18 time points; visible mean curve. Sources: S039.

02. Answer accuracy | Symbolic-NoOp; 8-shot
25 values; 18 time points; visible mean curve. Sources: S039.

GSM-Symbolic: Answer accuracy

Original Symbolic; 8-shot

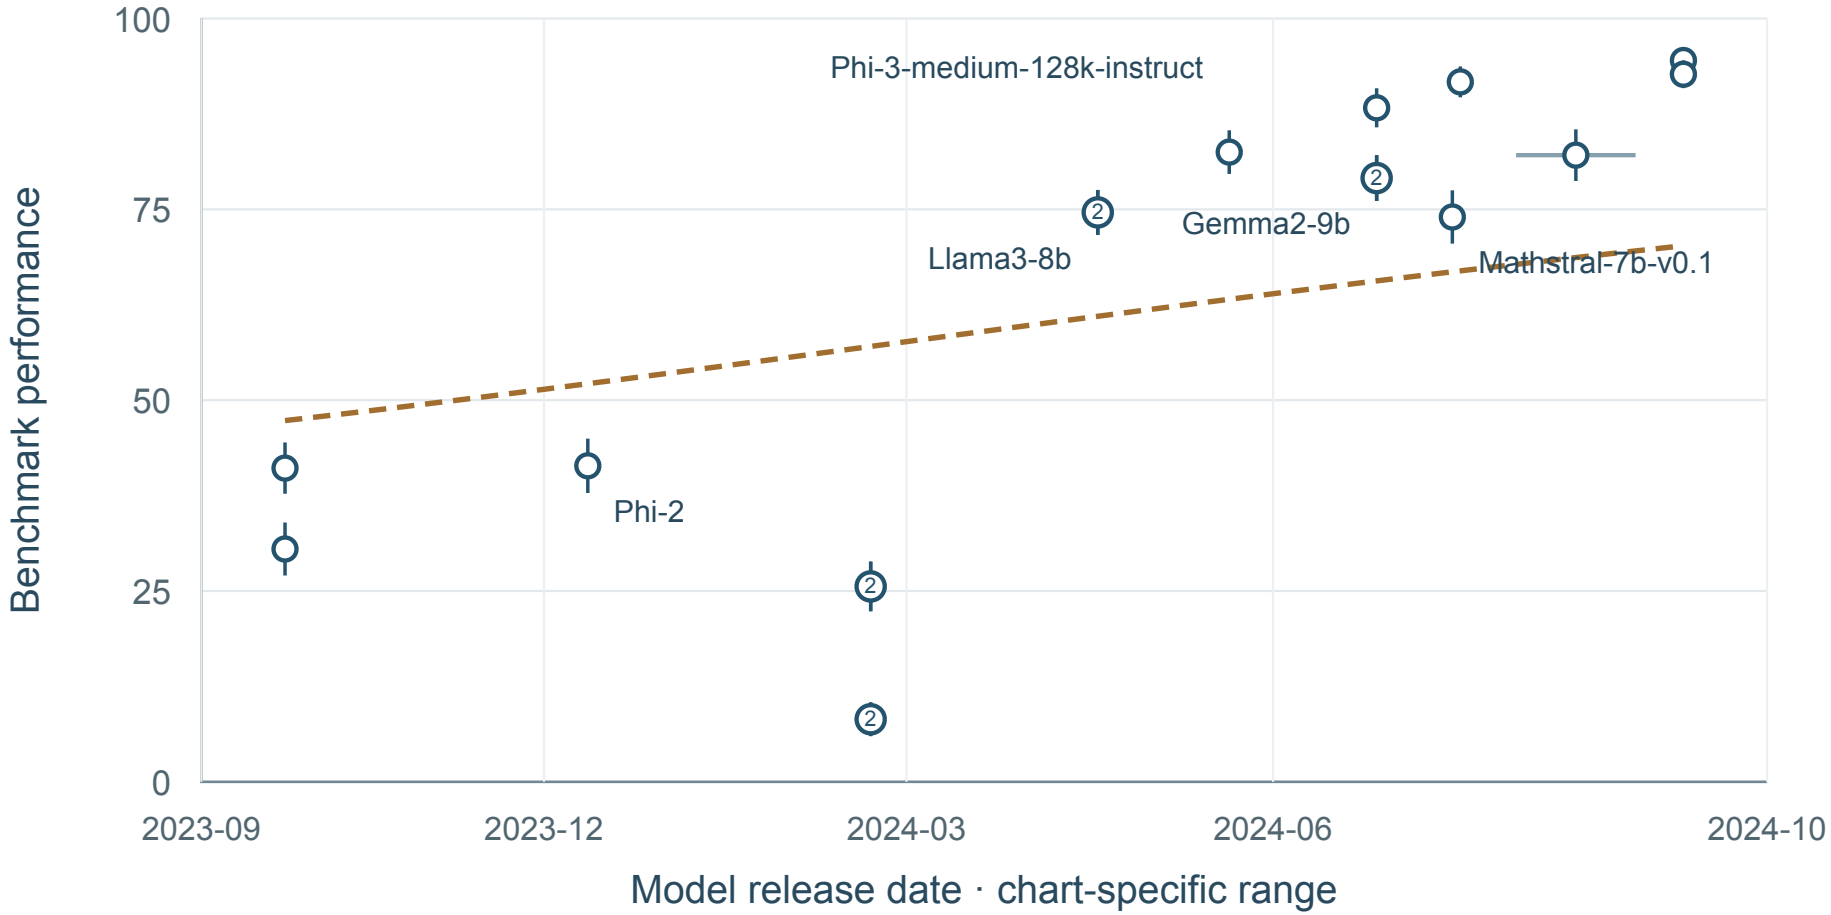

18 shown · 7 undated · 0 definition-held · sources: S039


Smoothed mean · 18 configurations · 10 release dates · 180-day kernel

Result-source references: S039. Exact point locators and raw values: data/F031_GSM_Symbolic_values.csv.

Benchmark reference (APA): Mirzadeh, I., Alizadeh, K., Shahrokhi, H., Tuzel, O., Bengio, S., & Farajtabar, M. (2024). GSM-Symbolic: Understanding the limitations of mathematical reasoning in large language models. arXiv. https://arxiv.org/abs/2410.05229

GSM-Symbolic: Answer accuracy

Symbolic-NoOp; 8-shot

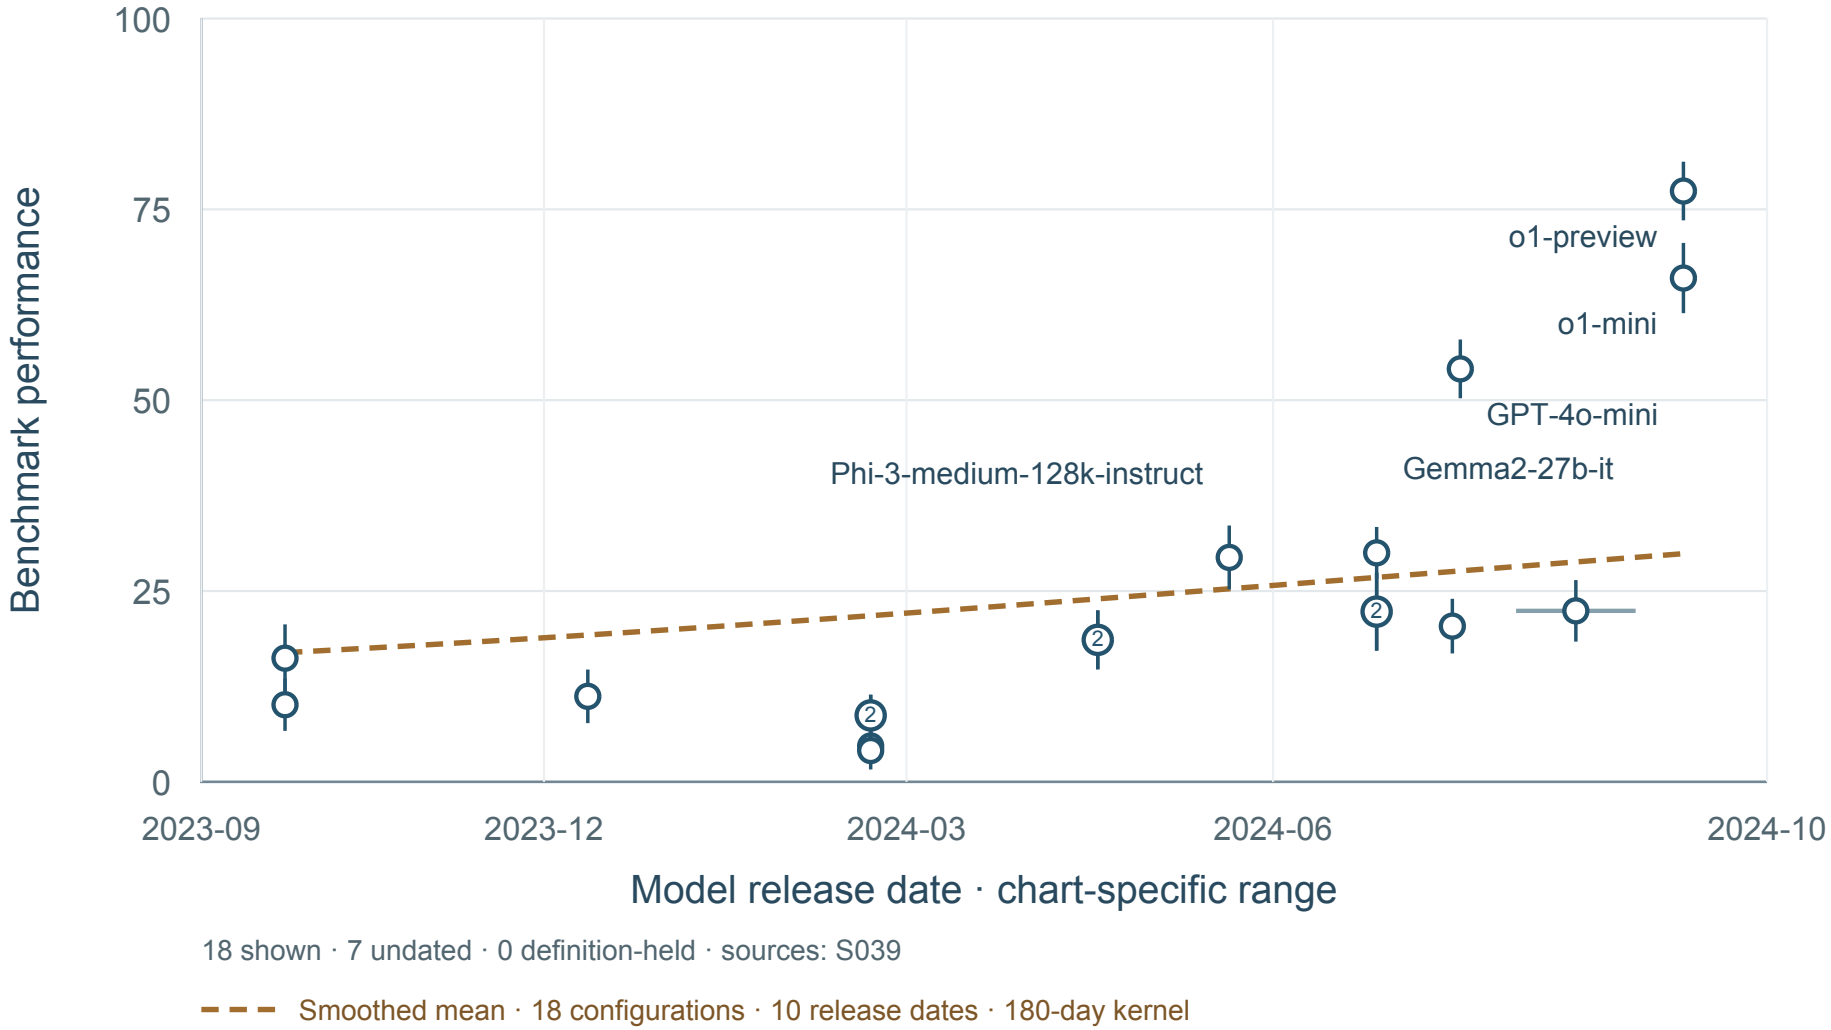

Result-source references: S039. Exact point locators and raw values: data/F031_GSM_Symbolic_values.csv.

Benchmark reference (APA): Mirzadeh, I., Alizadeh, K., Shahrokhi, H., Tuzel, O., Bengio, S., & Farajtabar, M. (2024). GSM-Symbolic: Understanding the limitations of mathematical reasoning in large language models. arXiv. https://arxiv.org/abs/2410.05229

F033 DROP

Discrete reasoning over text passages

24 source values; 18 new; 6 separate conditions; 17 visible time points; 0 definition-held values; 1 visible mean curves.

Benchmark references (APA)

Dua, D., Wang, Y., Dasigi, P., Stanovsky, G., Singh, S., & Gardner, M. (2019). DROP: A reading comprehension benchmark requiring discrete reasoning over paragraphs. In Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers) (pp. 2368–2378). https://doi.org/10.18653/v1/N19-1246

Workflow and article scope

Challenges: B; C

Locate relevant evidence; Bind values to the correct unit; Transform and calculate values

Short-passage reading and arithmetic, not full scientific documents.

Manuscript anchors: Source-based step comparisons, manuscript paragraph 31; Wrong-subgroup example, manuscript paragraph 29; Lu and Wang, Challenge C; manuscript paragraphs 15, 17–18 and 33

Result-source references: S013; MC016; MC023; MC031; MC047; MC076. Full references appear in the final bibliography.

Complete condition inventory

01. F1 | DeepSeek-R1 README fixed comparison; published provider settings
6 values; 6 time points; visible mean curve. Sources: S013.

02. F1 / source-reported score | DROP (3-shot F1); Mode not specified; MC016 M3; DROP
2 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC016.

03. F1 / source-reported score | DROP; Mode not specified; MC023 M3; DROP
5 values; 3 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC023.


04. F1 / source-reported score | DROP * _(F1)_; Mode not specified; MC031 M1; DROP
5 values; 3 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC031.

05. F1 / source-reported score | DROP; Mode not specified; MC047 H1; DROP
5 values; 3 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC047.

06. LLM-judged reference-answer score (%) | Mode not specified; MC076 Table 4; DROP with agentic tool use; Agentic question answering
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC076.

DROP: F1

DeepSeek-R1 README fixed comparison; published provider settings

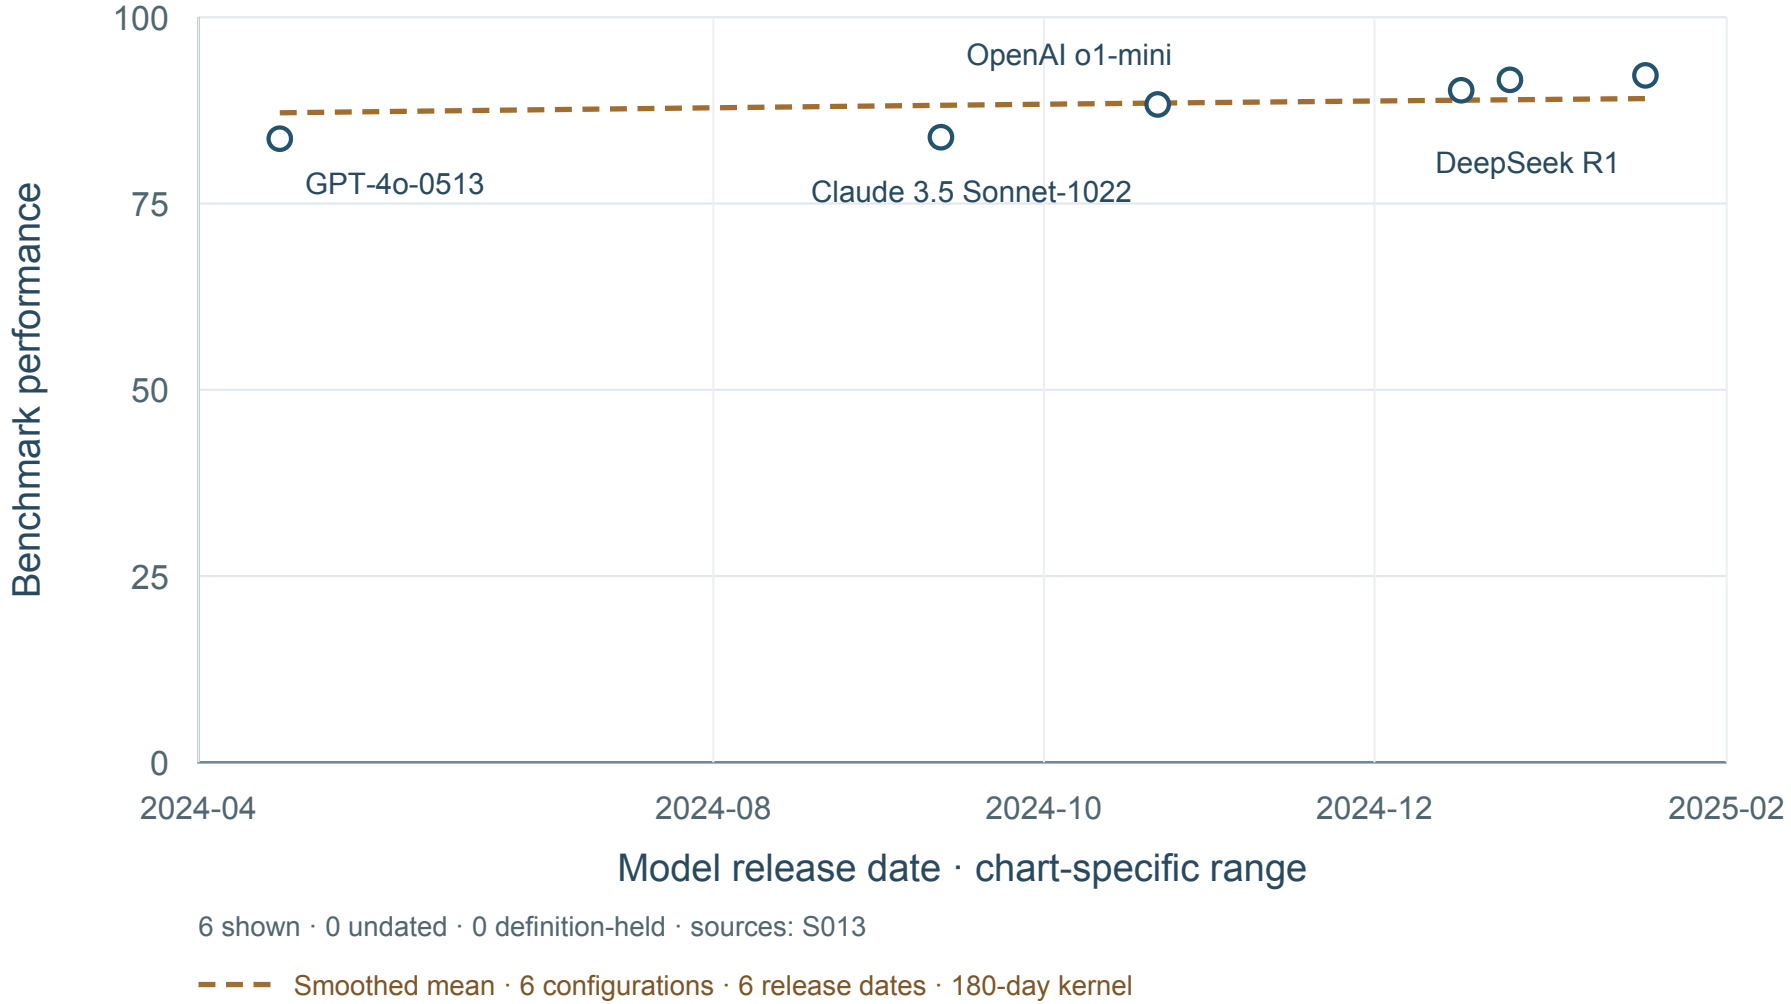


Result-source references: S013. Exact point locators and raw values: data/F033_DROP_values.csv.

Benchmark reference (APA): Dua, D., Wang, Y., Dasigi, P., Stanovsky, G., Singh, S., & Gardner, M. (2019). DROP: A reading comprehension benchmark requiring discrete reasoning over paragraphs. In Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers) (pp. 2368–2378). https://doi.org/10.18653/v1/N19-1246

DROP: F1 / source-reported score

DROP (3-shot F1); Mode not specified; MC016 M3; DROP

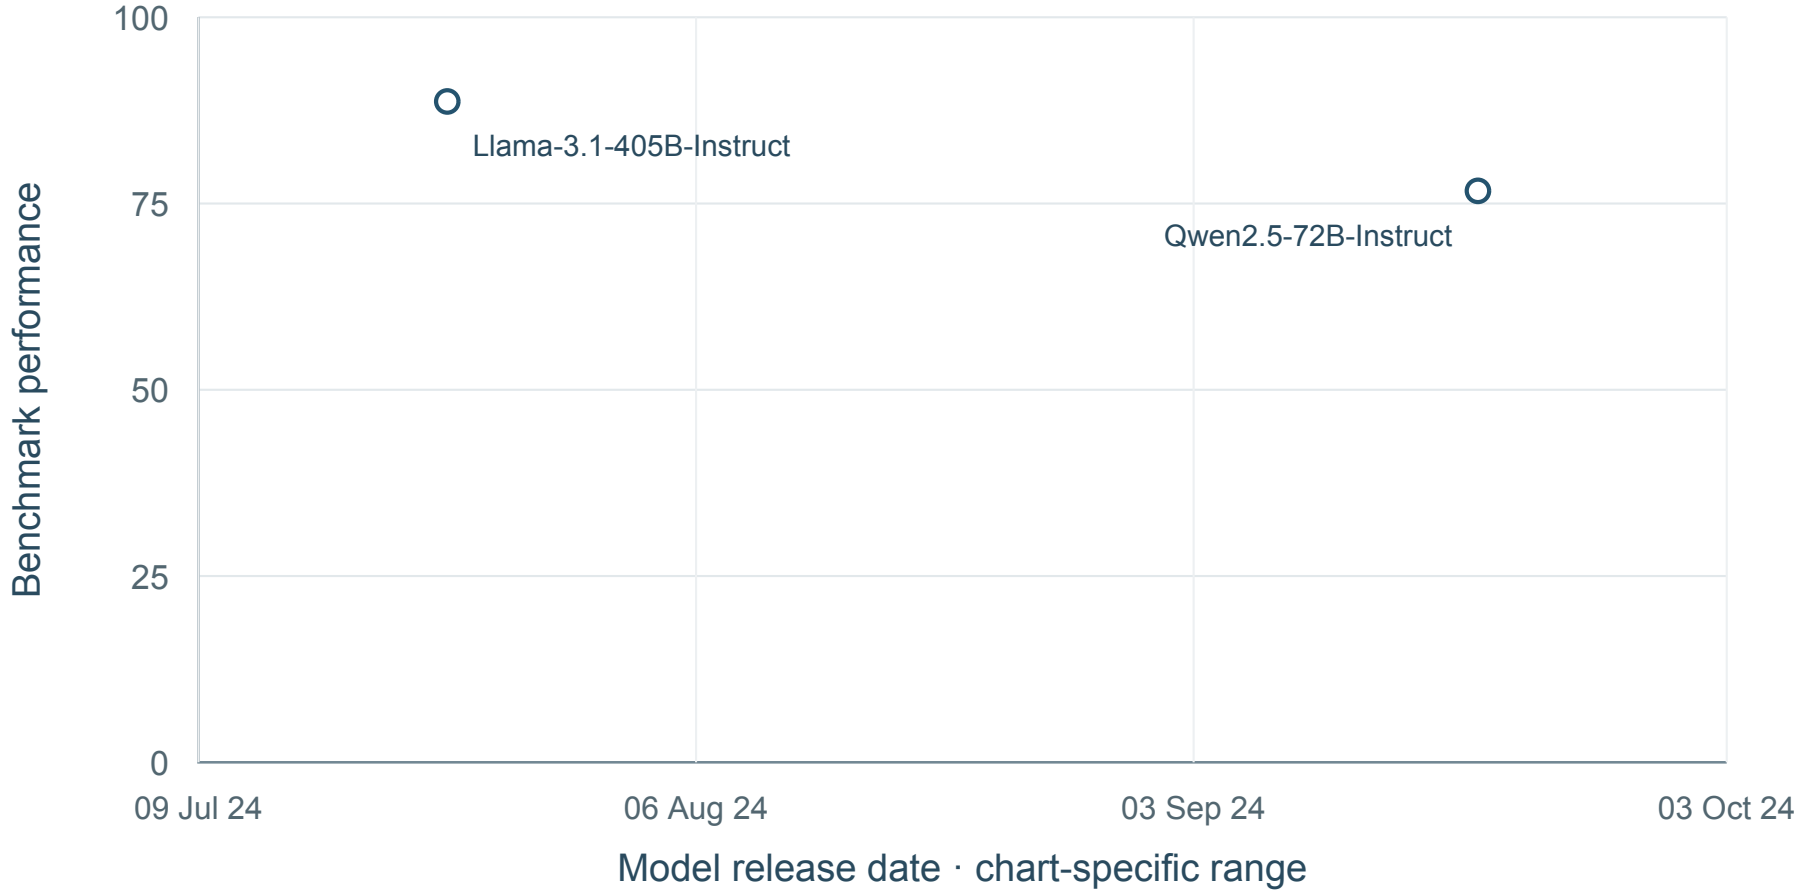

2 shown · 0 undated · 0 definition-held · sources: MC016


No mean curve: Fewer than five dated model configurations.

Result-source references: MC016. Exact point locators and raw values: data/F033_DROP_values.csv.

Benchmark reference (APA): Dua, D., Wang, Y., Dasigi, P., Stanovsky, G., Singh, S., & Gardner, M. (2019). DROP: A reading comprehension benchmark requiring discrete reasoning over paragraphs. In Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers) (pp. 2368–2378). https://doi.org/10.18653/v1/N19-1246

DROP: F1 / source-reported score

DROP; Mode not specified; MC023 M3; DROP

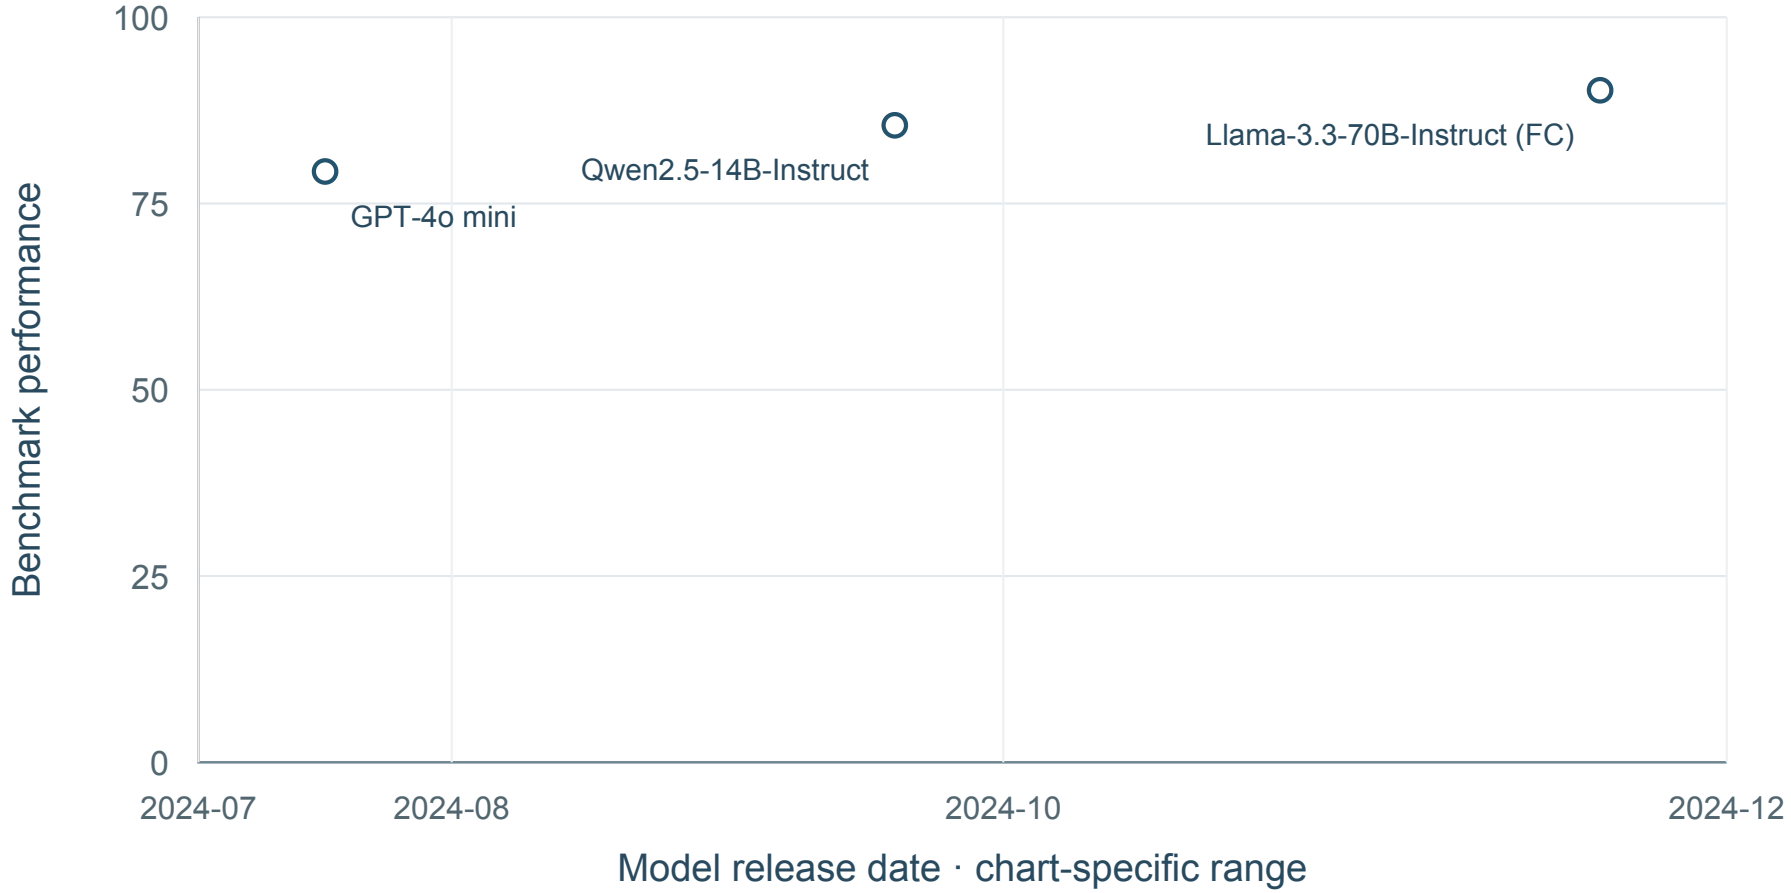

3 shown · 2 undated · 0 definition-held · sources: MC023


No mean curve: Fewer than five dated model configurations.

Result-source references: MC023. Exact point locators and raw values: data/F033_DROP_values.csv.

Benchmark reference (APA): Dua, D., Wang, Y., Dasigi, P., Stanovsky, G., Singh, S., & Gardner, M. (2019). DROP: A reading comprehension benchmark requiring discrete reasoning over paragraphs. In Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers) (pp. 2368–2378). https://doi.org/10.18653/v1/N19-1246

DROP: F1 / source-reported score

DROP * _(F1)_; Mode not specified; MC031 M1; DROP

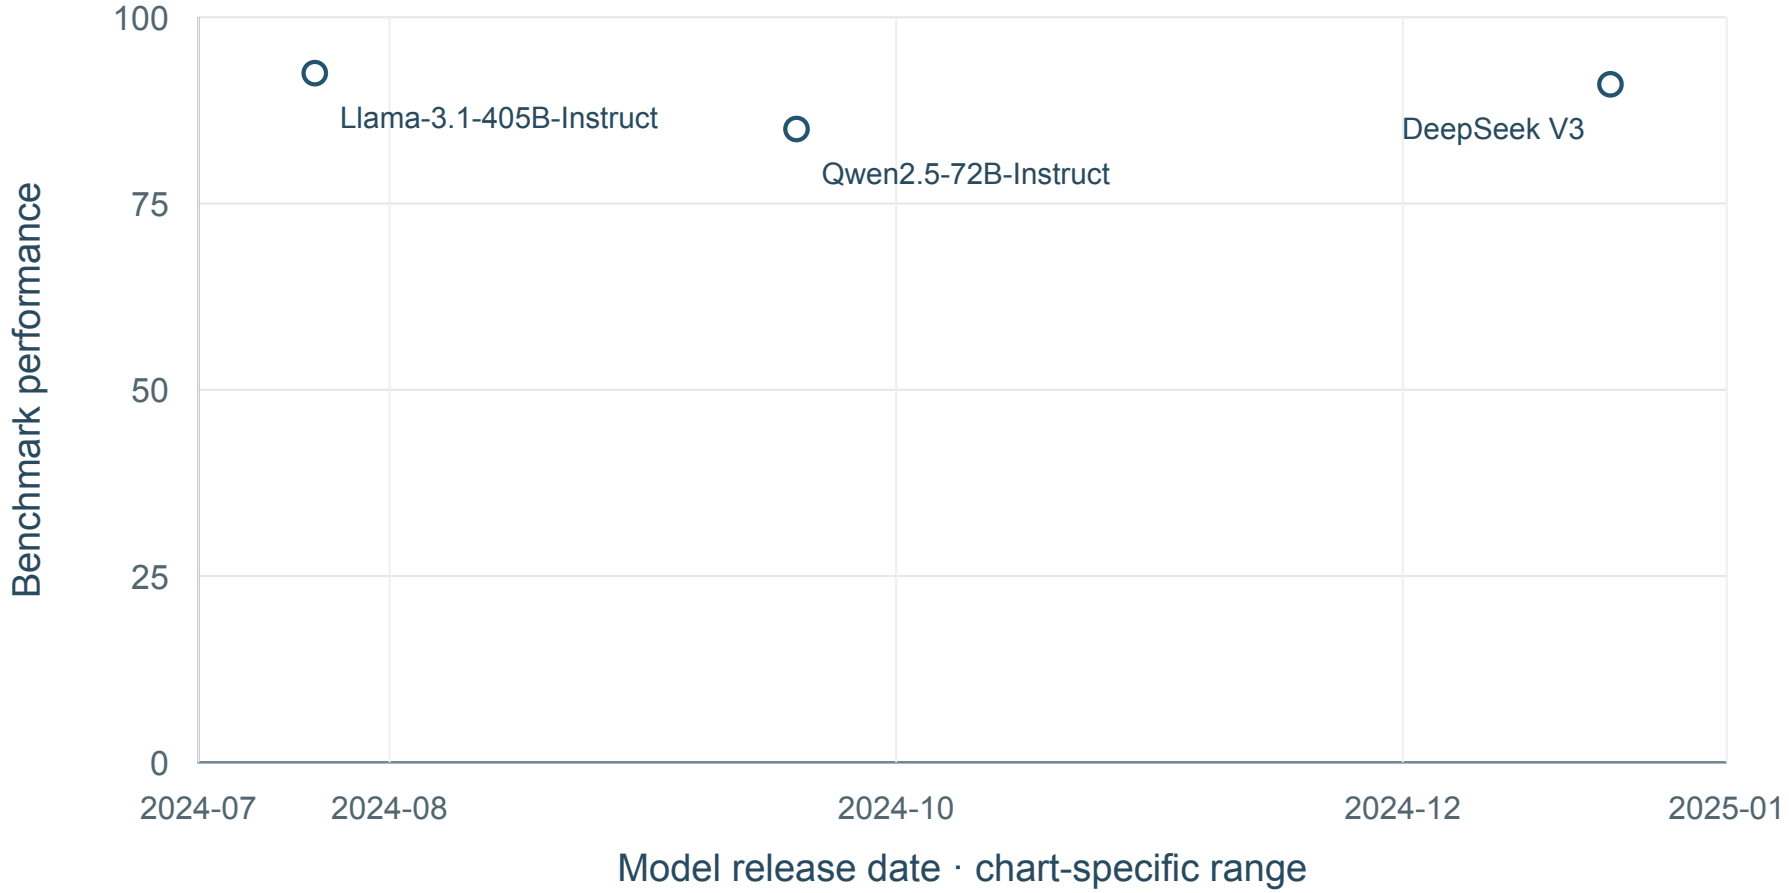

3 shown · 2 undated · 0 definition-held · sources: MC031


No mean curve: Fewer than five dated model configurations.

Result-source references: MC031. Exact point locators and raw values: data/F033_DROP_values.csv.

Benchmark reference (APA): Dua, D., Wang, Y., Dasigi, P., Stanovsky, G., Singh, S., & Gardner, M. (2019). DROP: A reading comprehension benchmark requiring discrete reasoning over paragraphs. In Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers) (pp. 2368–2378). https://doi.org/10.18653/v1/N19-1246

DROP: F1 / source-reported score

DROP; Mode not specified; MC047 H1; DROP

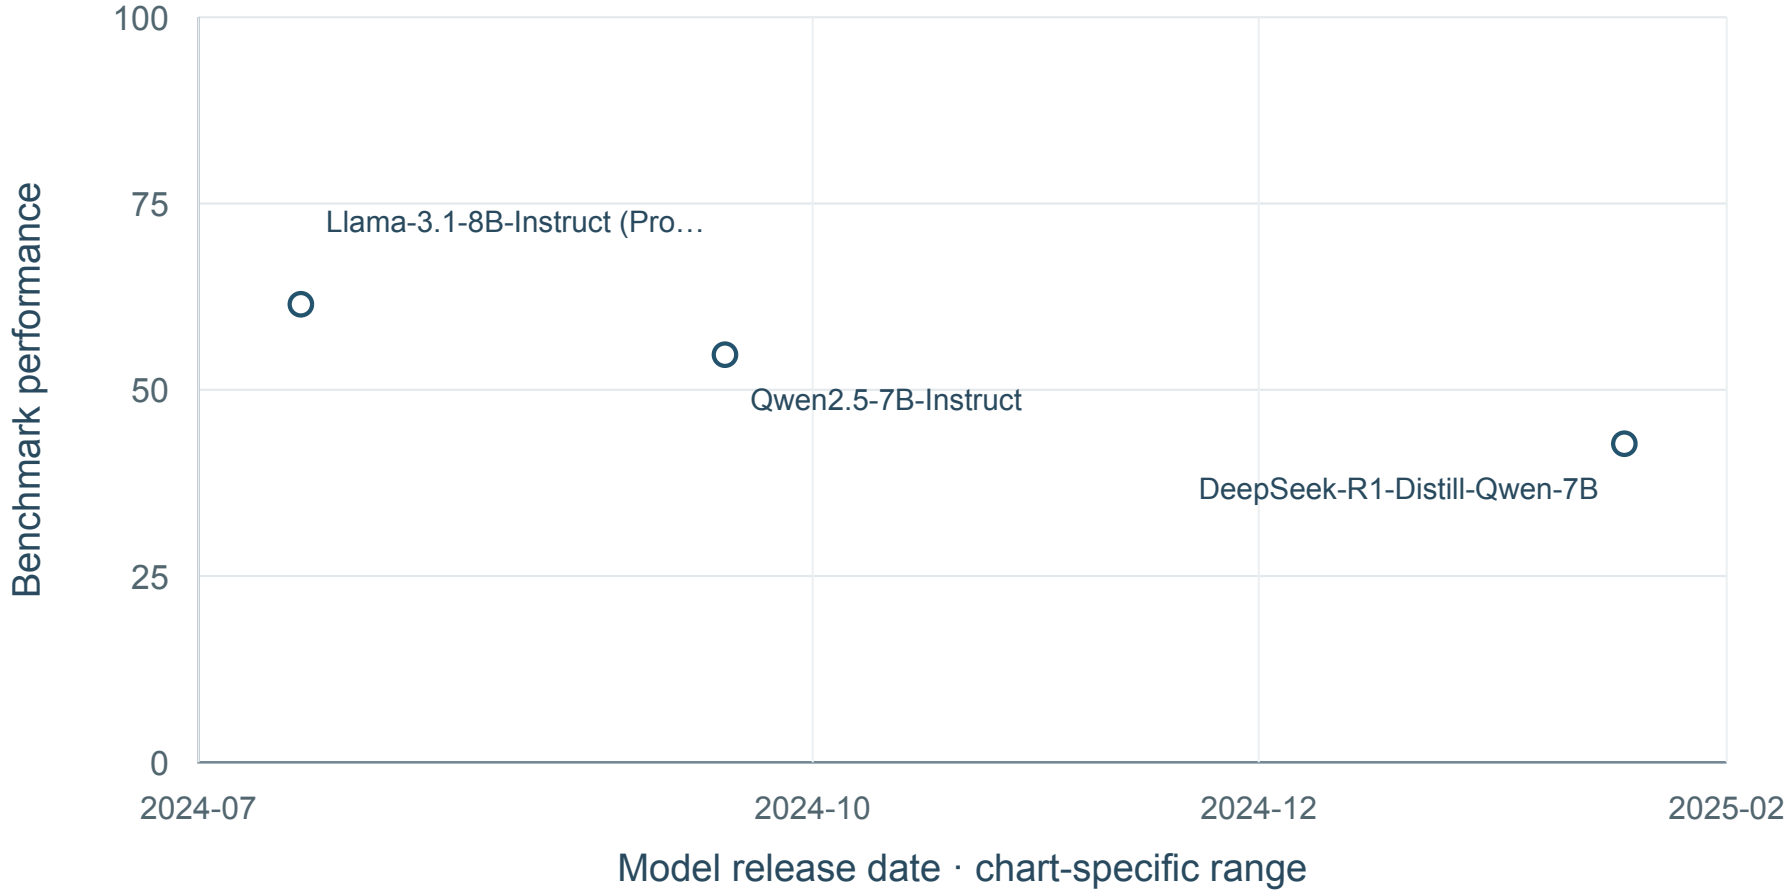

3 shown · 2 undated · 0 definition-held · sources: MC047

No mean curve: Fewer than five dated model configurations.

Result-source references: MC047. Exact point locators and raw values: data/F033_DROP_values.csv.

Benchmark reference (APA): Dua, D., Wang, Y., Dasigi, P., Stanovsky, G., Singh, S., & Gardner, M. (2019). DROP: A reading comprehension benchmark requiring discrete reasoning over paragraphs. In Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers) (pp. 2368–2378). https://doi.org/10.18653/v1/N19-1246

F034 FRAMES

Factuality, retrieval and multi-hop reasoning

8 source values; 3 new; 3 separate conditions; 8 visible time points; 0 definition-held values; 1 visible mean curves.

Benchmark references (APA)

Krishna, S., Krishna, K., Mohananey, A., Schwarcz, S., Stambler, A., Upadhyay, S., & Faruqui, M. (2024). Fact, fetch, and reason: A unified evaluation of retrieval-augmented generation. arXiv. https://arxiv.org/abs/2409.12941

Workflow and article scope

Challenges: B; D

Locate relevant evidence; Coordinate retrieval, tools and intermediate steps; Verify source support and detect errors

Open-domain retrieval; not directly empirical data extraction.

Manuscript anchors: Source-based step comparisons, manuscript paragraph 31; Lu and Wang, Challenge D; manuscript paragraphs 9, 15–18 and 31; Product accuracy and auditability, manuscript paragraphs 28–29

Result-source references: S013; MC015; MC016. Full references appear in the final bibliography.

Complete condition inventory


01. Answer accuracy | DeepSeek-R1 README fixed comparison; published provider settings
5 values; 5 time points; visible mean curve. Sources: S013.

02. Accuracy | FRAMES (Acc.); Mode not specified; MC015 M1; FRAMES
1 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC015.

03. Accuracy | FRAMES (Acc.); Mode not specified; MC016 M3; FRAMES
2 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC016.

FRAMES: Answer accuracy

DeepSeek-R1 README fixed comparison; published provider settings

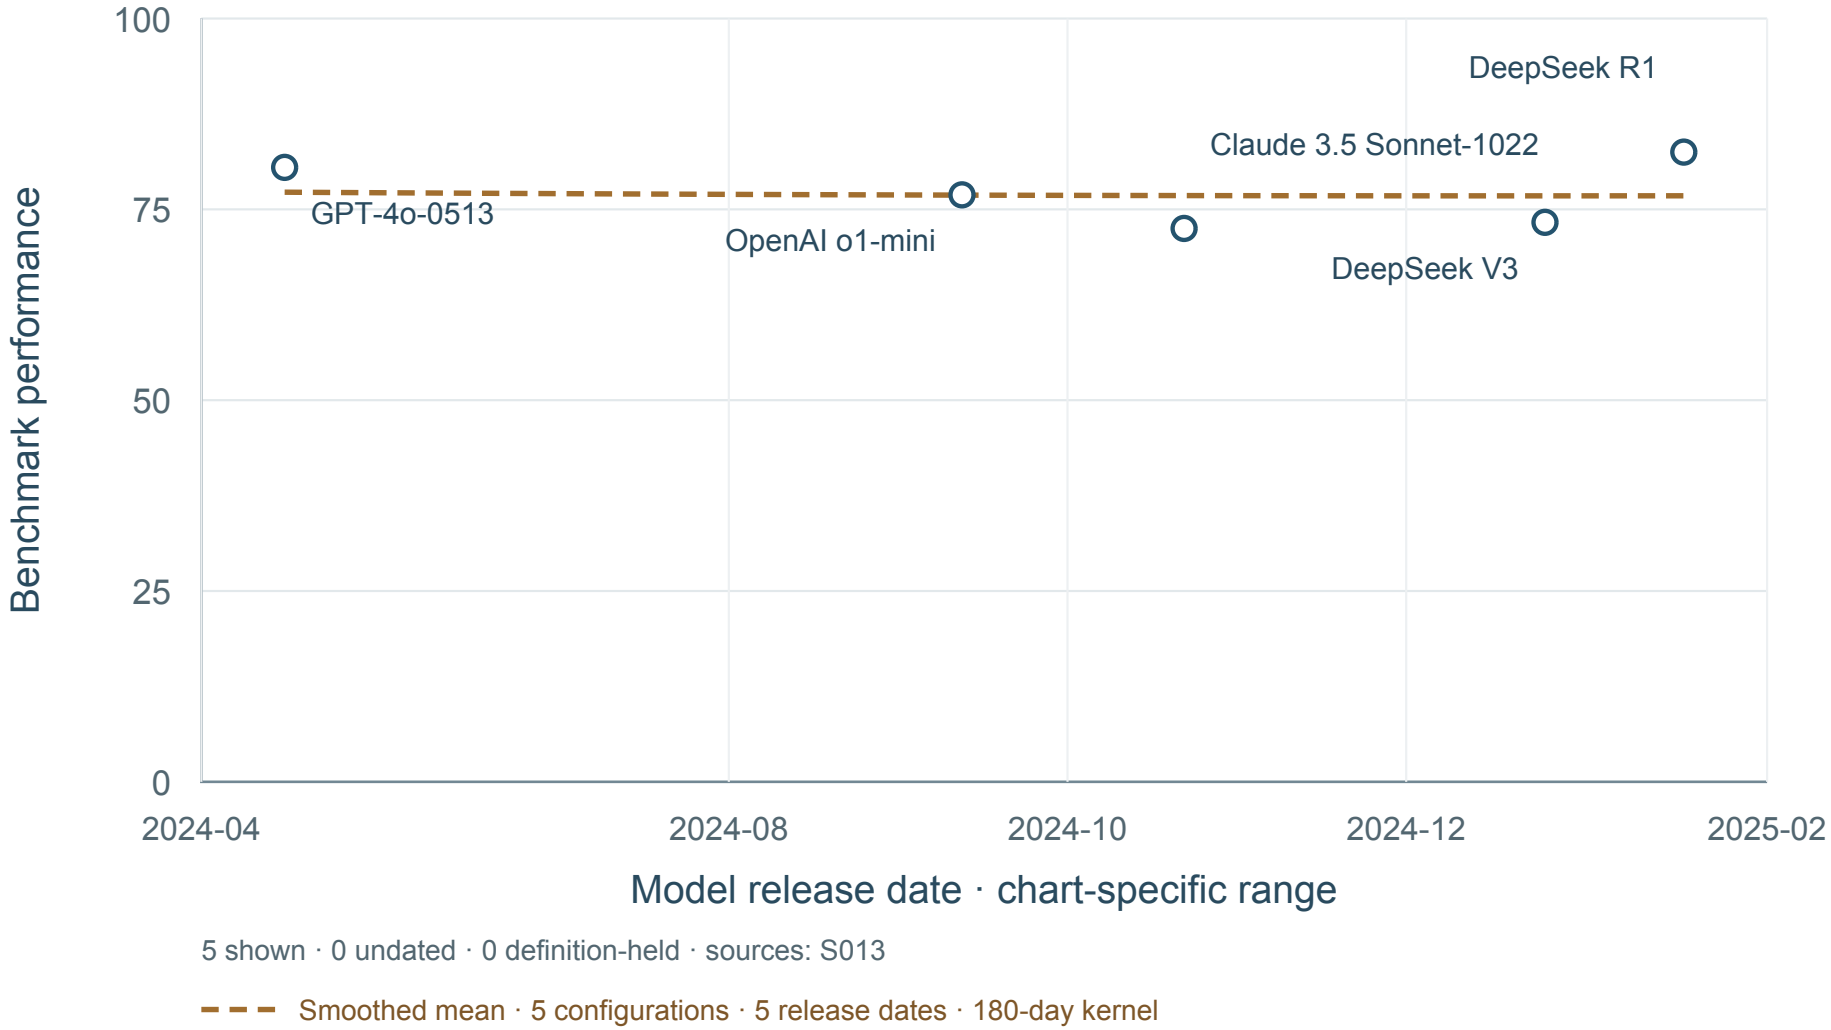

5 shown · 0 undated · 0 definition-held · sources: S013


Smoothed mean · 5 configurations · 5 release dates · 180-day kernel

Result-source references: S013. Exact point locators and raw values: data/F034_FRAMES_values.csv.

Benchmark reference (APA): Krishna, S., Krishna, K., Mohananey, A., Schwarcz, S., Stambler, A., Upadhyay, S., & Faruqui, M. (2024). Fact, fetch, and reason: A unified evaluation of retrieval-augmented generation. arXiv. https://arxiv.org/abs/2409.12941

FRAMES: Accuracy

FRAMES (Acc.); Mode not specified; MC015 M1; FRAMES

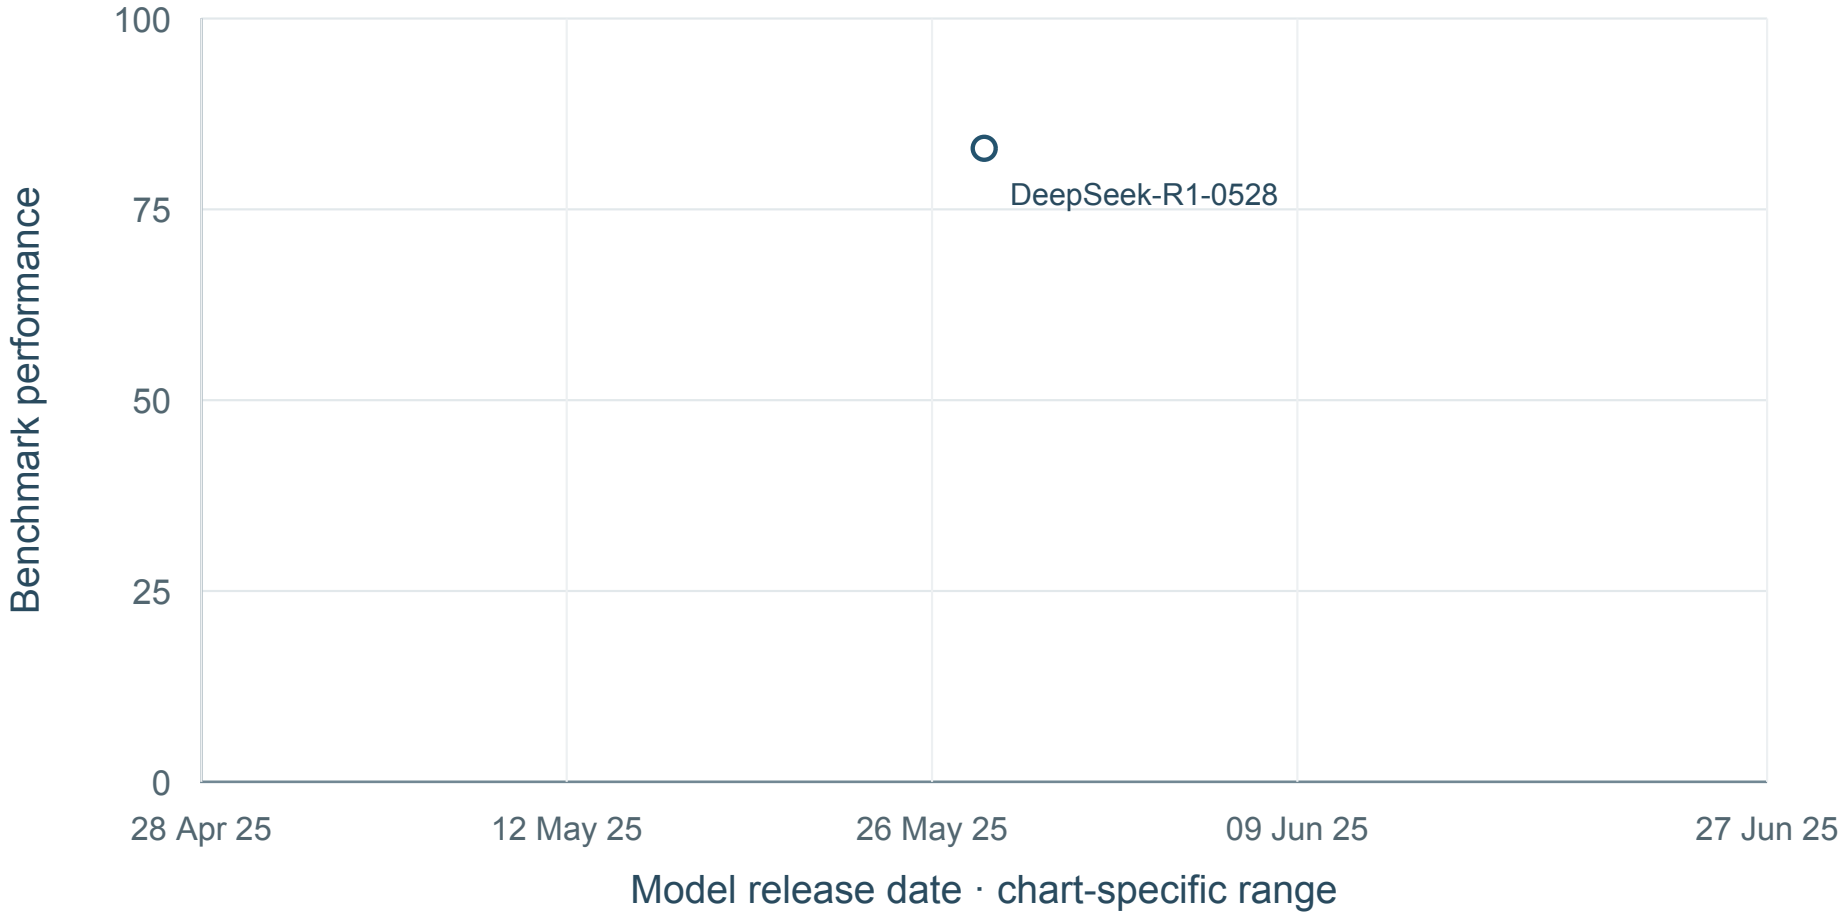

1 shown · 0 undated · 0 definition-held · sources: MC015


No mean curve: Fewer than five dated model configurations.

Result-source references: MC015. Exact point locators and raw values: data/F034_FRAMES_values.csv.

Benchmark reference (APA): Krishna, S., Krishna, K., Mohananey, A., Schwarcz, S., Stambler, A., Upadhyay, S., & Faruqui, M. (2024). Fact, fetch, and reason: A unified evaluation of retrieval-augmented generation. arXiv. https://arxiv.org/abs/2409.12941

FRAMES: Accuracy

FRAMES (Acc.); Mode not specified; MC016 M3; FRAMES

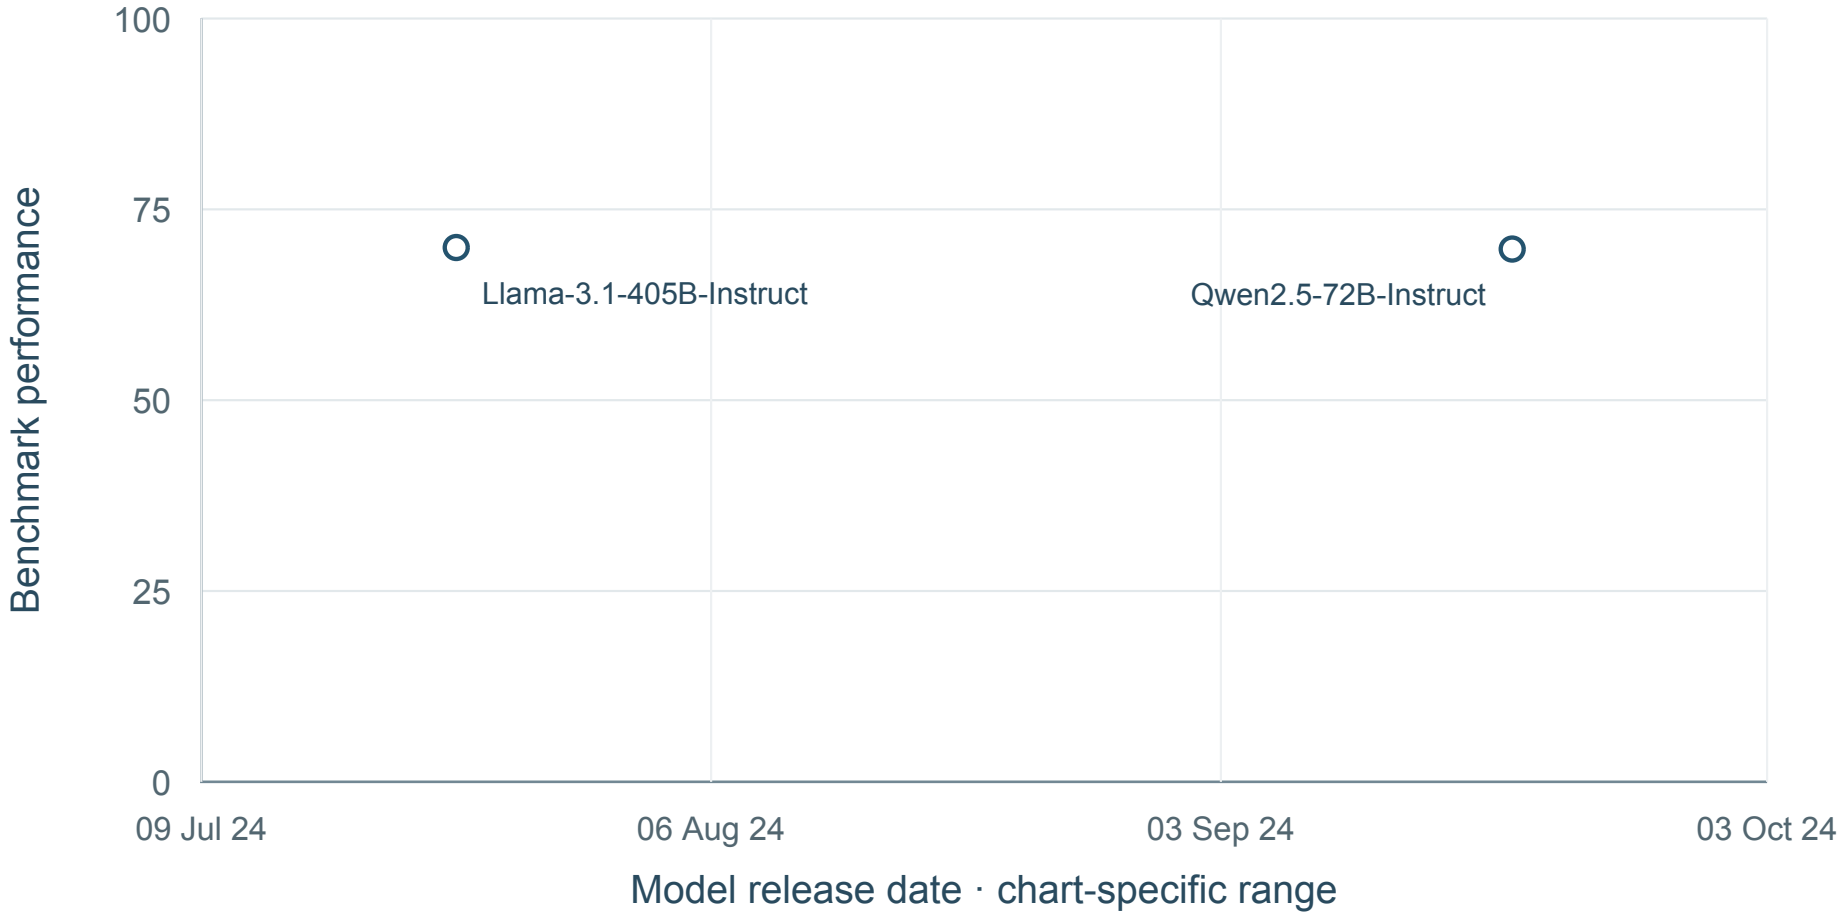

2 shown · 0 undated · 0 definition-held · sources: MC016

No mean curve: Fewer than five dated model configurations.

Result-source references: MC016. Exact point locators and raw values: data/F034_FRAMES_values.csv.

Benchmark reference (APA): Krishna, S., Krishna, K., Mohananey, A., Schwarcz, S., Stambler, A., Upadhyay, S., & Faruqui, M. (2024). Fact, fetch, and reason: A unified evaluation of retrieval-augmented generation. arXiv. https://arxiv.org/abs/2409.12941

F035 MuSiQue

Compositional multi-hop questions requiring connected evidence

14 source values; 0 new; 2 separate conditions; 0 visible time points; 0 definition-held values; 0 visible mean curves.

Benchmark references (APA)

Trivedi, H., Balasubramanian, N., Khot, T., & Sabharwal, A. (2021). MuSiQue: Multihop questions via Single-hop question composition. arXiv. https://arxiv.org/abs/2108.00573

Workflow and article scope

Challenges: B; D

Locate relevant evidence; Coordinate retrieval, tools and intermediate steps

Public QA text; evidence structure differs from scientific analyses.

Manuscript anchors: Source-based step comparisons, manuscript paragraph 31; Lu and Wang, Challenge D; manuscript paragraphs 9, 15–18 and 31

Result-source references: S074. Full references appear in the final bibliography.


Complete condition inventory

01. Answer F1 | MuSiQue-Ans; original full-input comparison
7 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S074.

02. Support F1 | MuSiQue-Ans; original full-input comparison
7 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S074.

MuSiQue: Answer F1

MuSiQue-Ans; original full-input comparison

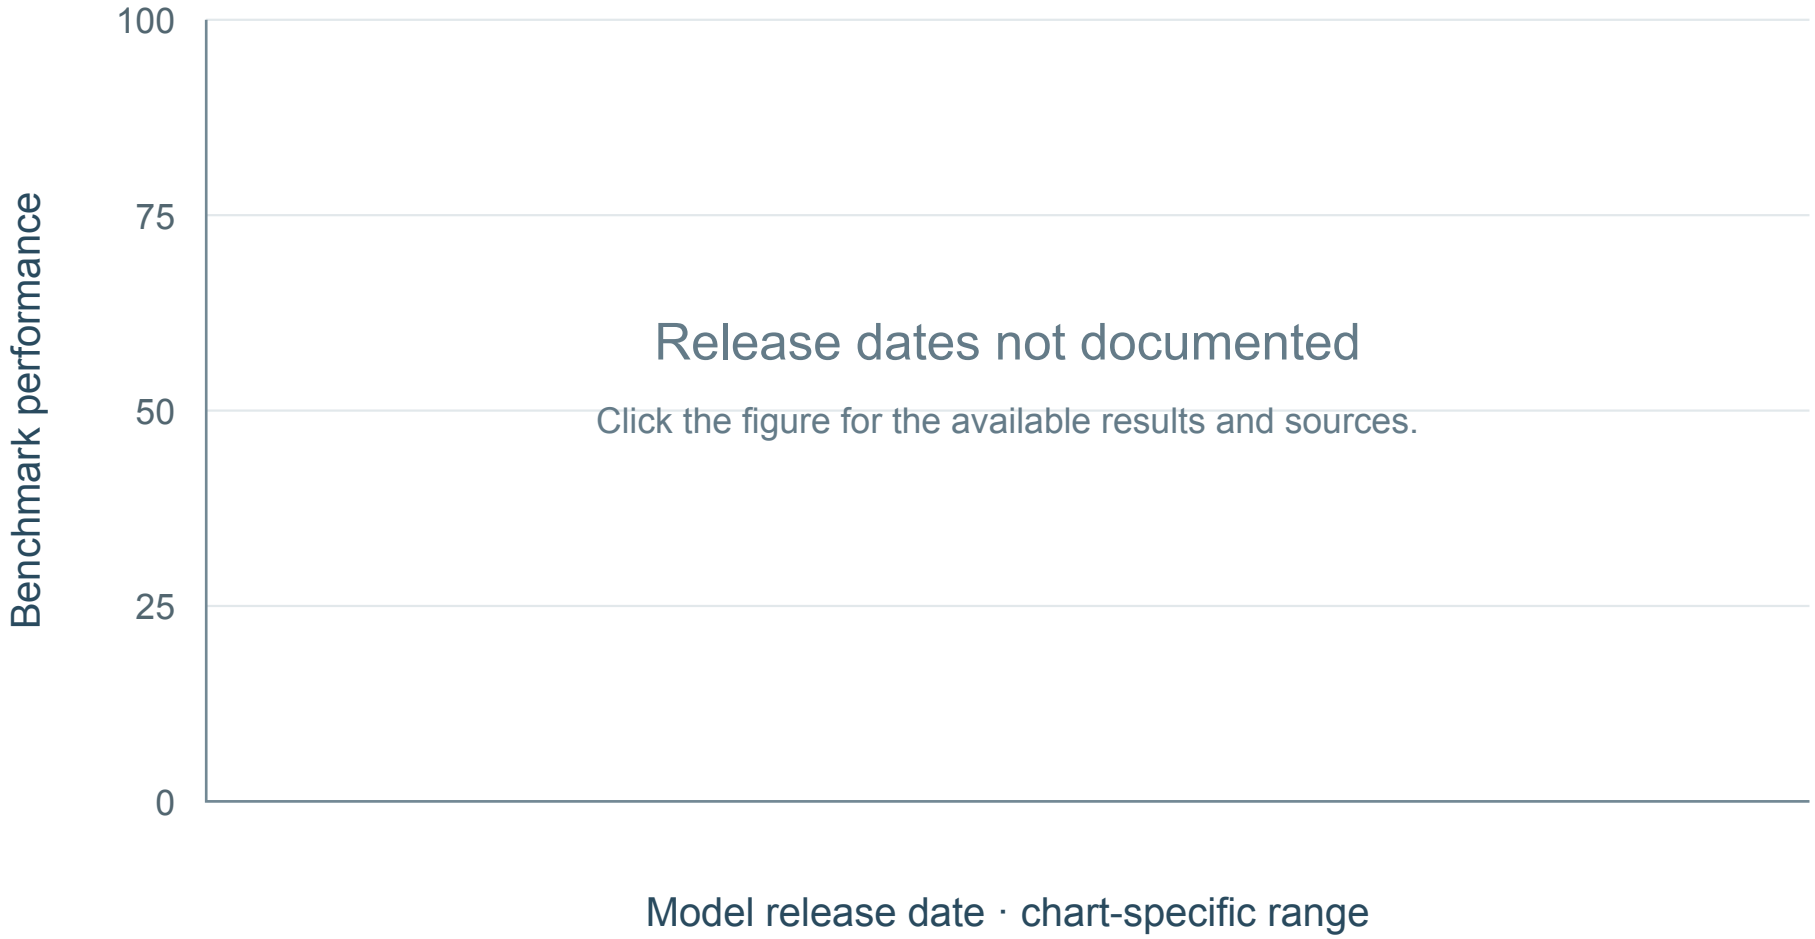

0 shown · 7 undated · 0 definition-held · sources: S074

No mean curve: Fewer than five dated model configurations.

Result-source references: S074. Exact point locators and raw values: data/F035_MuSiQue_values.csv.

Benchmark reference (APA): Trivedi, H., Balasubramanian, N., Khot, T., & Sabharwal, A. (2021). MuSiQue: Multihop questions via Single-hop question composition. arXiv. https://arxiv.org/abs/2108.00573

F036 HotpotQA

Multi-hop QA with supporting sentences

9 source values; 1 new; 3 separate conditions; 0 visible time points; 0 definition-held values; 0 visible mean curves.

Benchmark references (APA)

Yang, Z., Qi, P., Zhang, S., Bengio, Y., Cohen, W. W., Salakhutdinov, R., & Manning, C. D. (2018). HotpotQA: A dataset for diverse, explainable Multi-hop question answering. arXiv. https://arxiv.org/abs/1809.09600

Workflow and article scope

Challenges: B; D

Locate relevant evidence; Coordinate retrieval, tools and intermediate steps; Verify source support and detect errors

Wikipedia-based; weak transfer to review-specific interpretation.

Manuscript anchors: Source-based step comparisons, manuscript paragraph 31; Lu and Wang, Challenge D; manuscript paragraphs 9, 15–18 and 31; Product accuracy and auditability, manuscript paragraphs 28–29

Result-source references: S065; MC076. Full references appear in the final bibliography.

Complete condition inventory


01. Answer F1 | Original baseline; setting and split named
4 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S065.

02. Joint answer/support F1 | Original baseline; setting and split named
4 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S065.

03. LLM-judged reference-answer score (%) | Mode not specified; MC076 Table 4; HotpotQA with agentic tool use; Agentic question answering
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC076.

HotpotQA: Answer F1

Original baseline; setting and split named

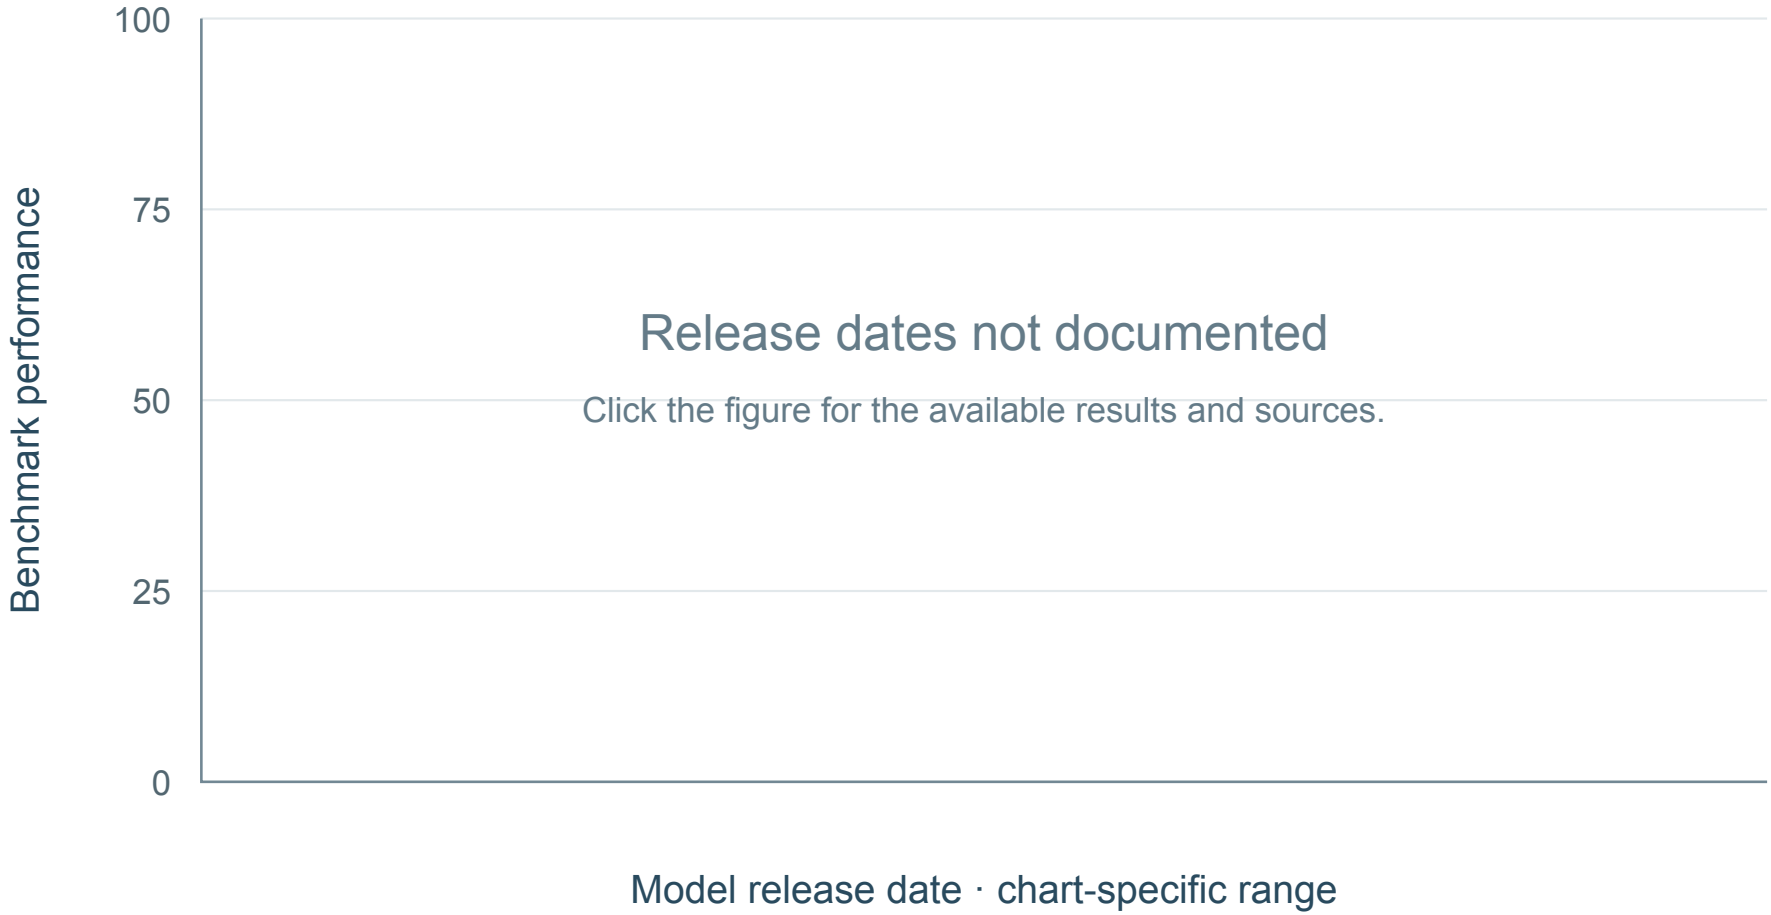

0 shown · 4 undated · 0 definition-held · sources: S065

No mean curve: Fewer than five dated model configurations.

Result-source references: S065. Exact point locators and raw values: data/F036_HotpotQA_values.csv.

Benchmark reference (APA): Yang, Z., Qi, P., Zhang, S., Bengio, Y., Cohen, W. W., Salakhutdinov, R., & Manning, C. D. (2018). HotpotQA: A dataset for diverse, explainable Multi-hop question answering. arXiv. https://arxiv.org/abs/1809.09600

F038 QASPER

Question answering on research papers with evidence annotations

12 source values; 0 new; 2 separate conditions; 0 visible time points; 0 definition-held values; 0 visible mean curves.

Benchmark references (APA)

Dasigi, P., Lo, K., Beltagy, I., Cohan, A., Smith, N. A., & Gardner, M. (2021). A dataset of information-seeking questions and answers anchored in research papers. In Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (pp. 4599–4610). https://doi.org/10.18653/v1/2021.naacl-main.365

Workflow and article scope

Challenges: B

Locate relevant evidence; Bind values to the correct unit; Verify source support and detect errors

Computer-science papers; paper QA rather than extraction under a meta-analysis codebook.

Manuscript anchors: Source-based step comparisons, manuscript paragraph 31; Wrong-subgroup example, manuscript paragraph 29; Product accuracy and auditability, manuscript paragraphs 28–29

Result-source references: S072. Full references appear in the final bibliography.


Complete condition inventory

01. Answer F1 | Original text-only test; Table 2
6 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S072.

02. Evidence F1 | Original text-only test; Table 3
6 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S072.

QASPER: Answer F1

Original text-only test; Table 2

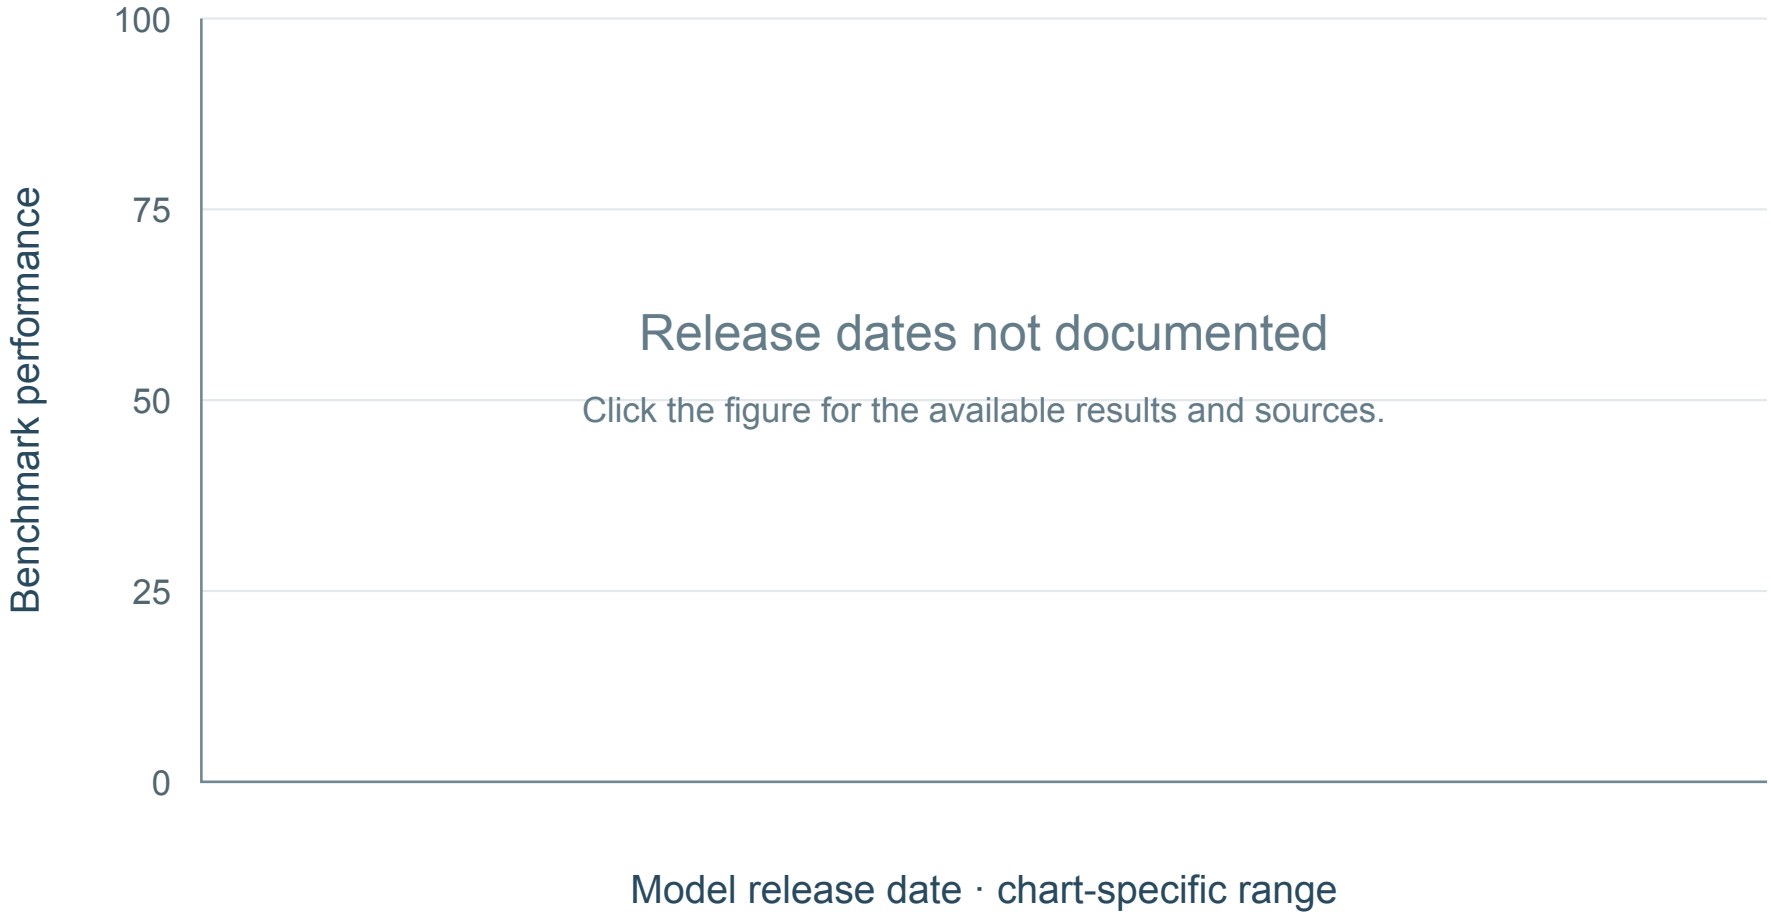

0 shown · 6 undated · 0 definition-held · sources: S072

No mean curve: Fewer than five dated model configurations.

Result-source references: S072. Exact point locators and raw values: data/F038_QASPER_values.csv.

Benchmark reference (APA): Dasigi, P., Lo, K., Beltagy, I., Cohan, A., Smith, N. A., & Gardner, M. (2021). A dataset of information-seeking questions and answers anchored in research papers. In Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (pp. 4599–4610). https://doi.org/10.18653/v1/2021.naacl-main.365

F040 SciAssess

Scientific literature comprehension, extraction and analysis

22 source values; 0 new; 2 separate conditions; 2 visible time points; 0 definition-held values; 0 visible mean curves.

Benchmark references (APA)

Cai, H., Cai, X., Chang, J., Li, S., Yao, L., Wang, C., Gao, Z., Wang, H., Li, Y., Lin, M., Yang, S., Wang, J., Xu, M., Huang, J., Fang, X., Zhuang, J., Yin, Y., Li, Y., Chen, C., … Ke, G. (2024). SciAssess: Benchmarking LLM proficiency in scientific literature analysis. arXiv. https://arxiv.org/abs/2403.01976

Workflow and article scope

Challenges: A; B; D

Locate relevant evidence; Bind values to the correct unit; Coordinate retrieval, tools and intermediate steps

Biology/chemistry/materials; a total score mixes different constructs.

Manuscript anchors: Source-based step comparisons, manuscript paragraph 31; Wrong-subgroup example, manuscript paragraph 29; Lu and Wang, Challenge D; manuscript paragraphs 9, 15–18 and 31

Result-source references: S043. Full references appear in the final bibliography.


Complete condition inventory

01. Table extraction recall | SciAssess L2; source paper Table 3
11 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S043.

02. Multiple-choice accuracy | SciAssess L3; Analysis and Reasoning
11 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S043.

SciAssess: Table extraction recall

SciAssess L2; source paper Table 3

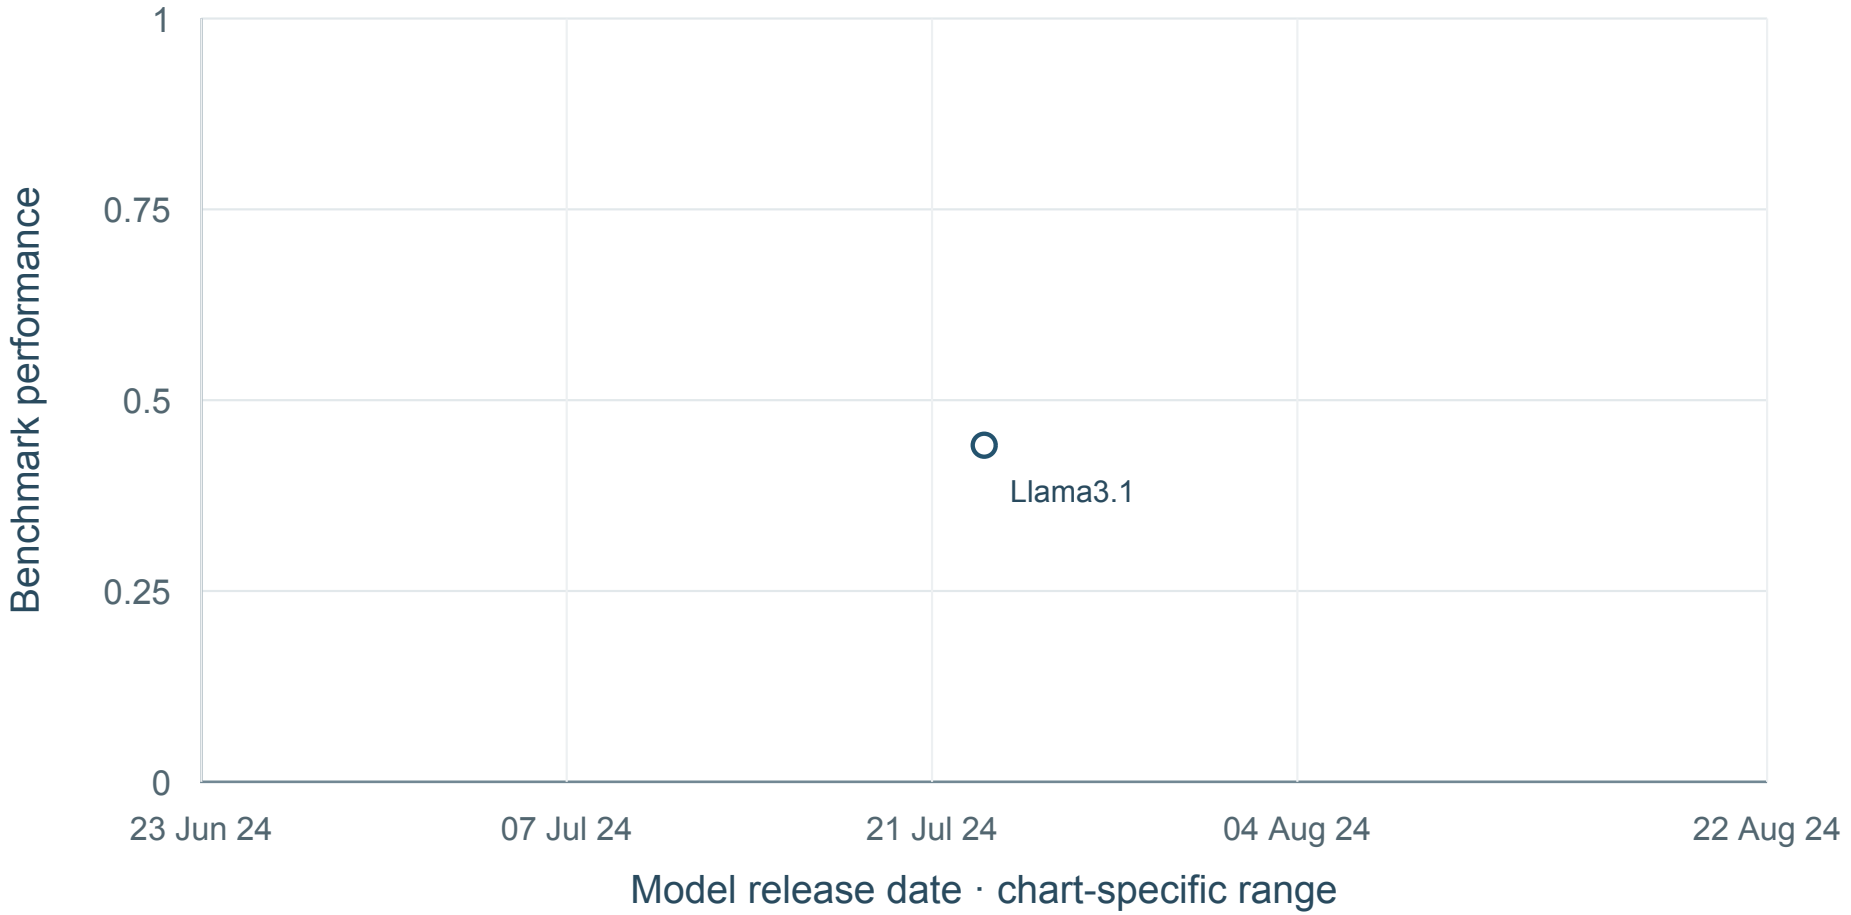

1 shown · 10 undated · 0 definition-held · sources: S043


No mean curve: Fewer than five dated model configurations.

Result-source references: S043. Exact point locators and raw values: data/F040_SciAssess_values.csv.

Benchmark reference (APA): Cai, H., Cai, X., Chang, J., Li, S., Yao, L., Wang, C., Gao, Z., Wang, H., Li, Y., Lin, M., Yang, S., Wang, J., Xu, M., Huang, J., Fang, X., Zhuang, J., Yin, Y., Li, Y., Chen, C., … Ke, G. (2024). SciAssess: Benchmarking LLM proficiency in scientific literature analysis. arXiv. https://arxiv.org/abs/2403.01976

SciAssess: Multiple-choice accuracy

SciAssess L3; Analysis and Reasoning

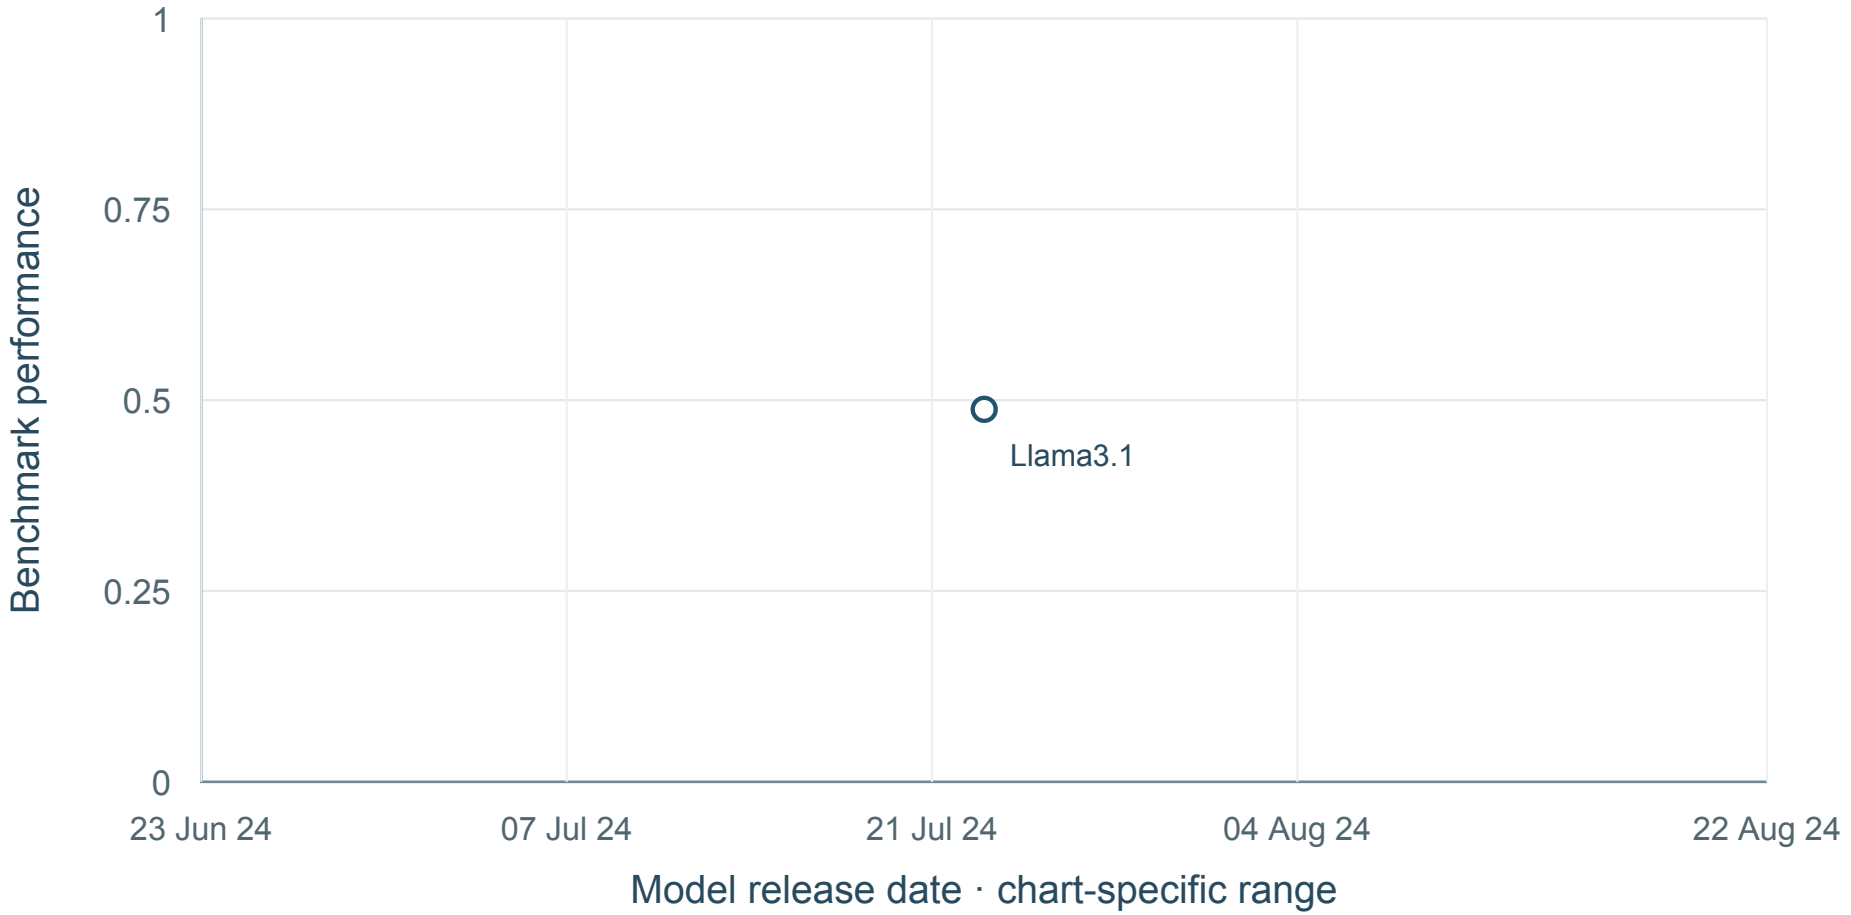

1 shown · 10 undated · 0 definition-held · sources: S043

No mean curve: Fewer than five dated model configurations.

Result-source references: S043. Exact point locators and raw values: data/F040_SciAssess_values.csv.

Benchmark reference (APA): Cai, H., Cai, X., Chang, J., Li, S., Yao, L., Wang, C., Gao, Z., Wang, H., Li, Y., Lin, M., Yang, S., Wang, J., Xu, M., Huang, J., Fang, X., Zhuang, J., Yin, Y., Li, Y., Chen, C., … Ke, G. (2024). SciAssess: Benchmarking LLM proficiency in scientific literature analysis. arXiv. https://arxiv.org/abs/2403.01976

F041 LAB-Bench

Literature, supplements, tables and figures in biological research

104 source values; 8 new; 16 separate conditions; 64 visible time points; 0 definition-held values; 12 visible mean curves.

Benchmark references (APA)

Laurent, J. M., Janizek, J. D., Ruzo, M., Hinks, M. M., Hammerling, M. J., Narayanan, S., Ponnapati, M., White, A. D., & Rodriques, S. G. (2024). LAB-Bench: Measuring capabilities of language models for biology research. arXiv. https://arxiv.org/abs/2407.10362

Workflow and article scope

Challenges: A; B; D

Locate relevant evidence; Bind values to the correct unit; Coordinate retrieval, tools and intermediate steps; Verify source support and detect errors

Do not count LitQA2/PaperQA2 as independent datasets; retrieval and abstention settings matter.

Manuscript anchors: Source-based step comparisons, manuscript paragraph 31; Wrong-subgroup example, manuscript paragraph 29; Lu and Wang, Challenge D; manuscript paragraphs 9, 15–18 and 31; Product accuracy and auditability, manuscript paragraphs 28–29

Result-source references: S014; MC061; MC062. Full references appear in the final bibliography.

Complete condition inventory

01. Accuracy | Paper v3; LitQA2; average of three runs
8 values; 5 time points; visible mean curve. Sources: S014.

02. Accuracy | Paper v3; SuppQA; average of three runs
8 values; 5 time points; visible mean curve. Sources: S014.

03. Accuracy | Paper v3; FigQA; average of three runs
8 values; 5 time points; visible mean curve. Sources: S014.

04. Accuracy | Paper v3; TableQA; average of three runs
8 values; 5 time points; visible mean curve. Sources: S014.

05. Precision | Paper v3; LitQA2; average of three runs
8 values; 5 time points; visible mean curve. Sources: S014.

06. Precision | Paper v3; SuppQA; average of three runs
8 values; 5 time points; visible mean curve. Sources: S014.

07. Precision | Paper v3; FigQA; average of three runs
8 values; 5 time points; visible mean curve. Sources: S014.

08. Precision | Paper v3; TableQA; average of three runs
8 values; 5 time points; visible mean curve. Sources: S014.

09. Coverage | Paper v3; LitQA2; average of three runs
8 values; 5 time points; visible mean curve. Sources: S014.

10. Coverage | Paper v3; SuppQA; average of three runs
8 values; 5 time points; visible mean curve. Sources: S014.

11. Coverage | Paper v3; FigQA; average of three runs
8 values; 5 time points; visible mean curve. Sources: S014.


12. Coverage | Paper v3; TableQA; average of three runs
8 values; 5 time points; visible mean curve. Sources: S014.

13. FigQA mean score (%) | Adaptive thinking; max effort (as labelled by source); MC061 Figure 2.17.1.A / adjacent text; LAB-Bench FigQA; No tools
2 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC061.

14. FigQA mean score (%) | Adaptive thinking; max effort (as labelled by source); MC061 Figure 2.17.1.A / adjacent text; LAB-Bench FigQA; Image cropping tool
2 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC061.

15. FigQA mean score (%) | Adaptive thinking; max effort (as labelled by source); MC062 Section 2.19.1, Figure 2.19.1.A; LAB-Bench FigQA; No tools
2 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC062.

16. FigQA mean score (%) | Adaptive thinking; max effort (as labelled by source); MC062 Section 2.19.1, Figure 2.19.1.A; LAB-Bench FigQA; Image cropping tool
2 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC062.

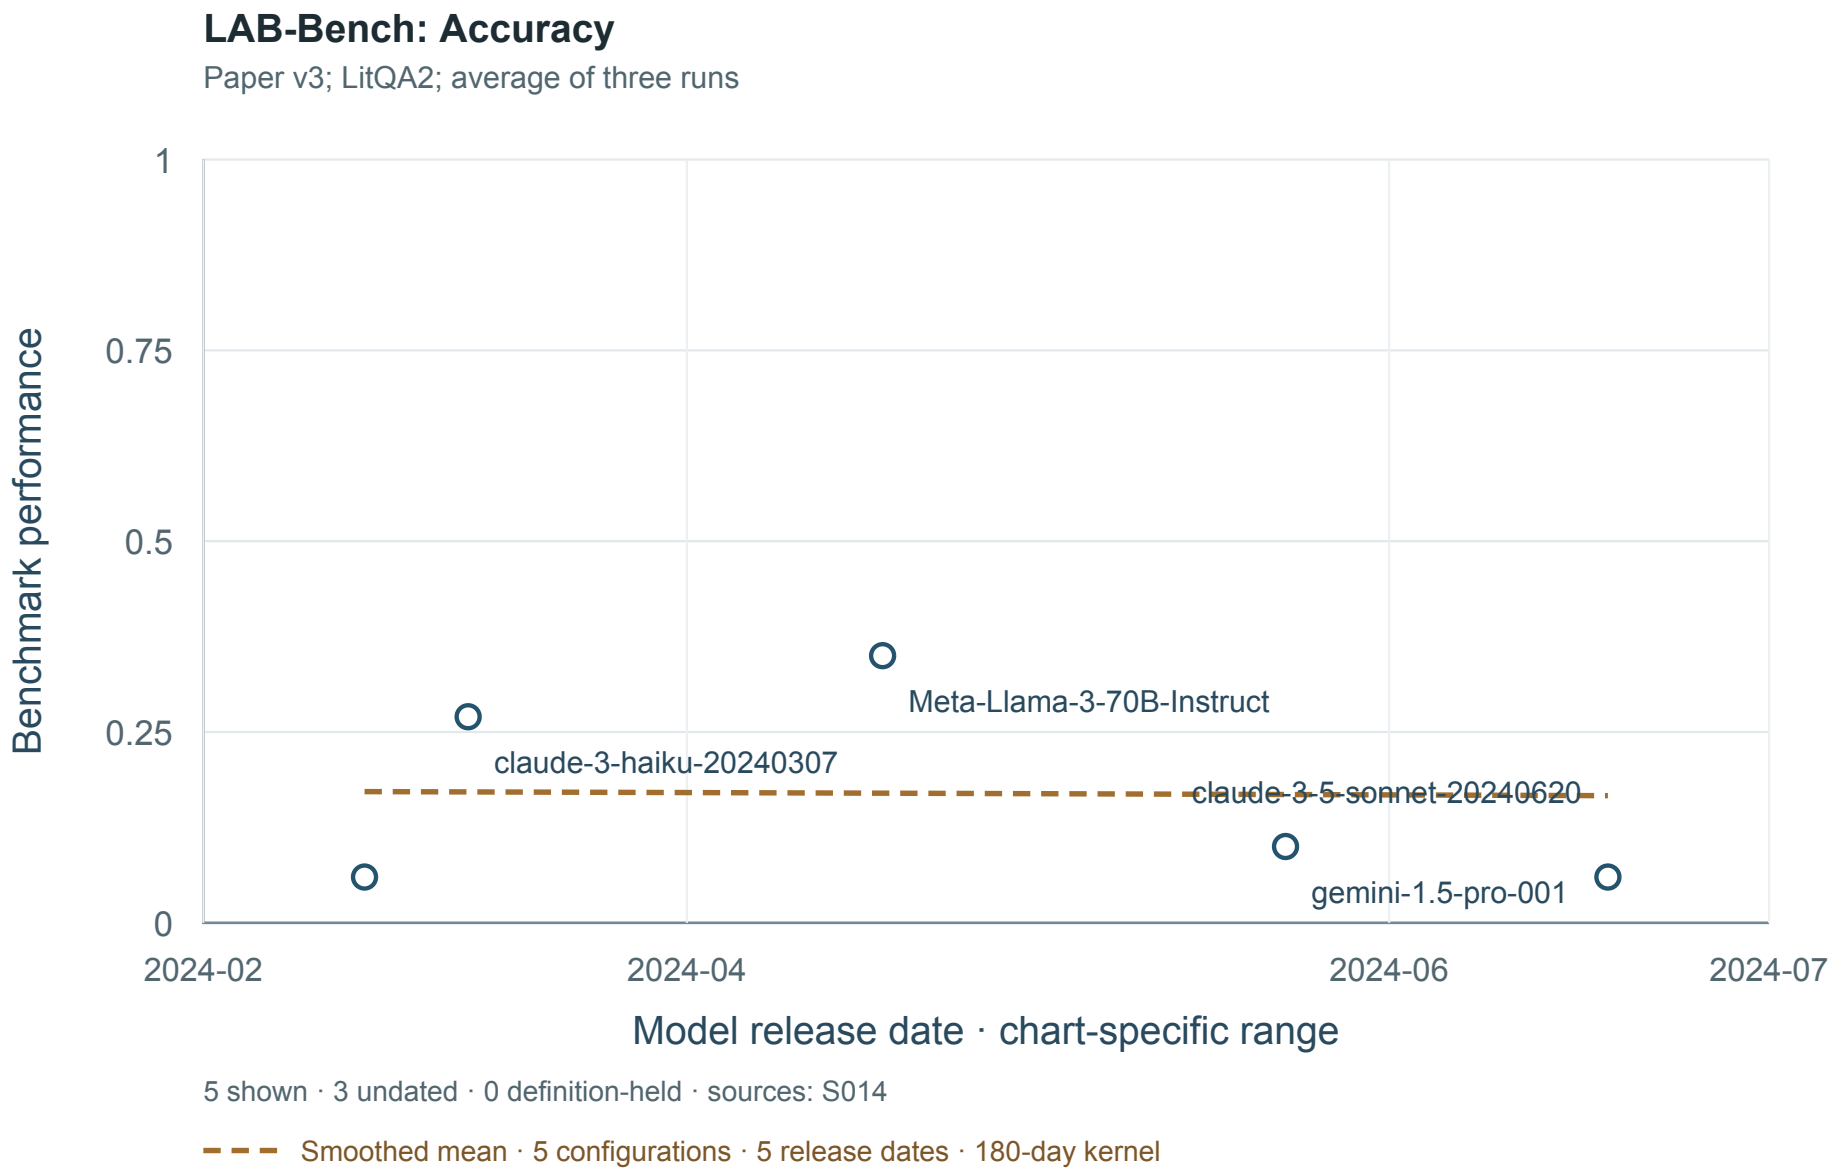


Result-source references: S014. Exact point locators and raw values: data/F041_LAB_Bench_values.csv.

Benchmark reference (APA): Laurent, J. M., Janizek, J. D., Ruzo, M., Hinks, M. M., Hammerling, M. J., Narayanan, S., Ponnapati, M., White, A. D., & Rodriques, S. G. (2024). LAB-Bench: Measuring capabilities of language models for biology research. arXiv. https://arxiv.org/abs/2407.10362

LAB-Bench: Accuracy

Paper v3; SuppQA; average of three runs

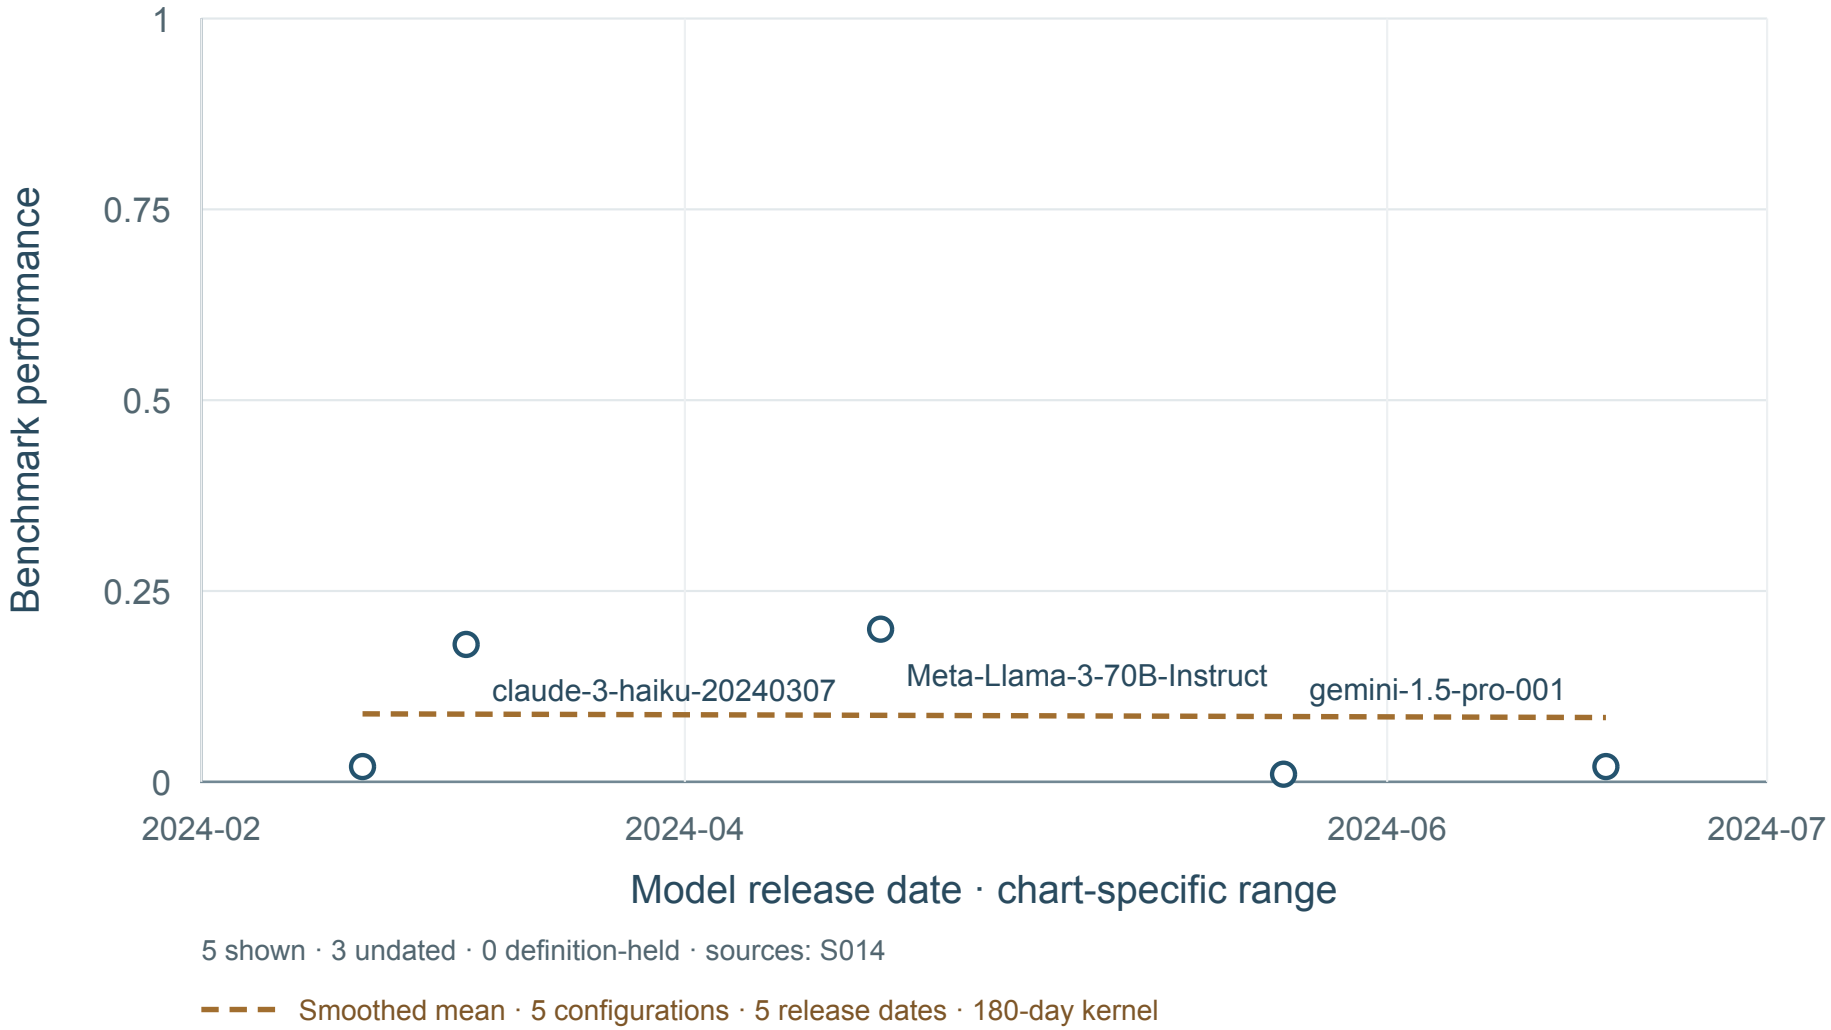

5 shown · 3 undated · 0 definition-held · sources: S014


Smoothed mean · 5 configurations · 5 release dates · 180-day kernel

Result-source references: S014. Exact point locators and raw values: data/F041_LAB_Bench_values.csv.

Benchmark reference (APA): Laurent, J. M., Janizek, J. D., Ruzo, M., Hinks, M. M., Hammerling, M. J., Narayanan, S., Ponnapati, M., White, A. D., & Rodriques, S. G. (2024). LAB-Bench: Measuring capabilities of language models for biology research. arXiv. https://arxiv.org/abs/2407.10362

LAB-Bench: Accuracy

Paper v3; FigQA; average of three runs

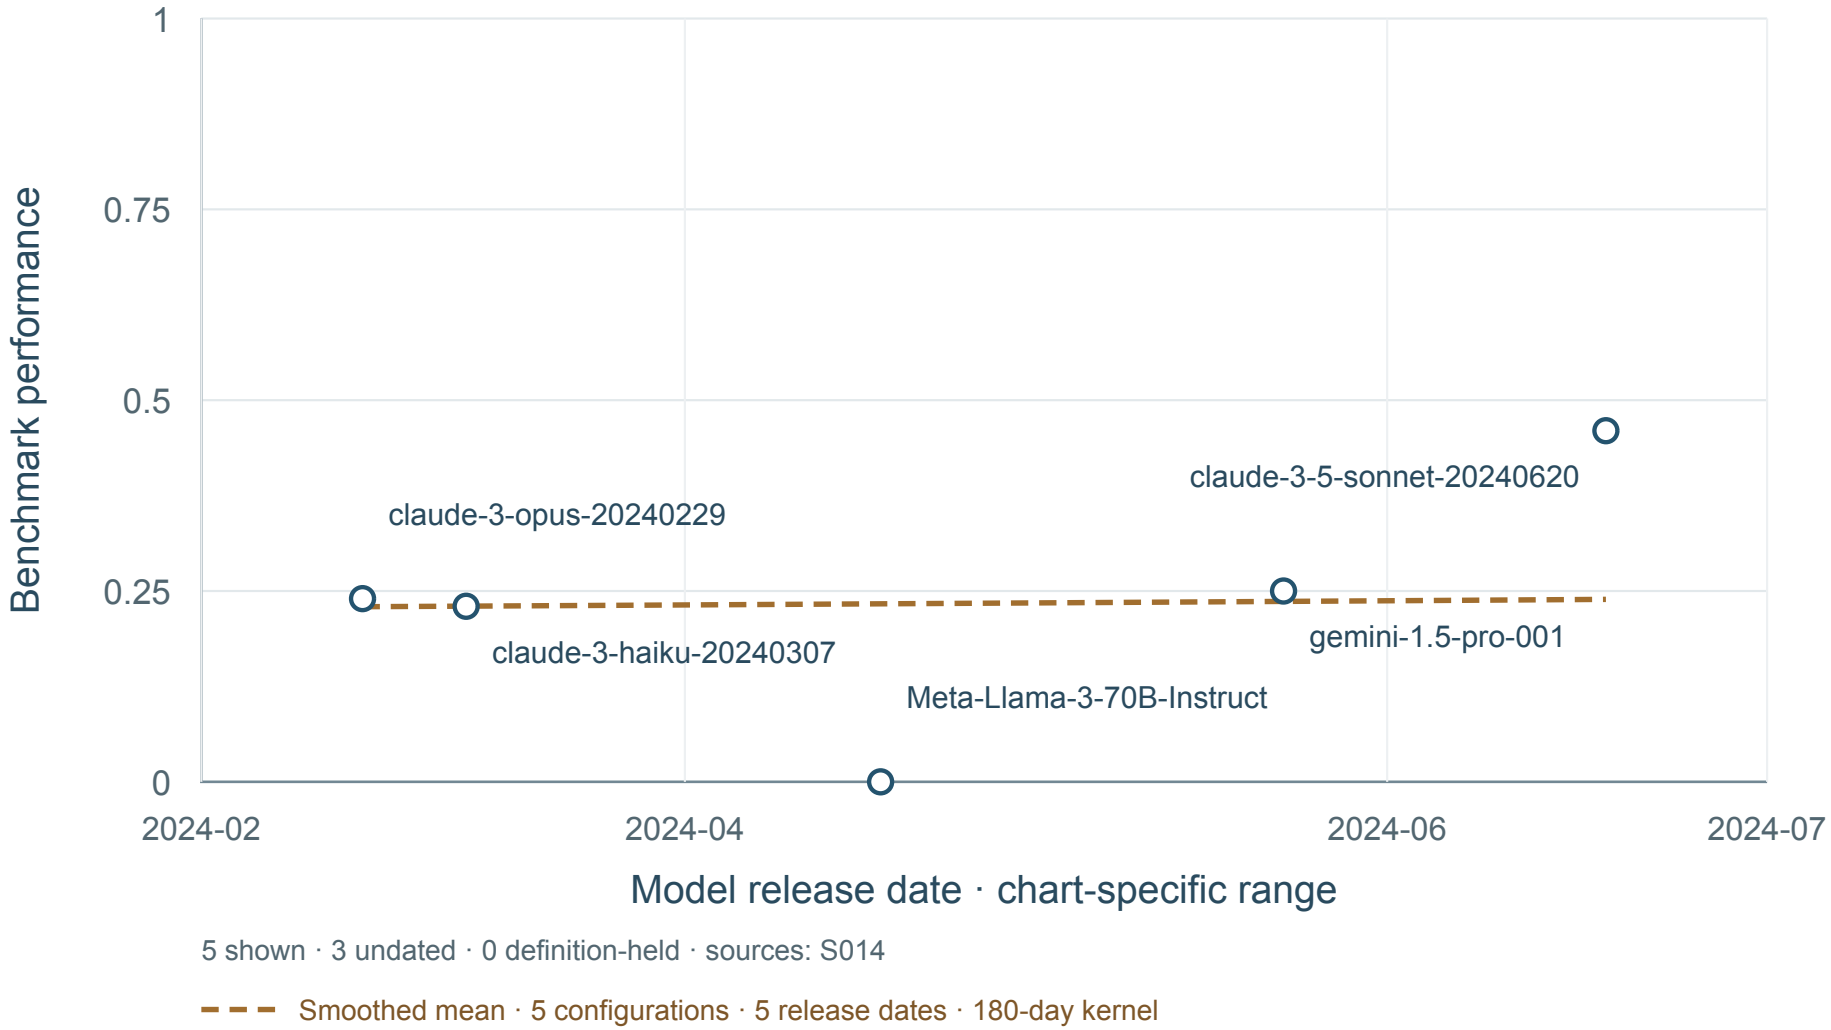

5 shown · 3 undated · 0 definition-held · sources: S014


Smoothed mean · 5 configurations · 5 release dates · 180-day kernel

Result-source references: S014. Exact point locators and raw values: data/F041_LAB_Bench_values.csv.

Benchmark reference (APA): Laurent, J. M., Janizek, J. D., Ruzo, M., Hinks, M. M., Hammerling, M. J., Narayanan, S., Ponnapati, M., White, A. D., & Rodriques, S. G. (2024). LAB-Bench: Measuring capabilities of language models for biology research. arXiv. https://arxiv.org/abs/2407.10362

LAB-Bench: Accuracy

Paper v3; TableQA; average of three runs

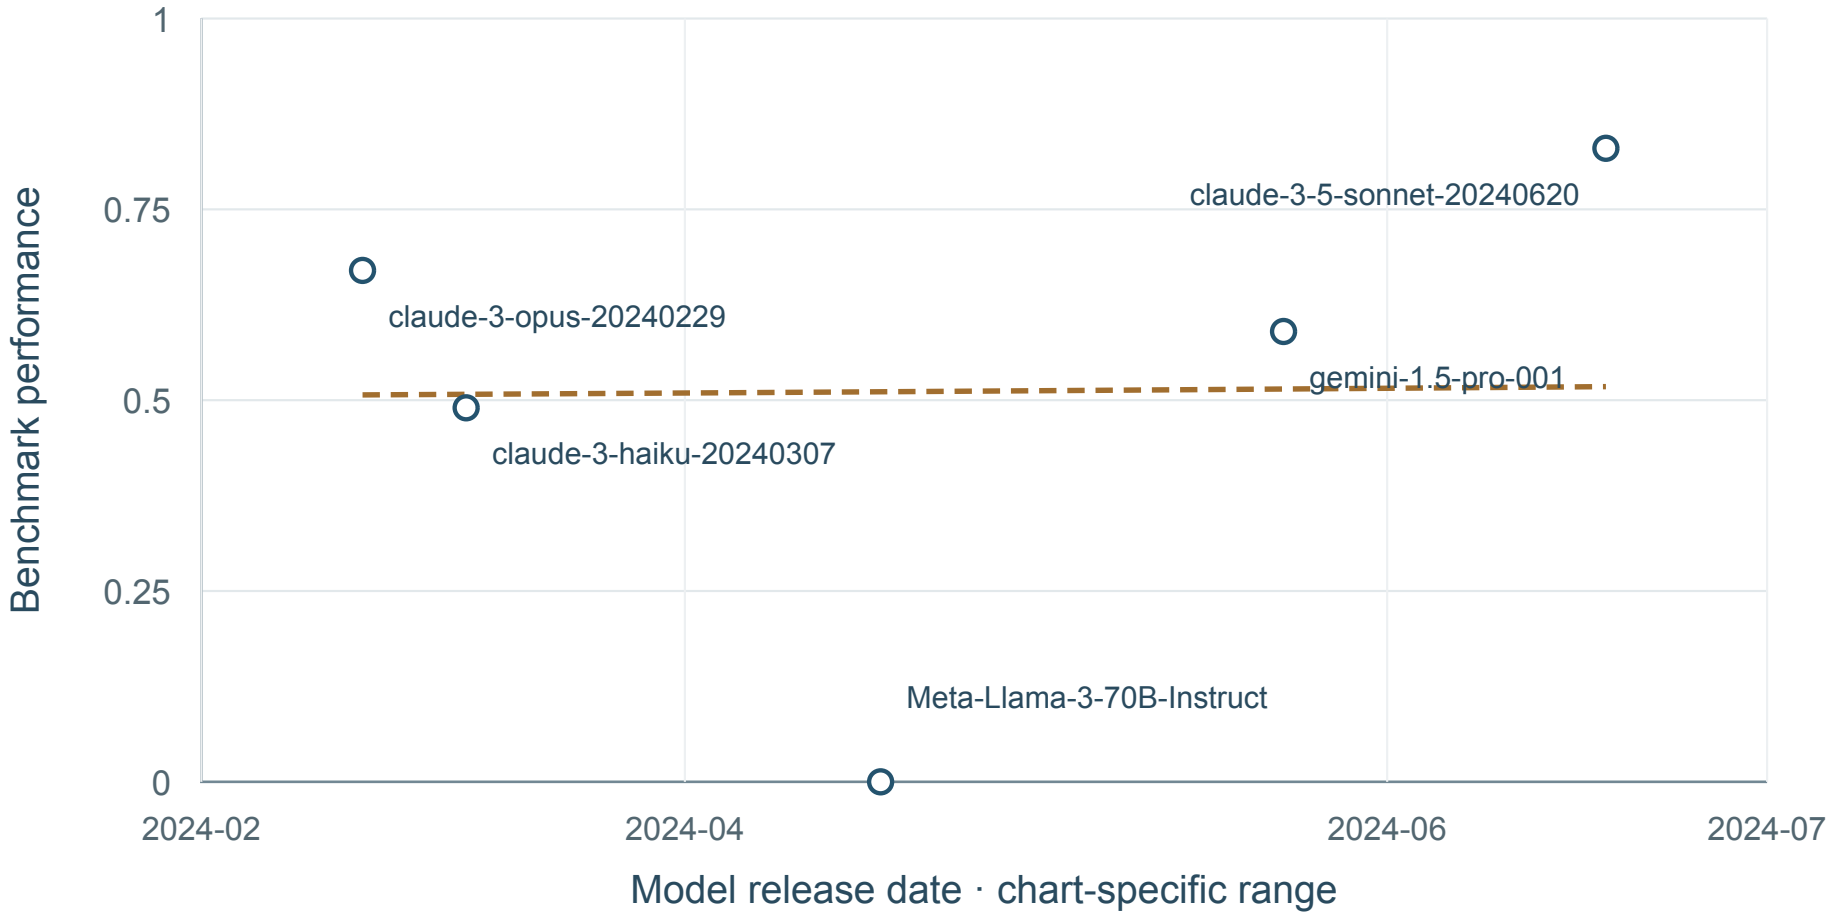

5 shown · 3 undated · 0 definition-held · sources: S014


Smoothed mean · 5 configurations · 5 release dates · 180-day kernel

Result-source references: S014. Exact point locators and raw values: data/F041_LAB_Bench_values.csv.

Benchmark reference (APA): Laurent, J. M., Janizek, J. D., Ruzo, M., Hinks, M. M., Hammerling, M. J., Narayanan, S., Ponnapati, M., White, A. D., & Rodriques, S. G. (2024). LAB-Bench: Measuring capabilities of language models for biology research. arXiv. https://arxiv.org/abs/2407.10362

LAB-Bench: Precision

Paper v3; LitQA2; average of three runs

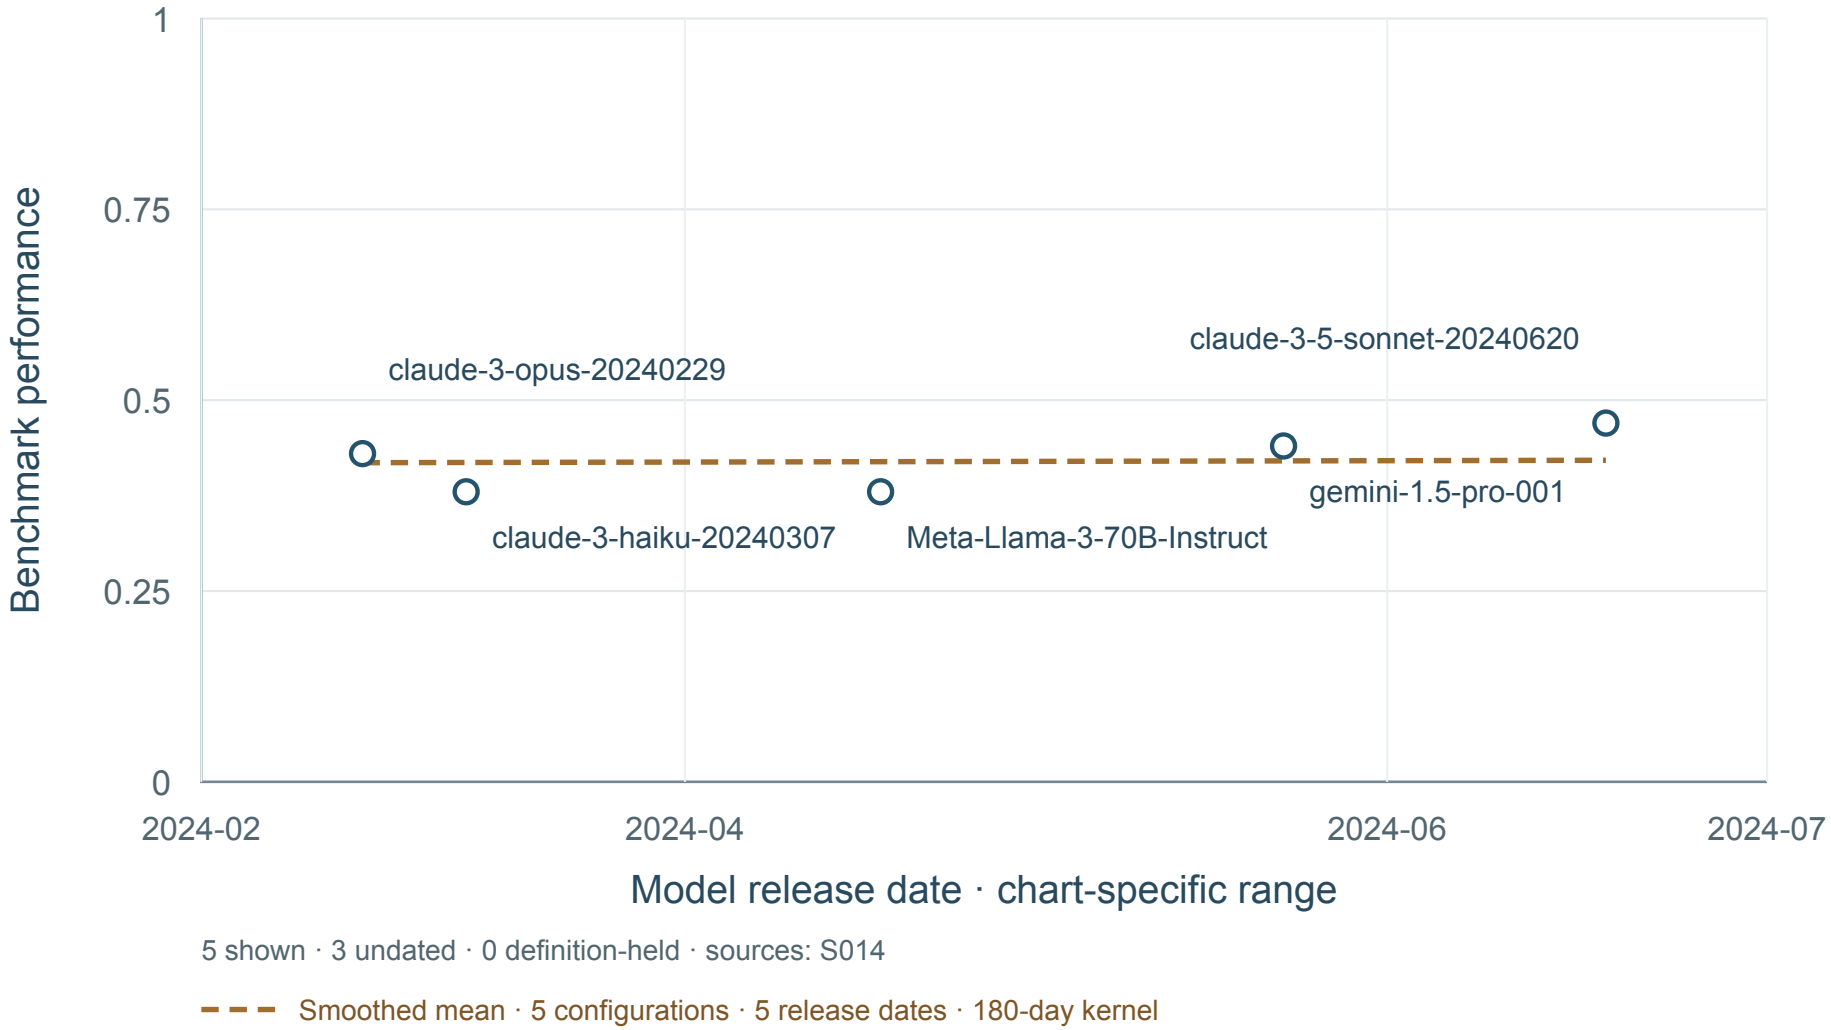

5 shown · 3 undated · 0 definition-held · sources: S014


Smoothed mean · 5 configurations · 5 release dates · 180-day kernel

Result-source references: S014. Exact point locators and raw values: data/F041_LAB_Bench_values.csv.

Benchmark reference (APA): Laurent, J. M., Janizek, J. D., Ruzo, M., Hinks, M. M., Hammerling, M. J., Narayanan, S., Ponnapati, M., White, A. D., & Rodriques, S. G. (2024). LAB-Bench: Measuring capabilities of language models for biology research. arXiv. https://arxiv.org/abs/2407.10362

LAB-Bench: Precision

Paper v3; SuppQA; average of three runs

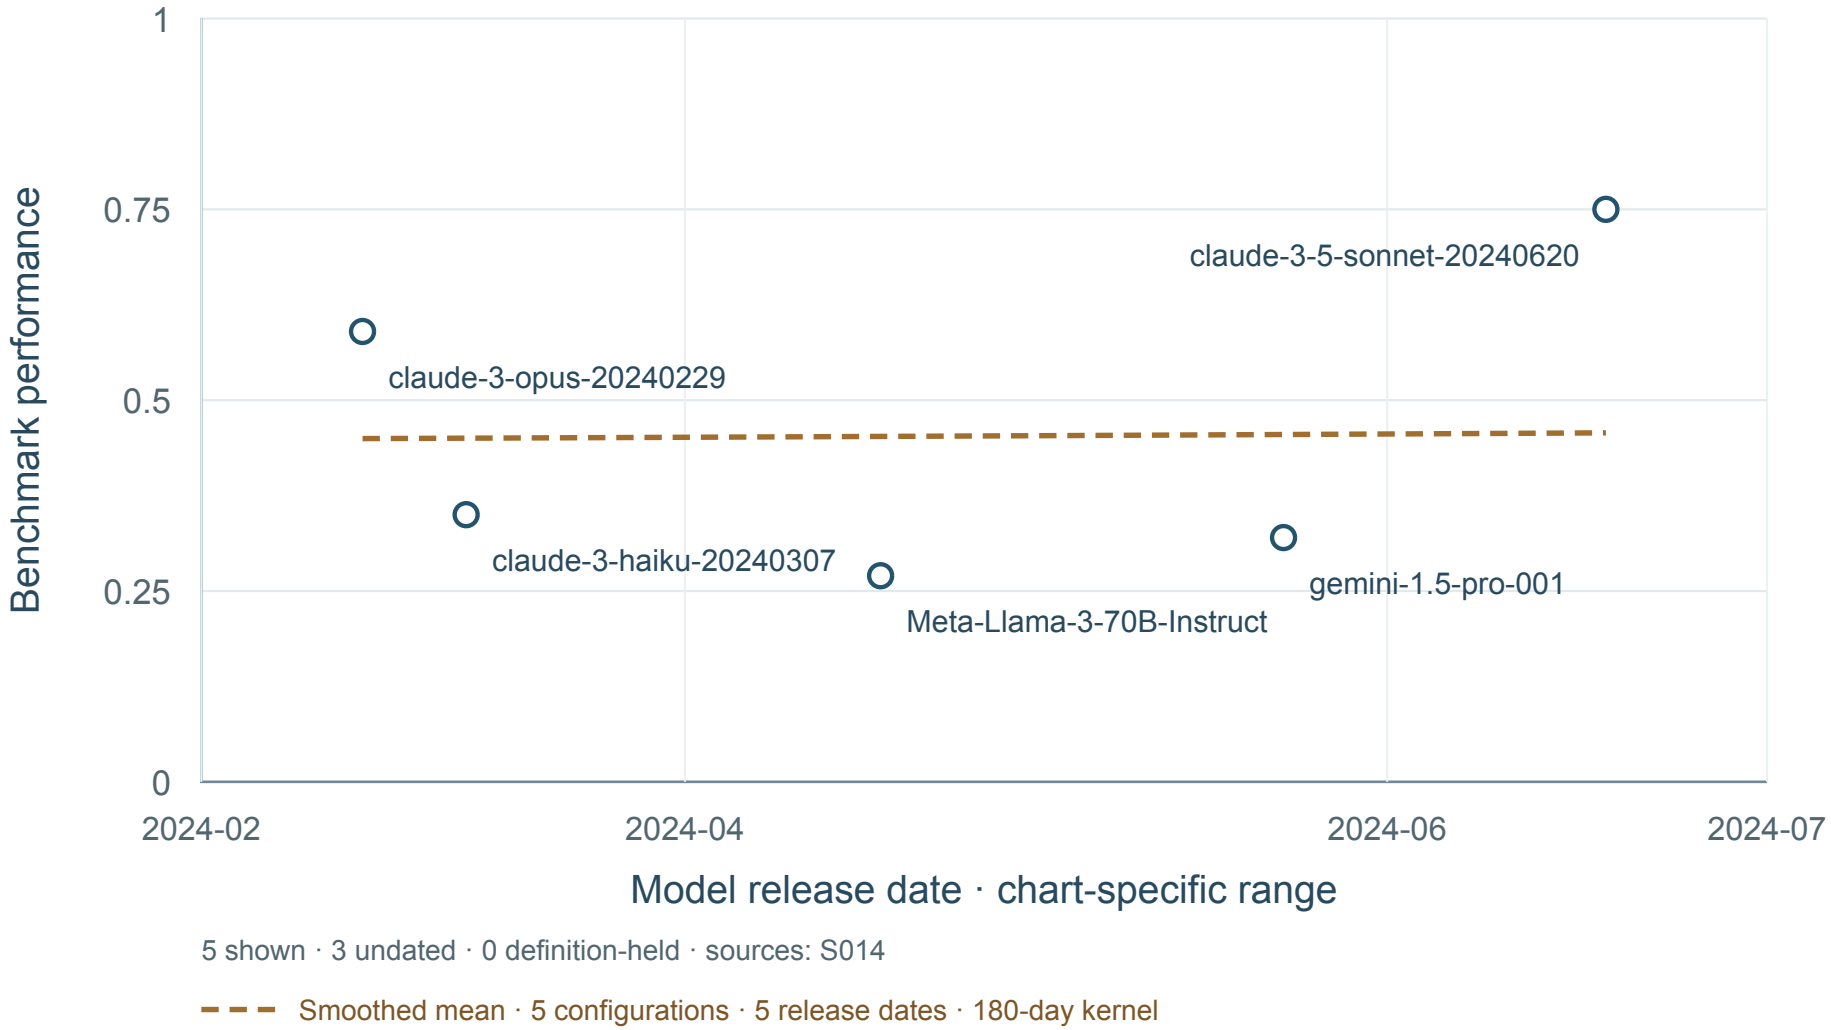

5 shown · 3 undated · 0 definition-held · sources: S014


Smoothed mean · 5 configurations · 5 release dates · 180-day kernel

Result-source references: S014. Exact point locators and raw values: data/F041_LAB_Bench_values.csv.

Benchmark reference (APA): Laurent, J. M., Janizek, J. D., Ruzo, M., Hinks, M. M., Hammerling, M. J., Narayanan, S., Ponnapati, M., White, A. D., & Rodriques, S. G. (2024). LAB-Bench: Measuring capabilities of language models for biology research. arXiv. https://arxiv.org/abs/2407.10362

LAB-Bench: Precision

Paper v3; FigQA; average of three runs

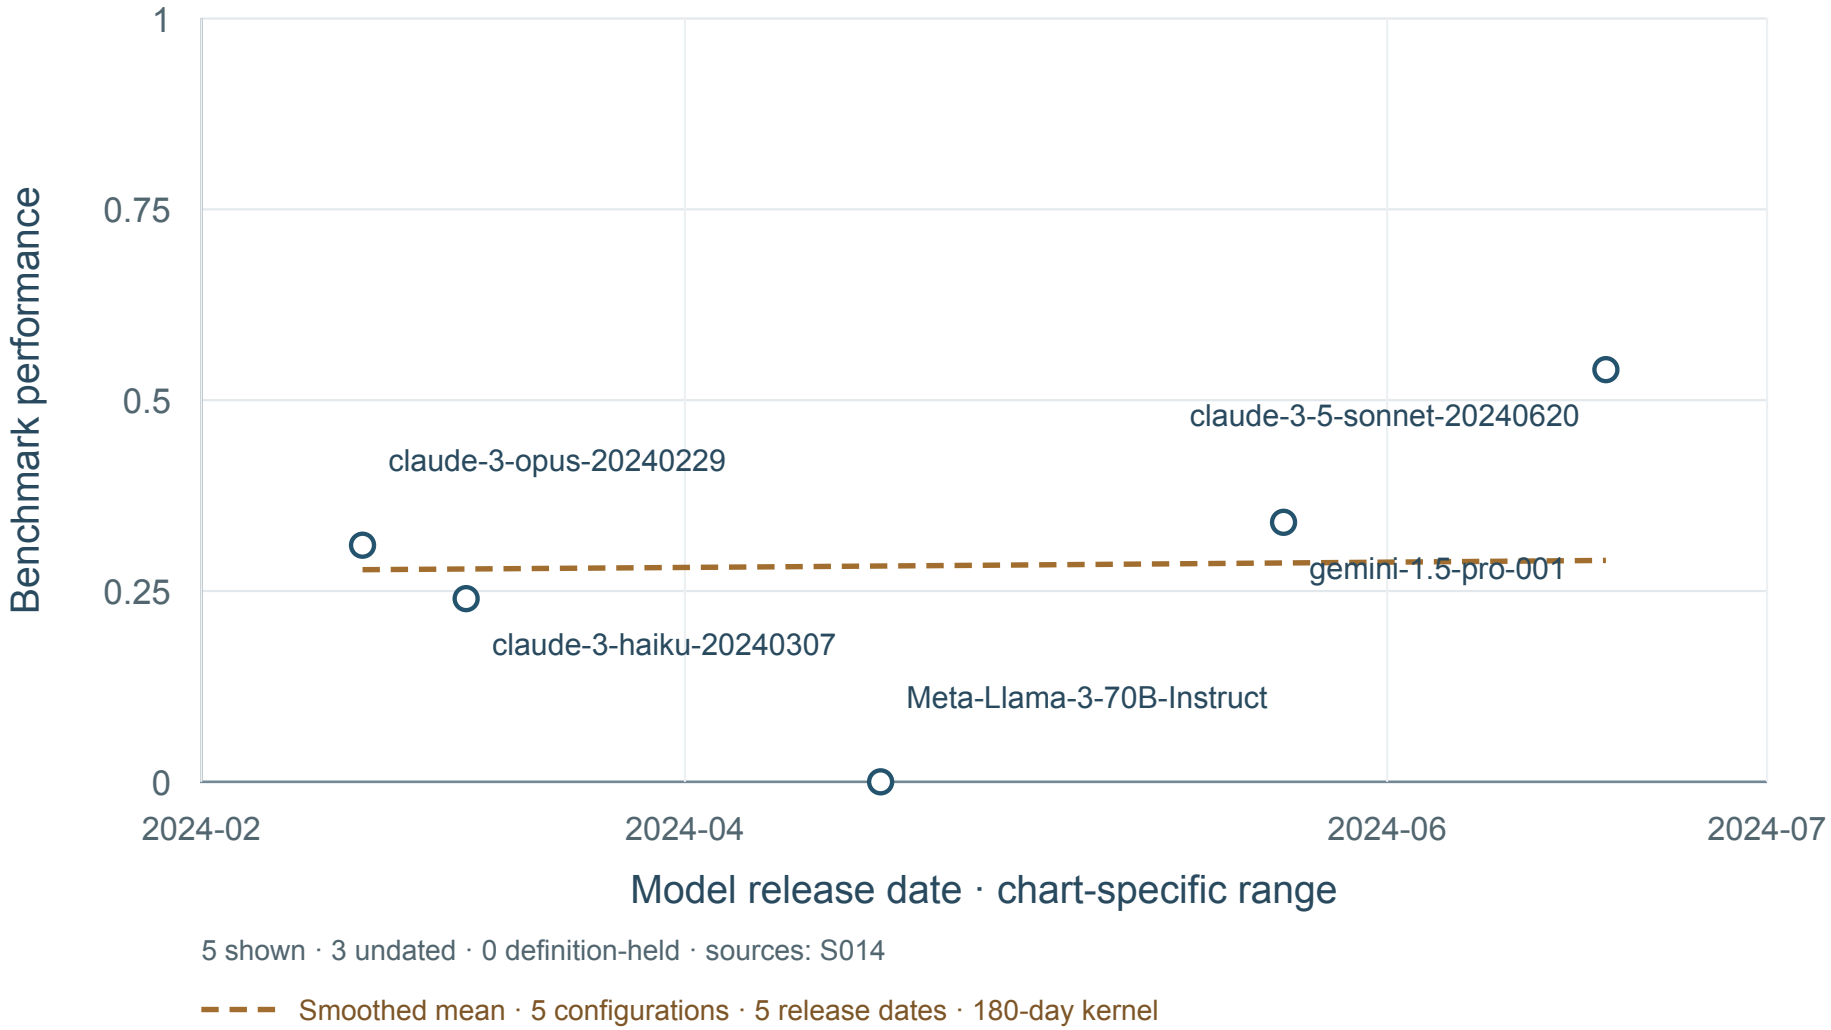

5 shown · 3 undated · 0 definition-held · sources: S014


Smoothed mean · 5 configurations · 5 release dates · 180-day kernel

Result-source references: S014. Exact point locators and raw values: data/F041_LAB_Bench_values.csv.

Benchmark reference (APA): Laurent, J. M., Janizek, J. D., Ruzo, M., Hinks, M. M., Hammerling, M. J., Narayanan, S., Ponnapati, M., White, A. D., & Rodriques, S. G. (2024). LAB-Bench: Measuring capabilities of language models for biology research. arXiv. https://arxiv.org/abs/2407.10362

LAB-Bench: Precision

Paper v3; TableQA; average of three runs

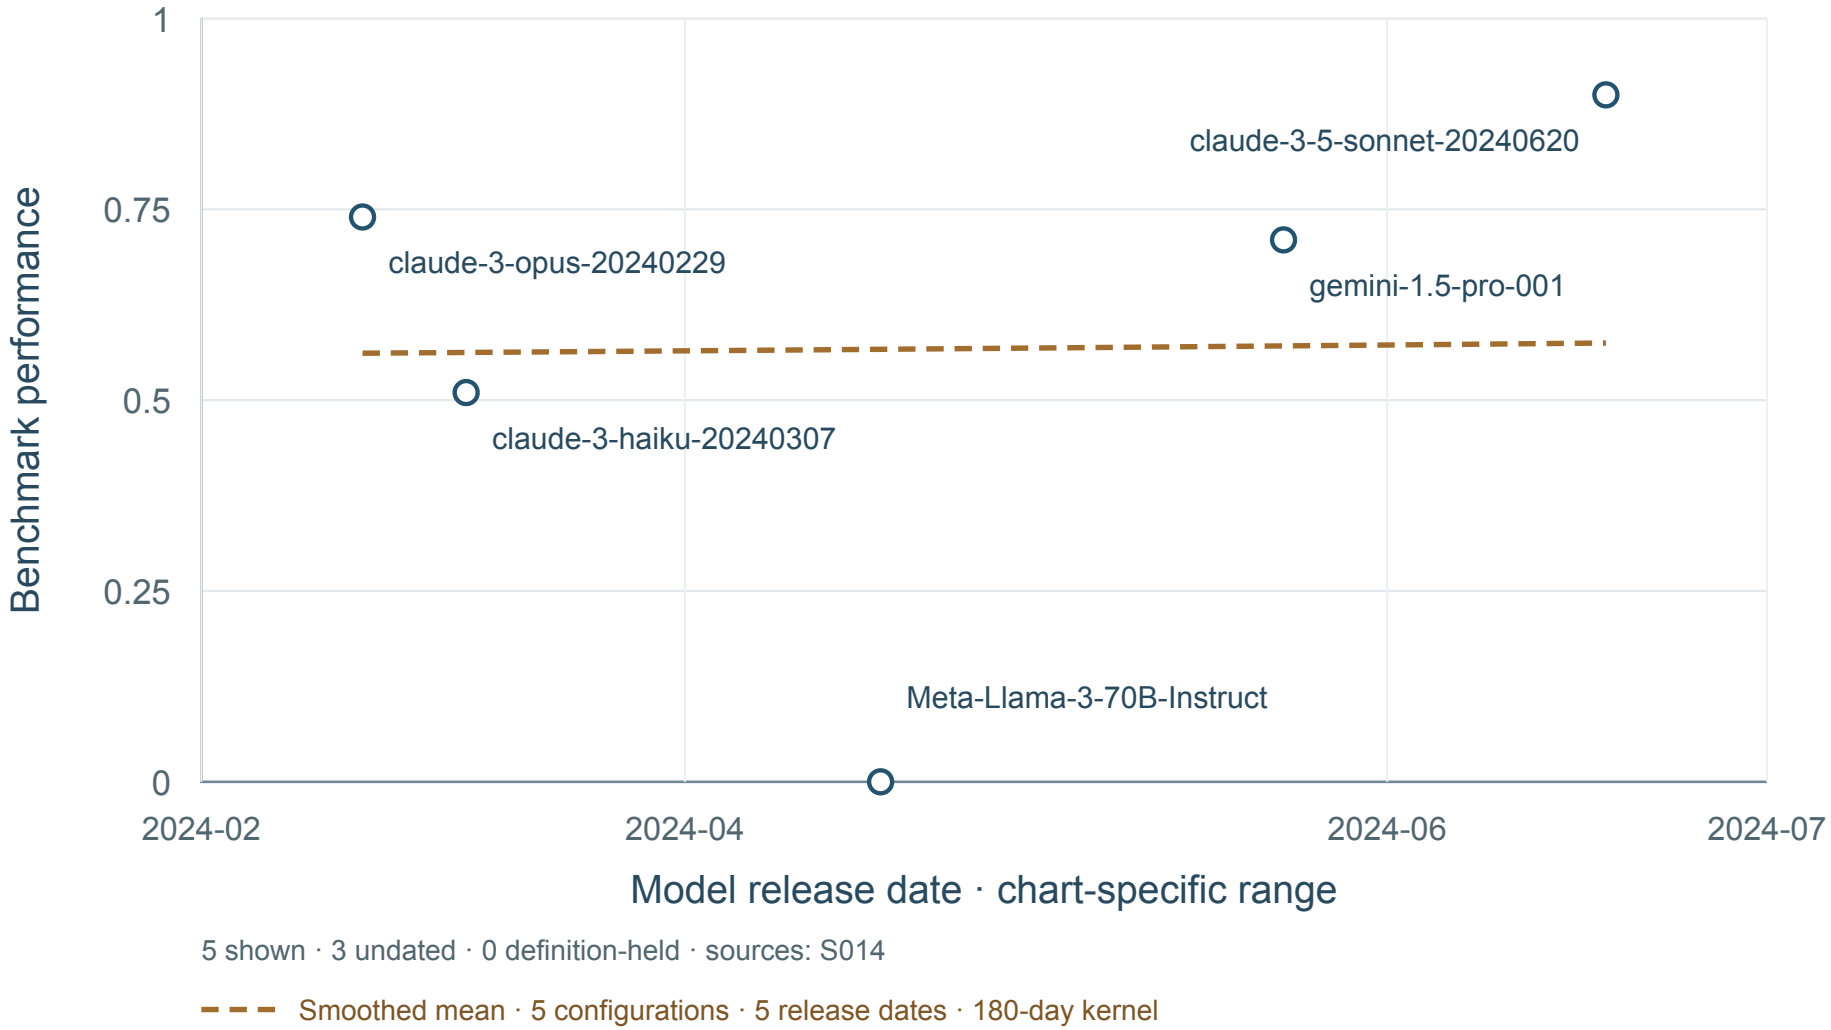

5 shown · 3 undated · 0 definition-held · sources: S014


Smoothed mean · 5 configurations · 5 release dates · 180-day kernel

Result-source references: S014. Exact point locators and raw values: data/F041_LAB_Bench_values.csv.

Benchmark reference (APA): Laurent, J. M., Janizek, J. D., Ruzo, M., Hinks, M. M., Hammerling, M. J., Narayanan, S., Ponnapati, M., White, A. D., & Rodriques, S. G. (2024). LAB-Bench: Measuring capabilities of language models for biology research. arXiv. https://arxiv.org/abs/2407.10362

LAB-Bench: Coverage

Paper v3; LitQA2; average of three runs

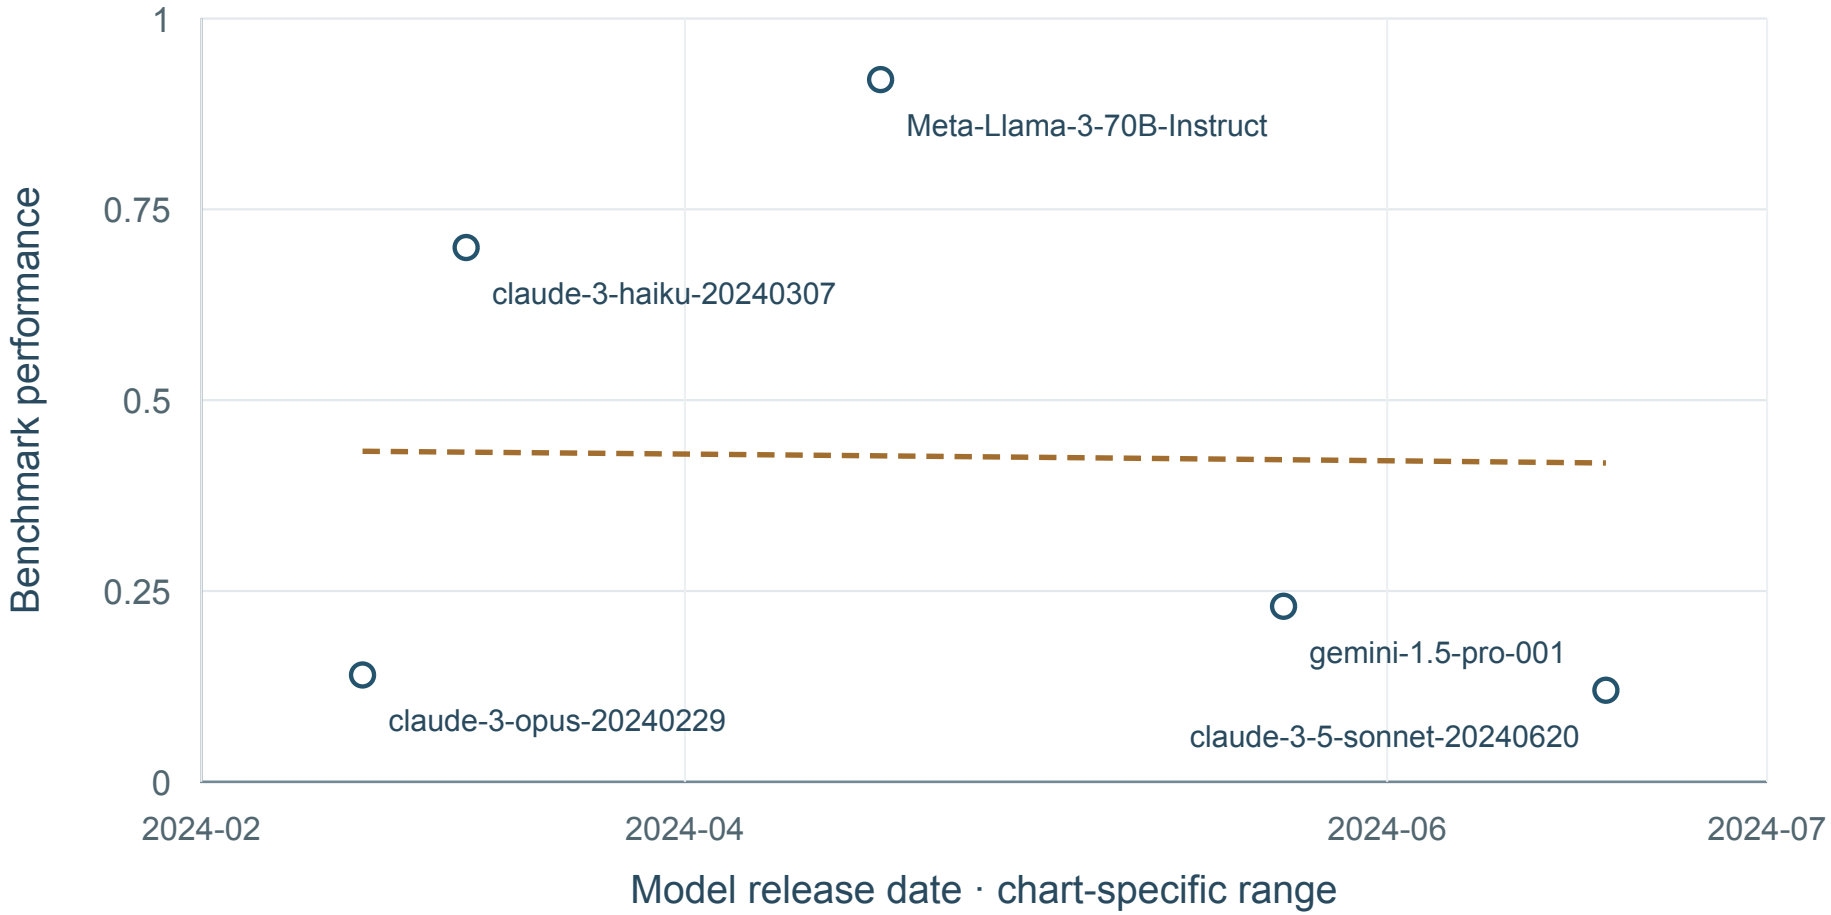

5 shown · 3 undated · 0 definition-held · sources: S014


Smoothed mean · 5 configurations · 5 release dates · 180-day kernel

Result-source references: S014. Exact point locators and raw values: data/F041_LAB_Bench_values.csv.

Benchmark reference (APA): Laurent, J. M., Janizek, J. D., Ruzo, M., Hinks, M. M., Hammerling, M. J., Narayanan, S., Ponnapati, M., White, A. D., & Rodriques, S. G. (2024). LAB-Bench: Measuring capabilities of language models for biology research. arXiv. https://arxiv.org/abs/2407.10362

LAB-Bench: Coverage

Paper v3; SuppQA; average of three runs

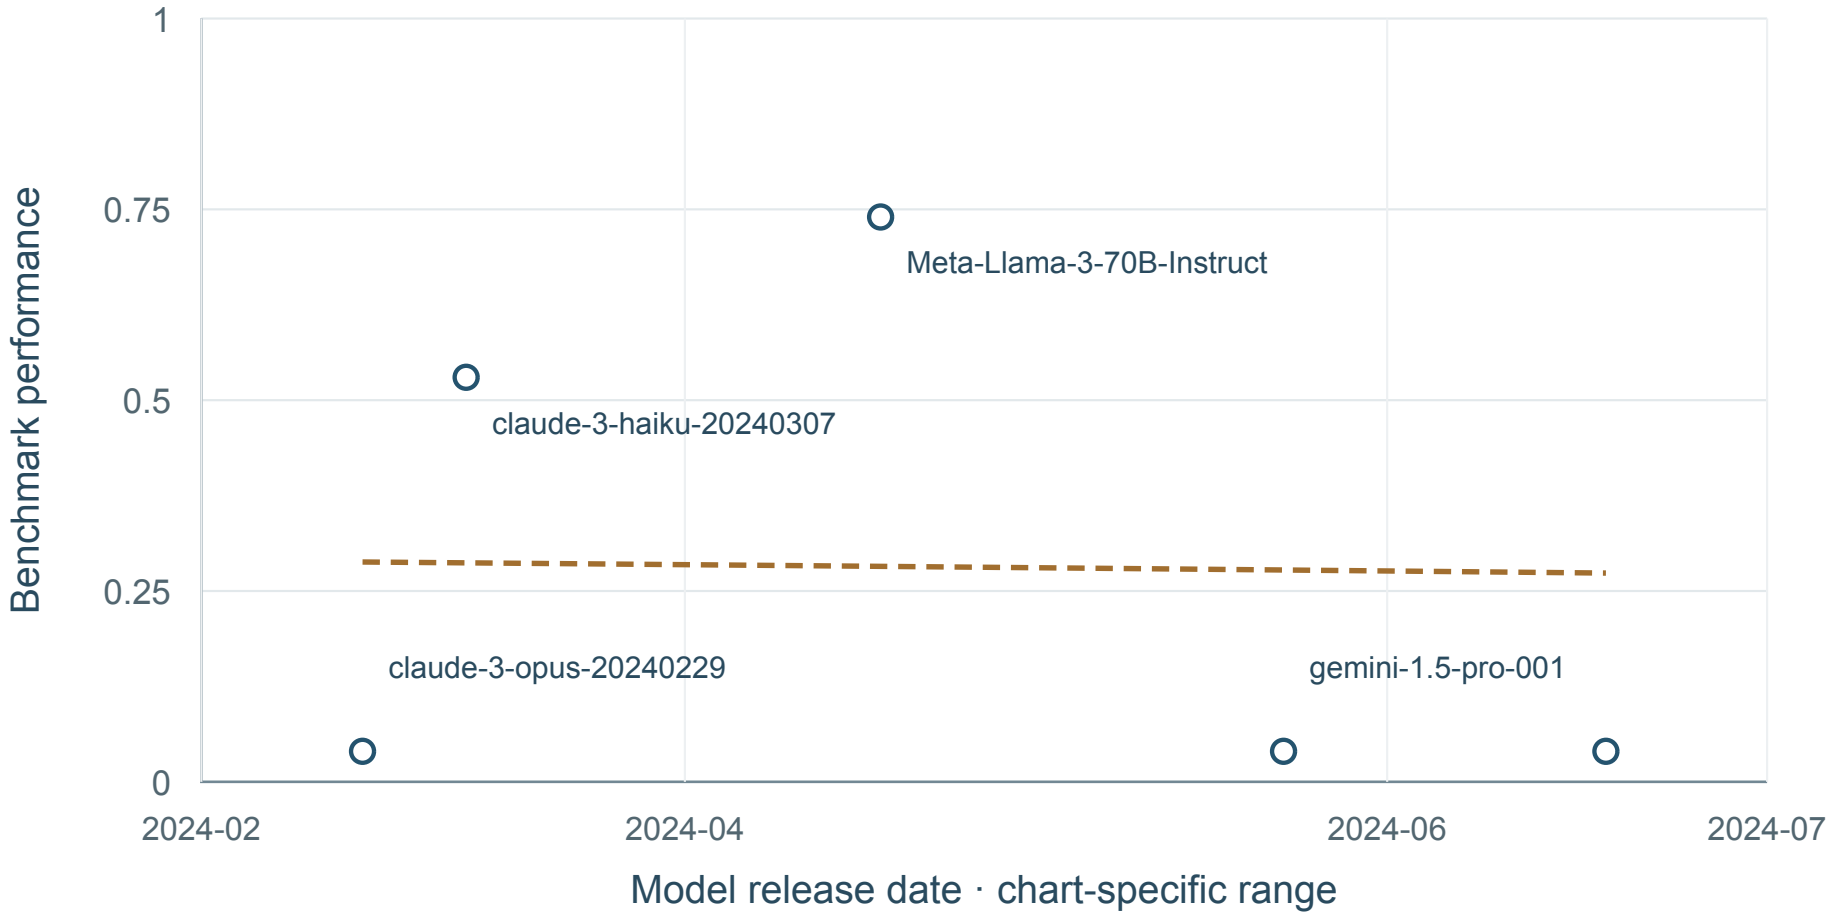

5 shown · 3 undated · 0 definition-held · sources: S014


Smoothed mean · 5 configurations · 5 release dates · 180-day kernel

Result-source references: S014. Exact point locators and raw values: data/F041_LAB_Bench_values.csv.

Benchmark reference (APA): Laurent, J. M., Janizek, J. D., Ruzo, M., Hinks, M. M., Hammerling, M. J., Narayanan, S., Ponnapati, M., White, A. D., & Rodriques, S. G. (2024). LAB-Bench: Measuring capabilities of language models for biology research. arXiv. https://arxiv.org/abs/2407.10362

LAB-Bench: Coverage

Paper v3; FigQA; average of three runs

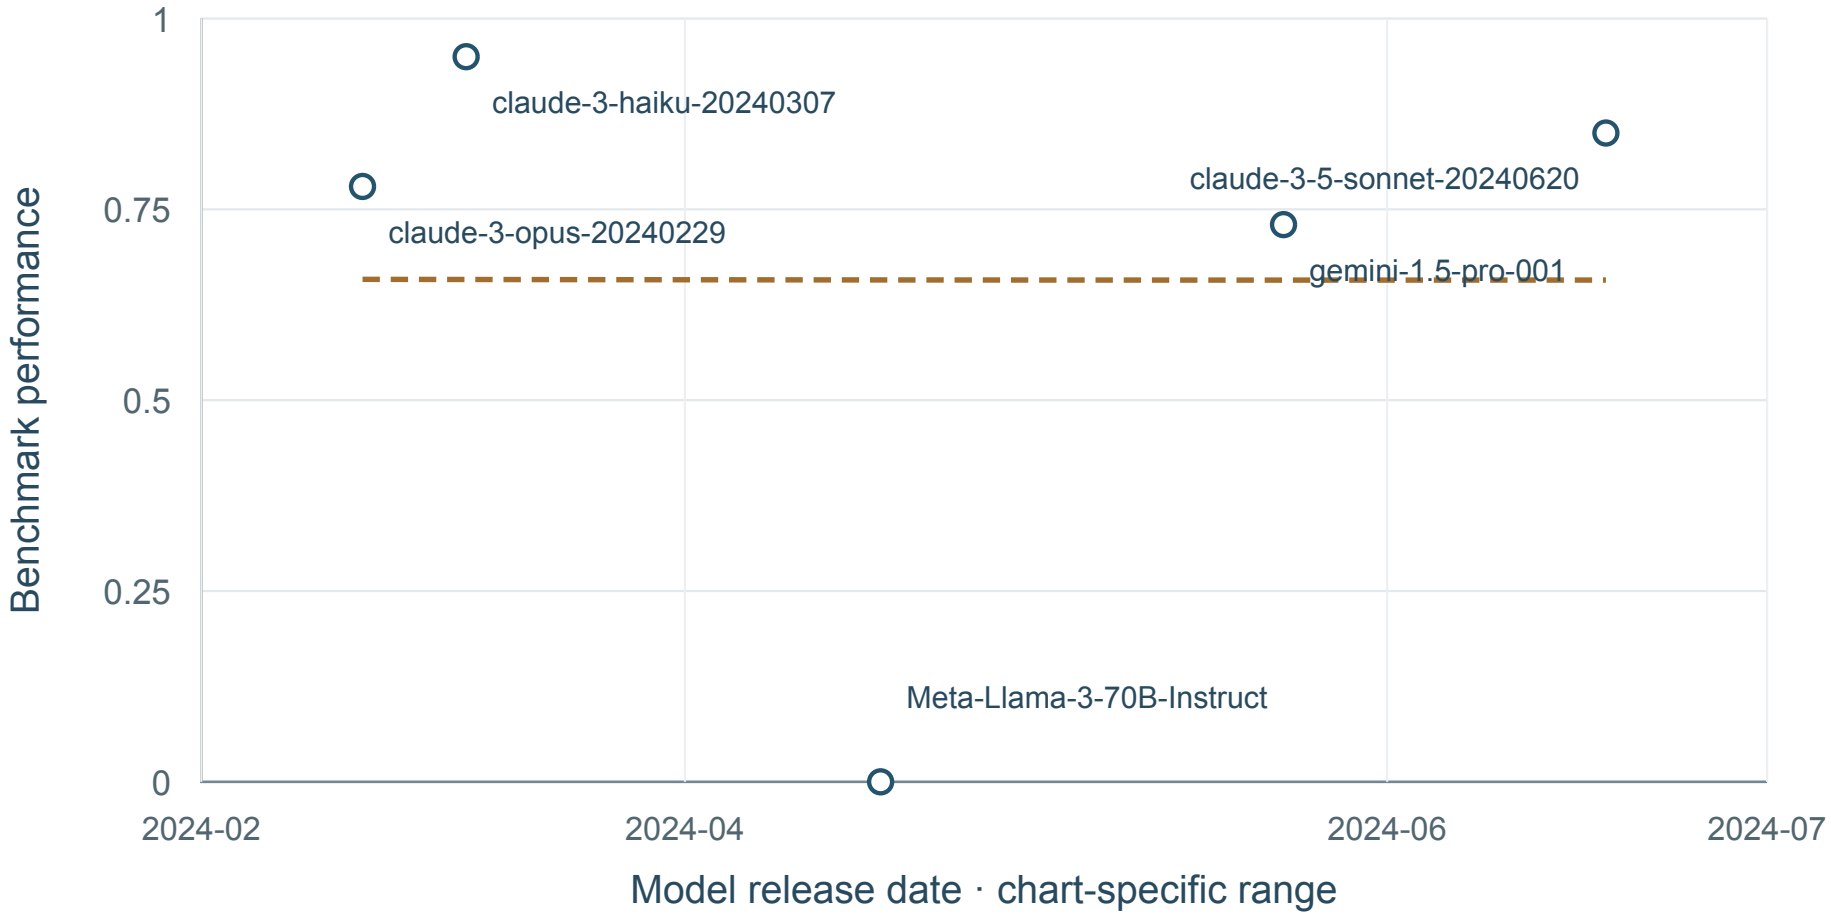

5 shown · 3 undated · 0 definition-held · sources: S014


Smoothed mean · 5 configurations · 5 release dates · 180-day kernel

Result-source references: S014. Exact point locators and raw values: data/F041_LAB_Bench_values.csv.

Benchmark reference (APA): Laurent, J. M., Janizek, J. D., Ruzo, M., Hinks, M. M., Hammerling, M. J., Narayanan, S., Ponnapati, M., White, A. D., & Rodriques, S. G. (2024). LAB-Bench: Measuring capabilities of language models for biology research. arXiv. https://arxiv.org/abs/2407.10362

LAB-Bench: Coverage

Paper v3; TableQA; average of three runs

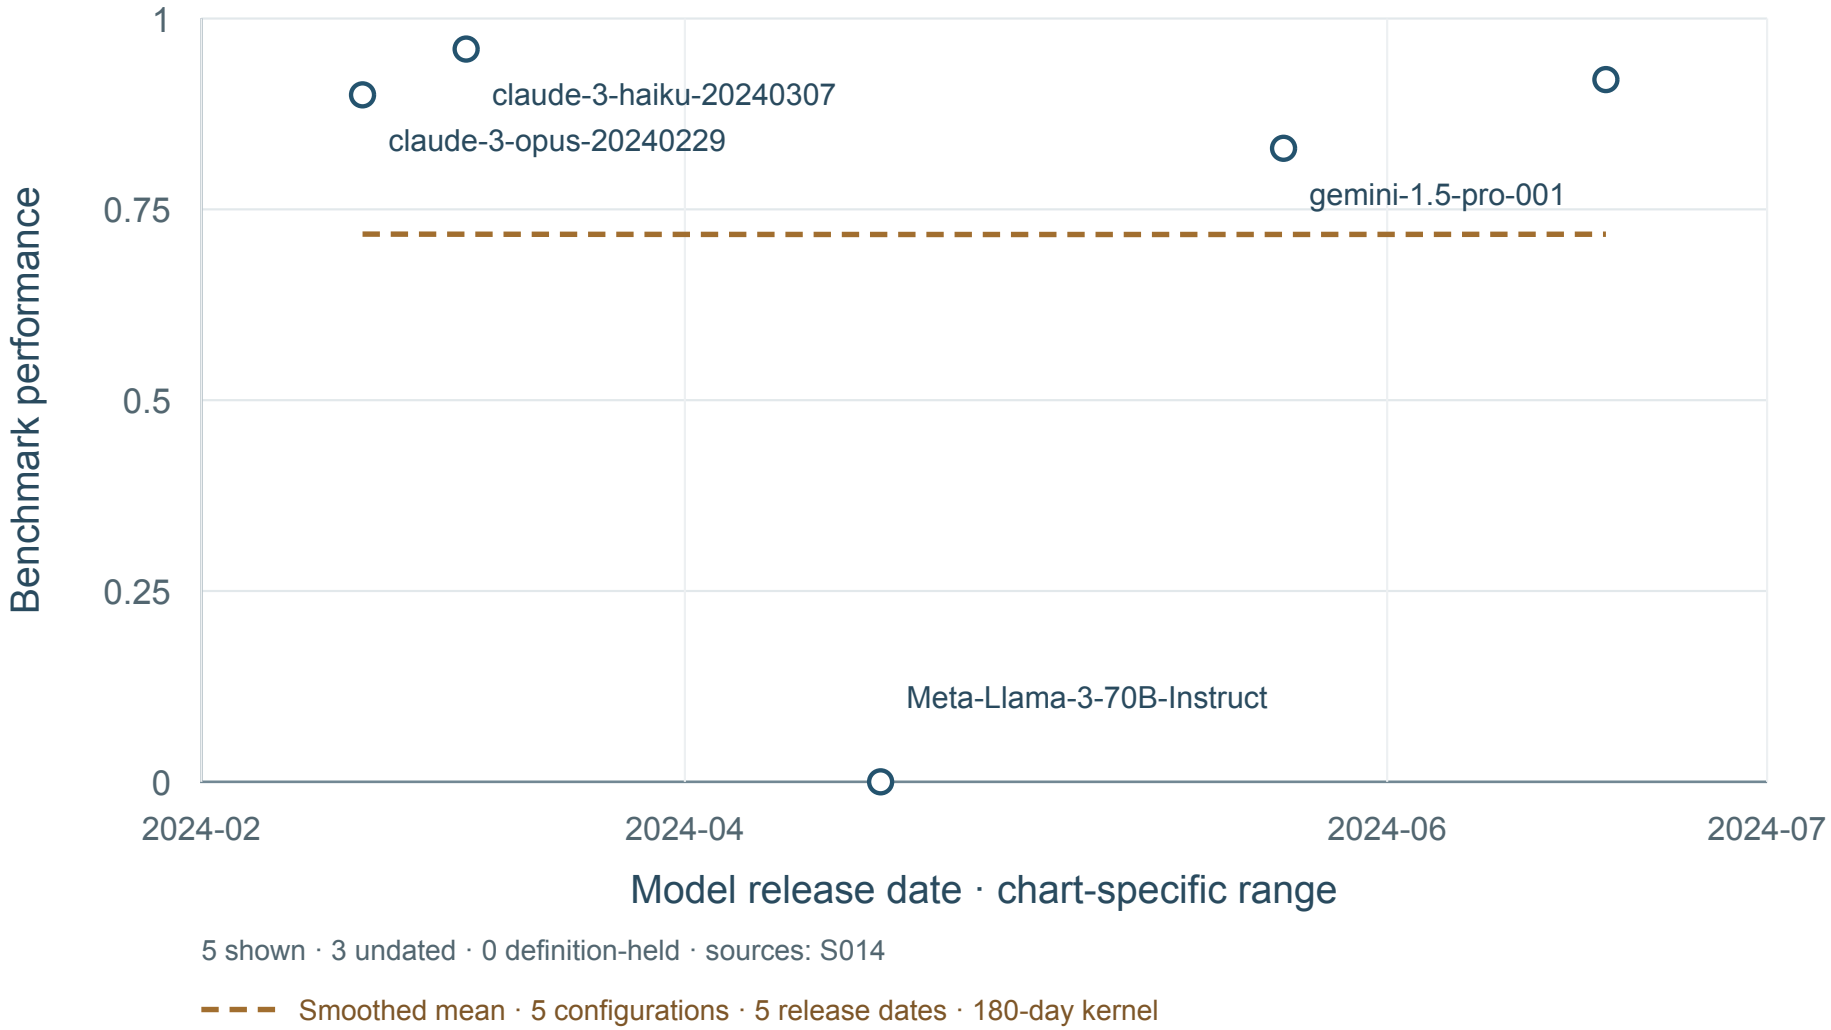

5 shown · 3 undated · 0 definition-held · sources: S014


Smoothed mean · 5 configurations · 5 release dates · 180-day kernel

Result-source references: S014. Exact point locators and raw values: data/F041_LAB_Bench_values.csv.

Benchmark reference (APA): Laurent, J. M., Janizek, J. D., Ruzo, M., Hinks, M. M., Hammerling, M. J., Narayanan, S., Ponnapati, M., White, A. D., & Rodriques, S. G. (2024). LAB-Bench: Measuring capabilities of language models for biology research. arXiv. https://arxiv.org/abs/2407.10362

LAB-Bench: FigQA mean score (%)

Adaptive thinking; max effort (as labelled by source); MC061 Figure 2.17.1.A / adjacent text; LAB-Bench FigQA; No tools

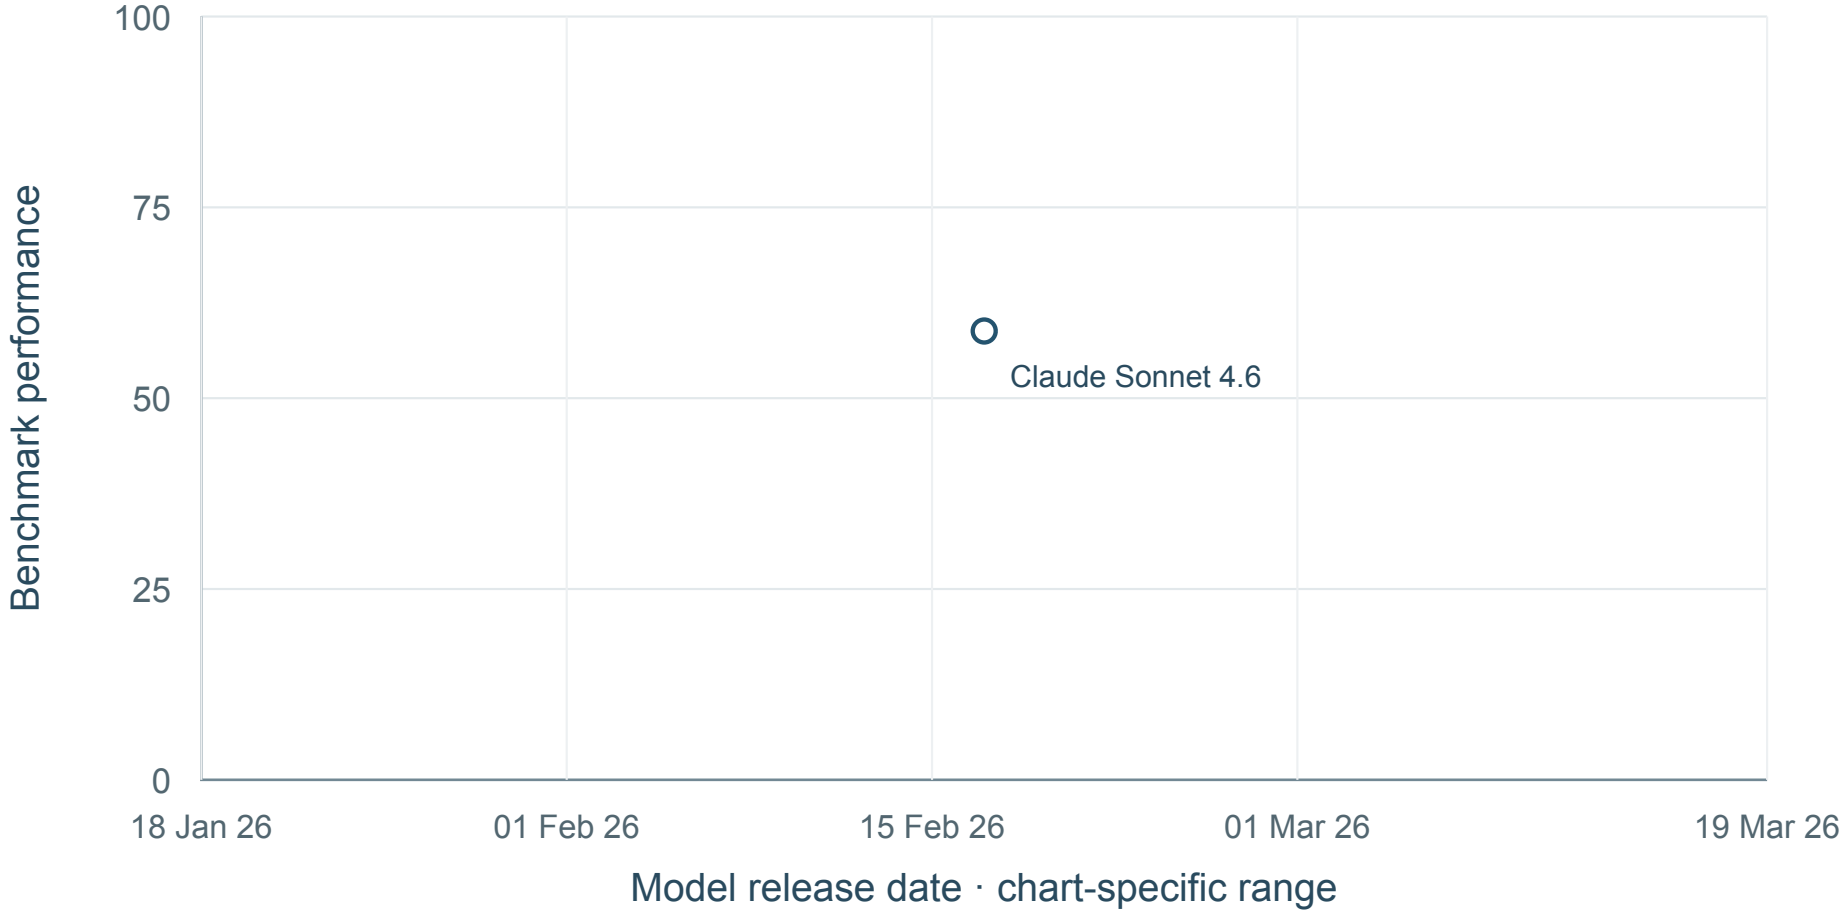

1 shown · 1 undated · 0 definition-held · sources: MC061


No mean curve: Fewer than five dated model configurations.

Result-source references: MC061. Exact point locators and raw values: data/F041_LAB_Bench_values.csv.

Benchmark reference (APA): Laurent, J. M., Janizek, J. D., Ruzo, M., Hinks, M. M., Hammerling, M. J., Narayanan, S., Ponnapati, M., White, A. D., & Rodriques, S. G. (2024). LAB-Bench: Measuring capabilities of language models for biology research. arXiv. https://arxiv.org/abs/2407.10362

LAB-Bench: FigQA mean score (%)

Adaptive thinking; max effort (as labelled by source); MC061 Figure 2.17.1.A / adjacent text; LAB-Bench FigQA; Image cropping tool

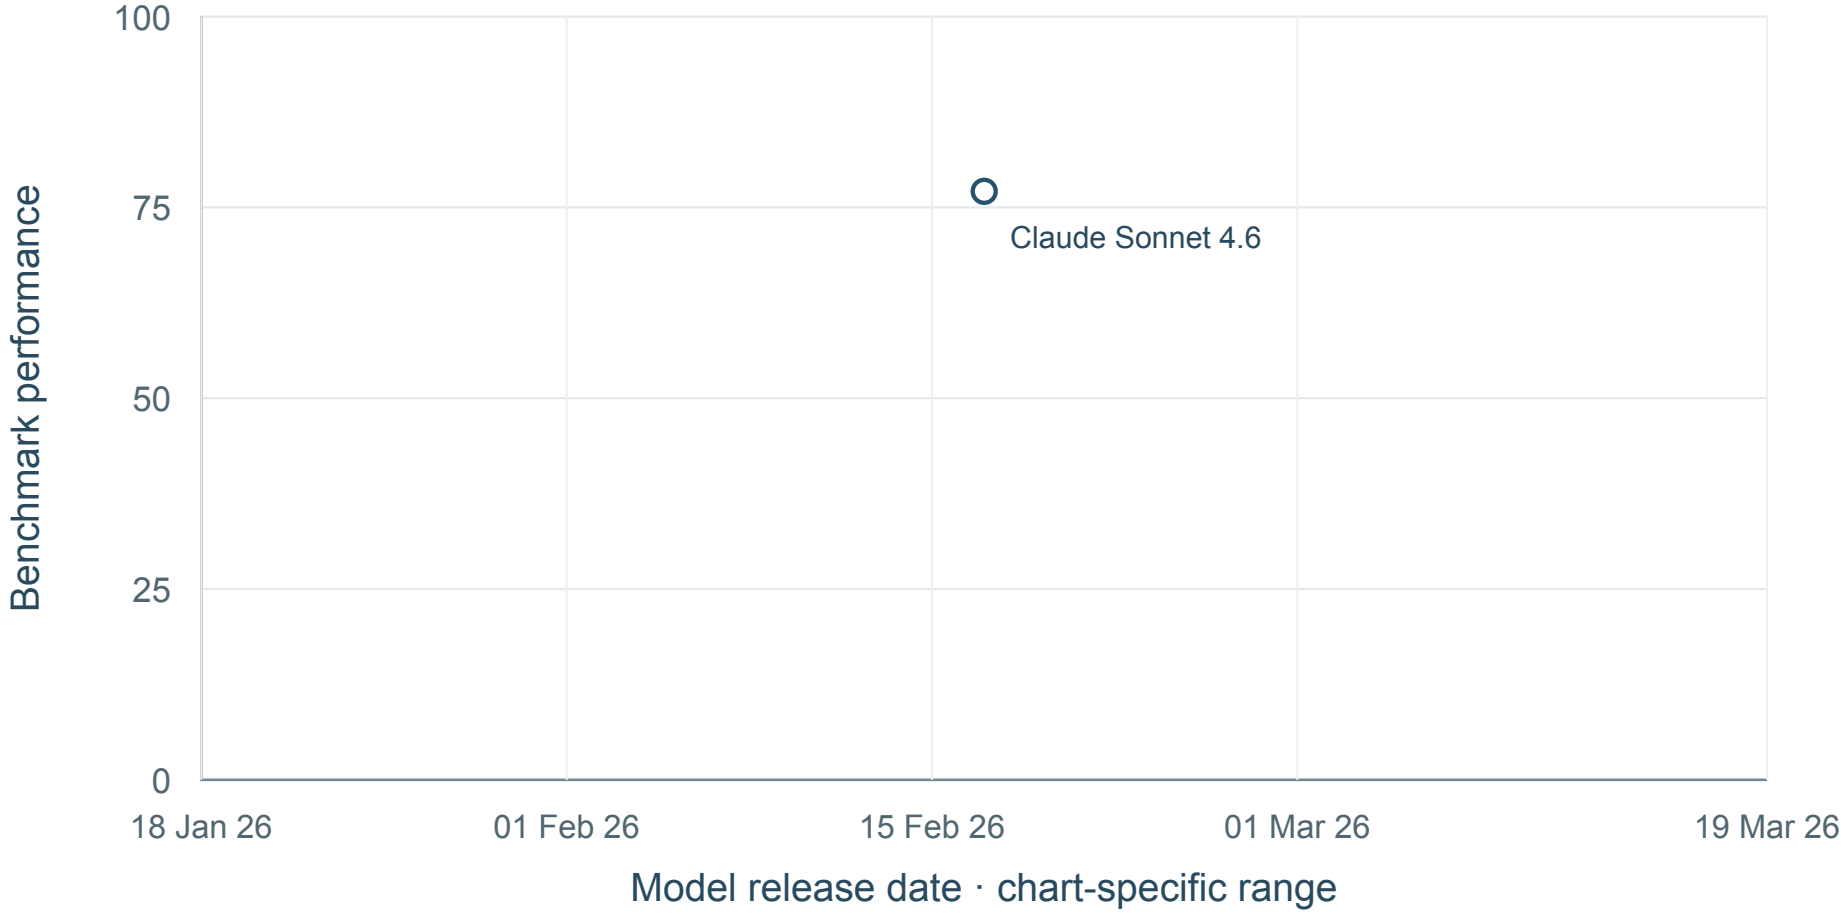

1 shown · 1 undated · 0 definition-held · sources: MC061


No mean curve: Fewer than five dated model configurations.

Result-source references: MC061. Exact point locators and raw values: data/F041_LAB_Bench_values.csv.

Benchmark reference (APA): Laurent, J. M., Janizek, J. D., Ruzo, M., Hinks, M. M., Hammerling, M. J., Narayanan, S., Ponnapati, M., White, A. D., & Rodriques, S. G. (2024). LAB-Bench: Measuring capabilities of language models for biology research. arXiv. https://arxiv.org/abs/2407.10362

LAB-Bench: FigQA mean score (%)

Adaptive thinking; max effort (as labelled by source); MC062 Section 2.19.1, Figure 2.19.1.A; LAB-Bench FigQA; No tools

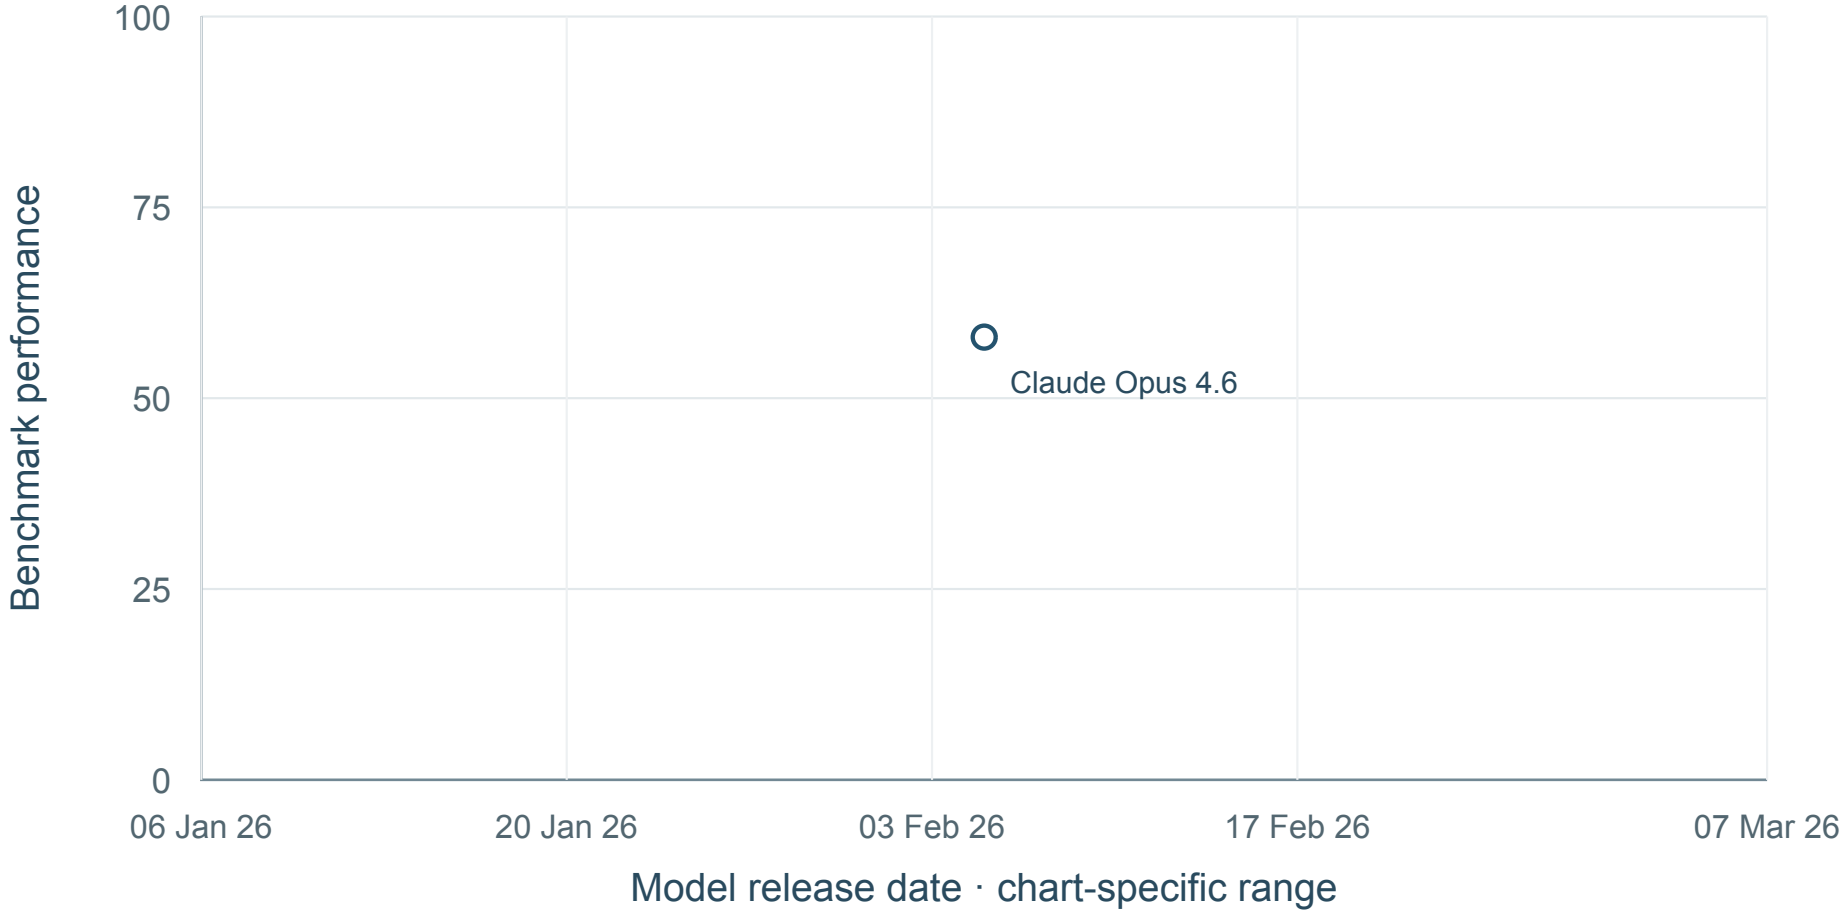

1 shown · 1 undated · 0 definition-held · sources: MC062


No mean curve: Fewer than five dated model configurations.

Result-source references: MC062. Exact point locators and raw values: data/F041_LAB_Bench_values.csv.

Benchmark reference (APA): Laurent, J. M., Janizek, J. D., Ruzo, M., Hinks, M. M., Hammerling, M. J., Narayanan, S., Ponnapati, M., White, A. D., & Rodriques, S. G. (2024). LAB-Bench: Measuring capabilities of language models for biology research. arXiv. https://arxiv.org/abs/2407.10362

LAB-Bench: FigQA mean score (%)

Adaptive thinking; max effort (as labelled by source); MC062 Section 2.19.1, Figure 2.19.1.A; LAB-Bench FigQA; Image cropping tool

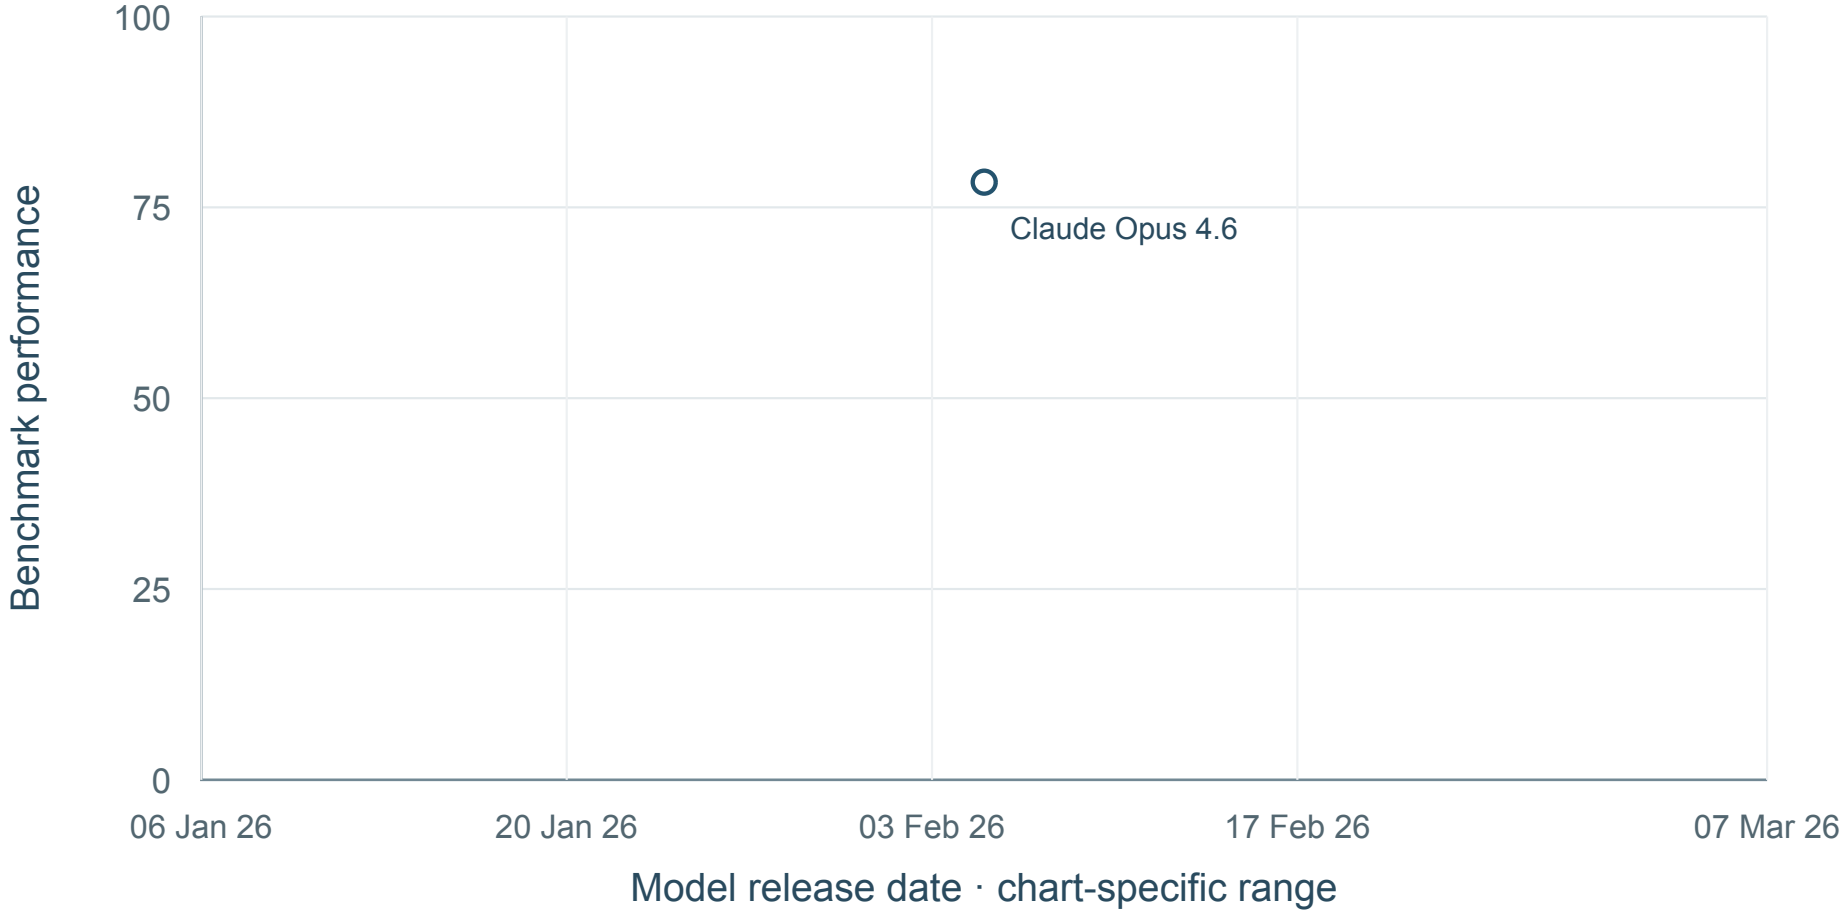

1 shown · 1 undated · 0 definition-held · sources: MC062

No mean curve: Fewer than five dated model configurations.

Result-source references: MC062. Exact point locators and raw values: data/F041_LAB_Bench_values.csv.

Benchmark reference (APA): Laurent, J. M., Janizek, J. D., Ruzo, M., Hinks, M. M., Hammerling, M. J., Narayanan, S., Ponnapati, M., White, A. D., & Rodriques, S. G. (2024). LAB-Bench: Measuring capabilities of language models for biology research. arXiv. https://arxiv.org/abs/2407.10362

F044 CORE-Bench

Reproduce results from scientific code and data

12 source values; 0 new; 6 separate conditions; 12 visible time points; 0 definition-held values; 0 visible mean curves.

Benchmark references (APA)

Siegel, Z. S., Kapoor, S., Nadgir, N., Stroebl, B., & Narayanan, A. (2024). CORE-Bench: Fostering the credibility of published research through a computational reproducibility agent benchmark. arXiv. https://arxiv.org/abs/2409.11363

Workflow and article scope

Challenges: D

Coordinate retrieval, tools and intermediate steps; Verify source support and detect errors

Public leaderboard mixes budgets and agents; manual validation gives a different score.

Manuscript anchors: Lu and Wang, Challenge D; manuscript paragraphs 9, 15–18 and 31; Product accuracy and auditability, manuscript paragraphs 28–29

Result-source references: S046. Full references appear in the final bibliography.

Complete condition inventory

01. Task pass@1 | Original 90-paper corpus; Easy; CORE-Agent
2 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S046.

02. Task pass@1 | Original 90-paper corpus; Easy; AutoGPT
2 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S046.

03. Task pass@1 | Original 90-paper corpus; Medium; CORE-Agent
2 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S046.


04. Task pass@1 | Original 90-paper corpus; Medium; AutoGPT
2 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S046.

05. Task pass@1 | Original 90-paper corpus; Hard; CORE-Agent
2 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S046.

06. Task pass@1 | Original 90-paper corpus; Hard; AutoGPT
2 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S046.

CORE-Bench: Task pass@1

Original 90-paper corpus; Easy; CORE-Agent

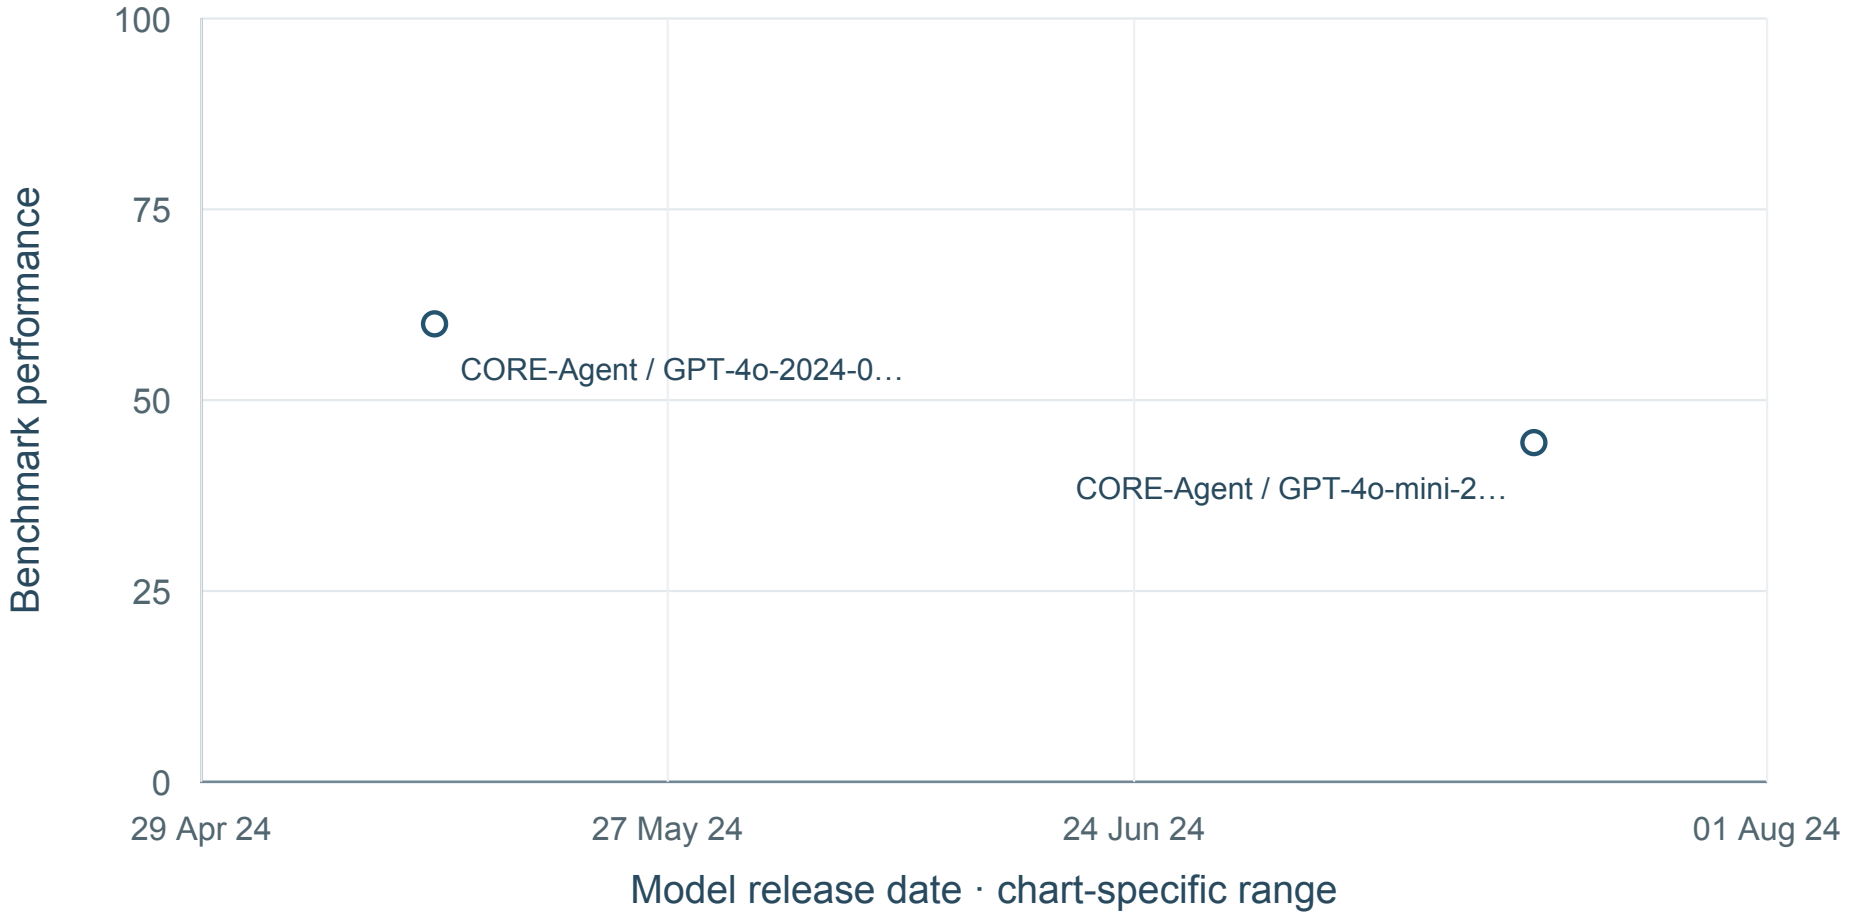

2 shown · 0 undated · 0 definition-held · sources: S046


No mean curve: Fewer than five dated model configurations.

Result-source references: S046. Exact point locators and raw values: data/F044_CORE_Bench_values.csv.

Benchmark reference (APA): Siegel, Z. S., Kapoor, S., Nadgir, N., Stroebl, B., & Narayanan, A. (2024). CORE-Bench: Fostering the credibility of published research through a computational reproducibility agent benchmark. arXiv. https://arxiv.org/abs/2409.11363

CORE-Bench: Task pass@1

Original 90-paper corpus; Easy; AutoGPT

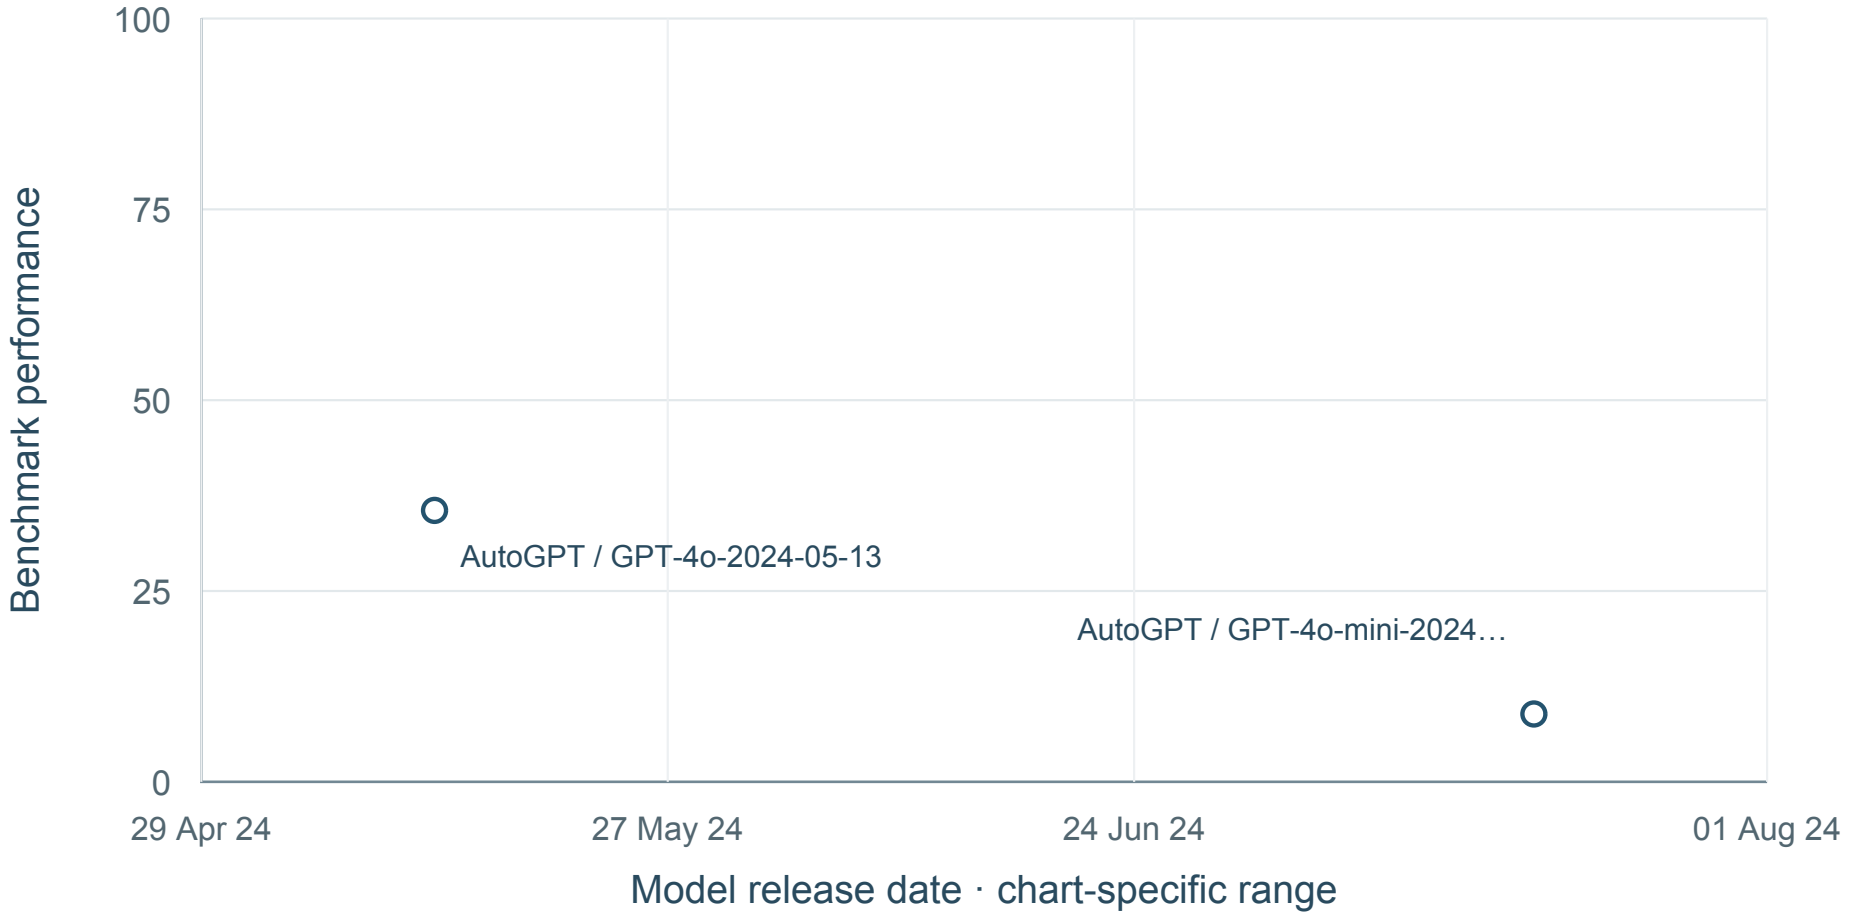

2 shown · 0 undated · 0 definition-held · sources: S046


No mean curve: Fewer than five dated model configurations.

Result-source references: S046. Exact point locators and raw values: data/F044_CORE_Bench_values.csv.

Benchmark reference (APA): Siegel, Z. S., Kapoor, S., Nadgir, N., Stroebl, B., & Narayanan, A. (2024). CORE-Bench: Fostering the credibility of published research through a computational reproducibility agent benchmark. arXiv. https://arxiv.org/abs/2409.11363

CORE-Bench: Task pass@1

Original 90-paper corpus; Medium; CORE-Agent

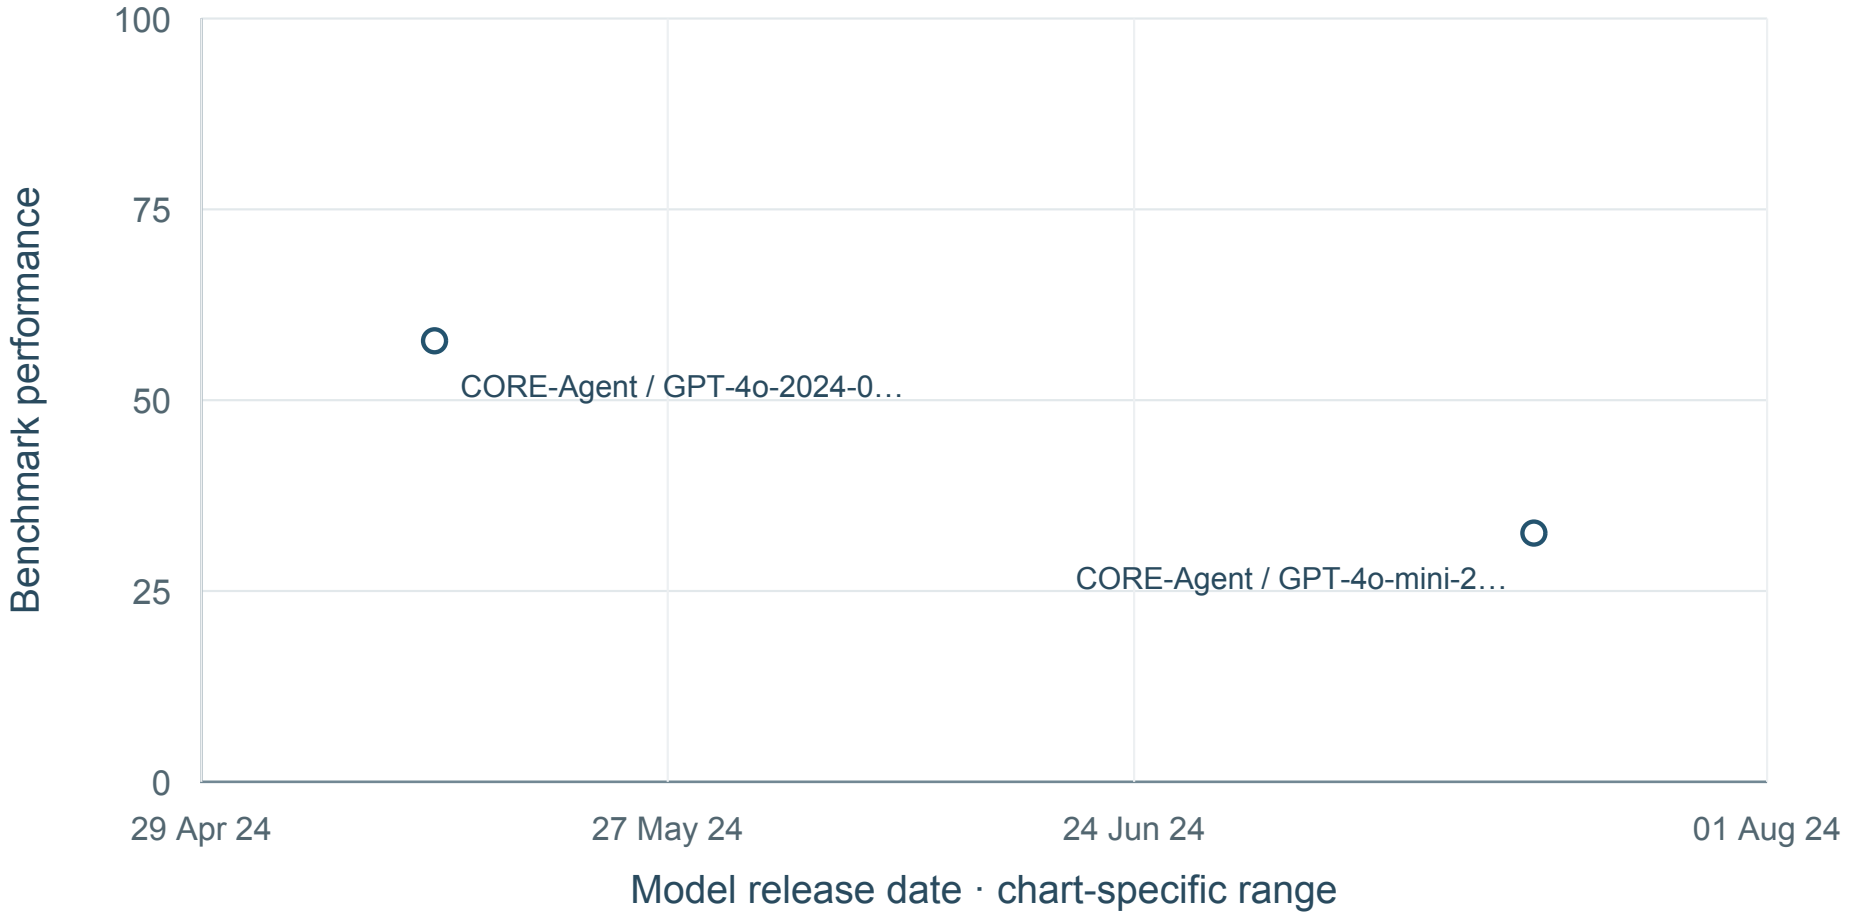

2 shown · 0 undated · 0 definition-held · sources: S046


No mean curve: Fewer than five dated model configurations.

Result-source references: S046. Exact point locators and raw values: data/F044_CORE_Bench_values.csv.

Benchmark reference (APA): Siegel, Z. S., Kapoor, S., Nadgir, N., Stroebl, B., & Narayanan, A. (2024). CORE-Bench: Fostering the credibility of published research through a computational reproducibility agent benchmark. arXiv. https://arxiv.org/abs/2409.11363

CORE-Bench: Task pass@1

Original 90-paper corpus; Medium; AutoGPT

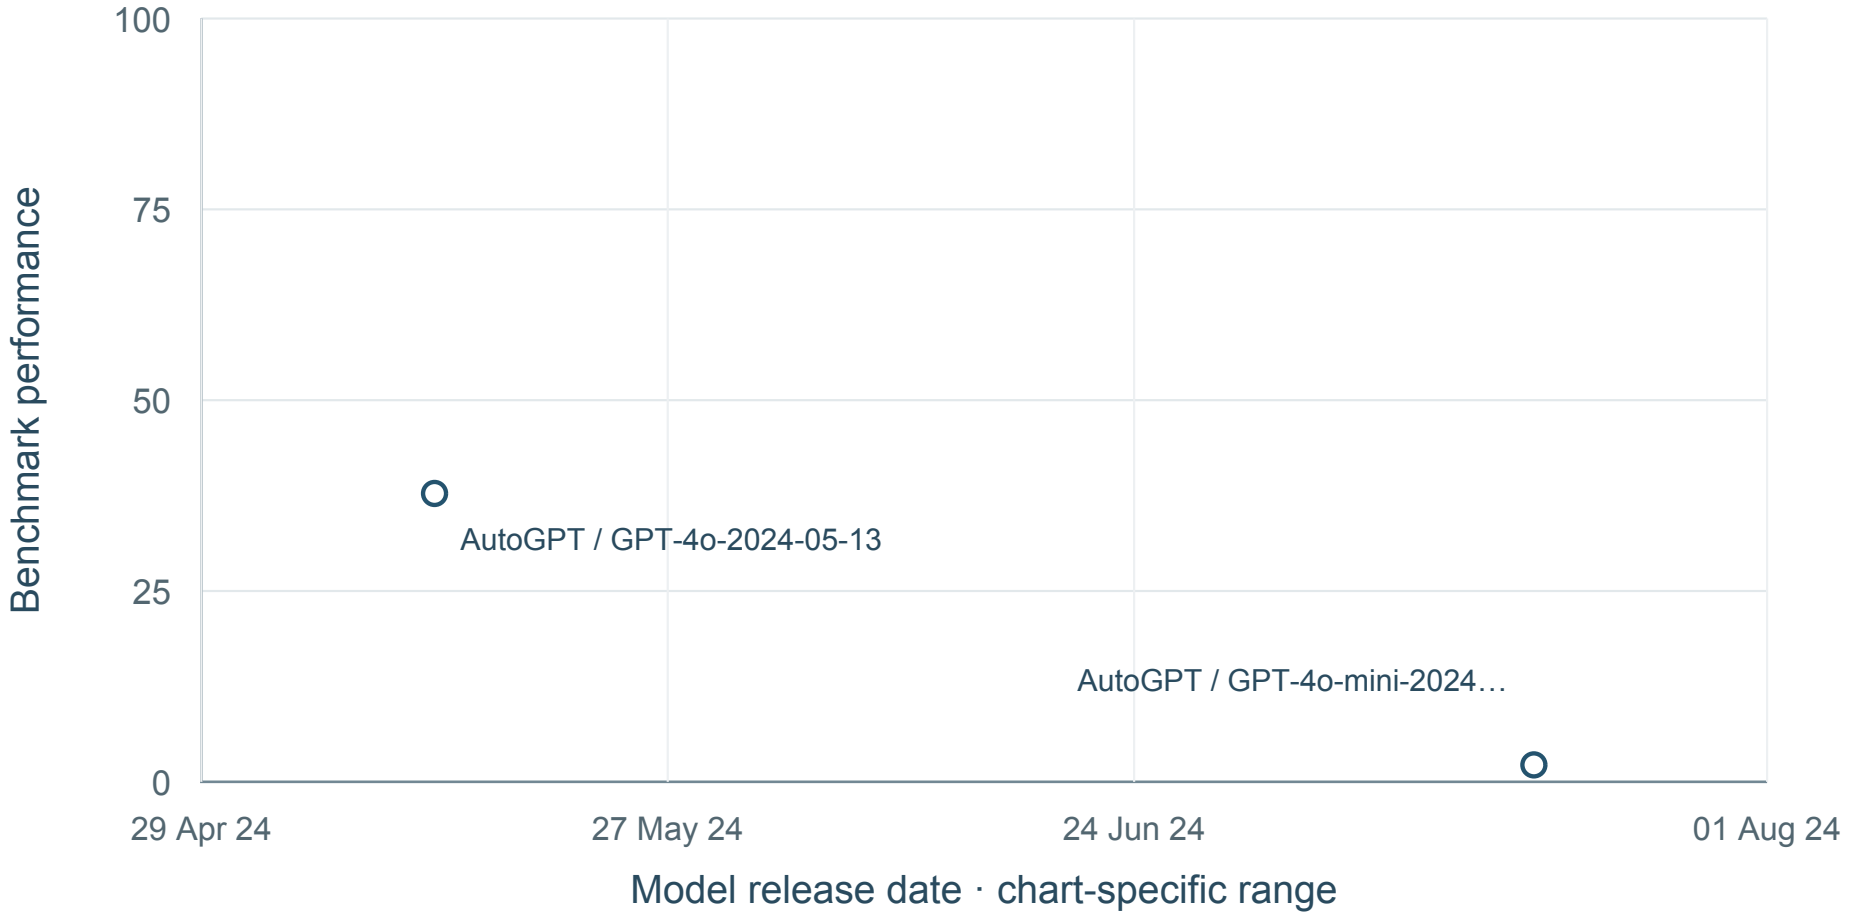

2 shown · 0 undated · 0 definition-held · sources: S046


No mean curve: Fewer than five dated model configurations.

Result-source references: S046. Exact point locators and raw values: data/F044_CORE_Bench_values.csv.

Benchmark reference (APA): Siegel, Z. S., Kapoor, S., Nadgir, N., Stroebl, B., & Narayanan, A. (2024). CORE-Bench: Fostering the credibility of published research through a computational reproducibility agent benchmark. arXiv. https://arxiv.org/abs/2409.11363

CORE-Bench: Task pass@1

Original 90-paper corpus; Hard; CORE-Agent

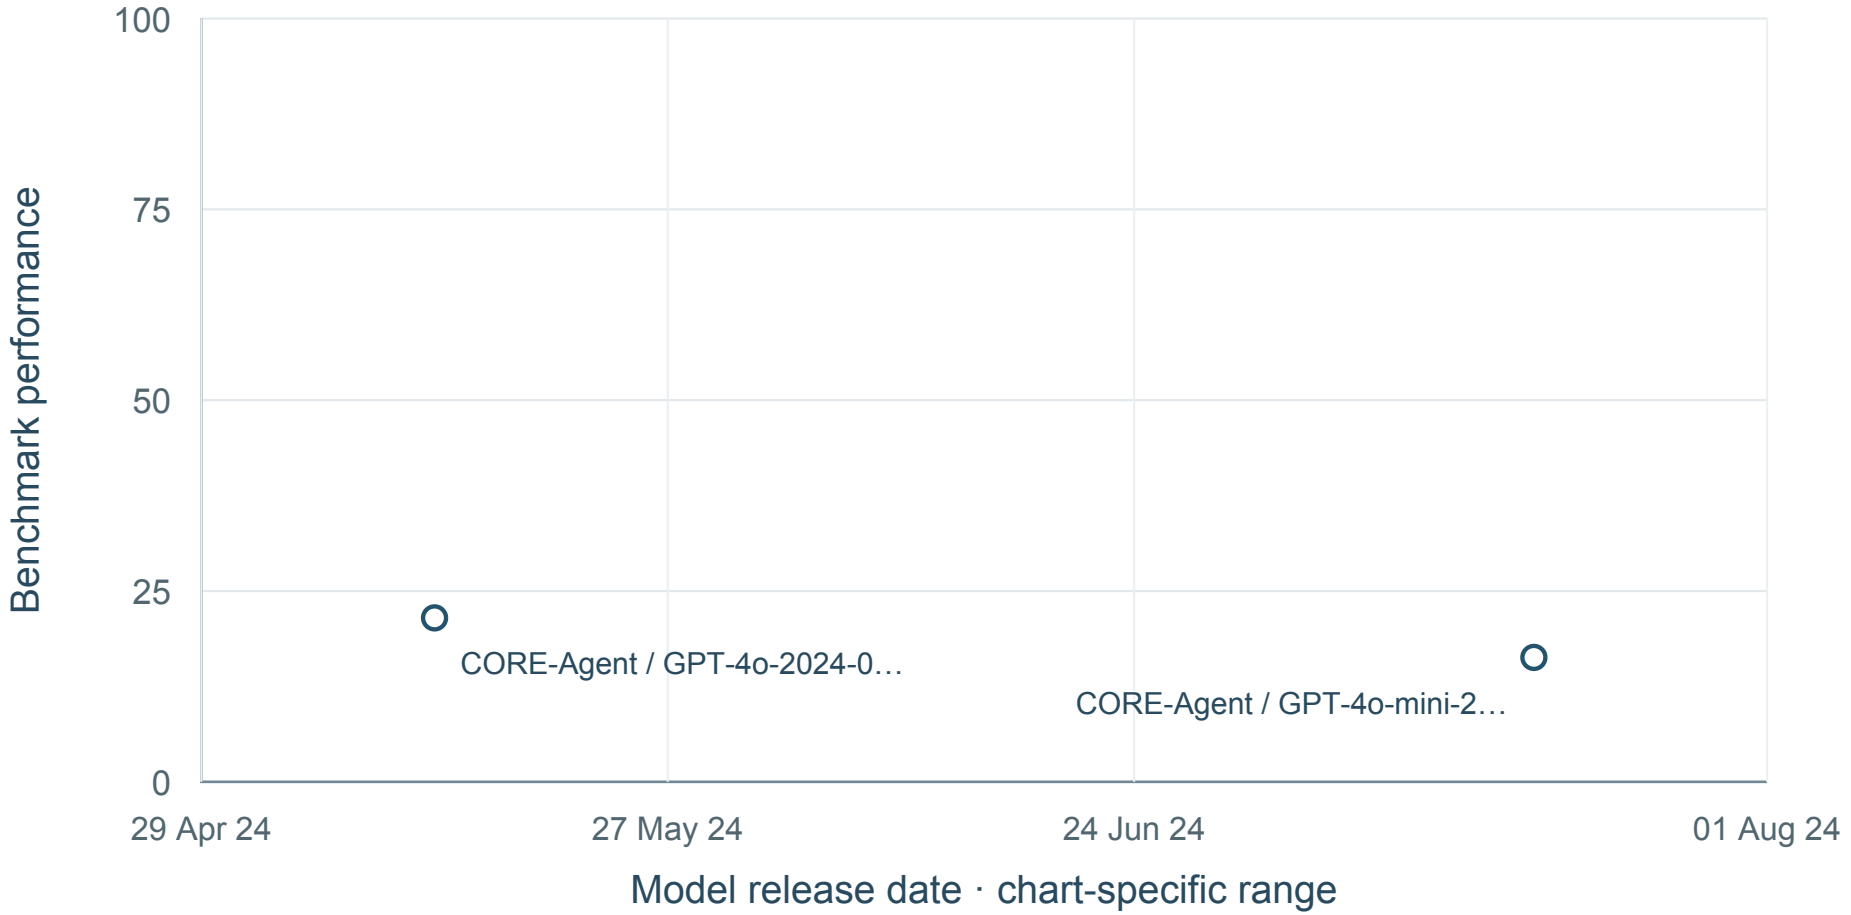

2 shown · 0 undated · 0 definition-held · sources: S046


No mean curve: Fewer than five dated model configurations.

Result-source references: S046. Exact point locators and raw values: data/F044_CORE_Bench_values.csv.

Benchmark reference (APA): Siegel, Z. S., Kapoor, S., Nadgir, N., Stroebl, B., & Narayanan, A. (2024). CORE-Bench: Fostering the credibility of published research through a computational reproducibility agent benchmark. arXiv. https://arxiv.org/abs/2409.11363

CORE-Bench: Task pass@1

Original 90-paper corpus; Hard; AutoGPT

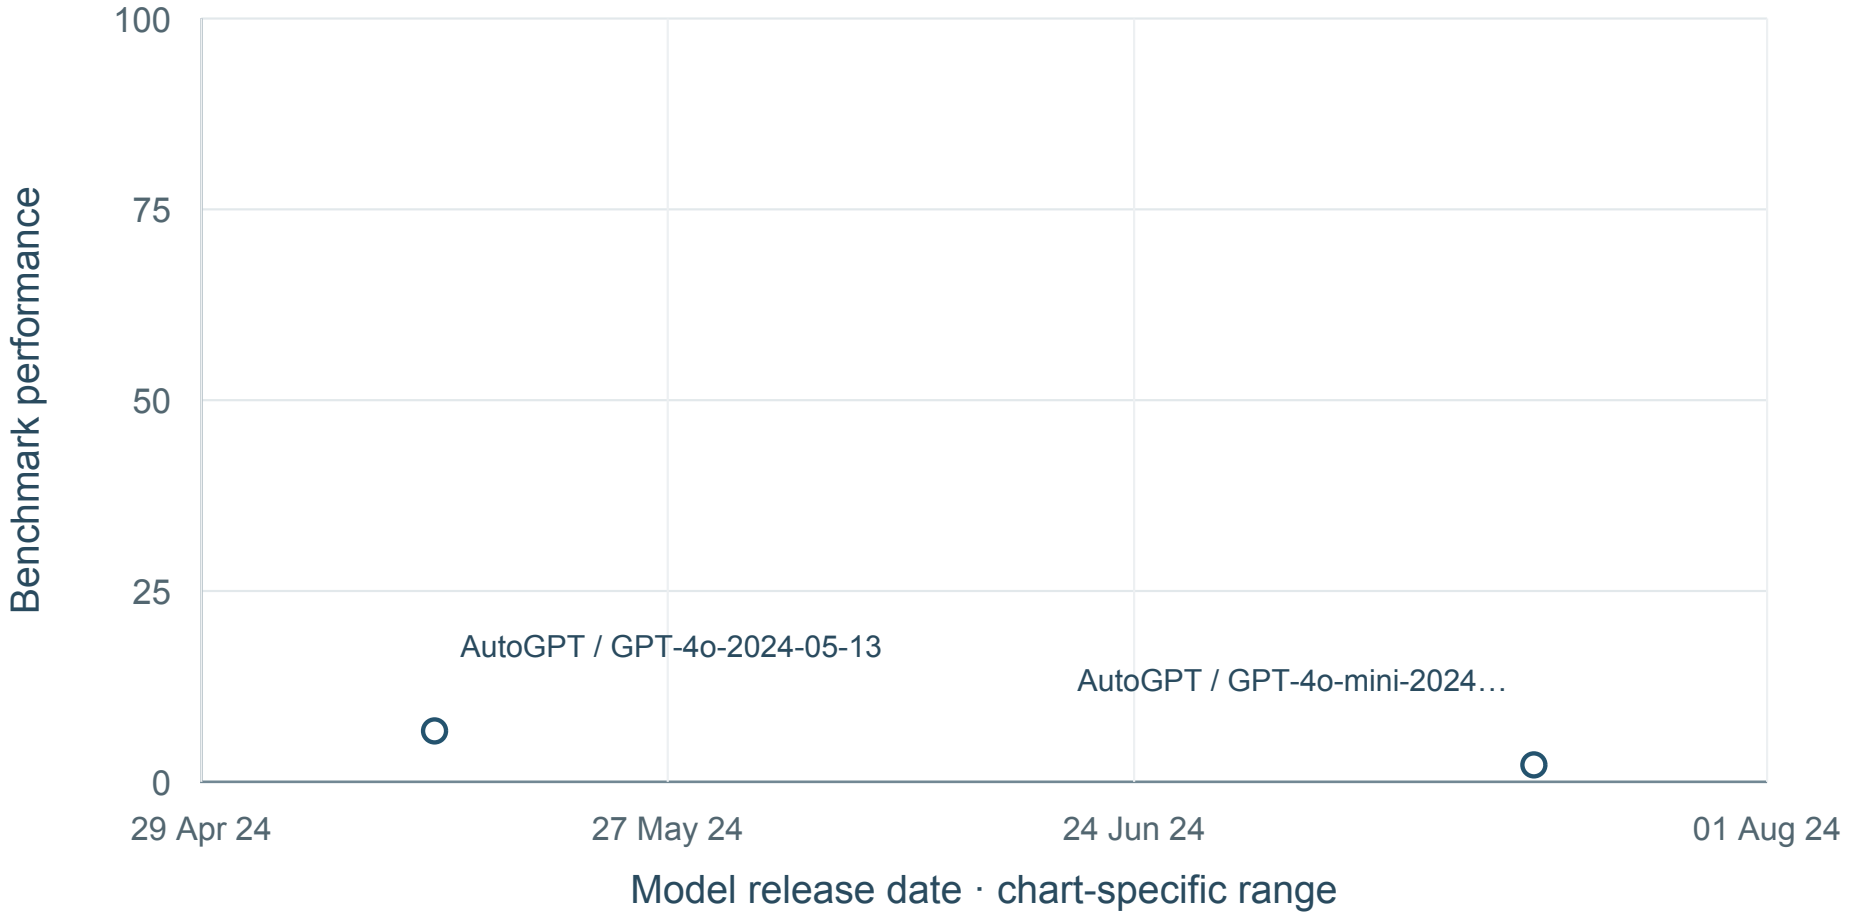

2 shown · 0 undated · 0 definition-held · sources: S046

No mean curve: Fewer than five dated model configurations.

Result-source references: S046. Exact point locators and raw values: data/F044_CORE_Bench_values.csv.

Benchmark reference (APA): Siegel, Z. S., Kapoor, S., Nadgir, N., Stroebl, B., & Narayanan, A. (2024). CORE-Bench: Fostering the credibility of published research through a computational reproducibility agent benchmark. arXiv. https://arxiv.org/abs/2409.11363

F046 GAIA

Multi-step assistant tasks using external tools and multimodal evidence

18 source values; 0 new; 3 separate conditions; 0 visible time points; 0 definition-held values; 0 visible mean curves.

Benchmark references (APA)

Mialon, G., Fourrier, C., Swift, C., Wolf, T., LeCun, Y., & Scialom, T. (2023). GAIA: a benchmark for general AI assistants. arXiv. https://arxiv.org/abs/2311.12983

Workflow and article scope

Challenges: B; D

Locate relevant evidence; Coordinate retrieval, tools and intermediate steps

General assistant tasks; not human coder accuracy.

Manuscript anchors: Source-based step comparisons, manuscript paragraph 31; Lu and Wang, Challenge D; manuscript paragraphs 9, 15–18 and 31

Result-source references: S047. Full references appear in the final bibliography.

Complete condition inventory


01. Answer accuracy | Original paper; Level 1
6 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S047.

02. Answer accuracy | Original paper; Level 2
6 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S047.

03. Answer accuracy | Original paper; Level 3
6 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S047.

GAIA: Answer accuracy

Original paper; Level 1

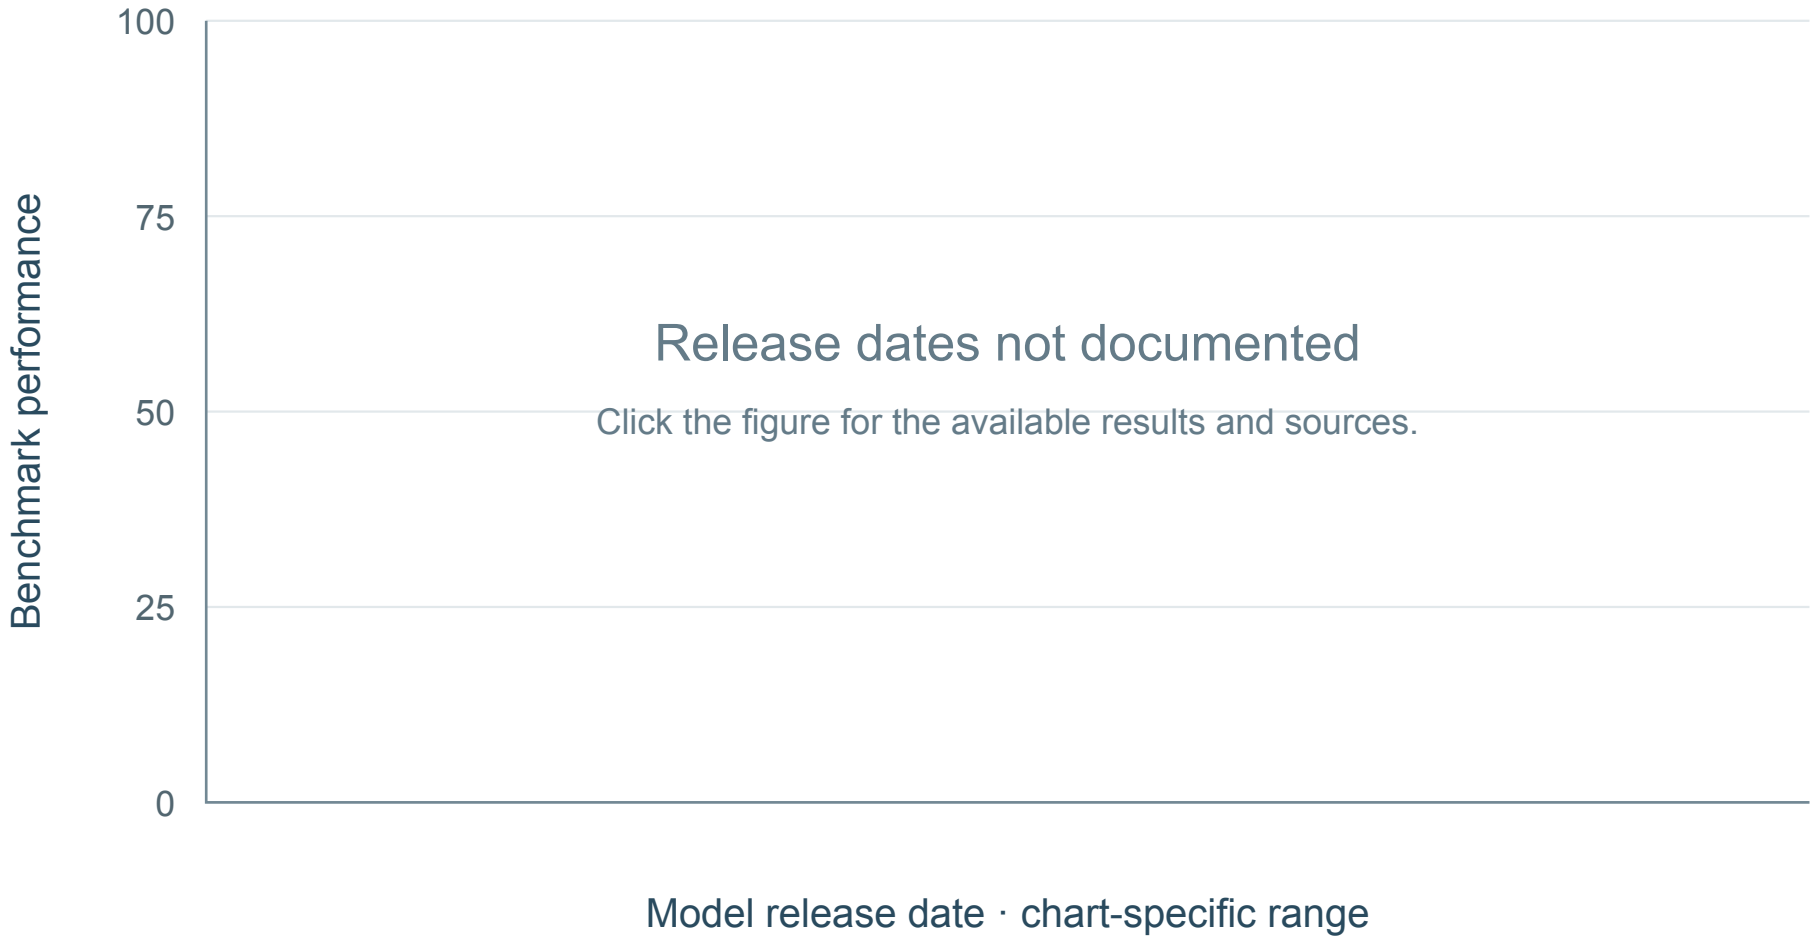

0 shown · 6 undated · 0 definition-held · sources: S047

No mean curve: Fewer than five dated model configurations.

Result-source references: S047. Exact point locators and raw values: data/F046_GAIA_values.csv.

Benchmark reference (APA): Mialon, G., Fourrier, C., Swift, C., Wolf, T., LeCun, Y., & Scialom, T. (2023). GAIA: a benchmark for general AI assistants. arXiv. https://arxiv.org/abs/2311.12983

F047 BFCL

Select tools, construct arguments and perform multi-turn function calls

752 source values; 98 new; 65 separate conditions; 196 visible time points; 13 definition-held values; 12 visible mean curves.

Benchmark references (APA)

Patil, S. G., Mao, H., Yan, F., Ji, C. C.-J., Suresh, V., Stoica, I., & Gonzalez, J. E. (2025). The Berkeley function calling leaderboard (BFCL): From tool use to agentic evaluation of large language models. In Proceedings of the 42nd International Conference on Machine Learning (Vol. 267) (pp. 48371–48392). https://proceedings.mlr.press/v267/patil25a.html

Workflow and article scope

Challenges: D

Define variables and coding rules; Interpret evidence and apply coding rules; Coordinate retrieval, tools and intermediate steps

Correct call syntax does not establish that extracted inputs or coding rules are valid.

Manuscript anchors: Preparation and reporting, manuscript paragraph 33; Lu and Wang, Challenge E; manuscript paragraphs 20 and 31; Lu and Wang, Challenge D; manuscript paragraphs 9, 15–18 and 31

Result-source references: S018; MC007; MC008; MC009; MC010; MC014; MC015; MC048; MC049; MC050; MC051; MC052; MC073; MC075; MC079; MC083; MC084; MC081; MC076. Full references appear in the final bibliography.

Complete condition inventory

01. Accuracy | BFCL v4; Overall; FC
66 values; 12 time points; visible mean curve. Sources: S018.

02. Accuracy | BFCL v4; Non-live AST; FC
66 values; 12 time points; visible mean curve. Sources: S018.

03. Accuracy | BFCL v4; Live; FC
66 values; 12 time points; visible mean curve. Sources: S018.

04. Accuracy | BFCL v4; Multi-turn; FC
66 values; 12 time points; visible mean curve. Sources: S018.

05. Accuracy | BFCL v4; Web search; FC
66 values; 12 time points; visible mean curve. Sources: S018.

06. Accuracy | BFCL v4; Memory; FC
66 values; 12 time points; visible mean curve. Sources: S018.

07. Accuracy | BFCL v4; Overall; Prompt
34 values; 11 time points; visible mean curve. Sources: S018.

08. Accuracy | BFCL v4; Non-live AST; Prompt
34 values; 11 time points; visible mean curve. Sources: S018.

09. Accuracy | BFCL v4; Live; Prompt
34 values; 11 time points; visible mean curve. Sources: S018.

10. Accuracy | BFCL v4; Multi-turn; Prompt
34 values; 11 time points; visible mean curve. Sources: S018.

11. Accuracy | BFCL v4; Web search; Prompt
34 values; 11 time points; visible mean curve. Sources: S018.

12. Accuracy | BFCL v4; Memory; Prompt
34 values; 11 time points; visible mean curve. Sources: S018.

13. Accuracy | BFCL v4; Overall; FC thinking
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S018.

14. Accuracy | BFCL v4; Non-live AST; FC thinking
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S018.

15. Accuracy | BFCL v4; Live; FC thinking
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S018.

16. Accuracy | BFCL v4; Multi-turn; FC thinking
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S018.

17. Accuracy | BFCL v4; Web search; FC thinking
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S018.

18. Accuracy | BFCL v4; Memory; FC thinking
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S018.

19. Accuracy | BFCL v4; Overall; Prompt + Thinking
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S018.

20. Accuracy | BFCL v4; Non-live AST; Prompt + Thinking
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S018.

21. Accuracy | BFCL v4; Live; Prompt + Thinking
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S018.

22. Accuracy | BFCL v4; Multi-turn; Prompt + Thinking
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S018.

23. Accuracy | BFCL v4; Web search; Prompt + Thinking
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S018.

24. Accuracy | BFCL v4; Memory; Prompt + Thinking
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S018.

25. Accuracy | BFCL v4; Overall; unspecified
7 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S018.

26. Accuracy | BFCL v4; Non-live AST; unspecified
7 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S018.

27. Accuracy | BFCL v4; Live; unspecified
7 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S018.

28. Accuracy | BFCL v4; Multi-turn; unspecified
7 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S018.

29. Accuracy | BFCL v4; Web search; unspecified
7 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S018.

30. Accuracy | BFCL v4; Memory; unspecified
7 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S018.

31. Reported BFCL score (%) | Mode not specified; MC007 M1; BFCL v3; Overall
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC007.

32. Reported BFCL score (%) | Non-thinking; MC007 M1; BFCL v3; Overall
1 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC007.

33. Reported BFCL score (%) | Instruct / non-thinking variant; MC007 M1; BFCL v3; Overall
1 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC007.

34. Reported BFCL score (%) | Mode not specified; MC008 M1; BFCL v3; Overall
3 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC008.

35. Reported BFCL score (%) | Thinking; MC008 M1; BFCL v3; Overall
2 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC008.

36. Reported BFCL score (%) | Thinking; MC009 M1; BFCL v3; Overall
3 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC009.

37. Reported BFCL score (%) | Mode not specified; MC010 M1; BFCL v3; Overall
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC010.

38. Reported BFCL score (%) | Non-thinking; MC010 M1; BFCL v3; Overall
2 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC010.

39. Reported BFCL score (%) | Instruct / non-thinking variant; MC010 M1; BFCL v3; Overall
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC010.

40. Reported BFCL score (%) | Thinking; MC014 H1; BFCL v4; Overall
1 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC014.

41. Reported BFCL score (%) | Mode not specified; MC014 H1; BFCL v4; Overall
2 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC014.

42. Reported BFCL score (%) | Mode not specified; MC015 M1; BFCL v3; Multi-turn component
1 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC015.

43. Reported BFCL score (%) | Mode not specified; MC048 H2; BFCL version unspecified; AST component
2 values; 0 time points; definition unresolved; raw data only. Sources: MC048.

44. Reported BFCL score (%) | Thinking; MC049 H1; 32B comparison; BFCL v3; Overall
3 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC049.

45. Reported BFCL score (%) | Non-thinking; MC049 H2; 32B comparison; BFCL v3; Overall
4 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC049.

46. Reported BFCL score (%) | Thinking; MC049 H3; 1.2B comparison; BFCL v3; Overall
3 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC049.

47. Reported BFCL score (%) | Non-thinking; MC049 H4; 1.2B comparison; BFCL v3; Overall
3 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC049.

48. Reported BFCL score (%) | Reasoning off; MC050 M3; BFCL v2; Live component
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC050.

49. Reported BFCL score (%) | Reasoning on; MC050 M3; BFCL v2; Live component
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC050.

50. Reported BFCL score (%) | Mode not specified; MC051 M3; BFCL v2; Overall
4 values; 4 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC051.

51. Reported BFCL score (%) | Mode not specified; MC052 H4; BFCL version unspecified; Overall
5 values; 0 time points; definition unresolved; raw data only. Sources: MC052.

52. Reported BFCL score (%) | Mode not specified; MC073 H6; BFCL v3; Overall
7 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC073.

53. Reported BFCL score (%) | Mode not specified; MC075 H13; BFCL v3; Overall
2 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC075.

54. Reported BFCL score (%) | Instruct / non-thinking variant; MC075 H13; BFCL v3; Overall
2 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC075.

55. Reported BFCL score (%) | Instruct / non-thinking variant; MC075 H25; BFCL v3; Overall
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC075.

56. Reported BFCL score (%) | Mode not specified; MC075 H25; BFCL v3; Overall
3 values; 3 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC075.

57. Reported BFCL score (%) | Thinking; MC075 H33; BFCL v3; Overall
6 values; 5 time points; no visible mean curve: Fewer than four distinct release dates. Sources: MC075.

58. Reported BFCL score (%) | Mode not specified; MC079 H1; BFCL v1; Overall
2 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC079.

59. Reported BFCL score (%) | Mode not specified; MC083 H1; BFCL v4; Overall
4 values; 3 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC083.

60. Reported BFCL score (%) | Mode not specified; MC084 H1; BFCL v4; Overall
4 values; 3 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC084.

61. Reported BFCL score (%) | Thinking; FC format; MC081 own-model post-training comparison; BFCL v3; Overall
8 values; 8 time points; no visible mean curve: Fewer than four distinct release dates. Sources: MC081.

62. Reported BFCL score (%) | Non-thinking; FC format; MC081 own-model post-training comparison; BFCL v3; Overall
8 values; 8 time points; no visible mean curve: Fewer than four distinct release dates. Sources: MC081.


63. Reported BFCL score (%) | Mode not specified; MC076 Table 5; BFCL version not pinned; Overall; Overall
2 values; 0 time points; definition unresolved; raw data only. Sources: MC076.

64. Reported BFCL score (%) | Mode not specified; MC076 Table 5; BFCL version not pinned; Live AST; Live component
2 values; 0 time points; definition unresolved; raw data only. Sources: MC076.

65. Reported BFCL score (%) | Mode not specified; MC076 Table 5; BFCL version not pinned; Multi-turn; Multi-turn component
2 values; 0 time points; definition unresolved; raw data only. Sources: MC076.


Berkeley Function Calling Leaderboard: Accuracy

BFCL v4; Overall; FC

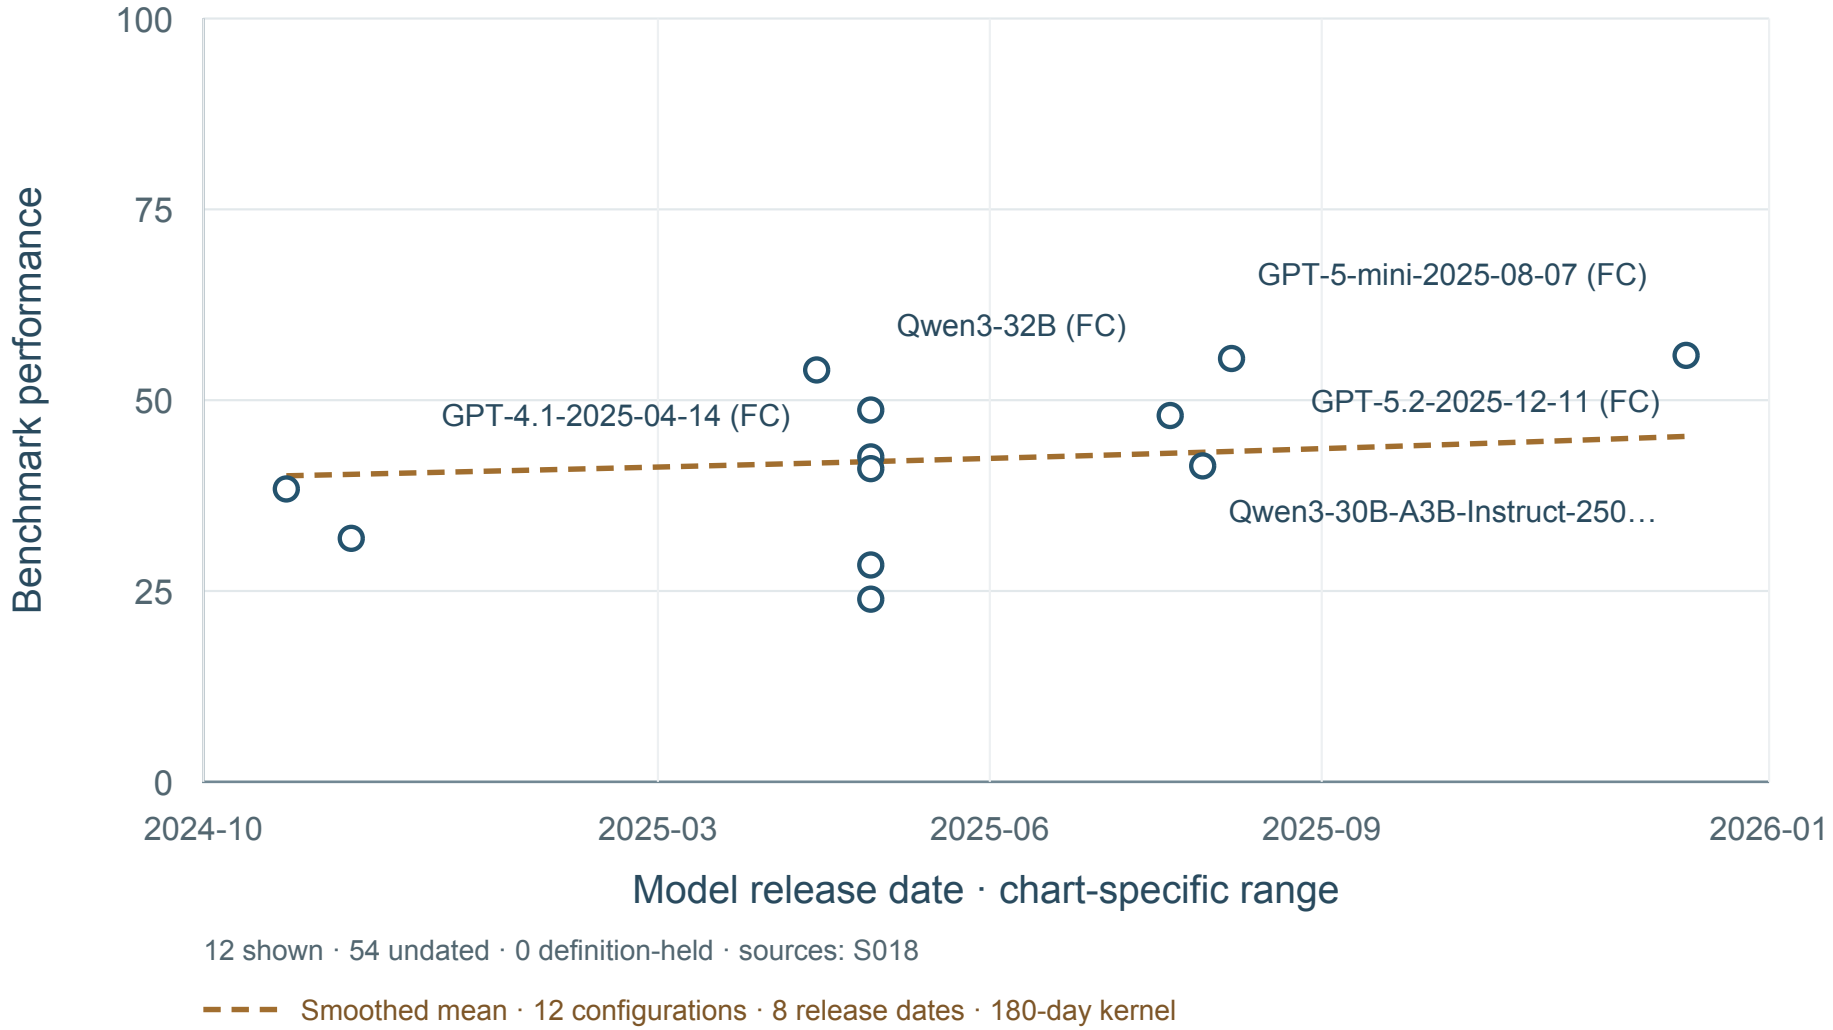

Result-source references: S018. Exact point locators and raw values: data/F047_BFCL_values.csv.

Benchmark reference (APA): Patil, S. G., Mao, H., Yan, F., Ji, C. C.-J., Suresh, V., Stoica, I., & Gonzalez, J. E. (2025). The Berkeley function calling leaderboard (BFCL): From tool use to agentic evaluation of large language models. In Proceedings of the 42nd International Conference on Machine Learning (Vol. 267) (pp. 48371–48392). https://proceedings.mlr.press/v267/patil25a.html

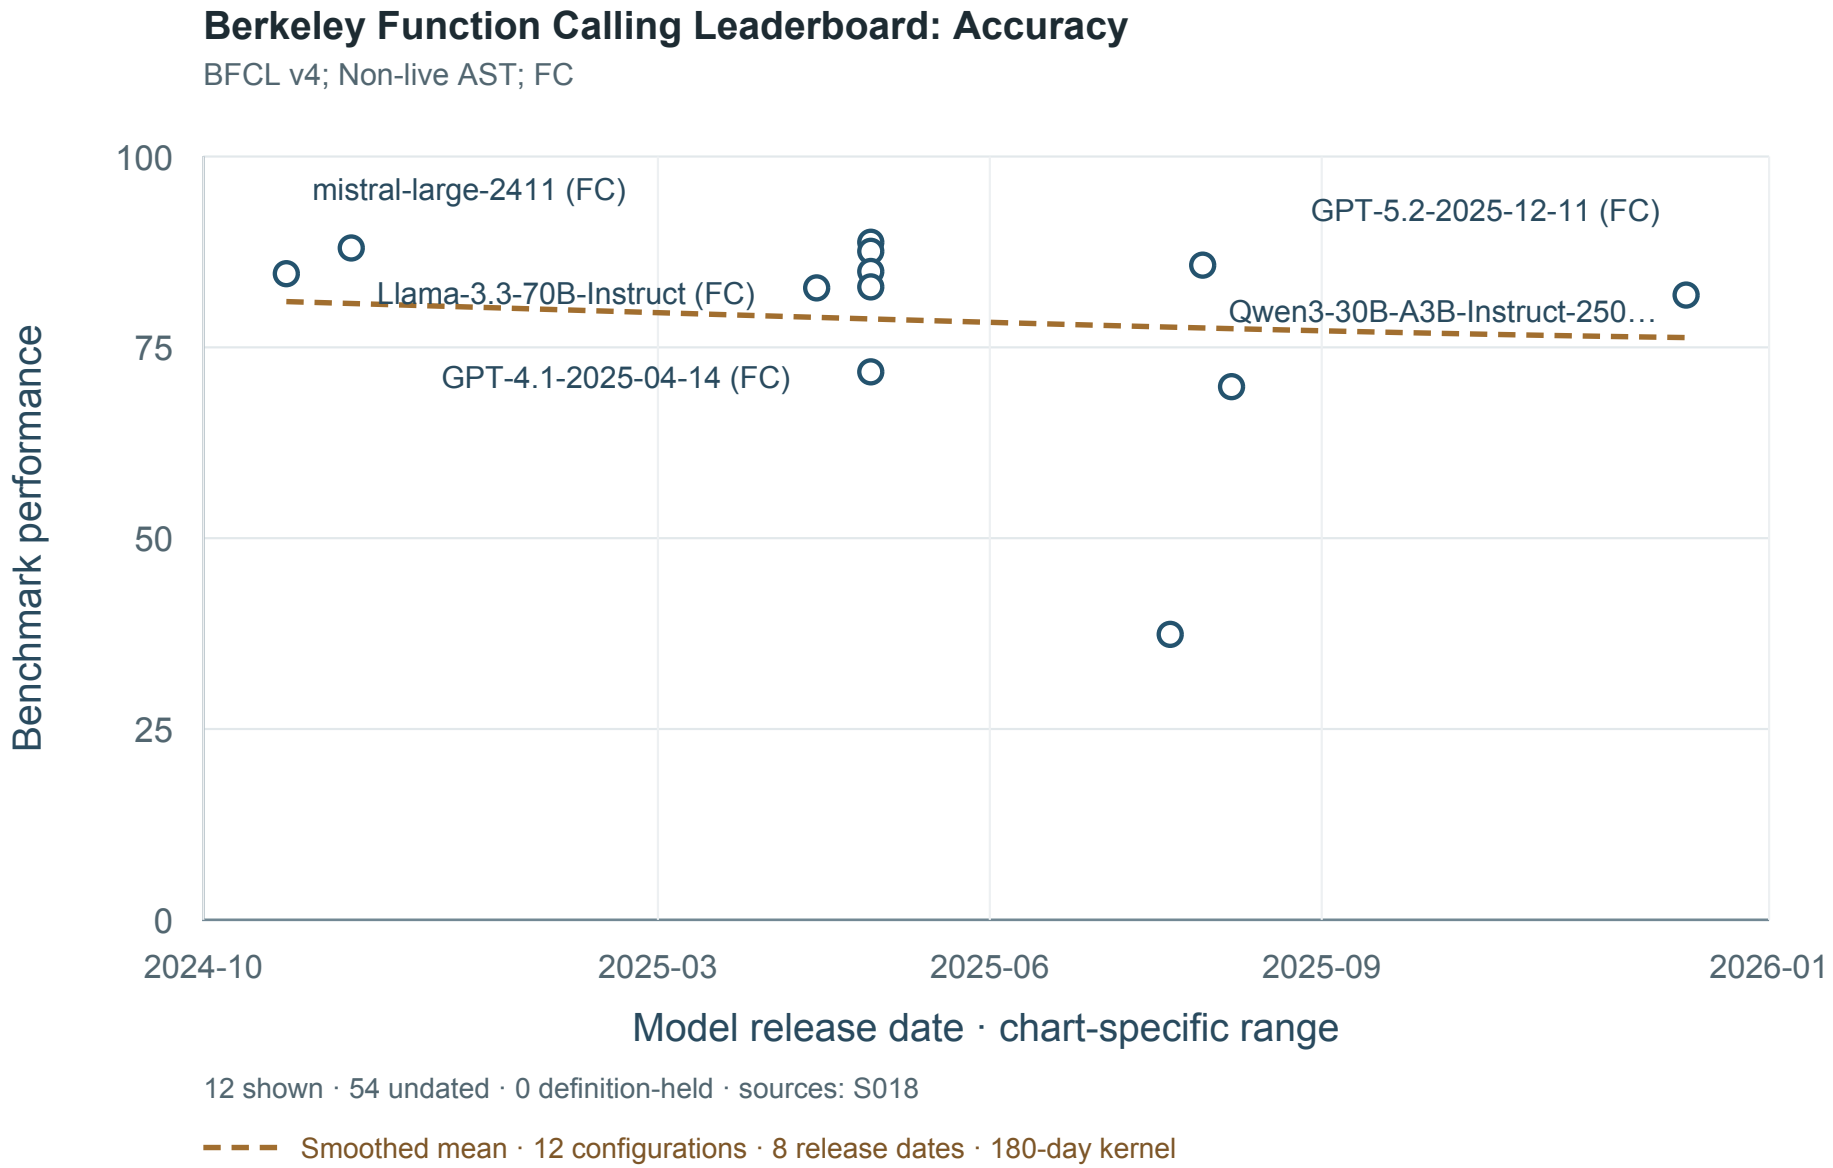


Result-source references: S018. Exact point locators and raw values: data/F047_BFCL_values.csv.

Benchmark reference (APA): Patil, S. G., Mao, H., Yan, F., Ji, C. C.-J., Suresh, V., Stoica, I., & Gonzalez, J. E. (2025). The Berkeley function calling leaderboard (BFCL): From tool use to agentic evaluation of large language models. In Proceedings of the 42nd International Conference on Machine Learning (Vol. 267) (pp. 48371–48392). https://proceedings.mlr.press/v267/patil25a.html

Berkeley Function Calling Leaderboard: Accuracy

BFCL v4; Live; FC

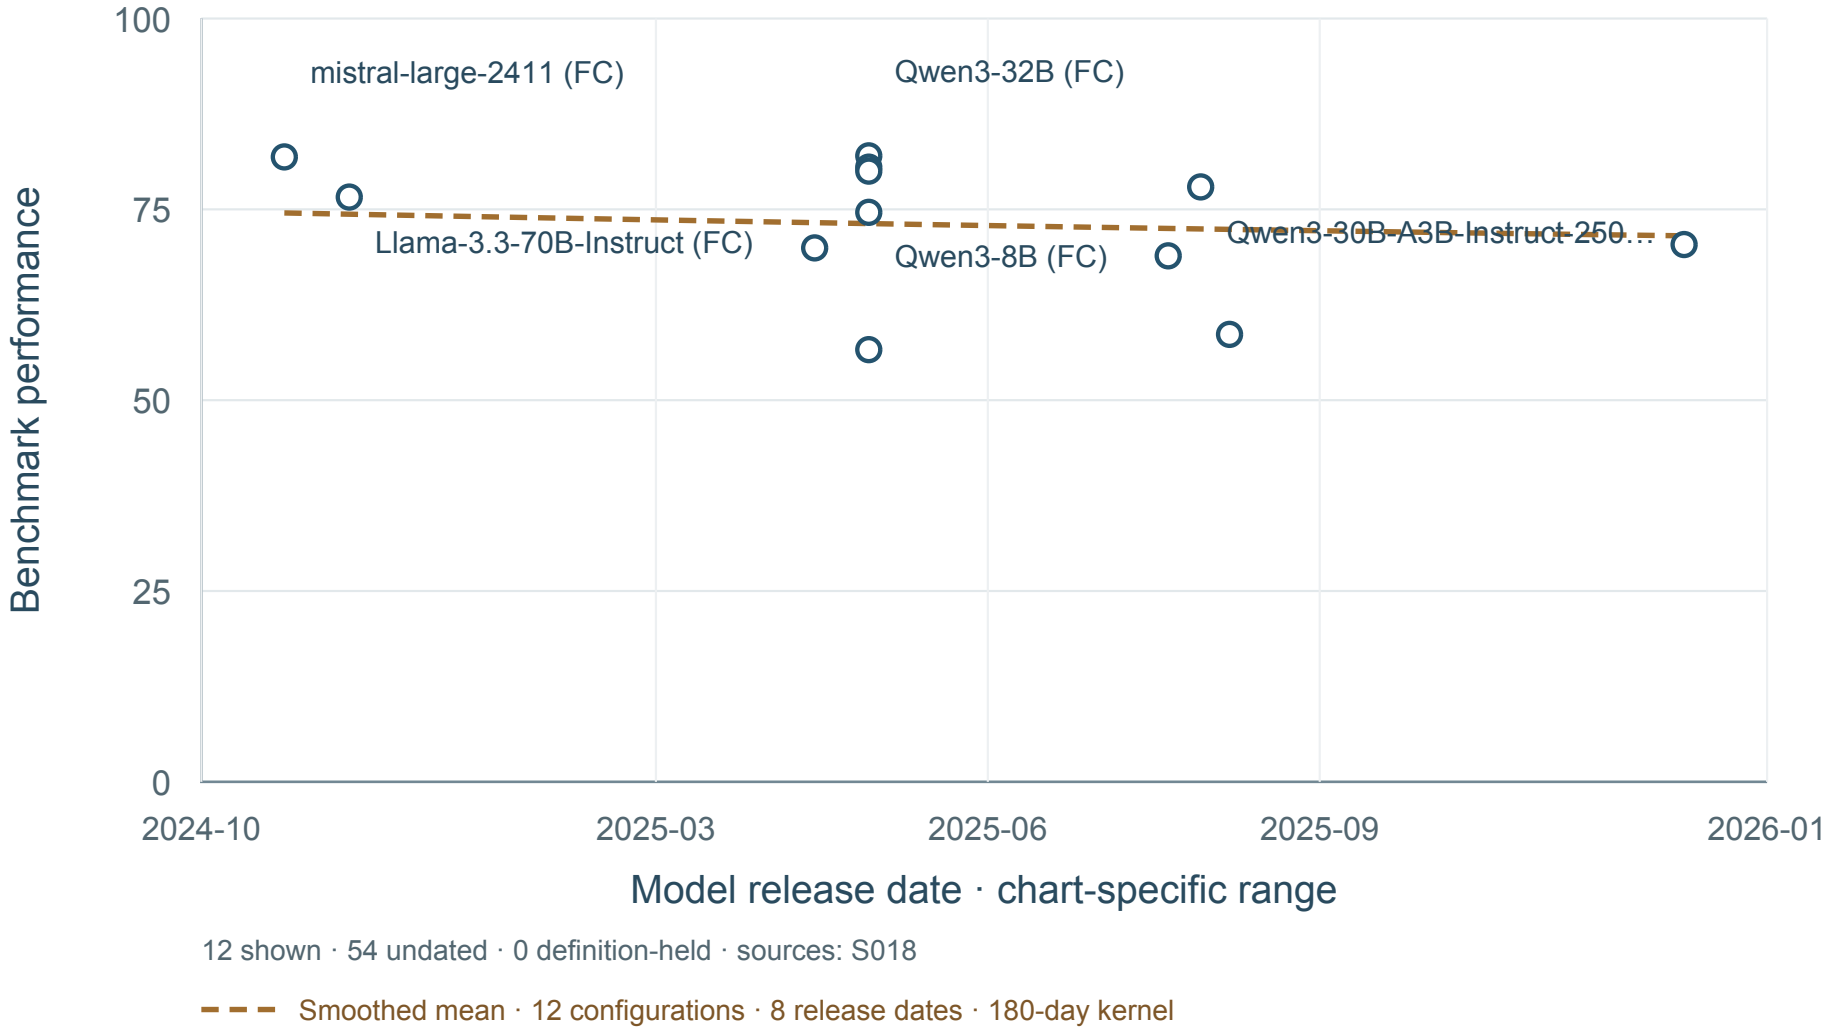


12 shown · 54 undated · 0 definition-held · sources: S018

Smoothed mean · 12 configurations · 8 release dates · 180-day kernel

Result-source references: S018. Exact point locators and raw values: data/F047_BFCL_values.csv.

Benchmark reference (APA): Patil, S. G., Mao, H., Yan, F., Ji, C. C.-J., Suresh, V., Stoica, I., & Gonzalez, J. E. (2025). The Berkeley function calling leaderboard (BFCL): From tool use to agentic evaluation of large language models. In Proceedings of the 42nd International Conference on Machine Learning (Vol. 267) (pp. 48371–48392). https://proceedings.mlr.press/v267/patil25a.html

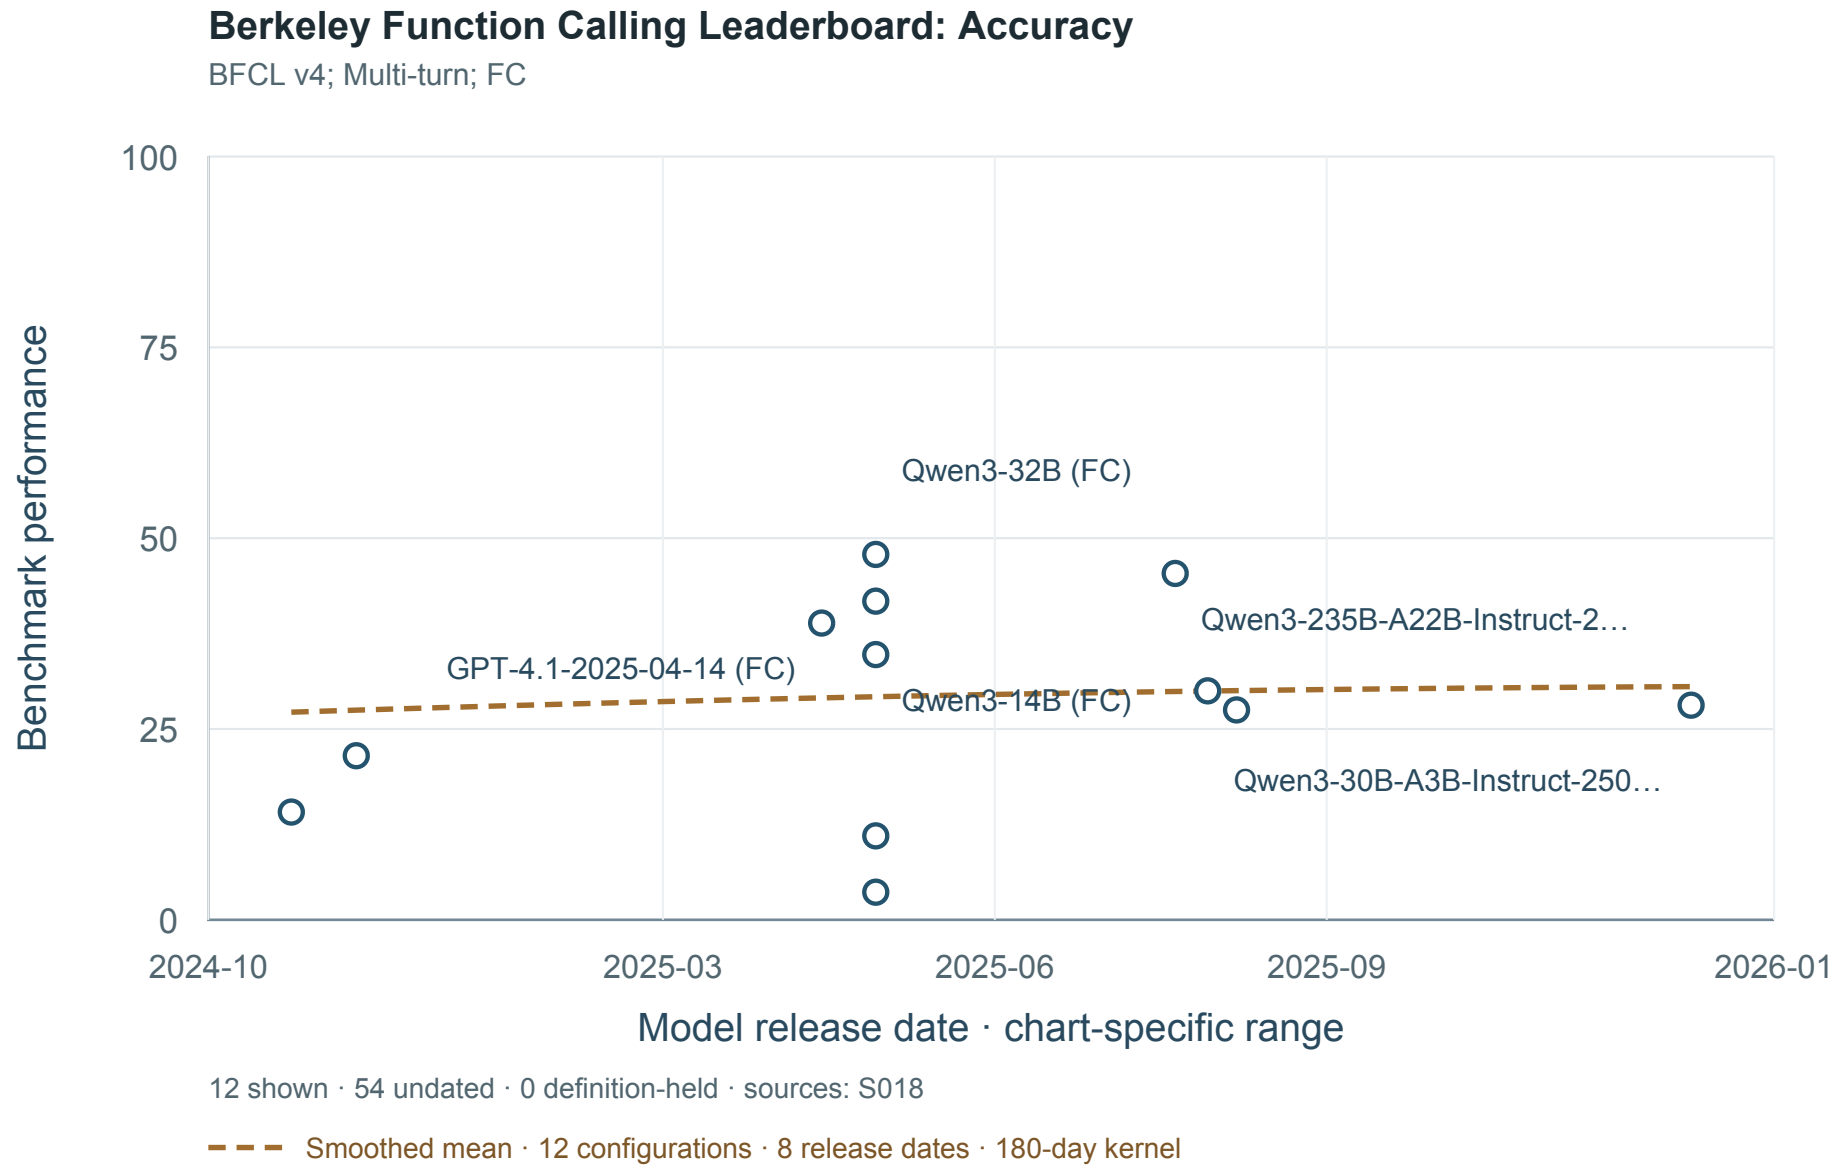


Result-source references: S018. Exact point locators and raw values: data/F047_BFCL_values.csv.

Benchmark reference (APA): Patil, S. G., Mao, H., Yan, F., Ji, C. C.-J., Suresh, V., Stoica, I., & Gonzalez, J. E. (2025). The Berkeley function calling leaderboard (BFCL): From tool use to agentic evaluation of large language models. In Proceedings of the 42nd International Conference on Machine Learning (Vol. 267) (pp. 48371–48392). https://proceedings.mlr.press/v267/patil25a.html

Berkeley Function Calling Leaderboard: Accuracy

BFCL v4; Web search; FC

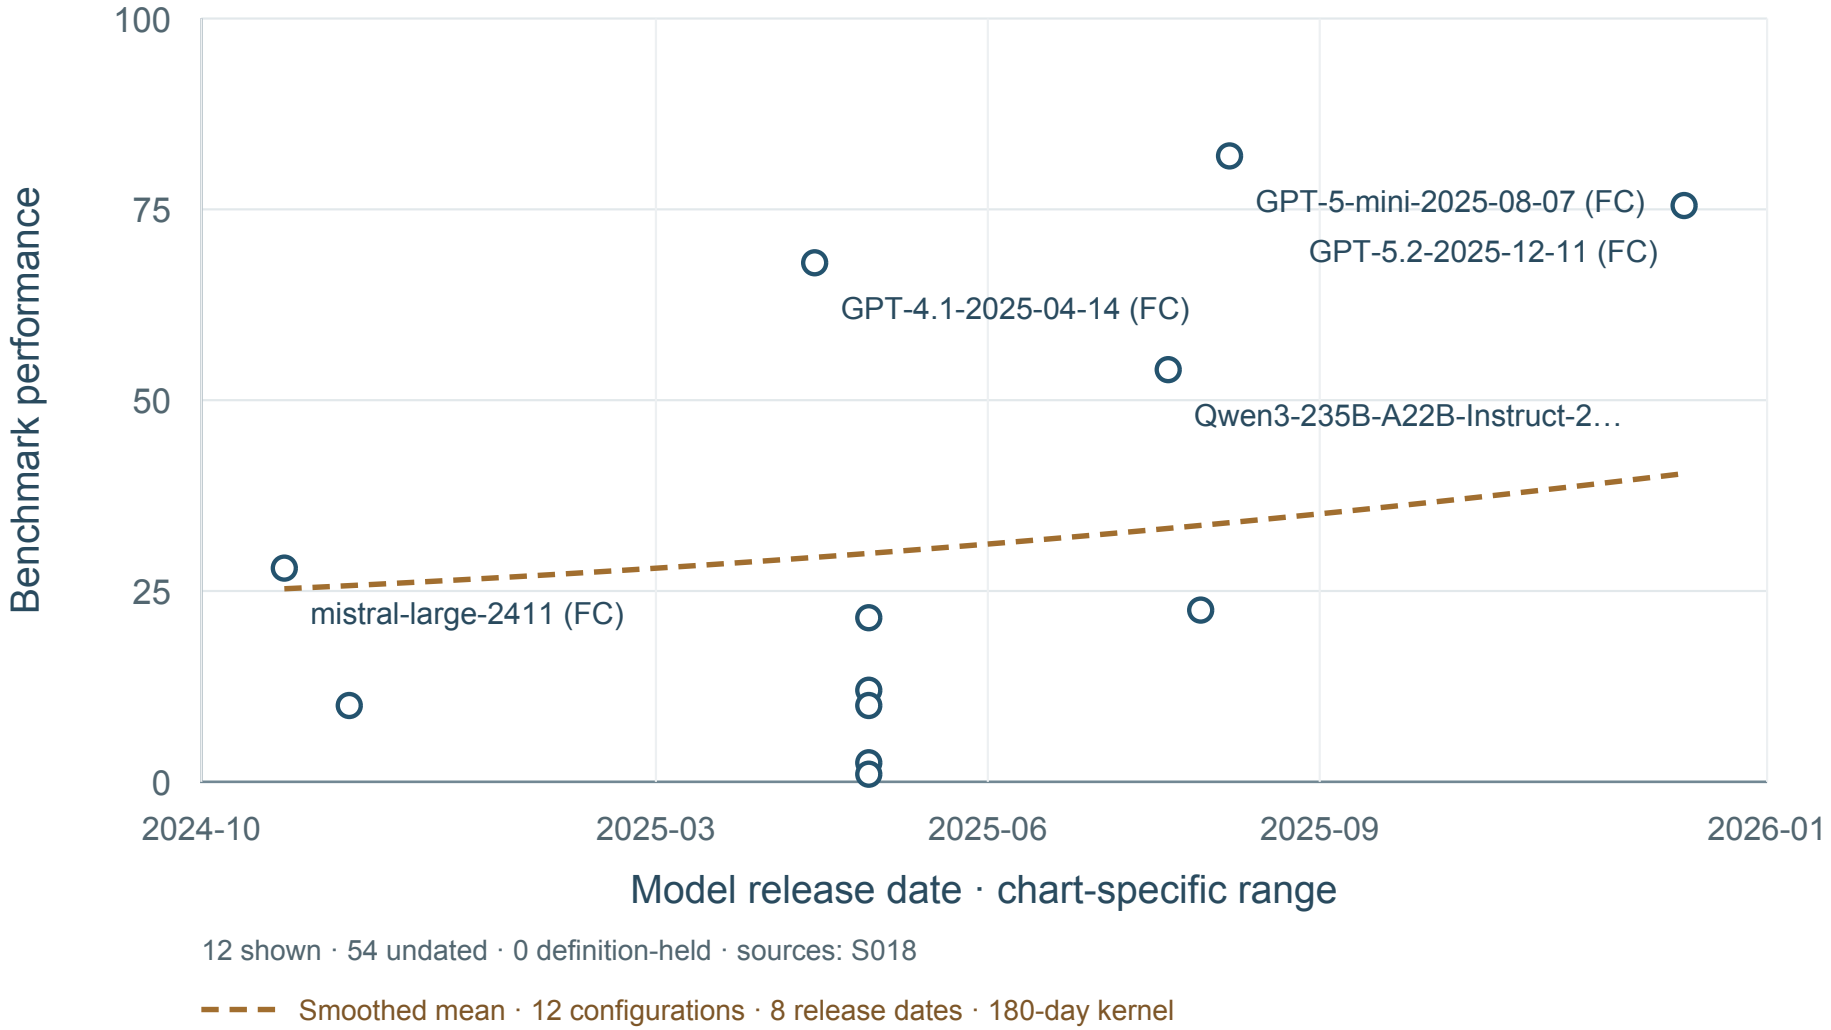


12 shown · 54 undated · 0 definition-held · sources: S018

Smoothed mean · 12 configurations · 8 release dates · 180-day kernel

Result-source references: S018. Exact point locators and raw values: data/F047_BFCL_values.csv.

Benchmark reference (APA): Patil, S. G., Mao, H., Yan, F., Ji, C. C.-J., Suresh, V., Stoica, I., & Gonzalez, J. E. (2025). The Berkeley function calling leaderboard (BFCL): From tool use to agentic evaluation of large language models. In Proceedings of the 42nd International Conference on Machine Learning (Vol. 267) (pp. 48371–48392). https://proceedings.mlr.press/v267/patil25a.html

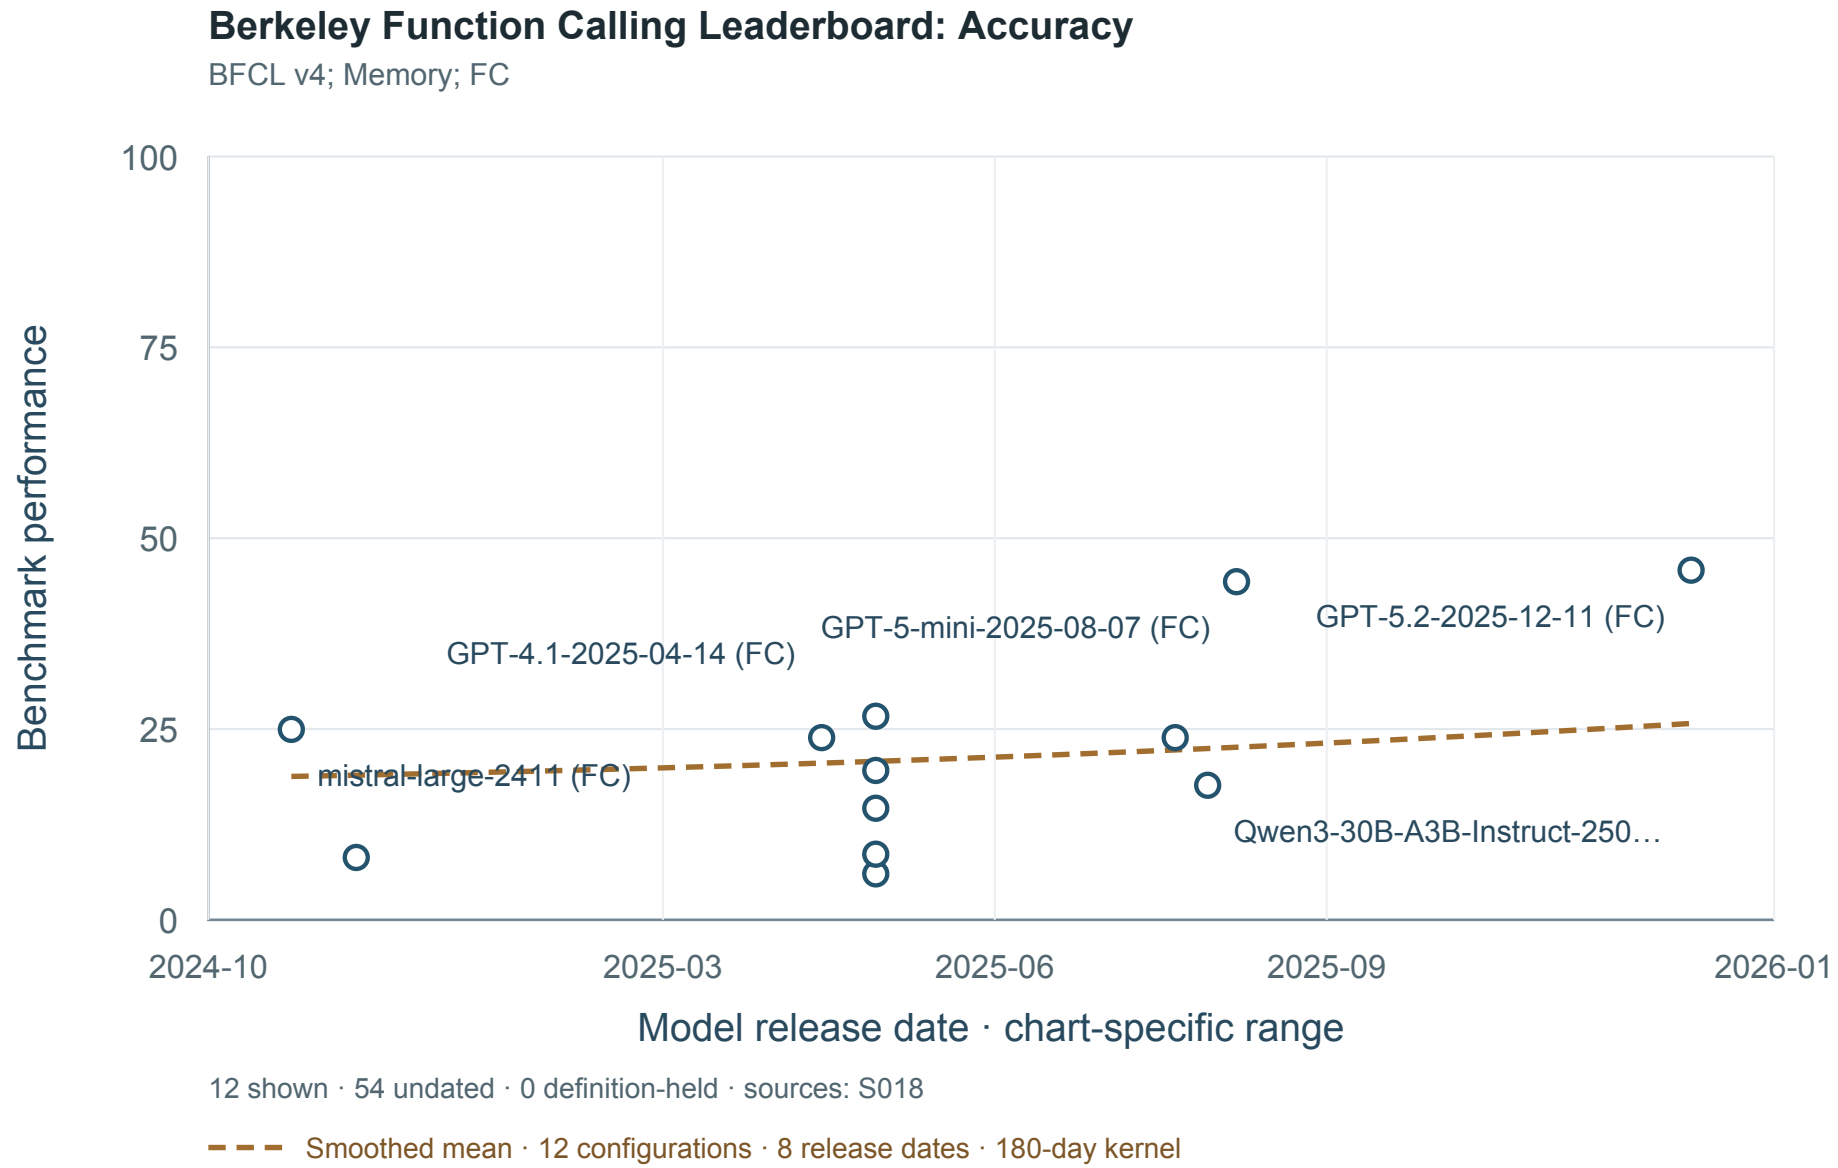


Result-source references: S018. Exact point locators and raw values: data/F047_BFCL_values.csv.

Benchmark reference (APA): Patil, S. G., Mao, H., Yan, F., Ji, C. C.-J., Suresh, V., Stoica, I., & Gonzalez, J. E. (2025). The Berkeley function calling leaderboard (BFCL): From tool use to agentic evaluation of large language models. In Proceedings of the 42nd International Conference on Machine Learning (Vol. 267) (pp. 48371–48392). https://proceedings.mlr.press/v267/patil25a.html


Berkeley Function Calling Leaderboard: Accuracy

BFCL v4; Overall; Prompt

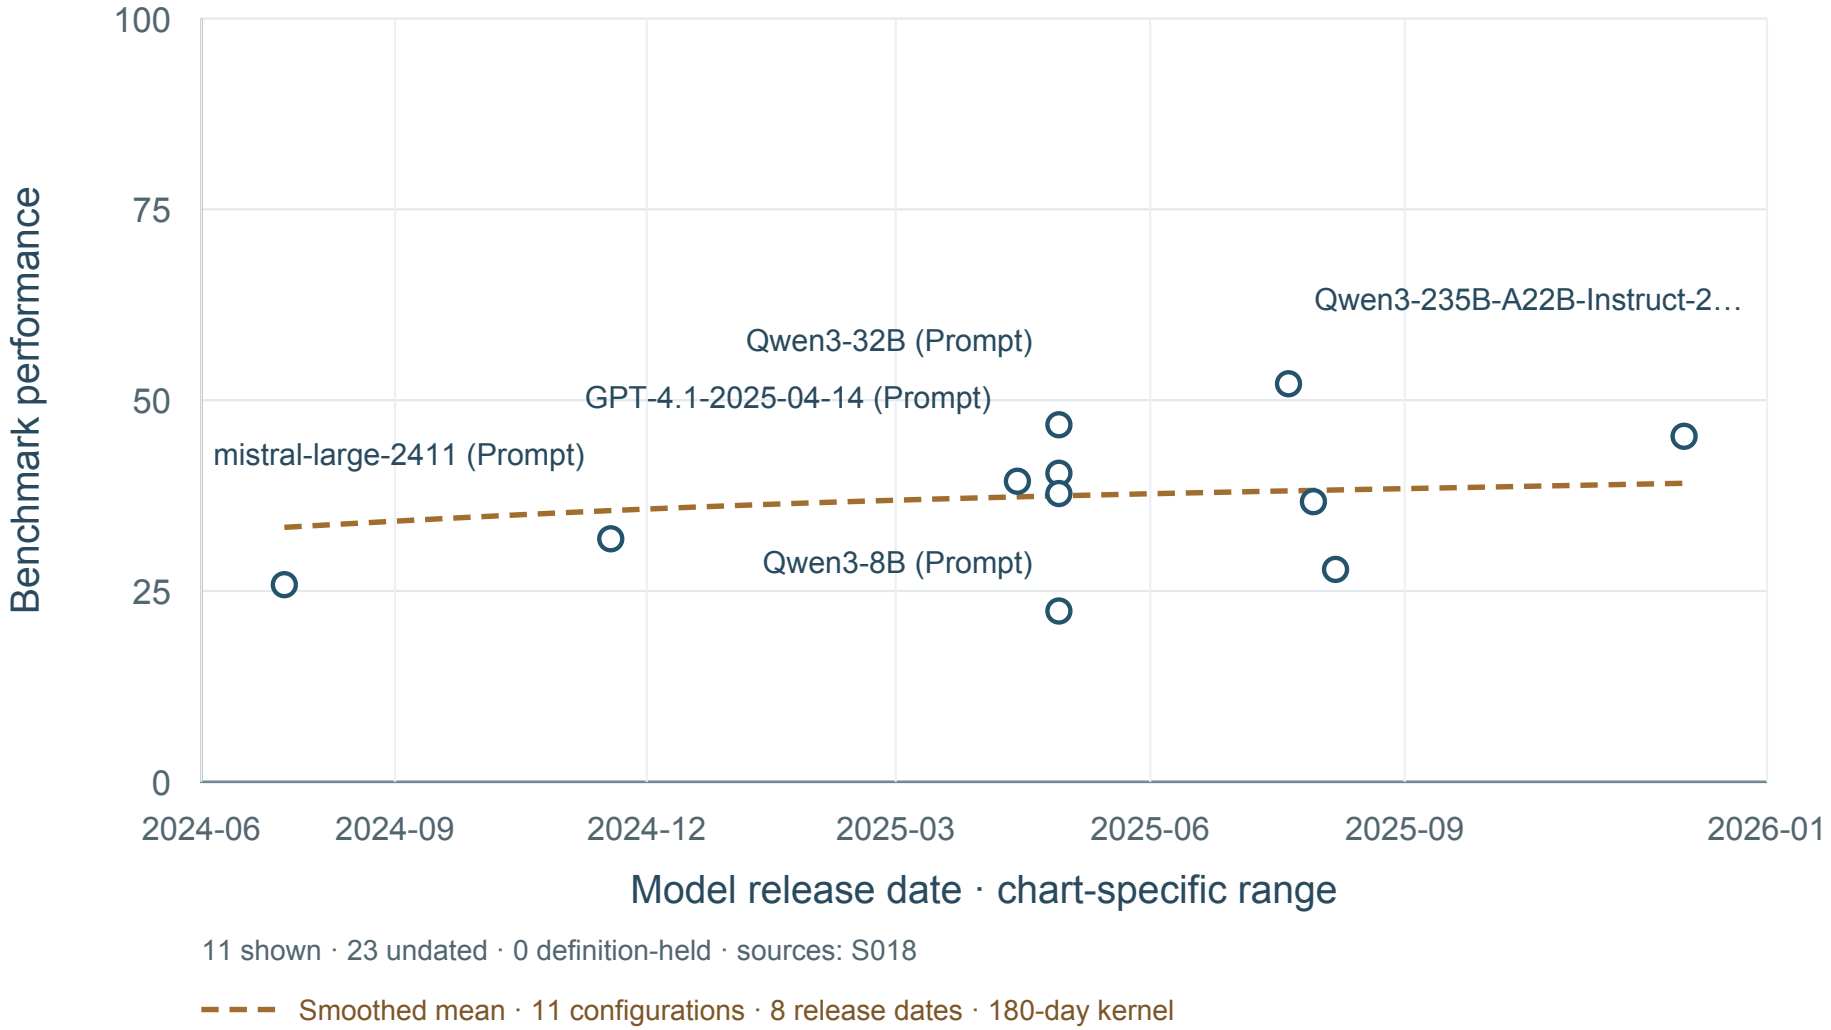

Result-source references: S018. Exact point locators and raw values: data/F047_BFCL_values.csv.

Benchmark reference (APA): Patil, S. G., Mao, H., Yan, F., Ji, C. C.-J., Suresh, V., Stoica, I., & Gonzalez, J. E. (2025). The Berkeley function calling leaderboard (BFCL): From tool use to agentic evaluation of large language models. In Proceedings of the 42nd International Conference on Machine Learning (Vol. 267) (pp. 48371–48392). https://proceedings.mlr.press/v267/patil25a.html

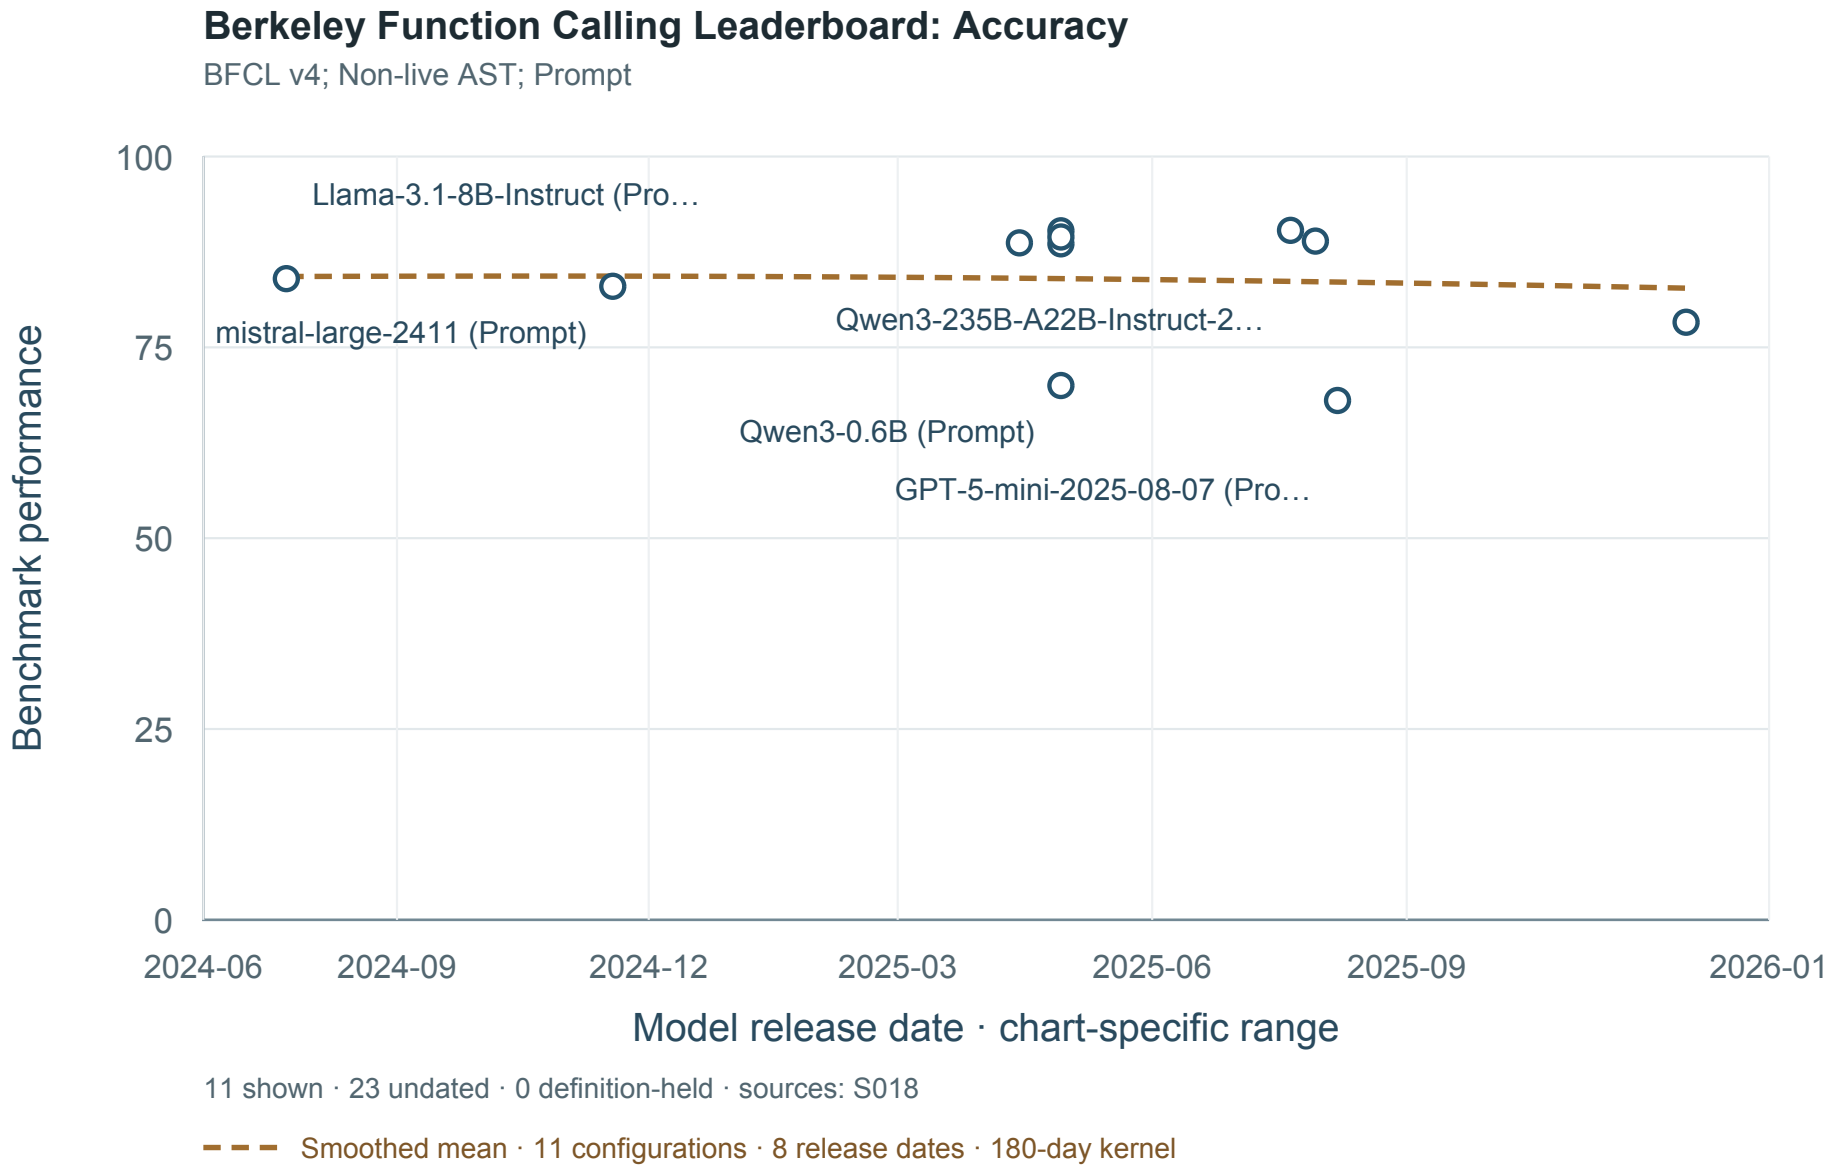


Result-source references: S018. Exact point locators and raw values: data/F047_BFCL_values.csv.

Benchmark reference (APA): Patil, S. G., Mao, H., Yan, F., Ji, C. C.-J., Suresh, V., Stoica, I., & Gonzalez, J. E. (2025). The Berkeley function calling leaderboard (BFCL): From tool use to agentic evaluation of large language models. In Proceedings of the 42nd International Conference on Machine Learning (Vol. 267) (pp. 48371–48392). https://proceedings.mlr.press/v267/patil25a.html

Berkeley Function Calling Leaderboard: Accuracy

BFCL v4; Live; Prompt

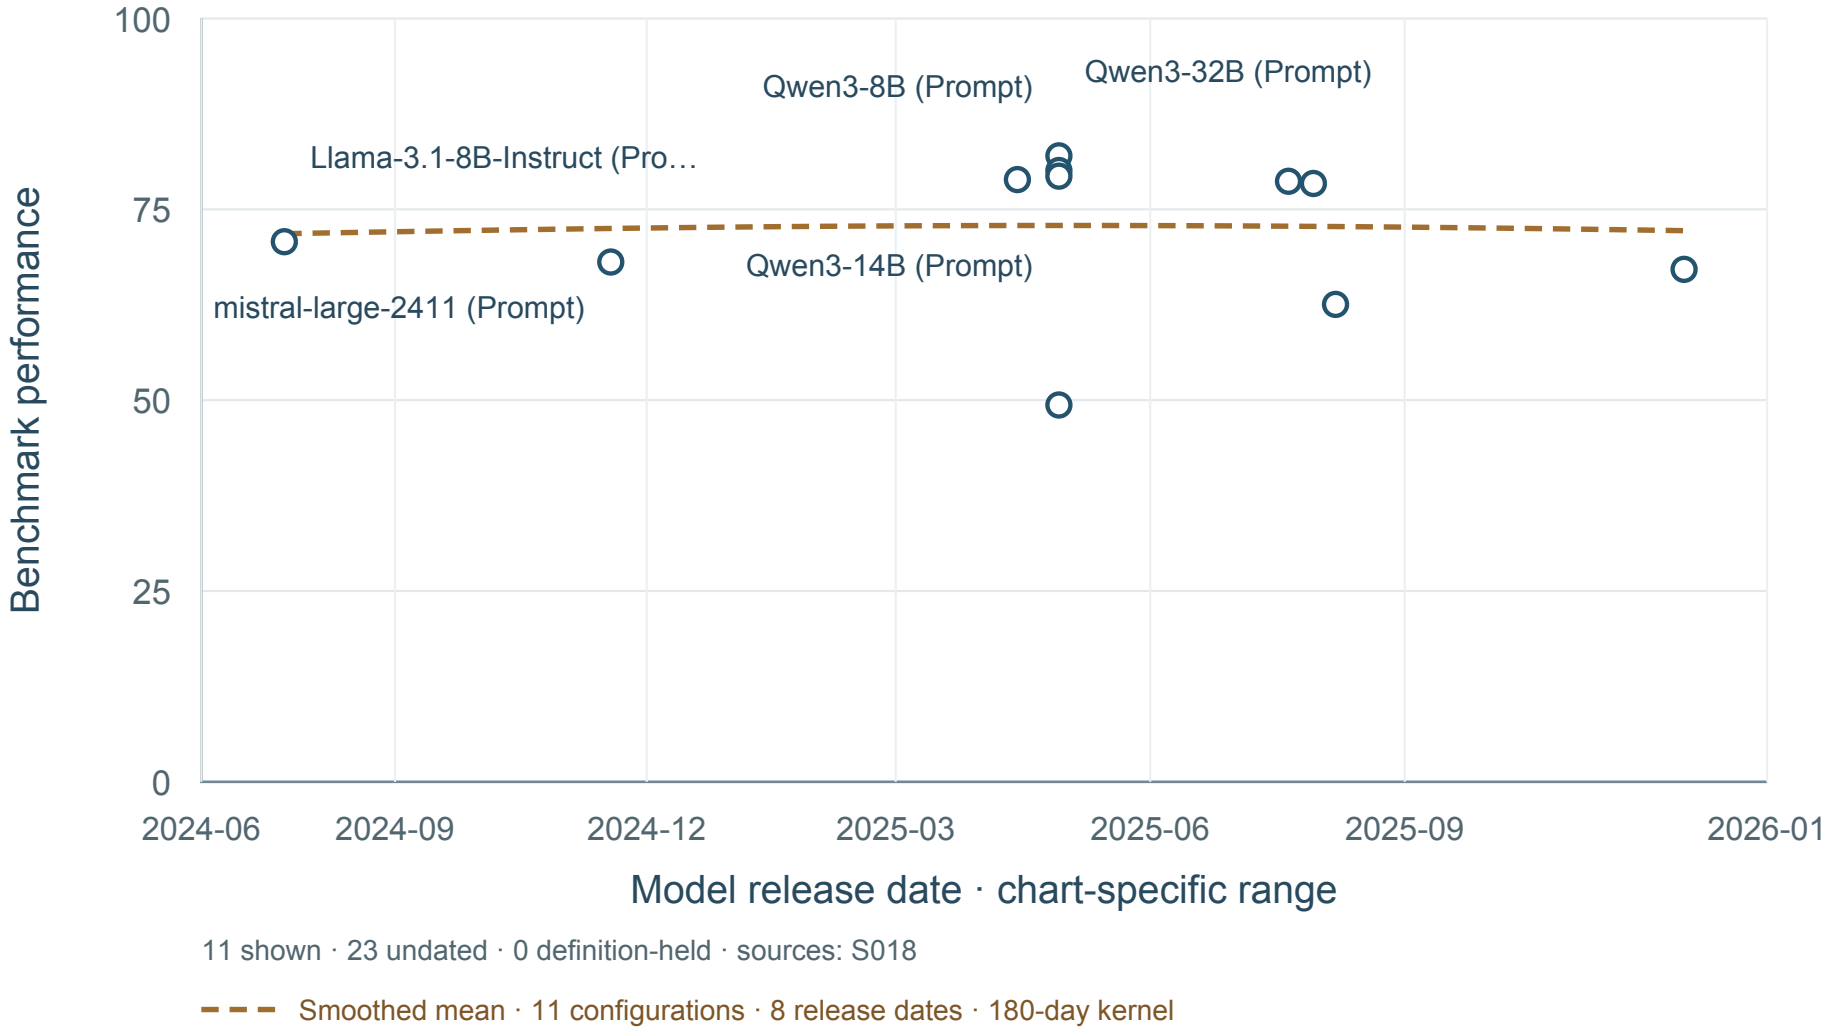


11 shown · 23 undated · 0 definition-held · sources: S018

Smoothed mean · 11 configurations · 8 release dates · 180-day kernel

Result-source references: S018. Exact point locators and raw values: data/F047_BFCL_values.csv.

Benchmark reference (APA): Patil, S. G., Mao, H., Yan, F., Ji, C. C.-J., Suresh, V., Stoica, I., & Gonzalez, J. E. (2025). The Berkeley function calling leaderboard (BFCL): From tool use to agentic evaluation of large language models. In Proceedings of the 42nd International Conference on Machine Learning (Vol. 267) (pp. 48371–48392). https://proceedings.mlr.press/v267/patil25a.html

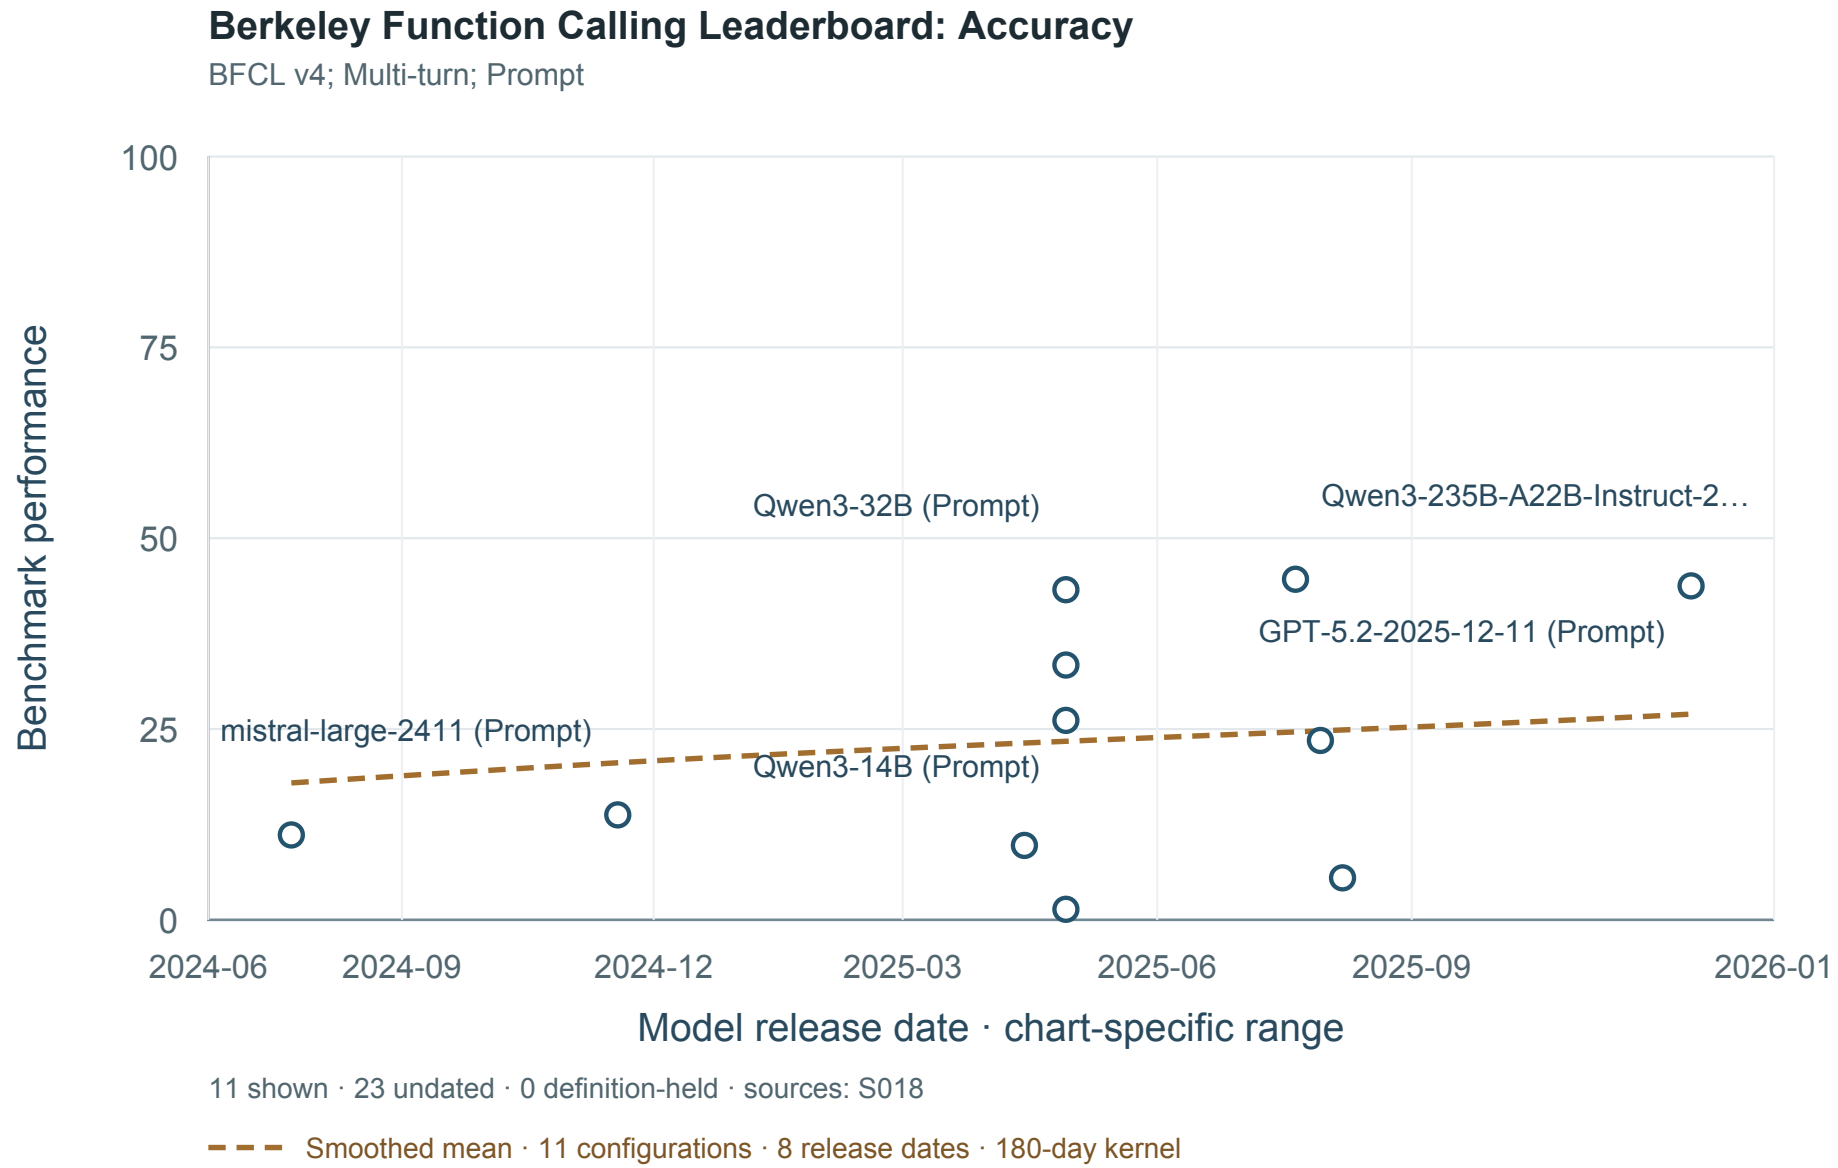


Result-source references: S018. Exact point locators and raw values: data/F047_BFCL_values.csv.

Benchmark reference (APA): Patil, S. G., Mao, H., Yan, F., Ji, C. C.-J., Suresh, V., Stoica, I., & Gonzalez, J. E. (2025). The Berkeley function calling leaderboard (BFCL): From tool use to agentic evaluation of large language models. In Proceedings of the 42nd International Conference on Machine Learning (Vol. 267) (pp. 48371–48392). https://proceedings.mlr.press/v267/patil25a.html


Berkeley Function Calling Leaderboard: Accuracy

BFCL v4; Web search; Prompt

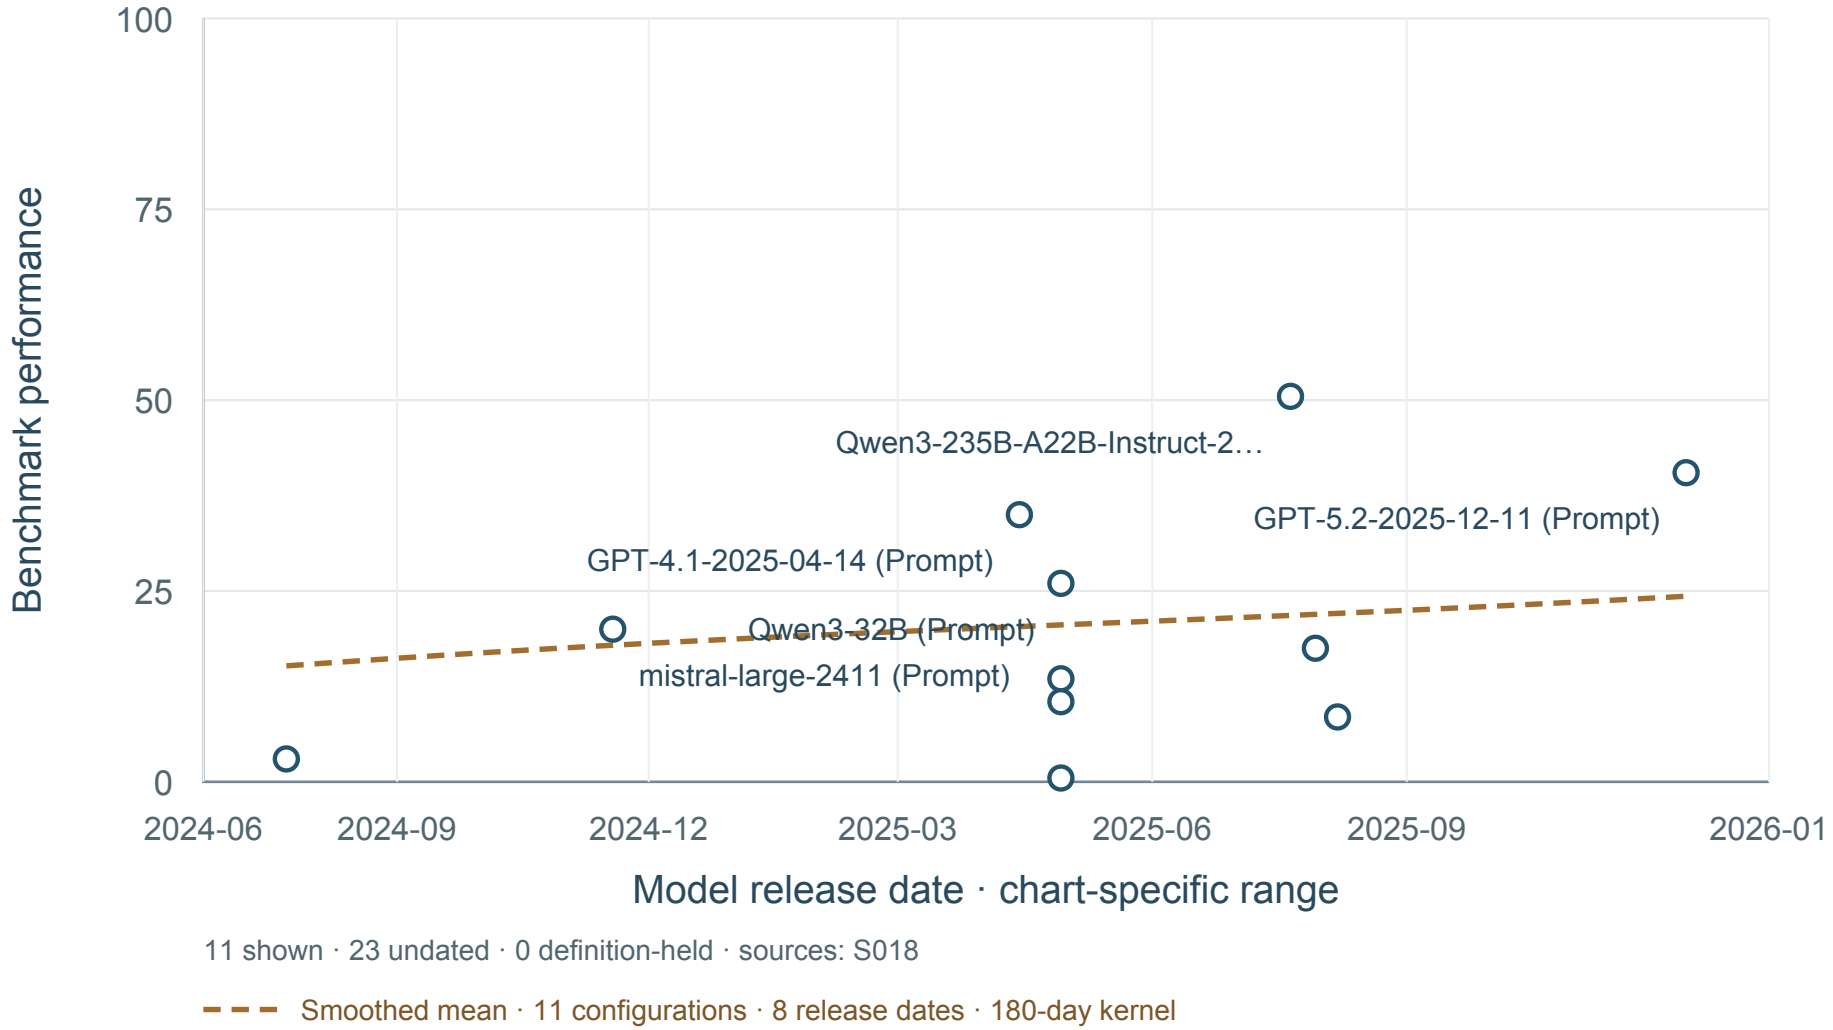

Result-source references: S018. Exact point locators and raw values: data/F047_BFCL_values.csv.

Benchmark reference (APA): Patil, S. G., Mao, H., Yan, F., Ji, C. C.-J., Suresh, V., Stoica, I., & Gonzalez, J. E. (2025). The Berkeley function calling leaderboard (BFCL): From tool use to agentic evaluation of large language models. In Proceedings of the 42nd International Conference on Machine Learning (Vol. 267) (pp. 48371–48392). https://proceedings.mlr.press/v267/patil25a.html

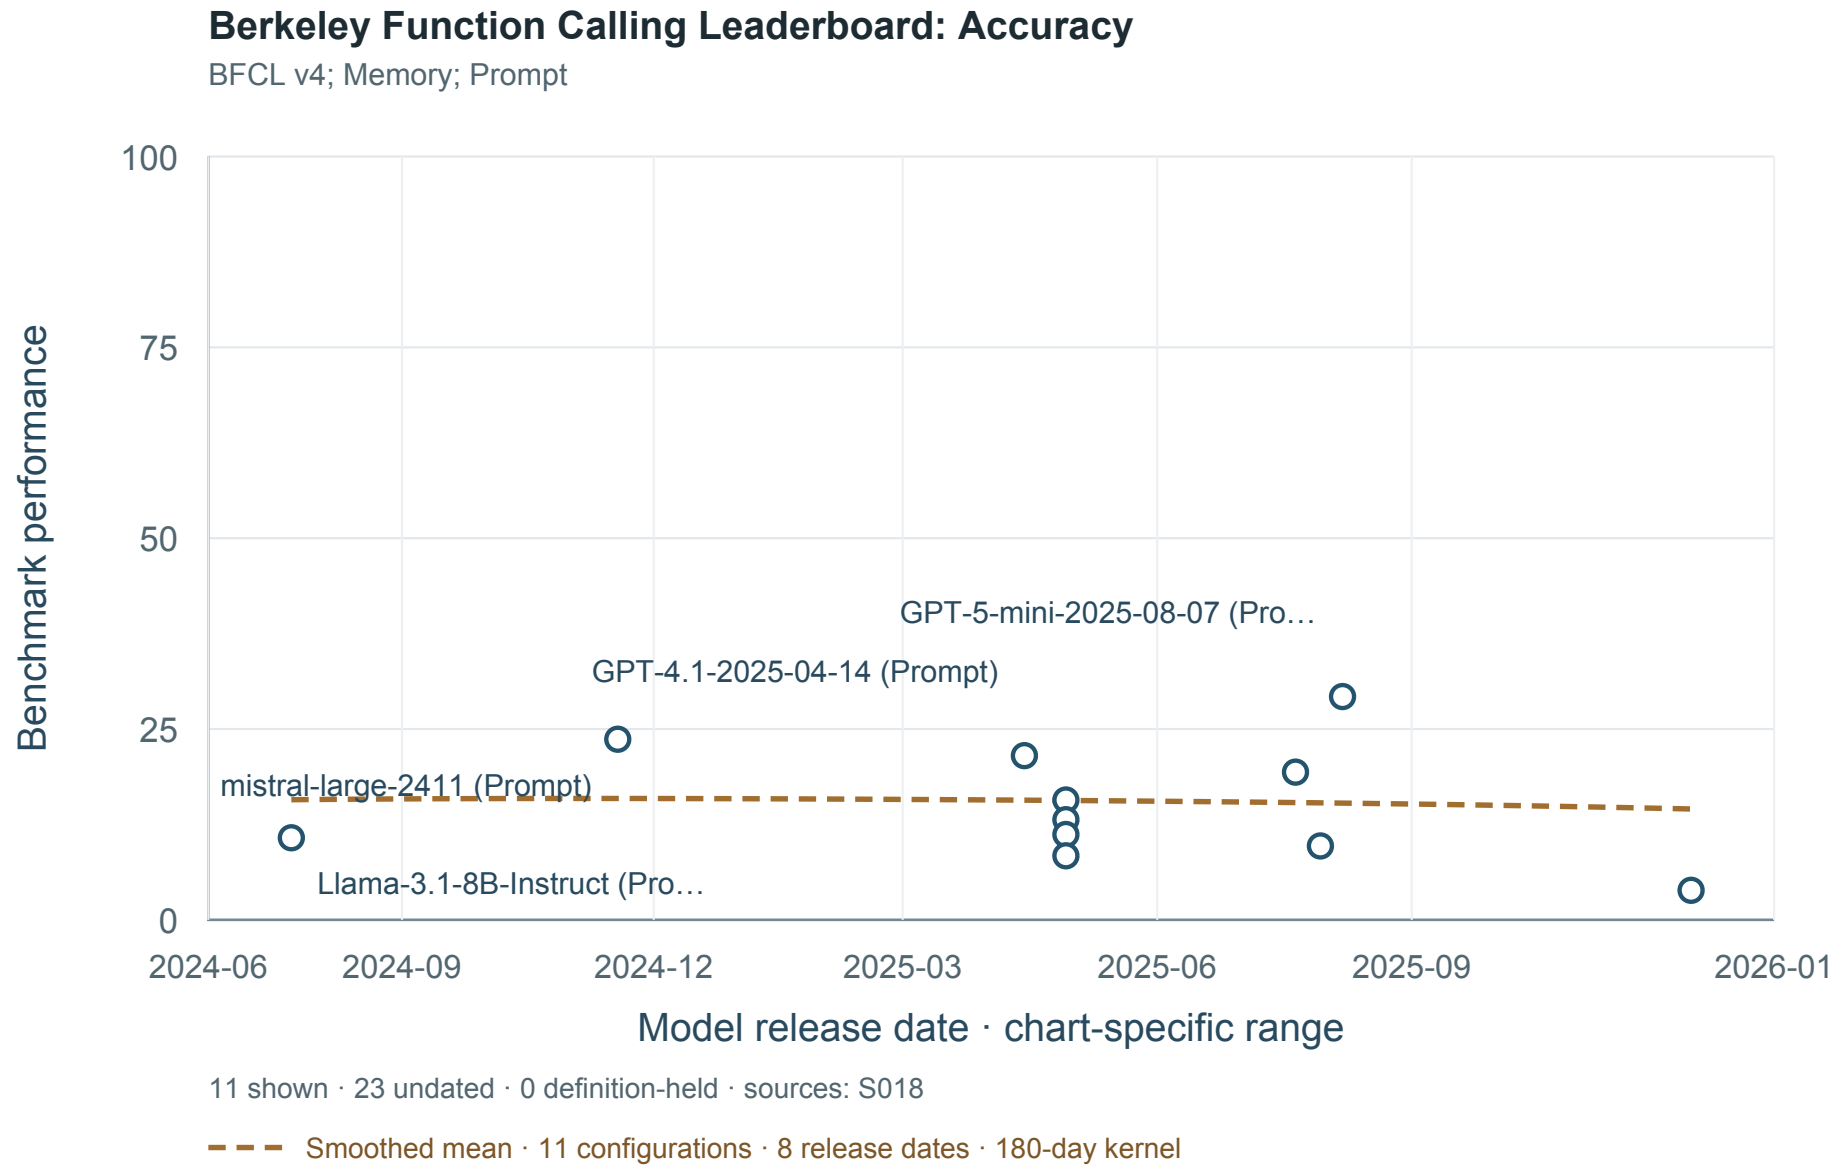


Result-source references: S018. Exact point locators and raw values: data/F047_BFCL_values.csv.

Benchmark reference (APA): Patil, S. G., Mao, H., Yan, F., Ji, C. C.-J., Suresh, V., Stoica, I., & Gonzalez, J. E. (2025). The Berkeley function calling leaderboard (BFCL): From tool use to agentic evaluation of large language models. In Proceedings of the 42nd International Conference on Machine Learning (Vol. 267) (pp. 48371–48392). https://proceedings.mlr.press/v267/patil25a.html

BFCL: Reported BFCL score (%)

Non-thinking; MC007 M1; BFCL v3; Overall

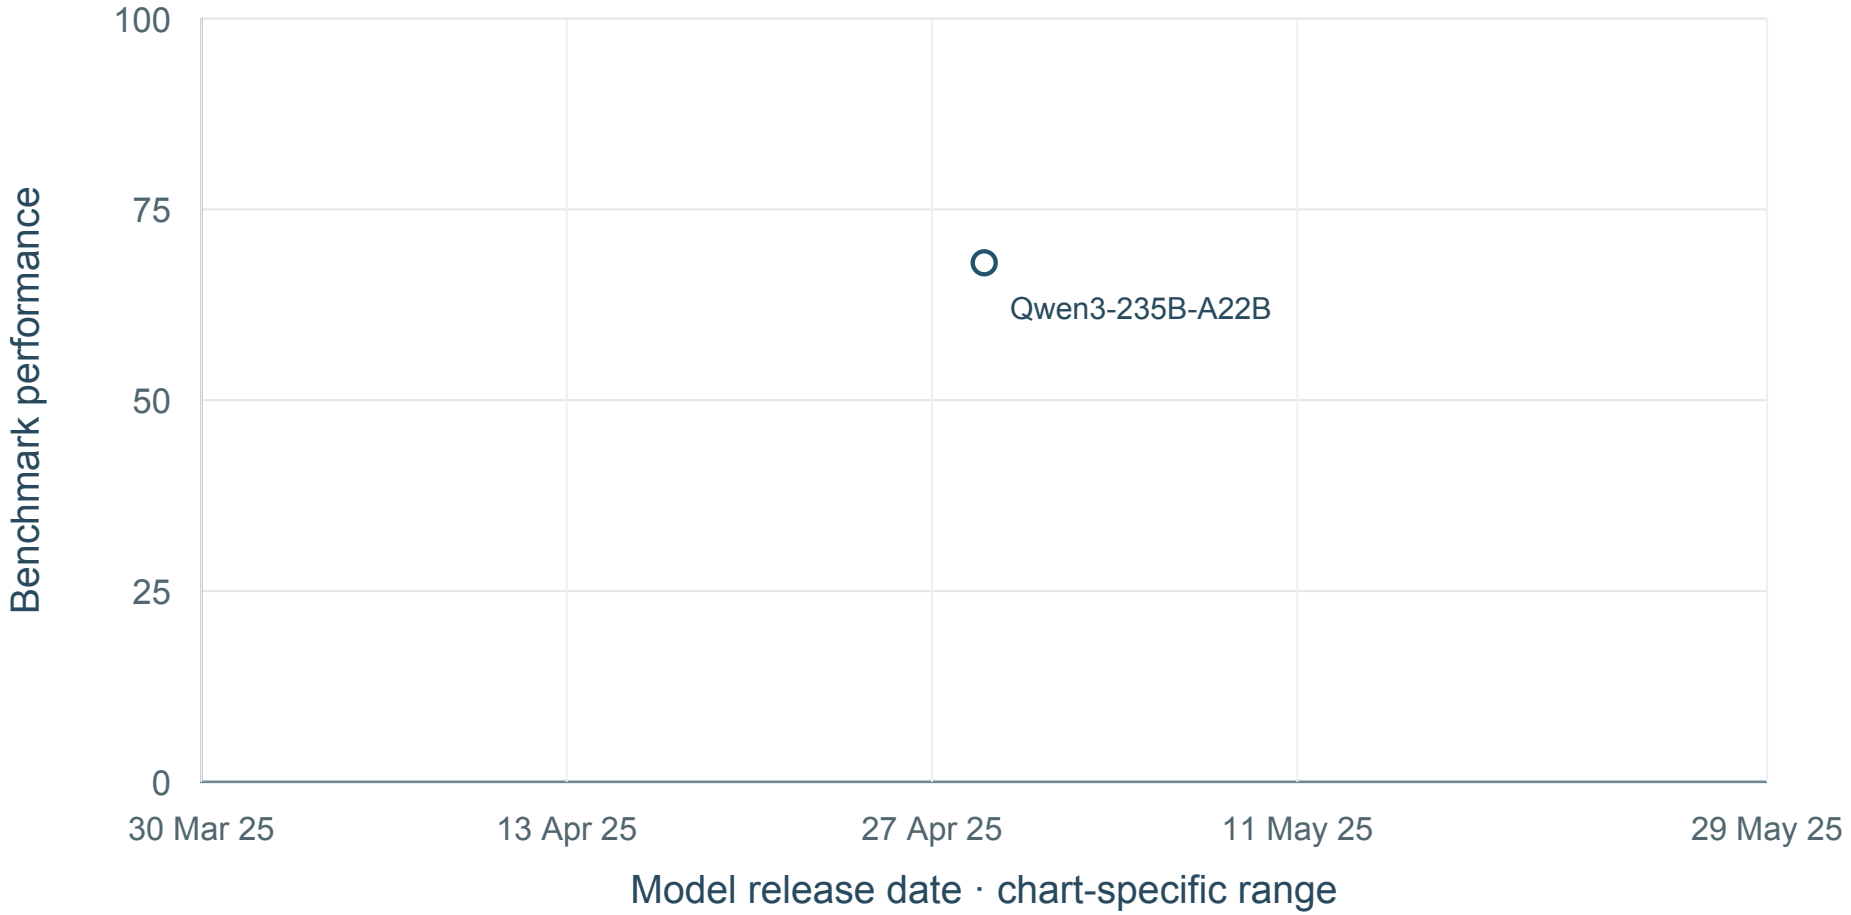

1 shown · 0 undated · 0 definition-held · sources: MC007


No mean curve: Fewer than five dated model configurations.

Result-source references: MC007. Exact point locators and raw values: data/F047_BFCL_values.csv.

Benchmark reference (APA): Patil, S. G., Mao, H., Yan, F., Ji, C. C.-J., Suresh, V., Stoica, I., & Gonzalez, J. E. (2025). The Berkeley function calling leaderboard (BFCL): From tool use to agentic evaluation of large language models. In Proceedings of the 42nd International Conference on Machine Learning (Vol. 267) (pp. 48371–48392). https://proceedings.mlr.press/v267/patil25a.html

BFCL: Reported BFCL score (%)

Instruct / non-thinking variant; MC007 M1; BFCL v3; Overall

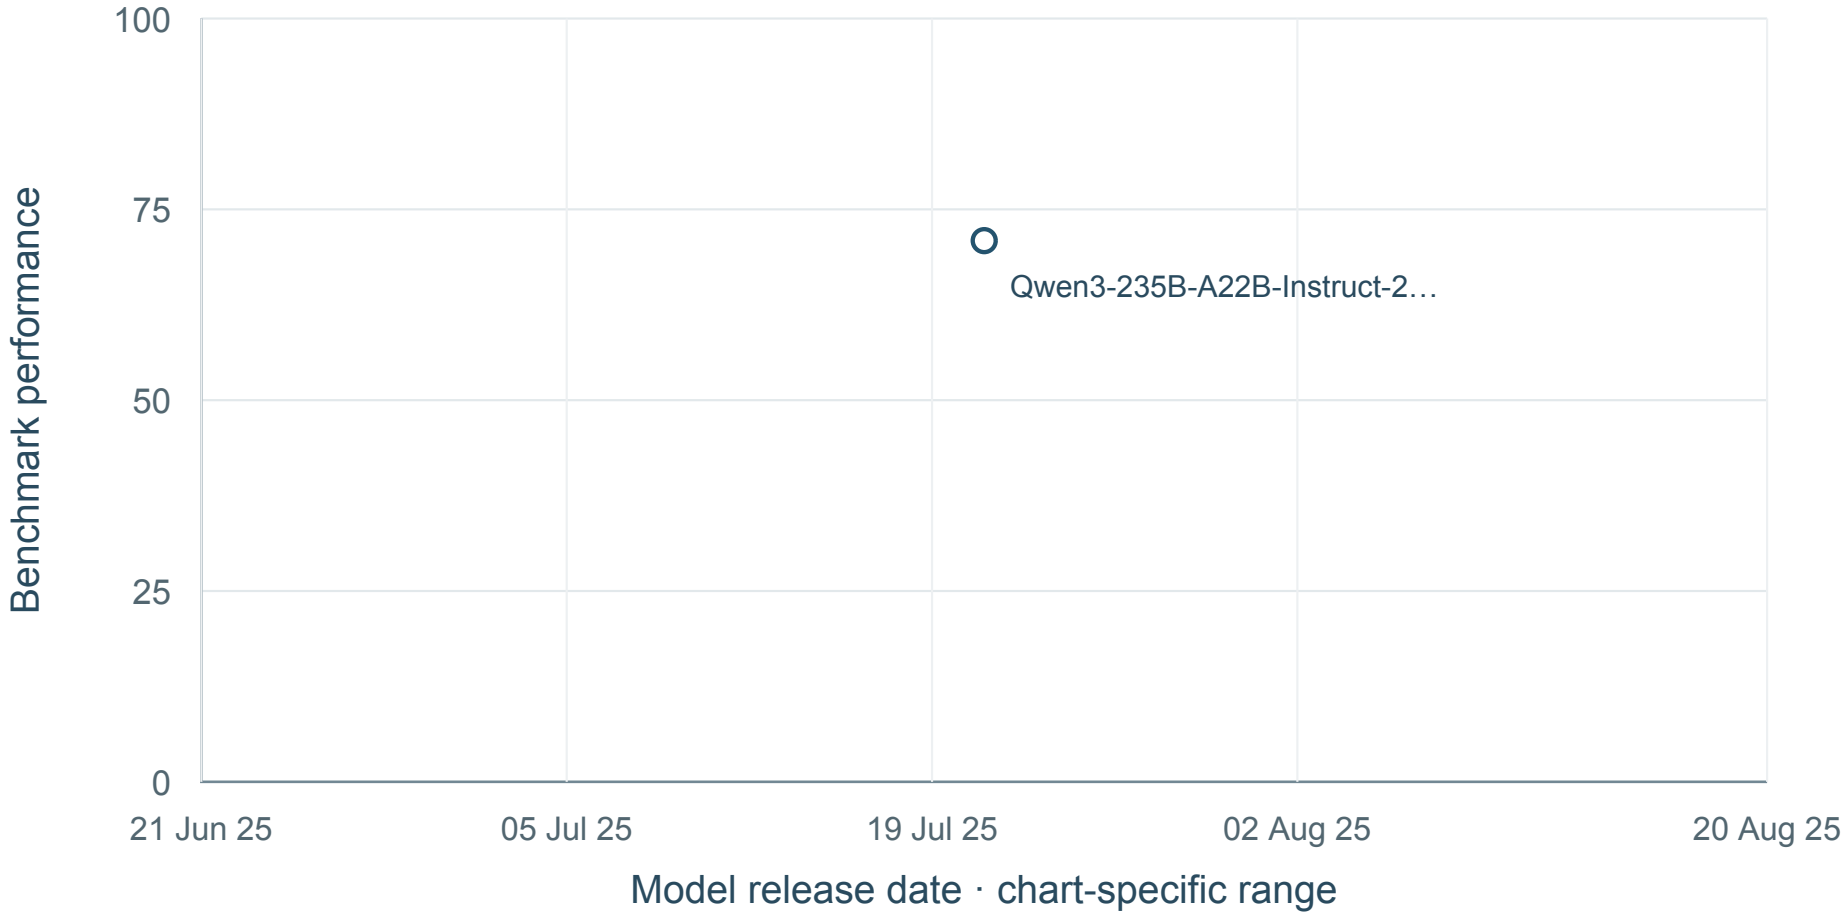

1 shown · 0 undated · 0 definition-held · sources: MC007


No mean curve: Fewer than five dated model configurations.

Result-source references: MC007. Exact point locators and raw values: data/F047_BFCL_values.csv.

Benchmark reference (APA): Patil, S. G., Mao, H., Yan, F., Ji, C. C.-J., Suresh, V., Stoica, I., & Gonzalez, J. E. (2025). The Berkeley function calling leaderboard (BFCL): From tool use to agentic evaluation of large language models. In Proceedings of the 42nd International Conference on Machine Learning (Vol. 267) (pp. 48371–48392). https://proceedings.mlr.press/v267/patil25a.html

BFCL: Reported BFCL score (%)

Mode not specified; MC008 M1; BFCL v3; Overall

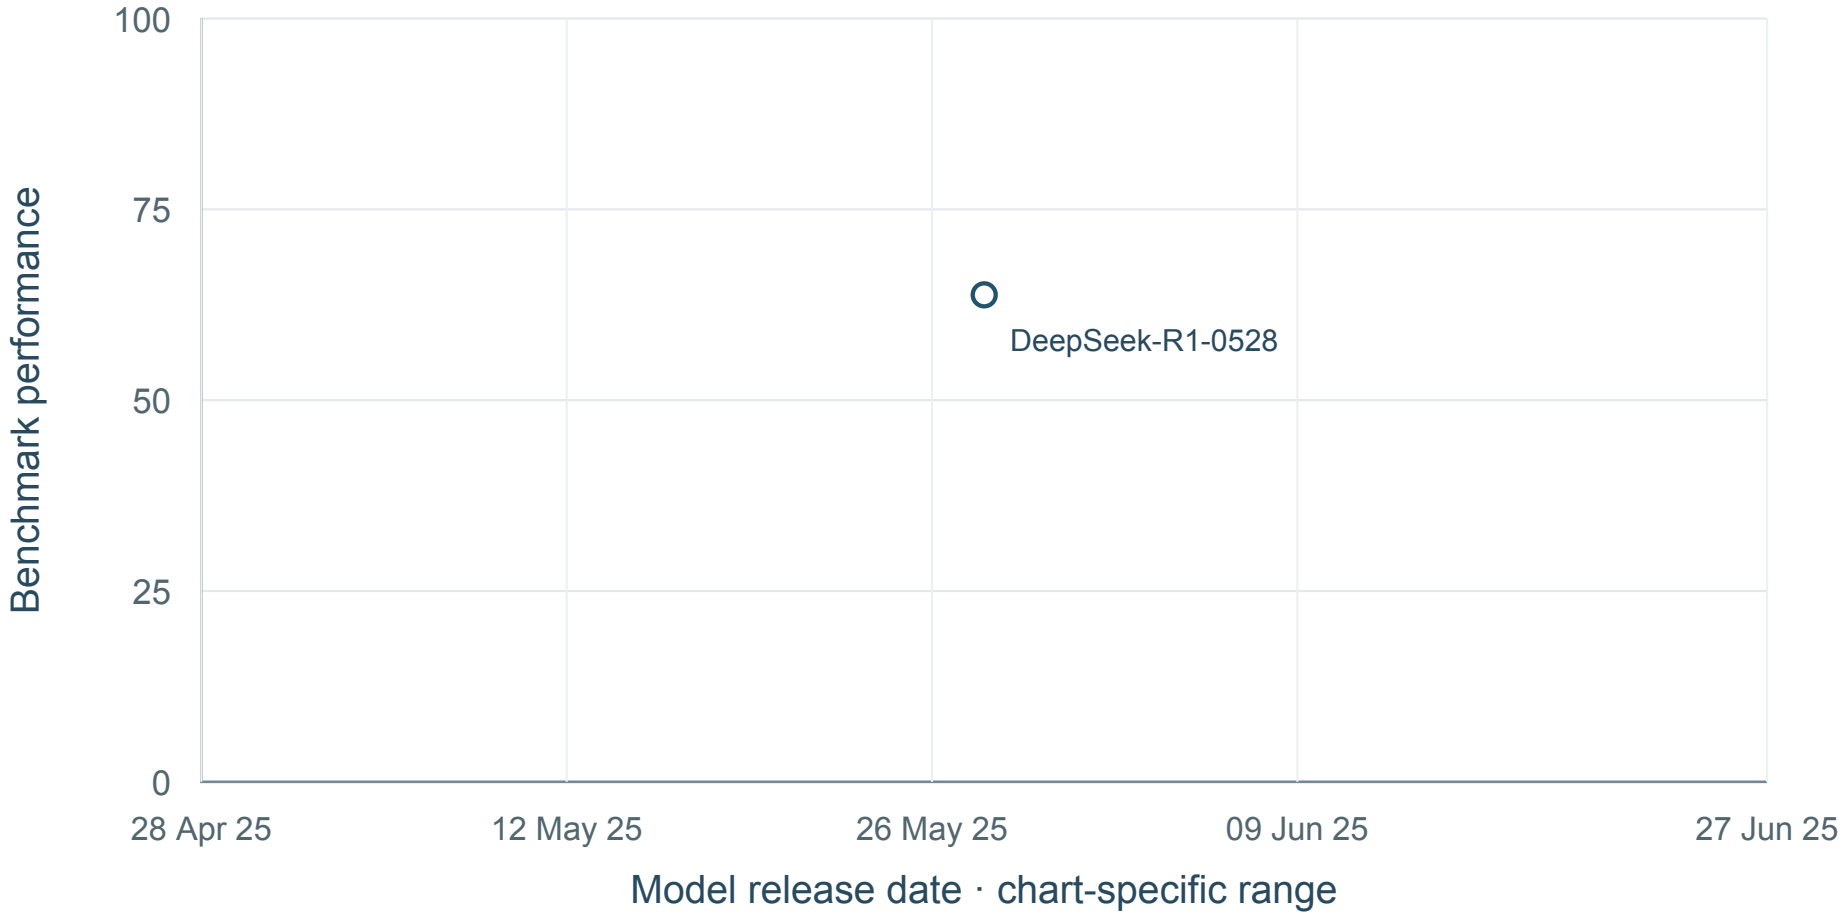

1 shown · 2 undated · 0 definition-held · sources: MC008


No mean curve: Fewer than five dated model configurations.

Result-source references: MC008. Exact point locators and raw values: data/F047_BFCL_values.csv.

Benchmark reference (APA): Patil, S. G., Mao, H., Yan, F., Ji, C. C.-J., Suresh, V., Stoica, I., & Gonzalez, J. E. (2025). The Berkeley function calling leaderboard (BFCL): From tool use to agentic evaluation of large language models. In Proceedings of the 42nd International Conference on Machine Learning (Vol. 267) (pp. 48371–48392). https://proceedings.mlr.press/v267/patil25a.html

BFCL: Reported BFCL score (%)

Thinking; MC008 M1; BFCL v3; Overall

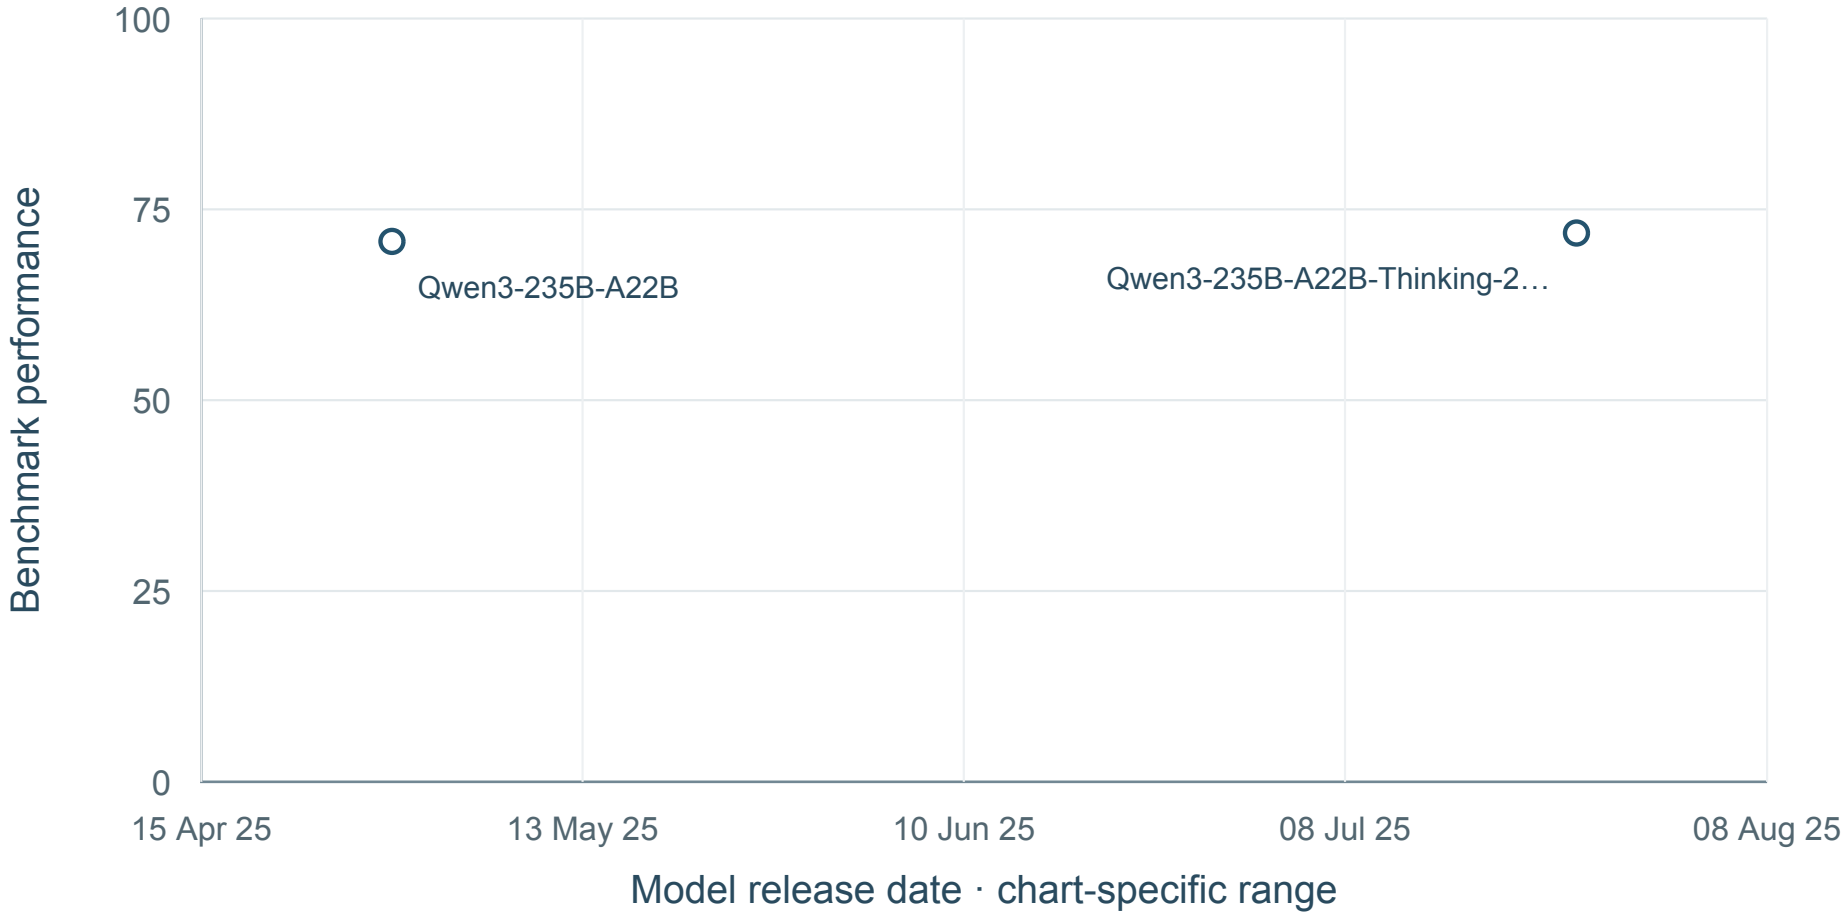

2 shown · 0 undated · 0 definition-held · sources: MC008


No mean curve: Fewer than five dated model configurations.

Result-source references: MC008. Exact point locators and raw values: data/F047_BFCL_values.csv.

Benchmark reference (APA): Patil, S. G., Mao, H., Yan, F., Ji, C. C.-J., Suresh, V., Stoica, I., & Gonzalez, J. E. (2025). The Berkeley function calling leaderboard (BFCL): From tool use to agentic evaluation of large language models. In Proceedings of the 42nd International Conference on Machine Learning (Vol. 267) (pp. 48371–48392). https://proceedings.mlr.press/v267/patil25a.html

BFCL: Reported BFCL score (%)

Thinking; MC009 M1; BFCL v3; Overall

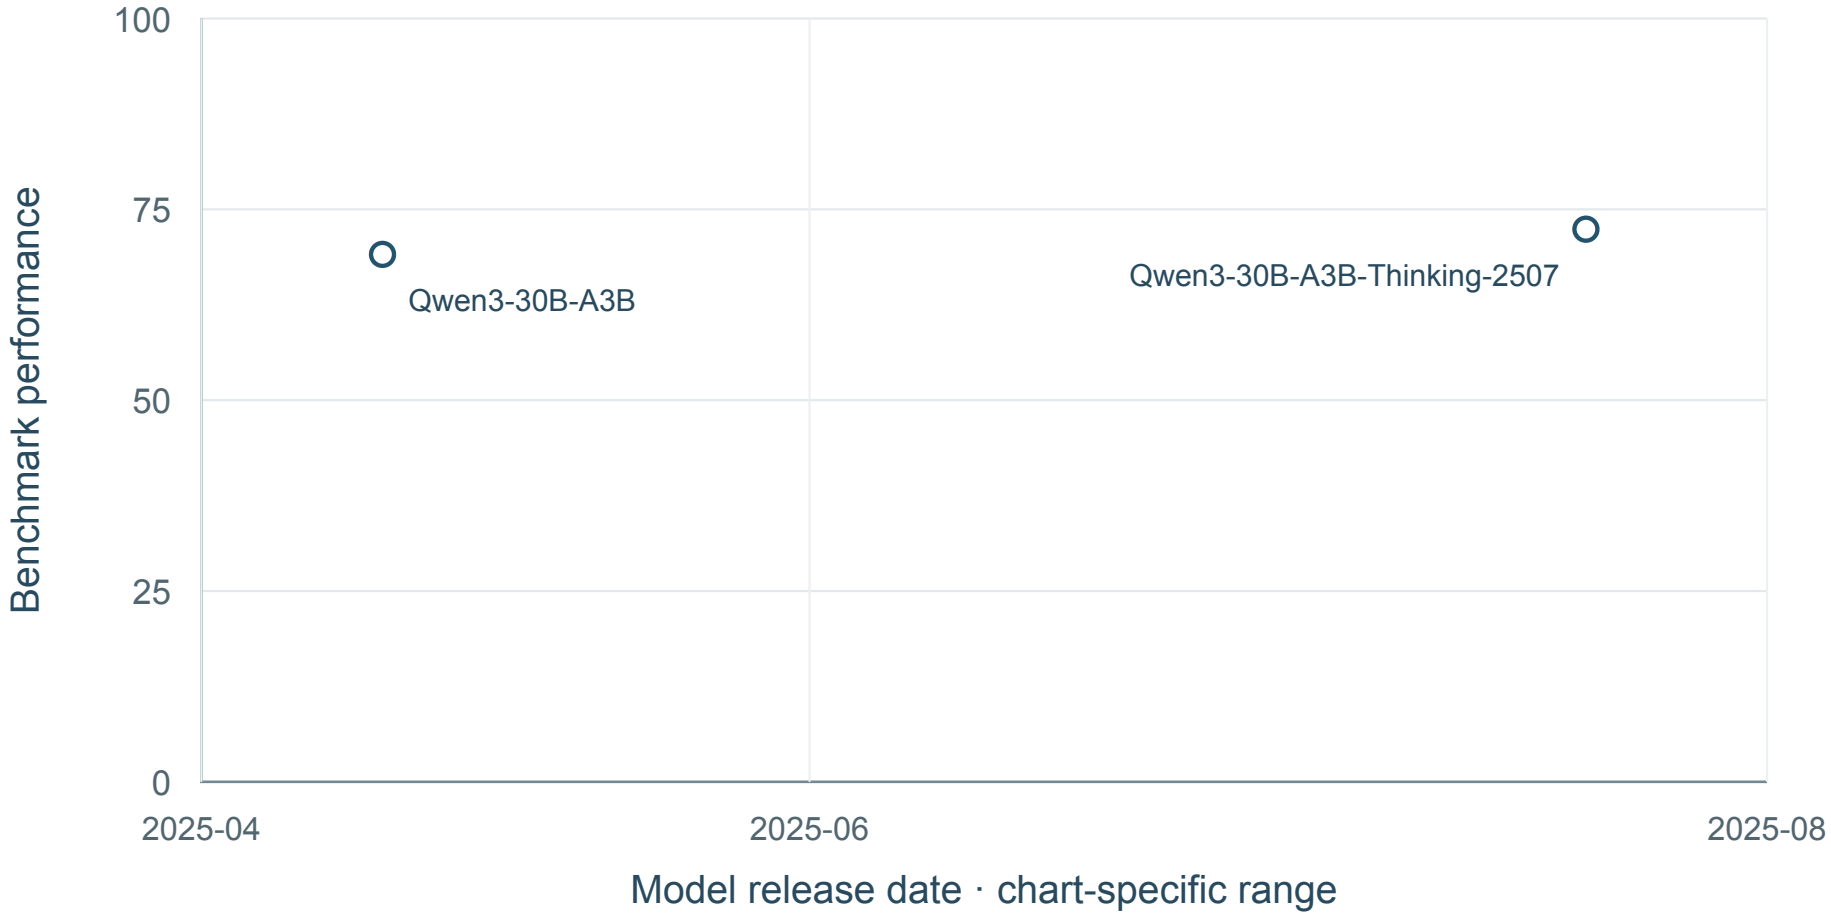

2 shown · 1 undated · 0 definition-held · sources: MC009


No mean curve: Fewer than five dated model configurations.

Result-source references: MC009. Exact point locators and raw values: data/F047_BFCL_values.csv.

Benchmark reference (APA): Patil, S. G., Mao, H., Yan, F., Ji, C. C.-J., Suresh, V., Stoica, I., & Gonzalez, J. E. (2025). The Berkeley function calling leaderboard (BFCL): From tool use to agentic evaluation of large language models. In Proceedings of the 42nd International Conference on Machine Learning (Vol. 267) (pp. 48371–48392). https://proceedings.mlr.press/v267/patil25a.html

BFCL: Reported BFCL score (%)

Non-thinking; MC010 M1; BFCL v3; Overall

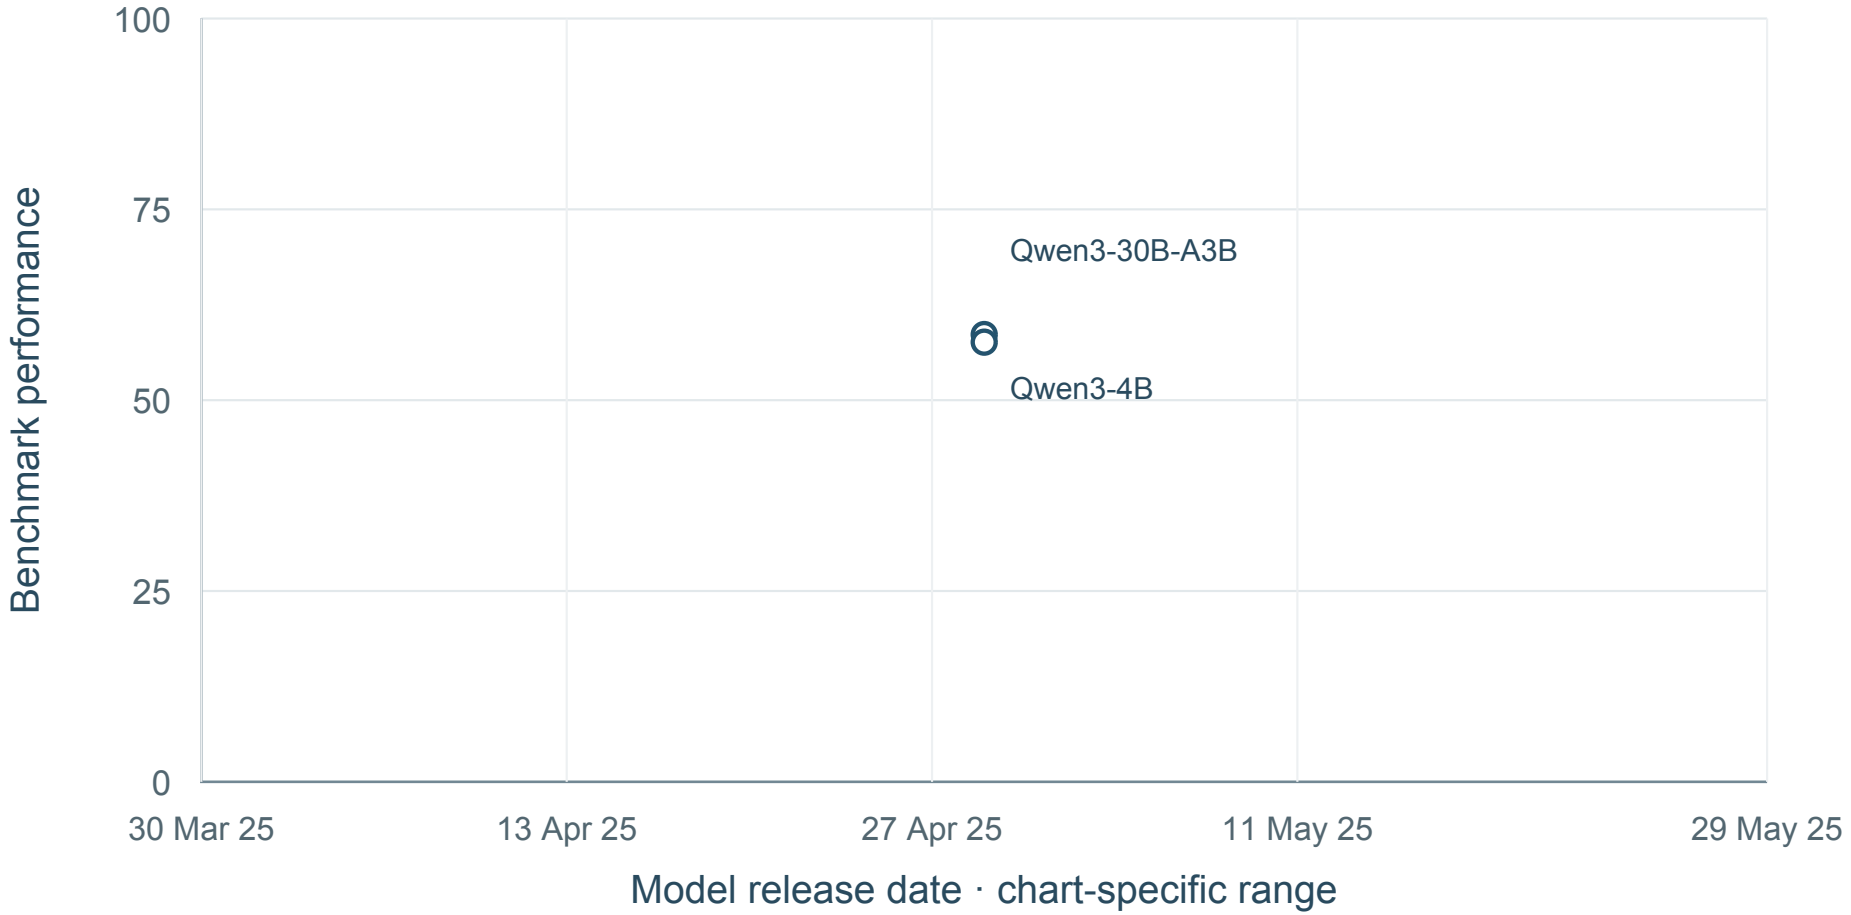

2 shown · 0 undated · 0 definition-held · sources: MC010


No mean curve: Fewer than five dated model configurations.

Result-source references: MC010. Exact point locators and raw values: data/F047_BFCL_values.csv.

Benchmark reference (APA): Patil, S. G., Mao, H., Yan, F., Ji, C. C.-J., Suresh, V., Stoica, I., & Gonzalez, J. E. (2025). The Berkeley function calling leaderboard (BFCL): From tool use to agentic evaluation of large language models. In Proceedings of the 42nd International Conference on Machine Learning (Vol. 267) (pp. 48371–48392). https://proceedings.mlr.press/v267/patil25a.html

BFCL: Reported BFCL score (%)

Thinking; MC014 H1; BFCL v4; Overall

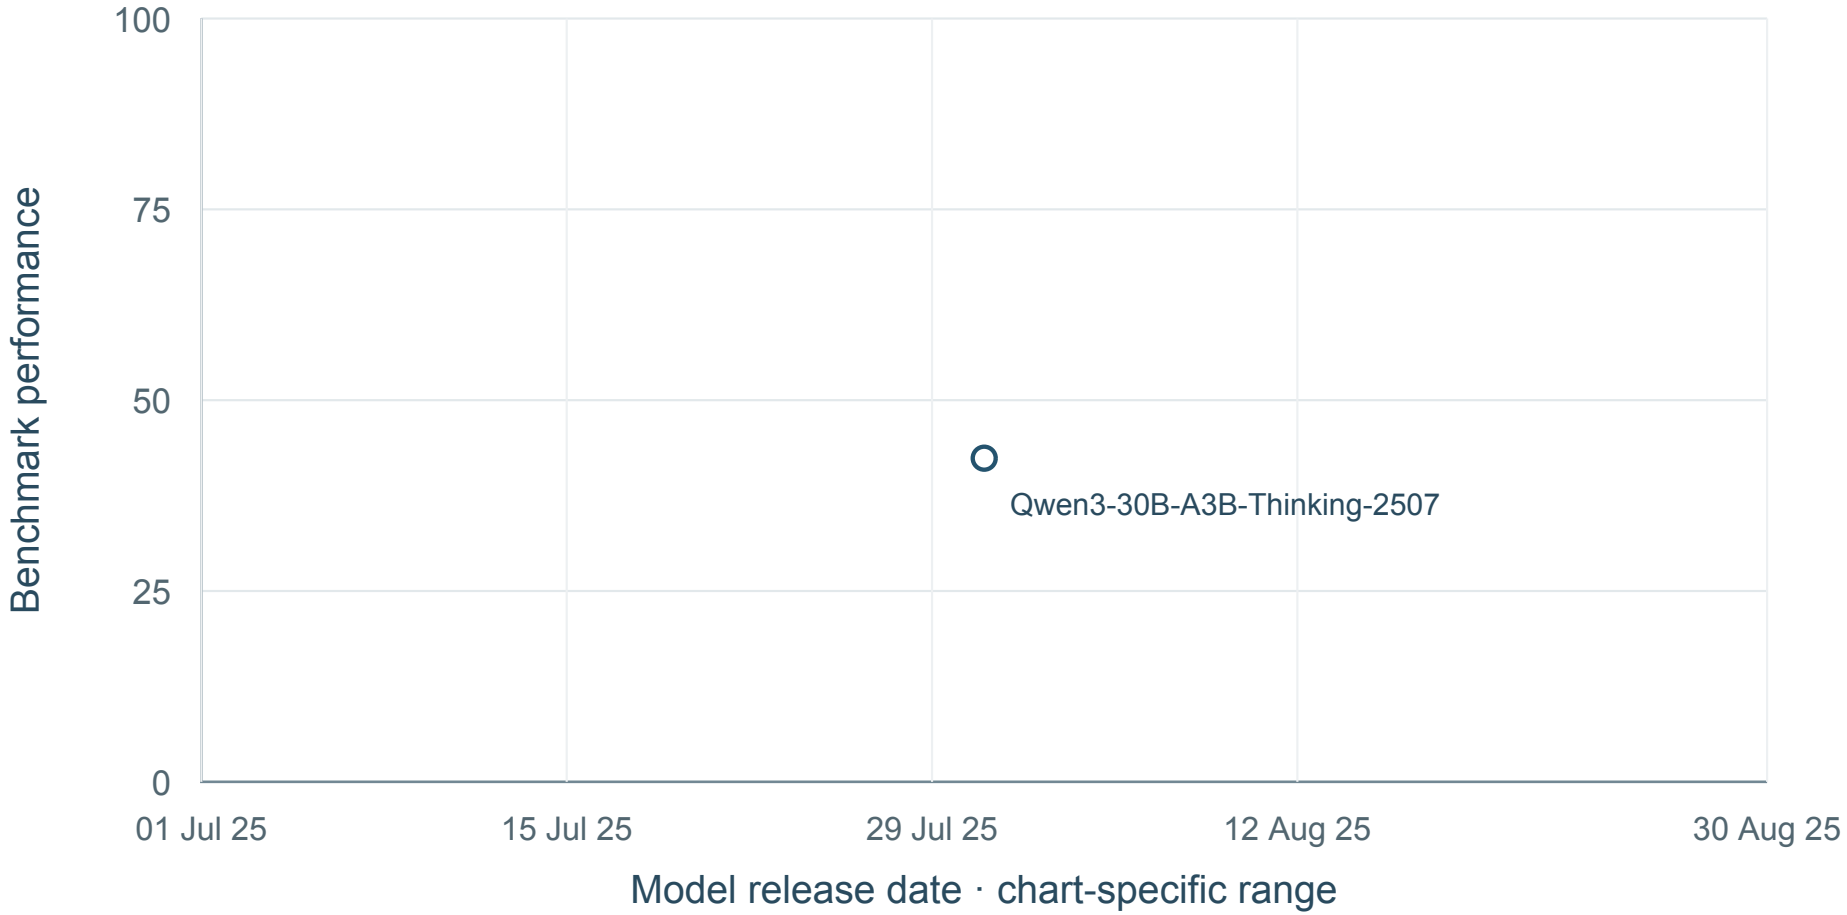

1 shown · 0 undated · 0 definition-held · sources: MC014


No mean curve: Fewer than five dated model configurations.

Result-source references: MC014. Exact point locators and raw values: data/F047_BFCL_values.csv.

Benchmark reference (APA): Patil, S. G., Mao, H., Yan, F., Ji, C. C.-J., Suresh, V., Stoica, I., & Gonzalez, J. E. (2025). The Berkeley function calling leaderboard (BFCL): From tool use to agentic evaluation of large language models. In Proceedings of the 42nd International Conference on Machine Learning (Vol. 267) (pp. 48371–48392). https://proceedings.mlr.press/v267/patil25a.html

BFCL: Reported BFCL score (%)

Mode not specified; MC014 H1; BFCL v4; Overall

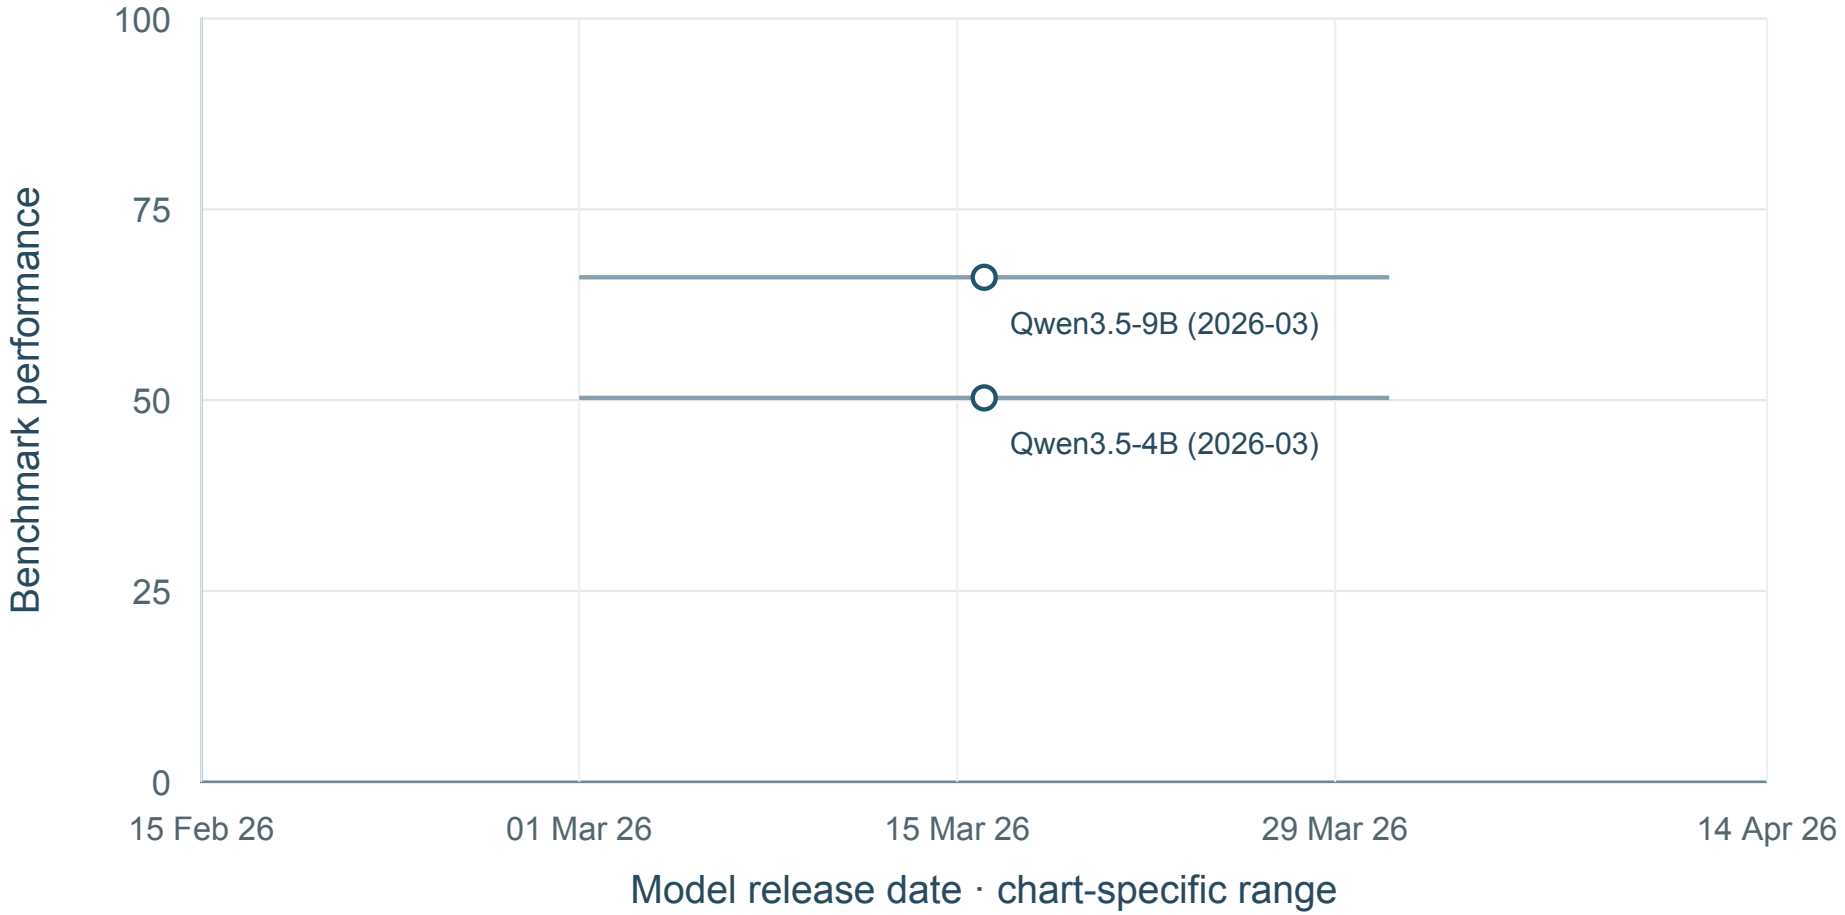

2 shown · 0 undated · 0 definition-held · sources: MC014


No mean curve: Fewer than five dated model configurations.

Result-source references: MC014. Exact point locators and raw values: data/F047_BFCL_values.csv.

Benchmark reference (APA): Patil, S. G., Mao, H., Yan, F., Ji, C. C.-J., Suresh, V., Stoica, I., & Gonzalez, J. E. (2025). The Berkeley function calling leaderboard (BFCL): From tool use to agentic evaluation of large language models. In Proceedings of the 42nd International Conference on Machine Learning (Vol. 267) (pp. 48371–48392). https://proceedings.mlr.press/v267/patil25a.html

BFCL: Reported BFCL score (%)

Mode not specified; MC015 M1; BFCL v3; Multi-turn component

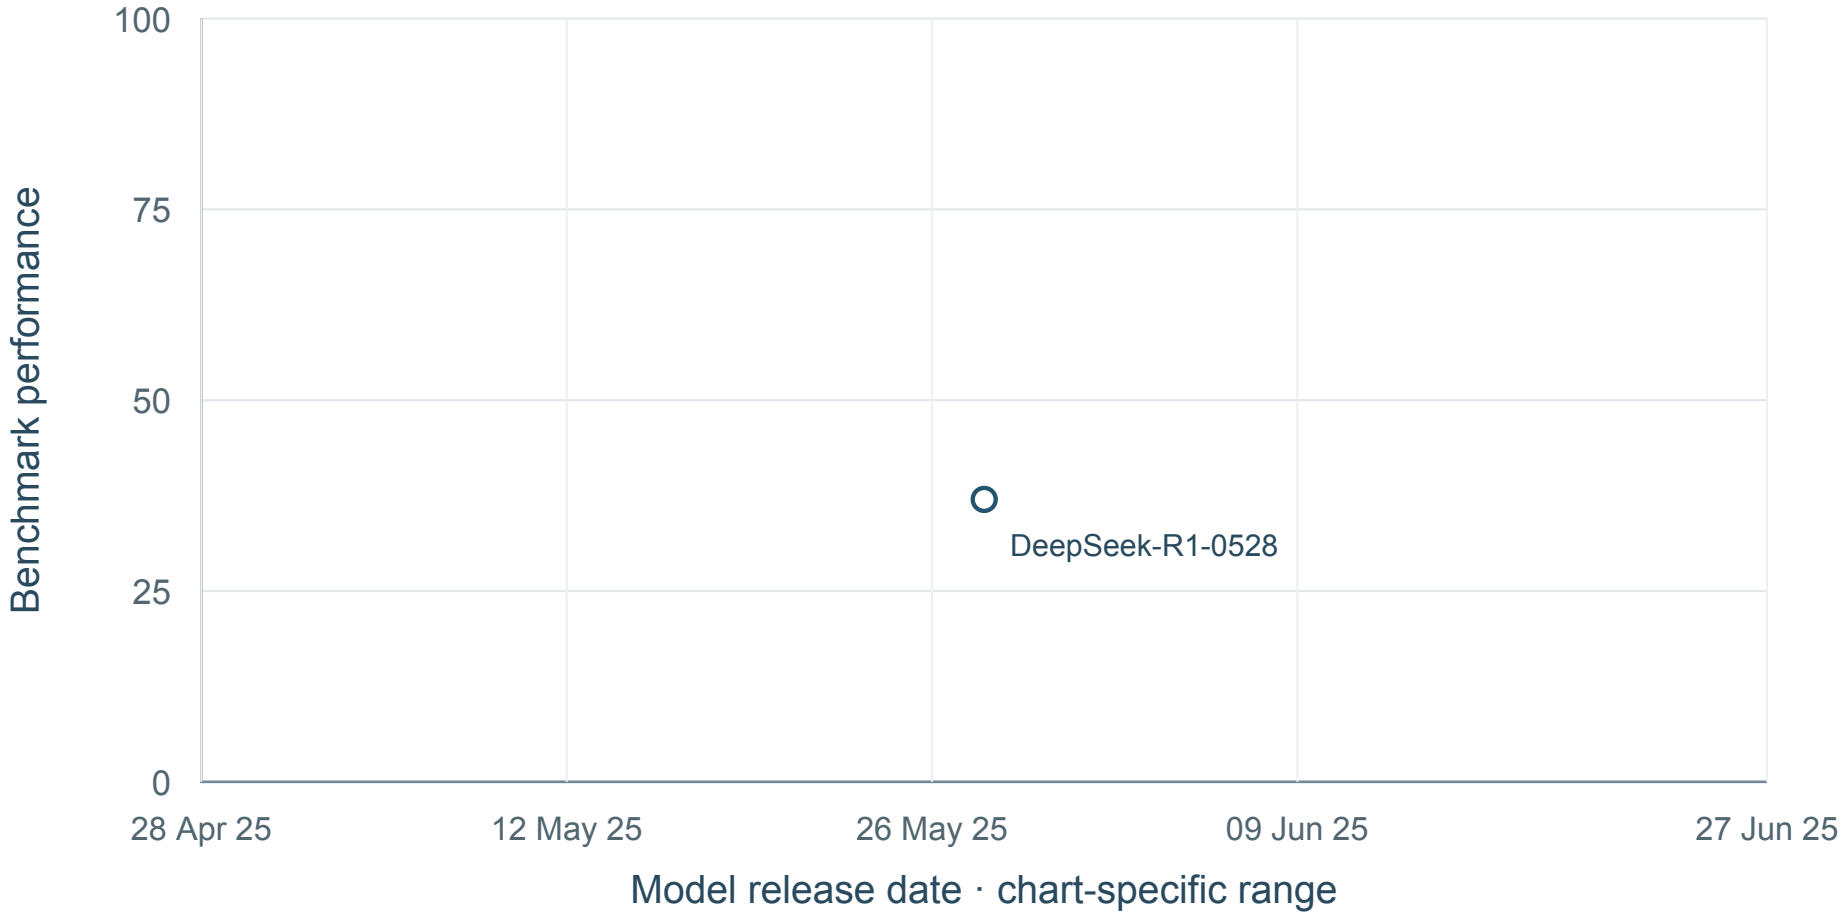

1 shown · 0 undated · 0 definition-held · sources: MC015


No mean curve: Fewer than five dated model configurations.

Result-source references: MC015. Exact point locators and raw values: data/F047_BFCL_values.csv.

Benchmark reference (APA): Patil, S. G., Mao, H., Yan, F., Ji, C. C.-J., Suresh, V., Stoica, I., & Gonzalez, J. E. (2025). The Berkeley function calling leaderboard (BFCL): From tool use to agentic evaluation of large language models. In Proceedings of the 42nd International Conference on Machine Learning (Vol. 267) (pp. 48371–48392). https://proceedings.mlr.press/v267/patil25a.html

BFCL: Reported BFCL score (%)

Thinking; MC049 H1; 32B comparison; BFCL v3; Overall

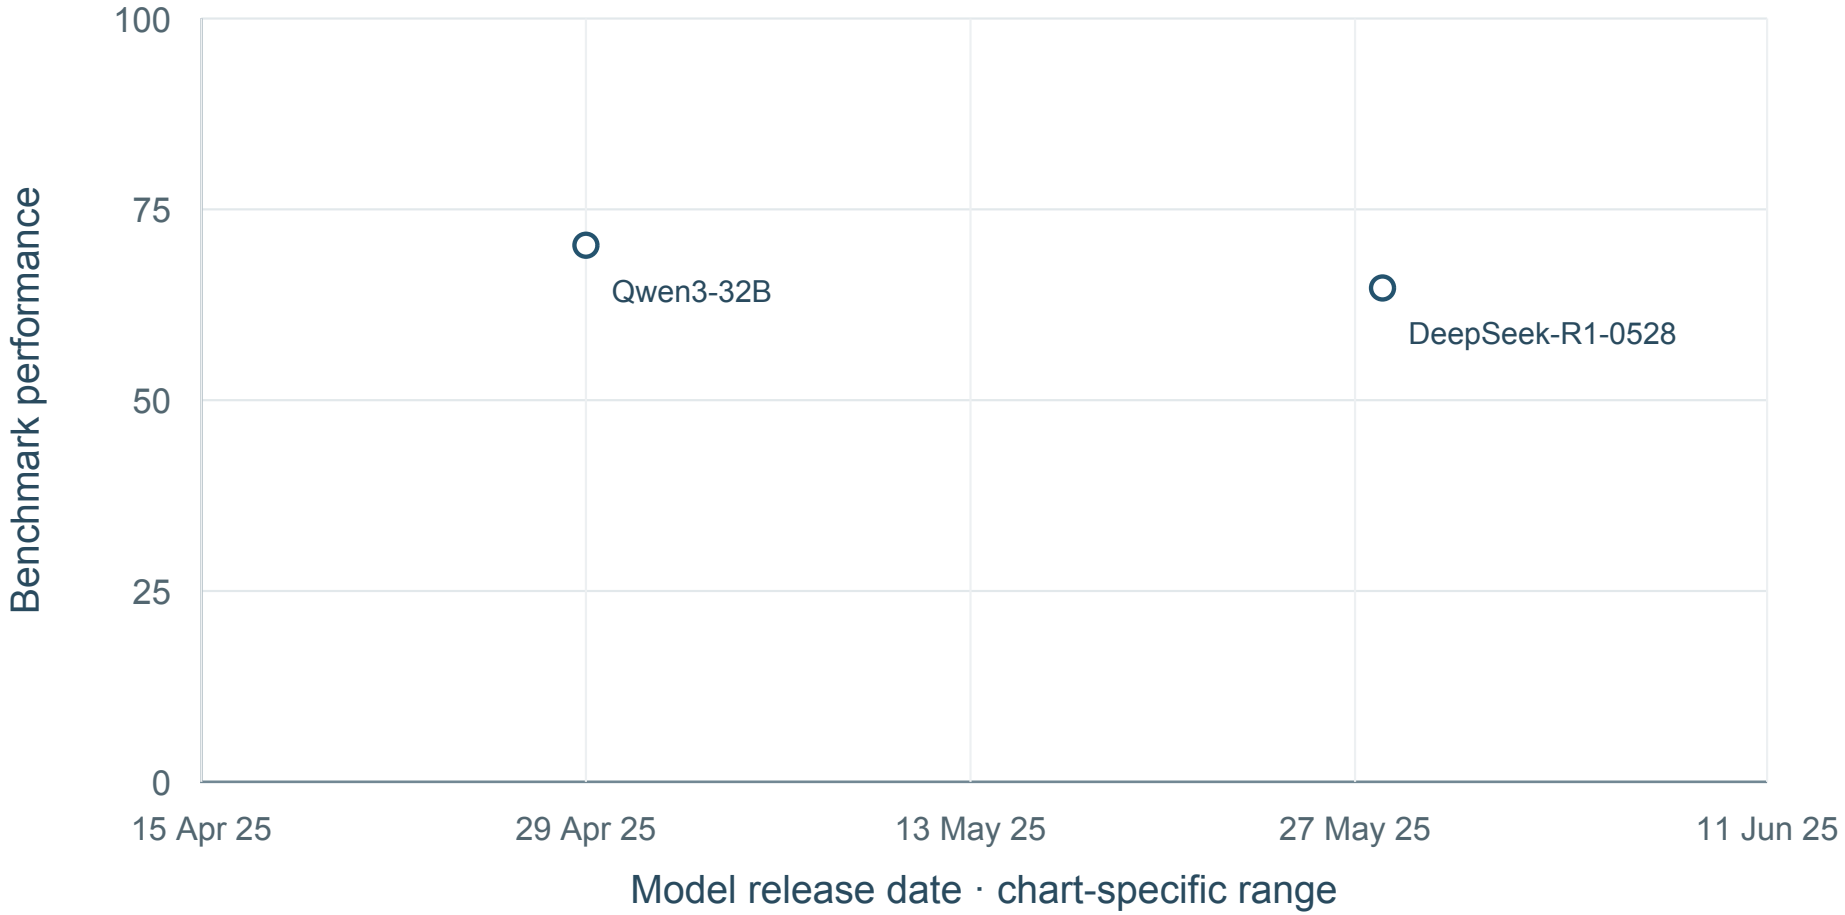

2 shown · 1 undated · 0 definition-held · sources: MC049


No mean curve: Fewer than five dated model configurations.

Result-source references: MC049. Exact point locators and raw values: data/F047_BFCL_values.csv.

Benchmark reference (APA): Patil, S. G., Mao, H., Yan, F., Ji, C. C.-J., Suresh, V., Stoica, I., & Gonzalez, J. E. (2025). The Berkeley function calling leaderboard (BFCL): From tool use to agentic evaluation of large language models. In Proceedings of the 42nd International Conference on Machine Learning (Vol. 267) (pp. 48371–48392). https://proceedings.mlr.press/v267/patil25a.html

BFCL: Reported BFCL score (%)

Non-thinking; MC049 H2; 32B comparison; BFCL v3; Overall

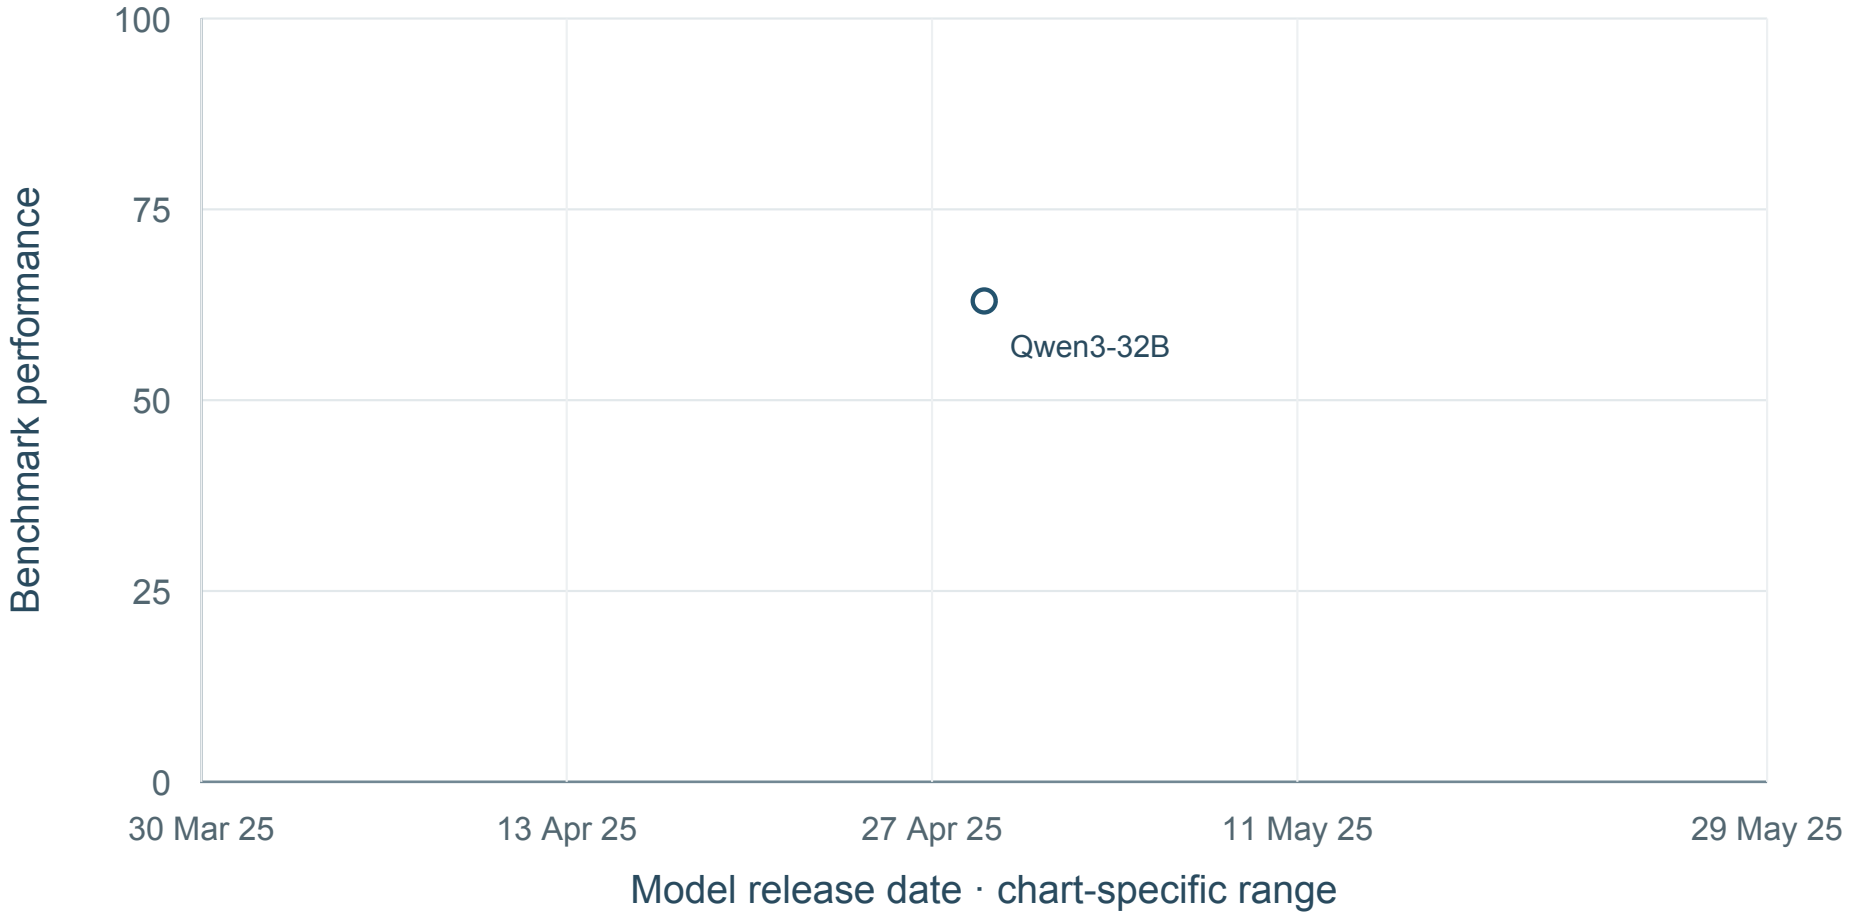

1 shown · 3 undated · 0 definition-held · sources: MC049


No mean curve: Fewer than five dated model configurations.

Result-source references: MC049. Exact point locators and raw values: data/F047_BFCL_values.csv.

Benchmark reference (APA): Patil, S. G., Mao, H., Yan, F., Ji, C. C.-J., Suresh, V., Stoica, I., & Gonzalez, J. E. (2025). The Berkeley function calling leaderboard (BFCL): From tool use to agentic evaluation of large language models. In Proceedings of the 42nd International Conference on Machine Learning (Vol. 267) (pp. 48371–48392). https://proceedings.mlr.press/v267/patil25a.html

BFCL: Reported BFCL score (%)

Thinking; MC049 H3; 1.2B comparison; BFCL v3; Overall

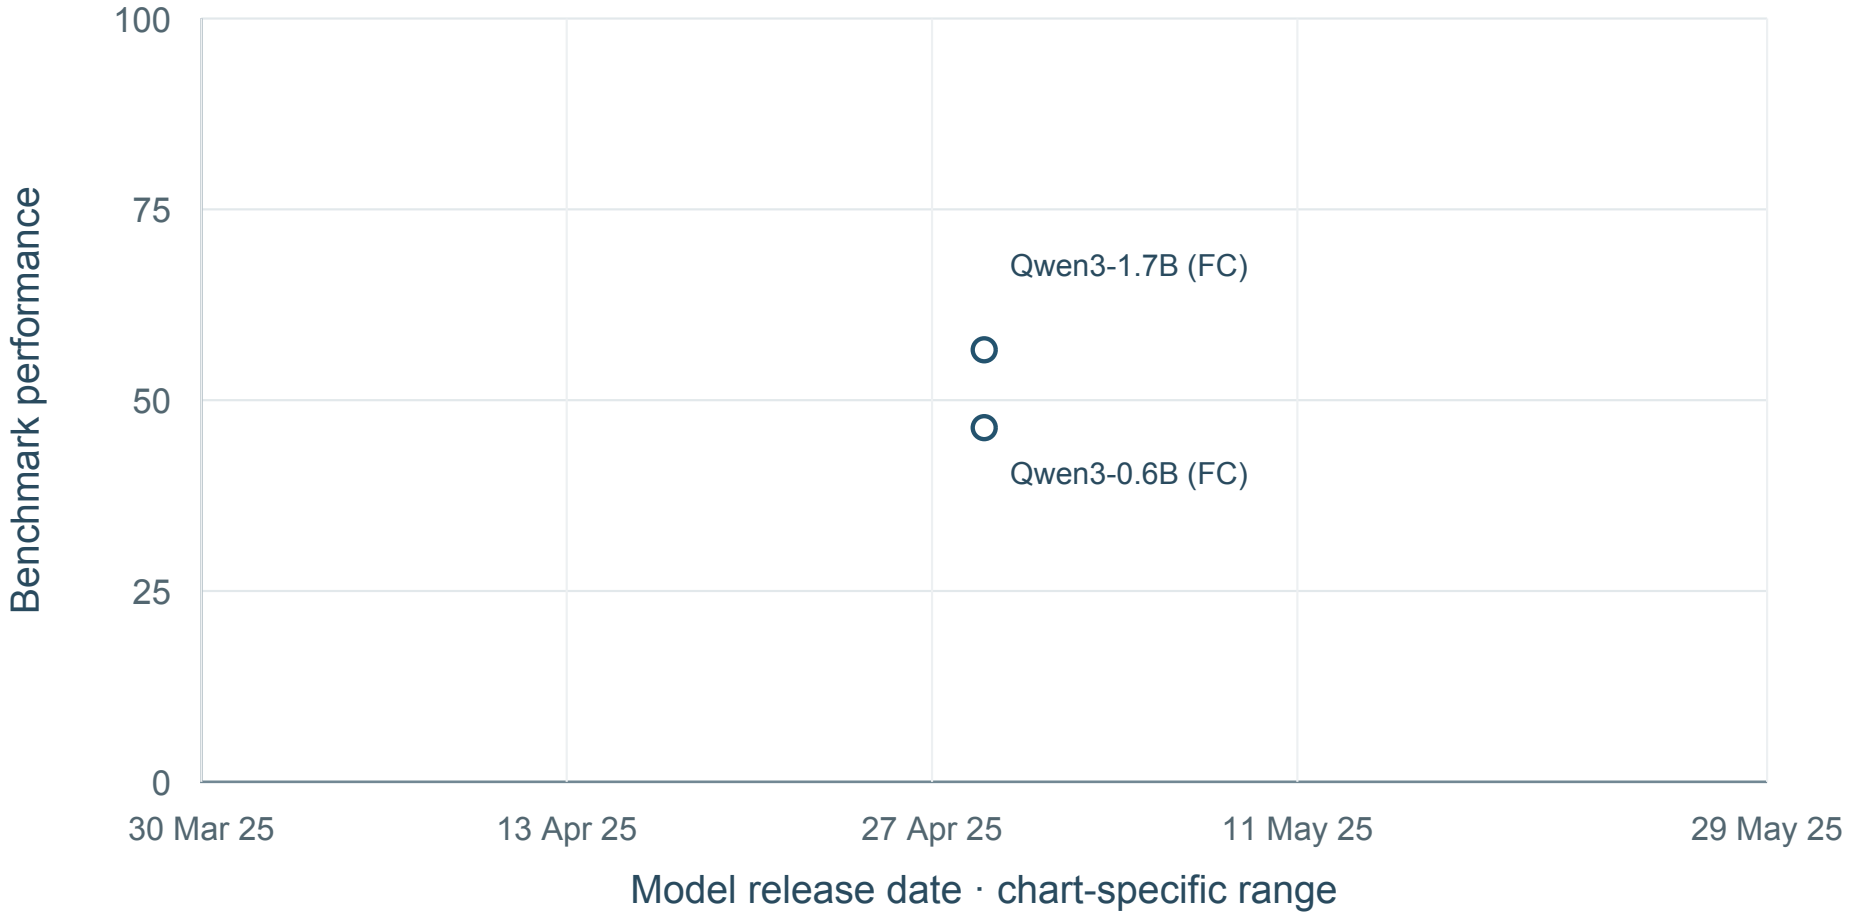

2 shown · 1 undated · 0 definition-held · sources: MC049


No mean curve: Fewer than five dated model configurations.

Result-source references: MC049. Exact point locators and raw values: data/F047_BFCL_values.csv.

Benchmark reference (APA): Patil, S. G., Mao, H., Yan, F., Ji, C. C.-J., Suresh, V., Stoica, I., & Gonzalez, J. E. (2025). The Berkeley function calling leaderboard (BFCL): From tool use to agentic evaluation of large language models. In Proceedings of the 42nd International Conference on Machine Learning (Vol. 267) (pp. 48371–48392). https://proceedings.mlr.press/v267/patil25a.html

BFCL: Reported BFCL score (%)

Non-thinking; MC049 H4; 1.2B comparison; BFCL v3; Overall

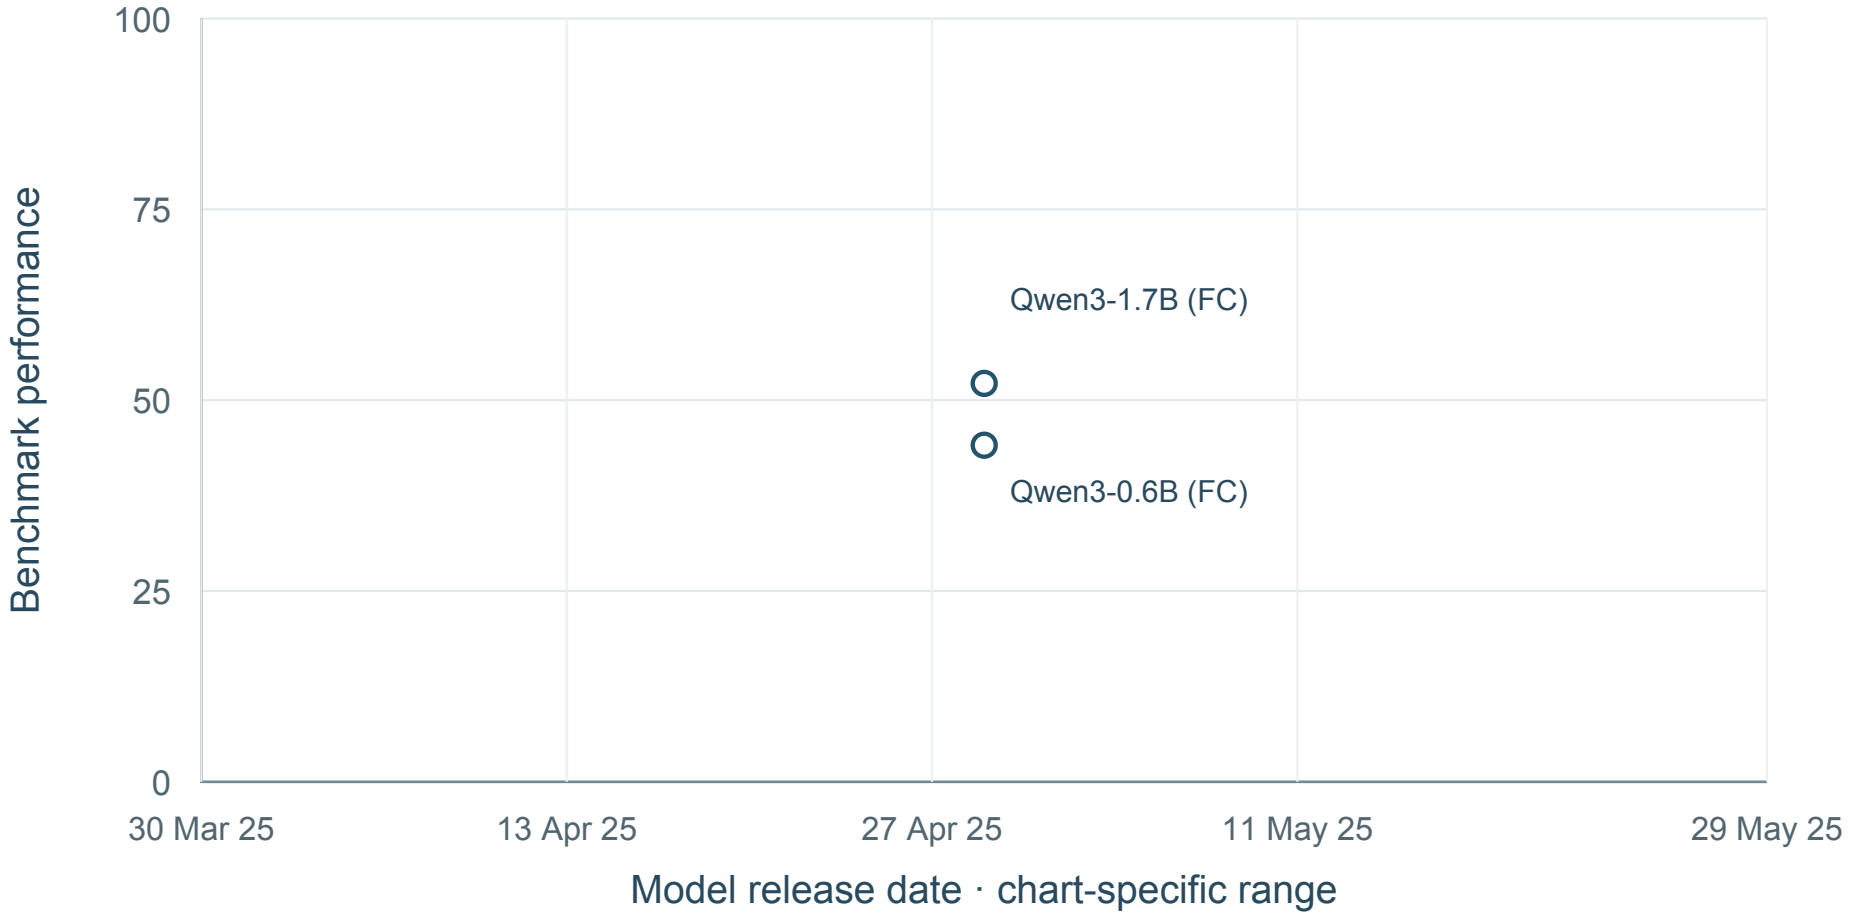

2 shown · 1 undated · 0 definition-held · sources: MC049


No mean curve: Fewer than five dated model configurations.

Result-source references: MC049. Exact point locators and raw values: data/F047_BFCL_values.csv.

Benchmark reference (APA): Patil, S. G., Mao, H., Yan, F., Ji, C. C.-J., Suresh, V., Stoica, I., & Gonzalez, J. E. (2025). The Berkeley function calling leaderboard (BFCL): From tool use to agentic evaluation of large language models. In Proceedings of the 42nd International Conference on Machine Learning (Vol. 267) (pp. 48371–48392). https://proceedings.mlr.press/v267/patil25a.html

BFCL: Reported BFCL score (%)

Mode not specified; MC051 M3; BFCL v2; Overall

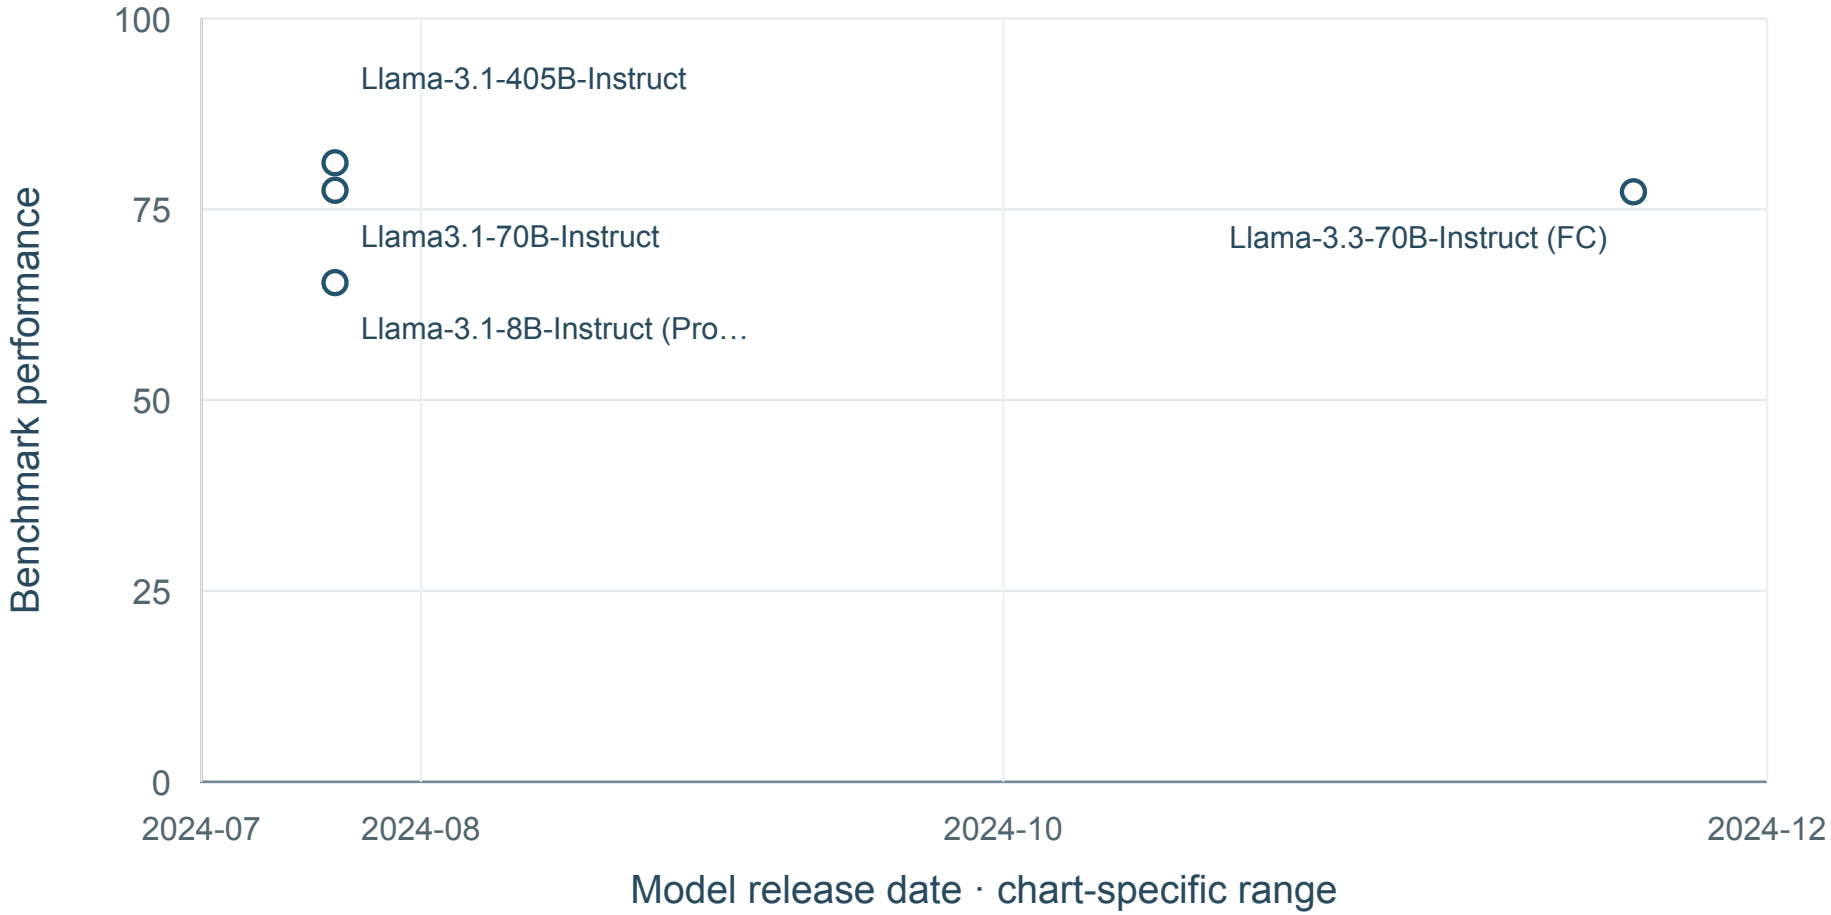

4 shown · 0 undated · 0 definition-held · sources: MC051


No mean curve: Fewer than five dated model configurations.

Result-source references: MC051. Exact point locators and raw values: data/F047_BFCL_values.csv.

Benchmark reference (APA): Patil, S. G., Mao, H., Yan, F., Ji, C. C.-J., Suresh, V., Stoica, I., & Gonzalez, J. E. (2025). The Berkeley function calling leaderboard (BFCL): From tool use to agentic evaluation of large language models. In Proceedings of the 42nd International Conference on Machine Learning (Vol. 267) (pp. 48371–48392). https://proceedings.mlr.press/v267/patil25a.html

BFCL: Reported BFCL score (%)

Mode not specified; MC073 H6; BFCL v3; Overall

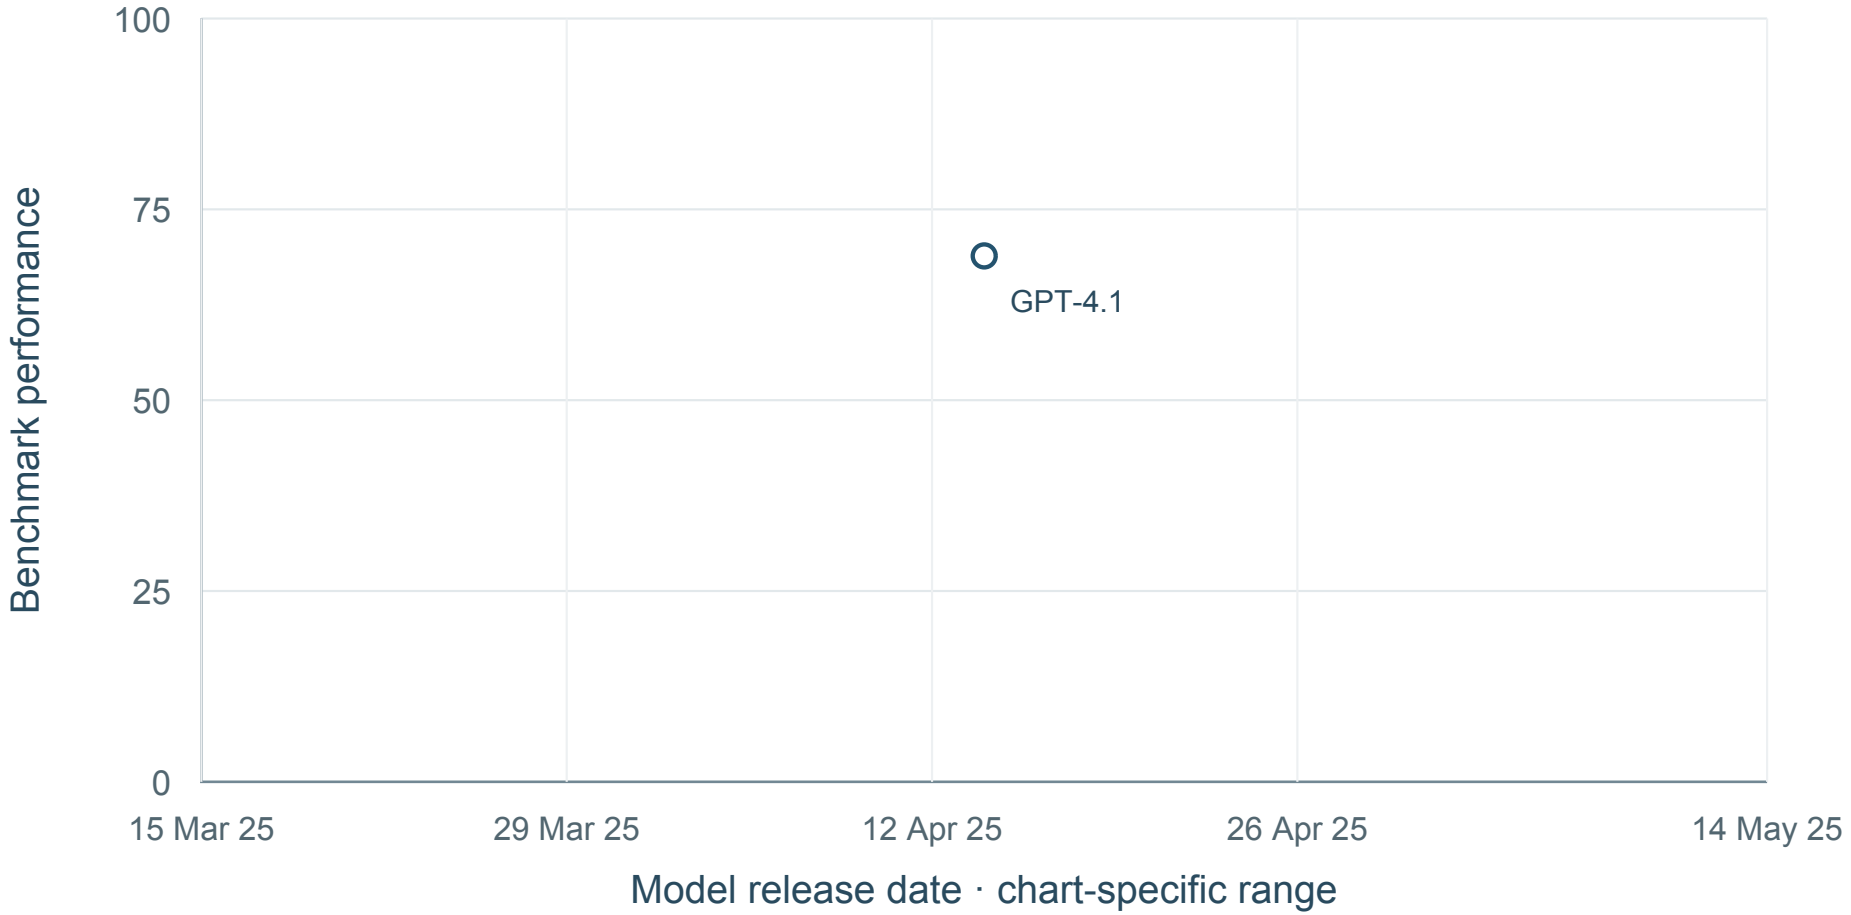

1 shown · 6 undated · 0 definition-held · sources: MC073


No mean curve: Fewer than five dated model configurations.

Result-source references: MC073. Exact point locators and raw values: data/F047_BFCL_values.csv.

Benchmark reference (APA): Patil, S. G., Mao, H., Yan, F., Ji, C. C.-J., Suresh, V., Stoica, I., & Gonzalez, J. E. (2025). The Berkeley function calling leaderboard (BFCL): From tool use to agentic evaluation of large language models. In Proceedings of the 42nd International Conference on Machine Learning (Vol. 267) (pp. 48371–48392). https://proceedings.mlr.press/v267/patil25a.html

BFCL: Reported BFCL score (%)

Mode not specified; MC075 H13; BFCL v3; Overall

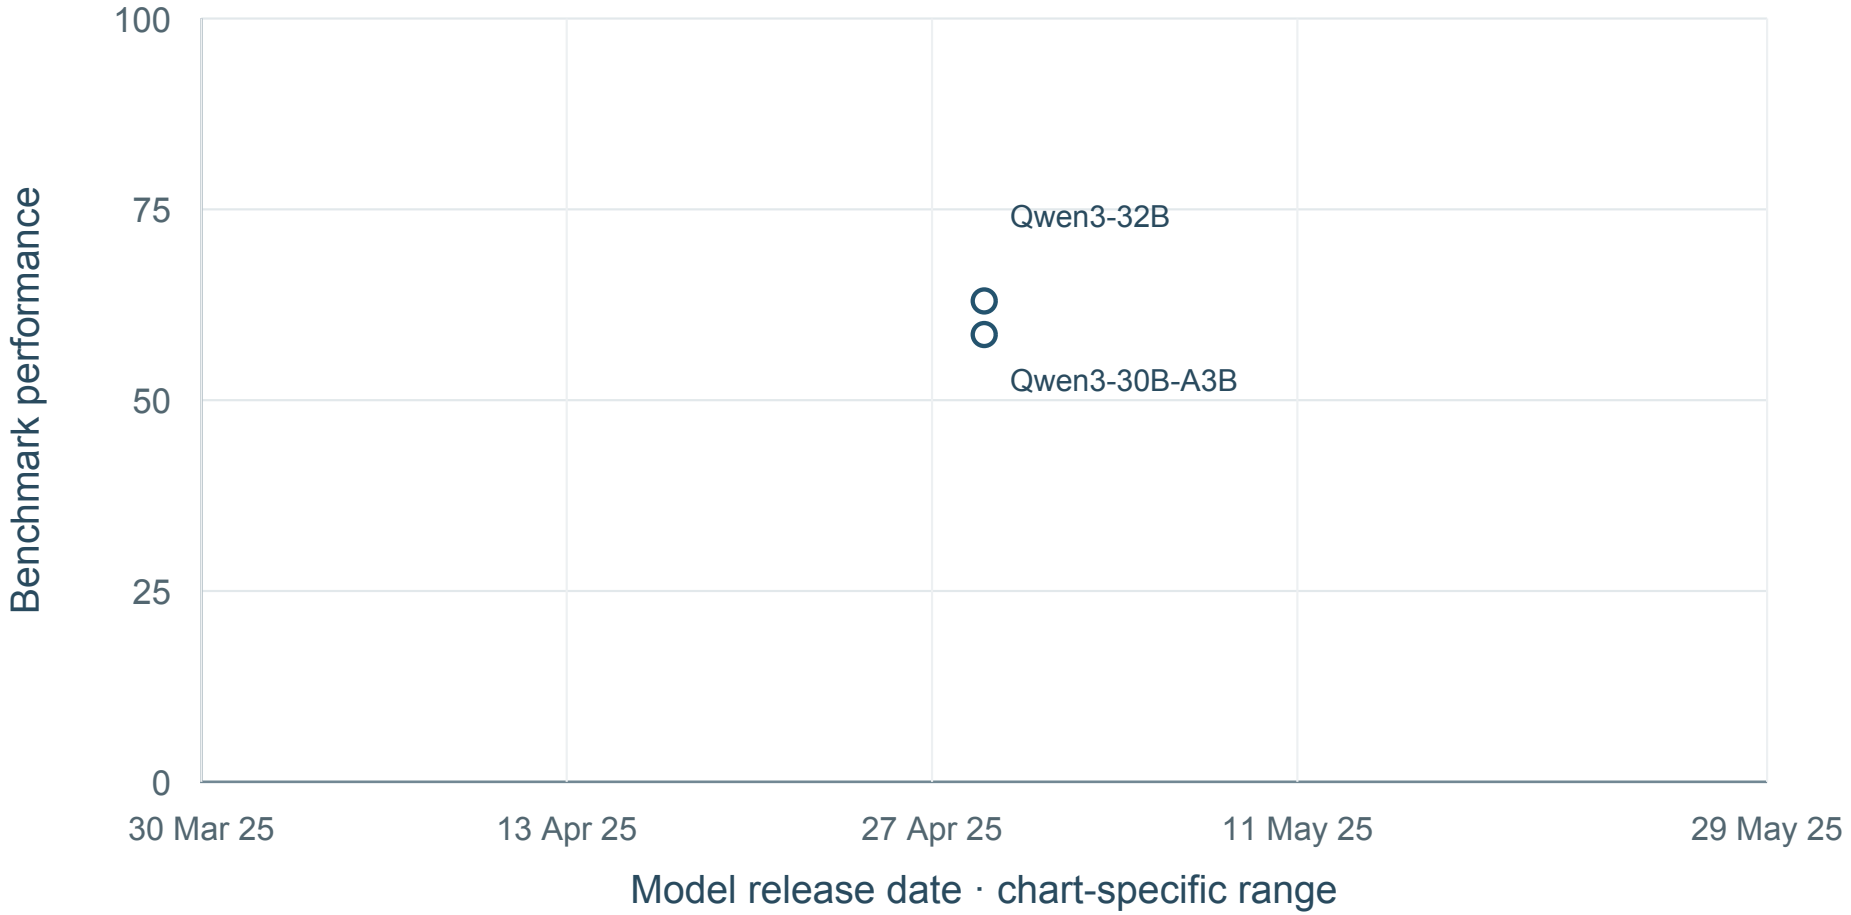

2 shown · 0 undated · 0 definition-held · sources: MC075


No mean curve: Fewer than five dated model configurations.

Result-source references: MC075. Exact point locators and raw values: data/F047_BFCL_values.csv.

Benchmark reference (APA): Patil, S. G., Mao, H., Yan, F., Ji, C. C.-J., Suresh, V., Stoica, I., & Gonzalez, J. E. (2025). The Berkeley function calling leaderboard (BFCL): From tool use to agentic evaluation of large language models. In Proceedings of the 42nd International Conference on Machine Learning (Vol. 267) (pp. 48371–48392). https://proceedings.mlr.press/v267/patil25a.html

BFCL: Reported BFCL score (%)

Instruct / non-thinking variant; MC075 H13; BFCL v3; Overall

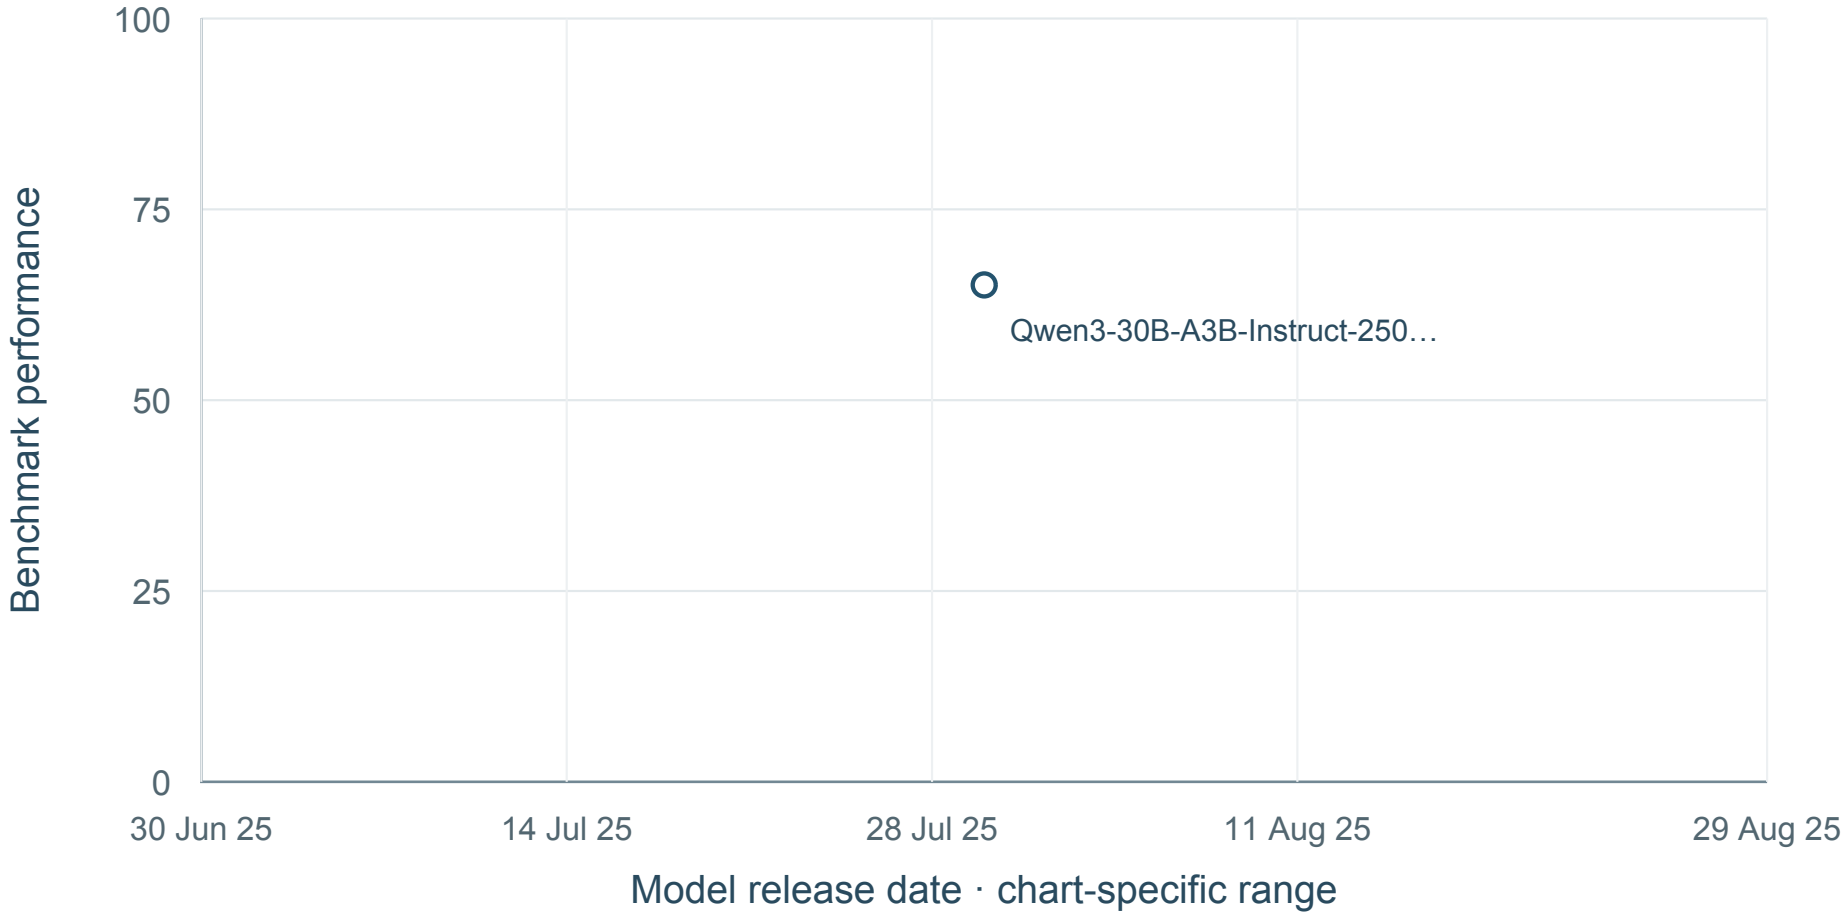

1 shown · 1 undated · 0 definition-held · sources: MC075


No mean curve: Fewer than five dated model configurations.

Result-source references: MC075. Exact point locators and raw values: data/F047_BFCL_values.csv.

Benchmark reference (APA): Patil, S. G., Mao, H., Yan, F., Ji, C. C.-J., Suresh, V., Stoica, I., & Gonzalez, J. E. (2025). The Berkeley function calling leaderboard (BFCL): From tool use to agentic evaluation of large language models. In Proceedings of the 42nd International Conference on Machine Learning (Vol. 267) (pp. 48371–48392). https://proceedings.mlr.press/v267/patil25a.html

BFCL: Reported BFCL score (%)

Mode not specified; MC075 H25; BFCL v3; Overall

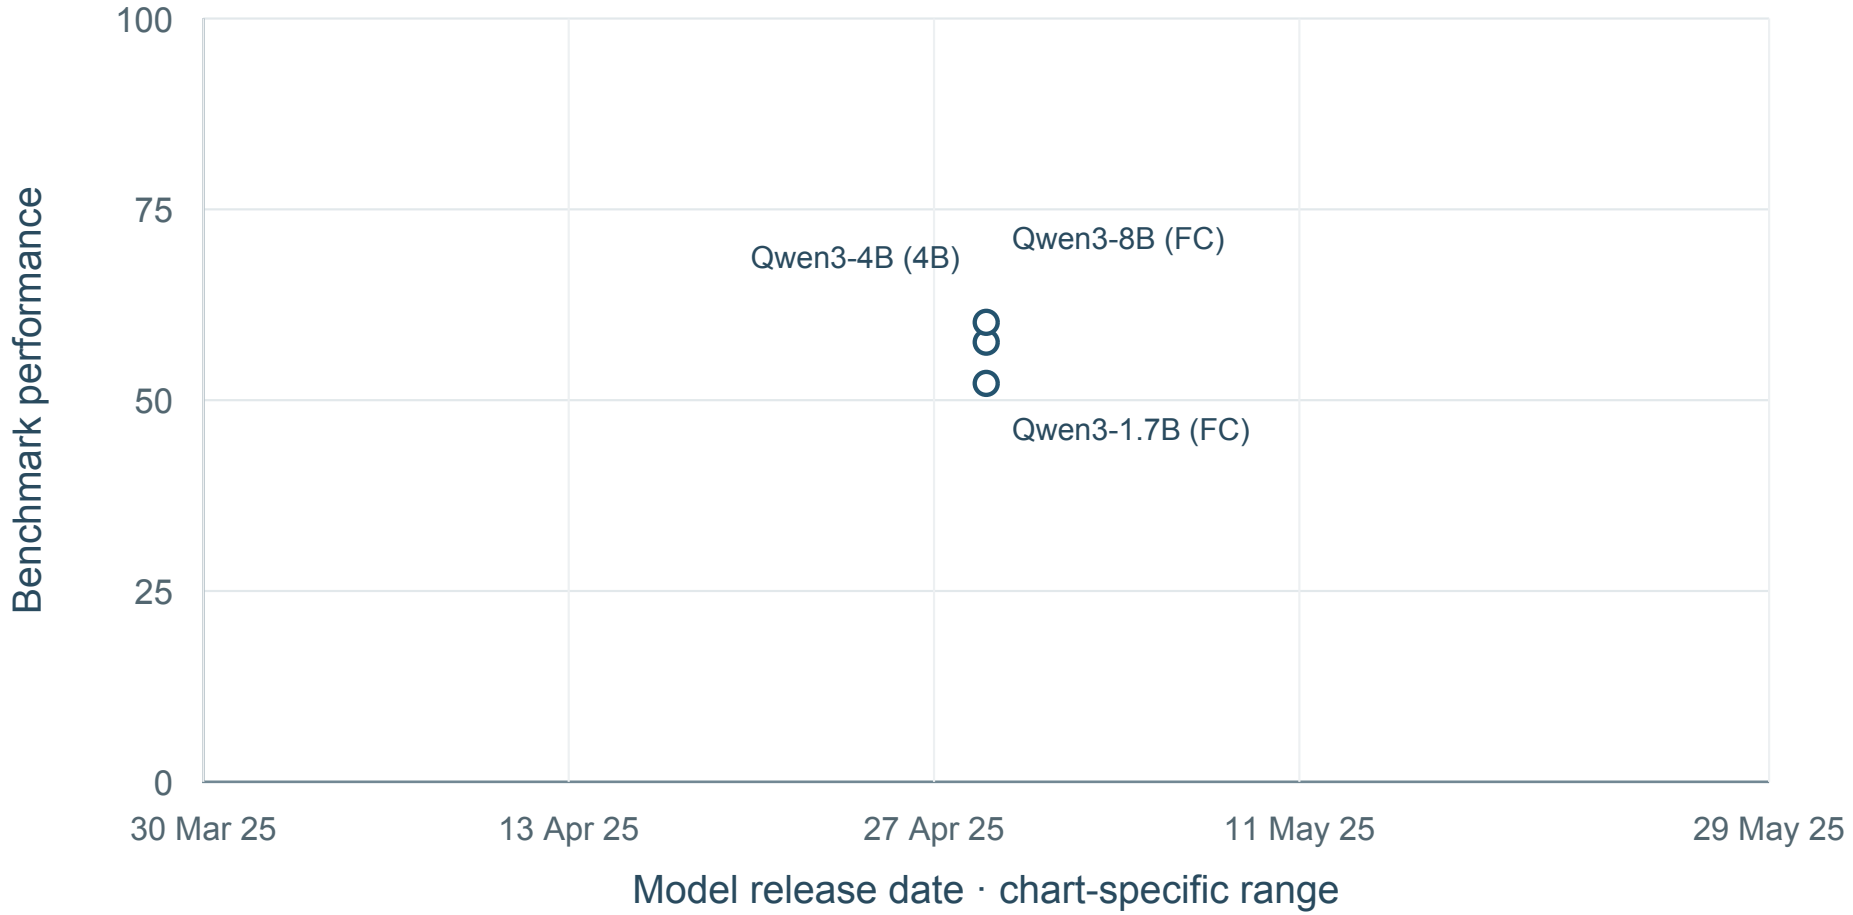

3 shown · 0 undated · 0 definition-held · sources: MC075


No mean curve: Fewer than five dated model configurations.

Result-source references: MC075. Exact point locators and raw values: data/F047_BFCL_values.csv.

Benchmark reference (APA): Patil, S. G., Mao, H., Yan, F., Ji, C. C.-J., Suresh, V., Stoica, I., & Gonzalez, J. E. (2025). The Berkeley function calling leaderboard (BFCL): From tool use to agentic evaluation of large language models. In Proceedings of the 42nd International Conference on Machine Learning (Vol. 267) (pp. 48371–48392). https://proceedings.mlr.press/v267/patil25a.html

BFCL: Reported BFCL score (%)

Thinking; MC075 H33; BFCL v3; Overall

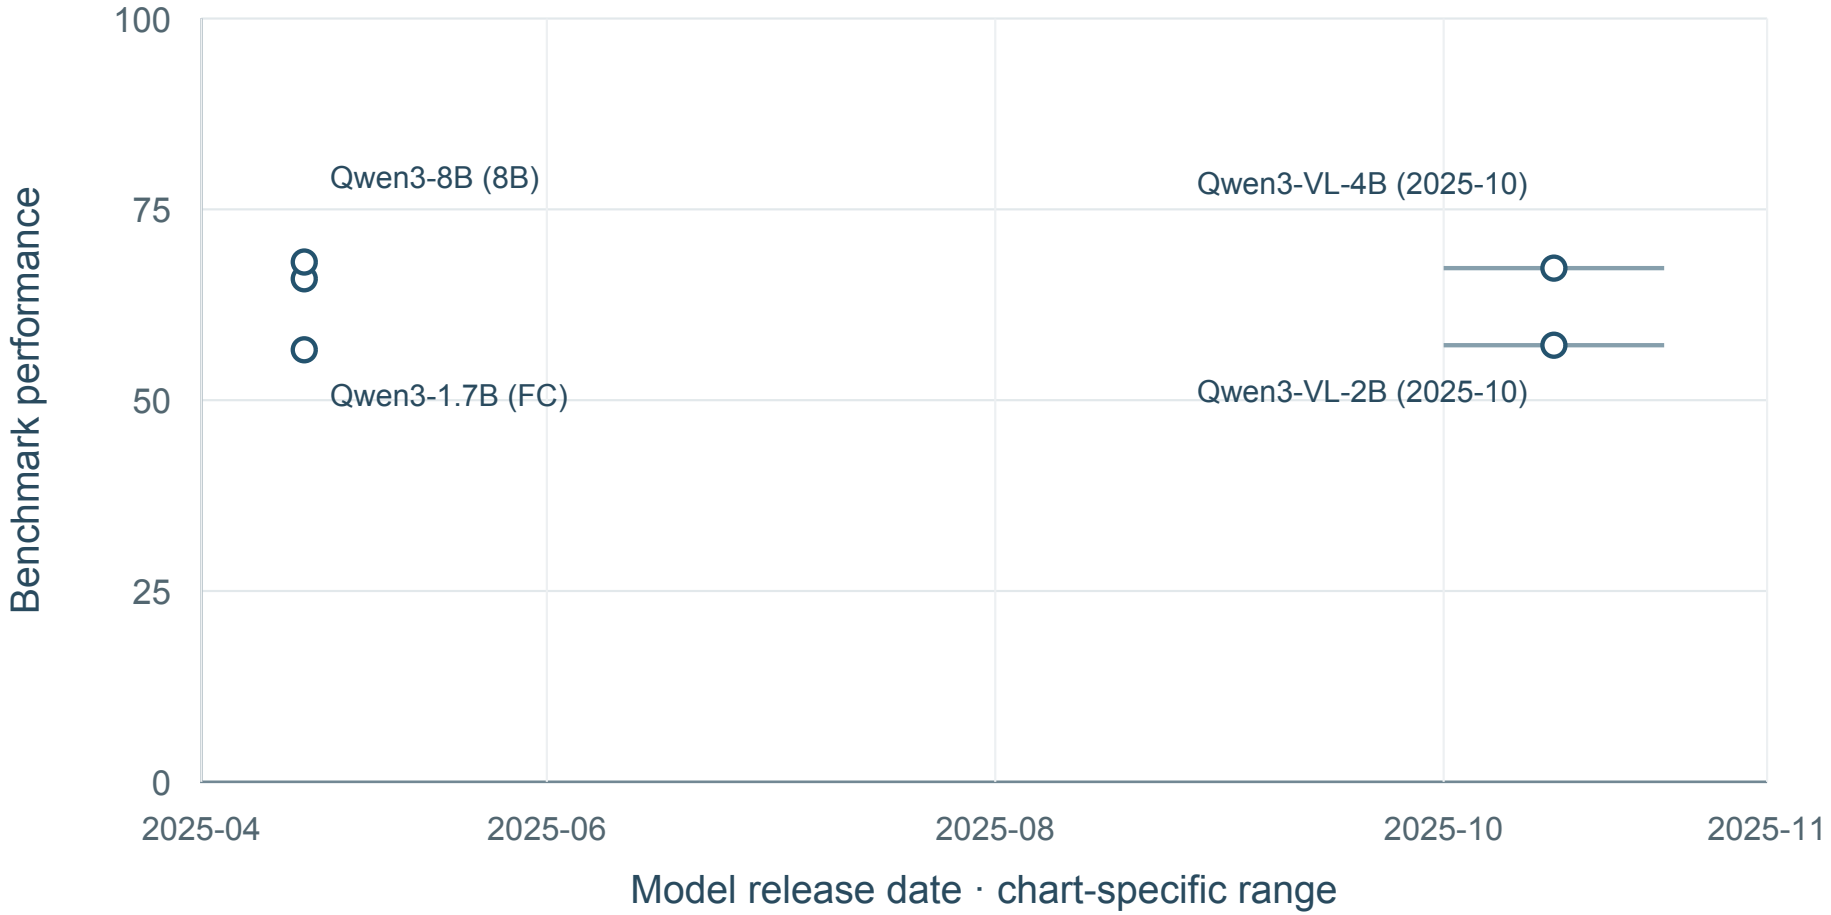

5 shown · 1 undated · 0 definition-held · sources: MC075


No mean curve: Fewer than four distinct release dates.

Result-source references: MC075. Exact point locators and raw values: data/F047_BFCL_values.csv.

Benchmark reference (APA): Patil, S. G., Mao, H., Yan, F., Ji, C. C.-J., Suresh, V., Stoica, I., & Gonzalez, J. E. (2025). The Berkeley function calling leaderboard (BFCL): From tool use to agentic evaluation of large language models. In Proceedings of the 42nd International Conference on Machine Learning (Vol. 267) (pp. 48371–48392). https://proceedings.mlr.press/v267/patil25a.html

BFCL: Reported BFCL score (%)

Mode not specified; MC083 H1; BFCL v4; Overall

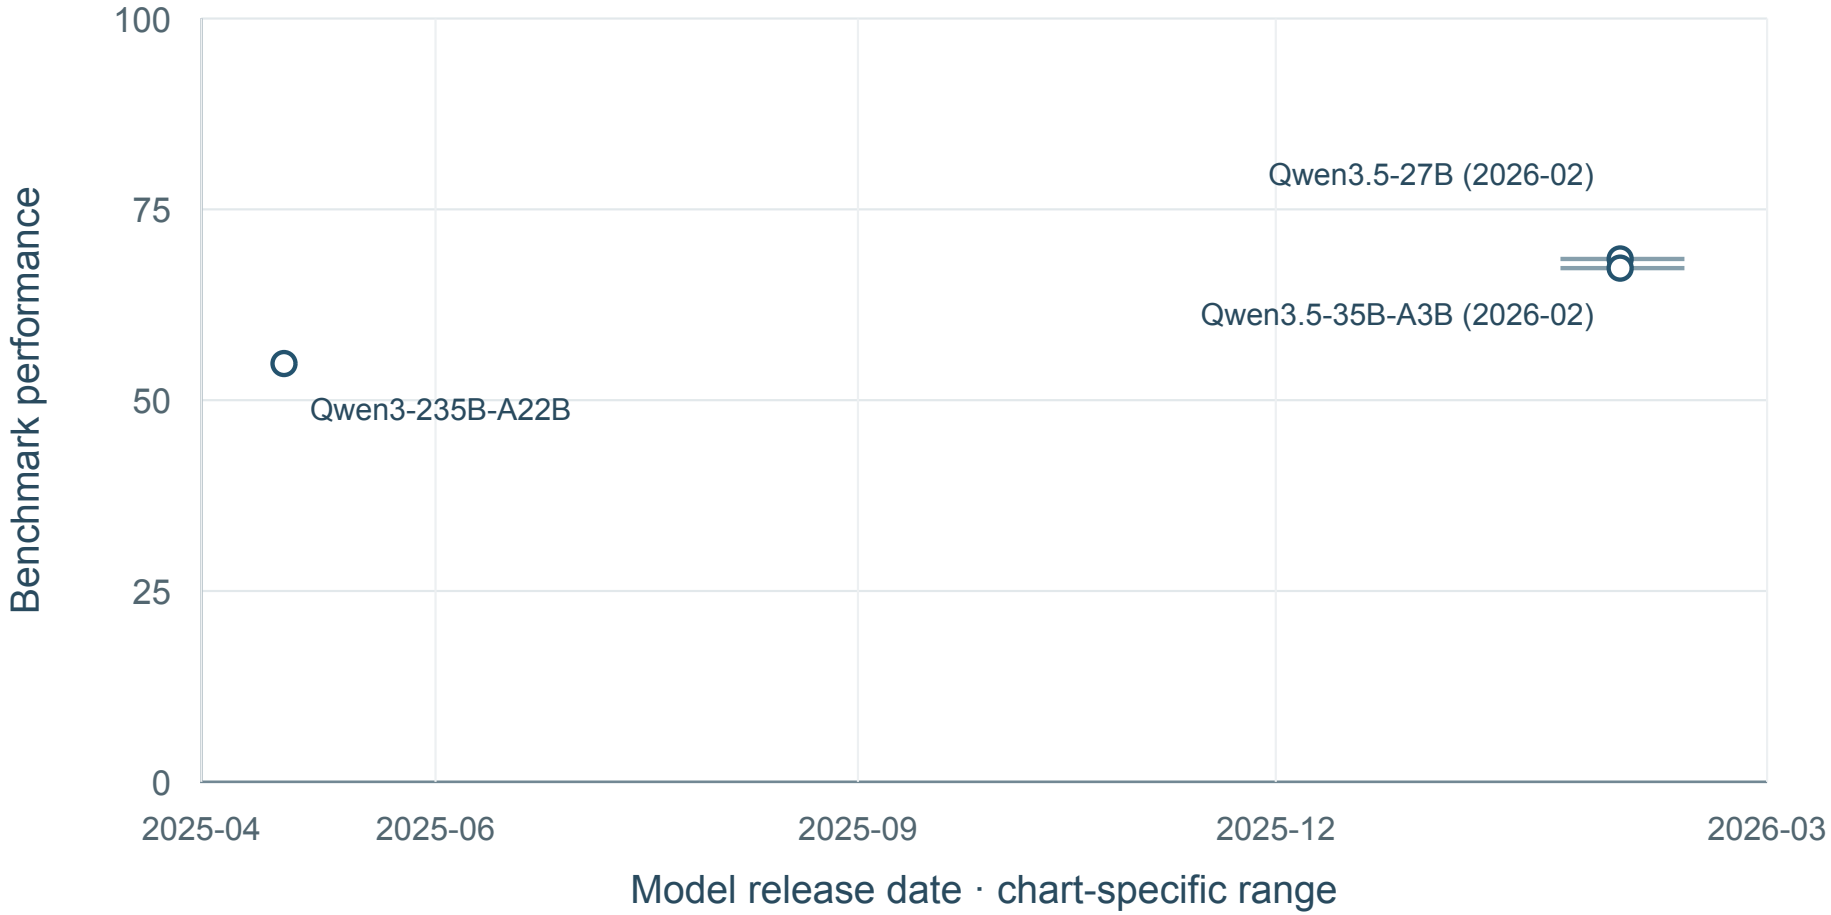

3 shown · 1 undated · 0 definition-held · sources: MC083


No mean curve: Fewer than five dated model configurations.

Result-source references: MC083. Exact point locators and raw values: data/F047_BFCL_values.csv.

Benchmark reference (APA): Patil, S. G., Mao, H., Yan, F., Ji, C. C.-J., Suresh, V., Stoica, I., & Gonzalez, J. E. (2025). The Berkeley function calling leaderboard (BFCL): From tool use to agentic evaluation of large language models. In Proceedings of the 42nd International Conference on Machine Learning (Vol. 267) (pp. 48371–48392). https://proceedings.mlr.press/v267/patil25a.html

BFCL: Reported BFCL score (%)

Mode not specified; MC084 H1; BFCL v4; Overall

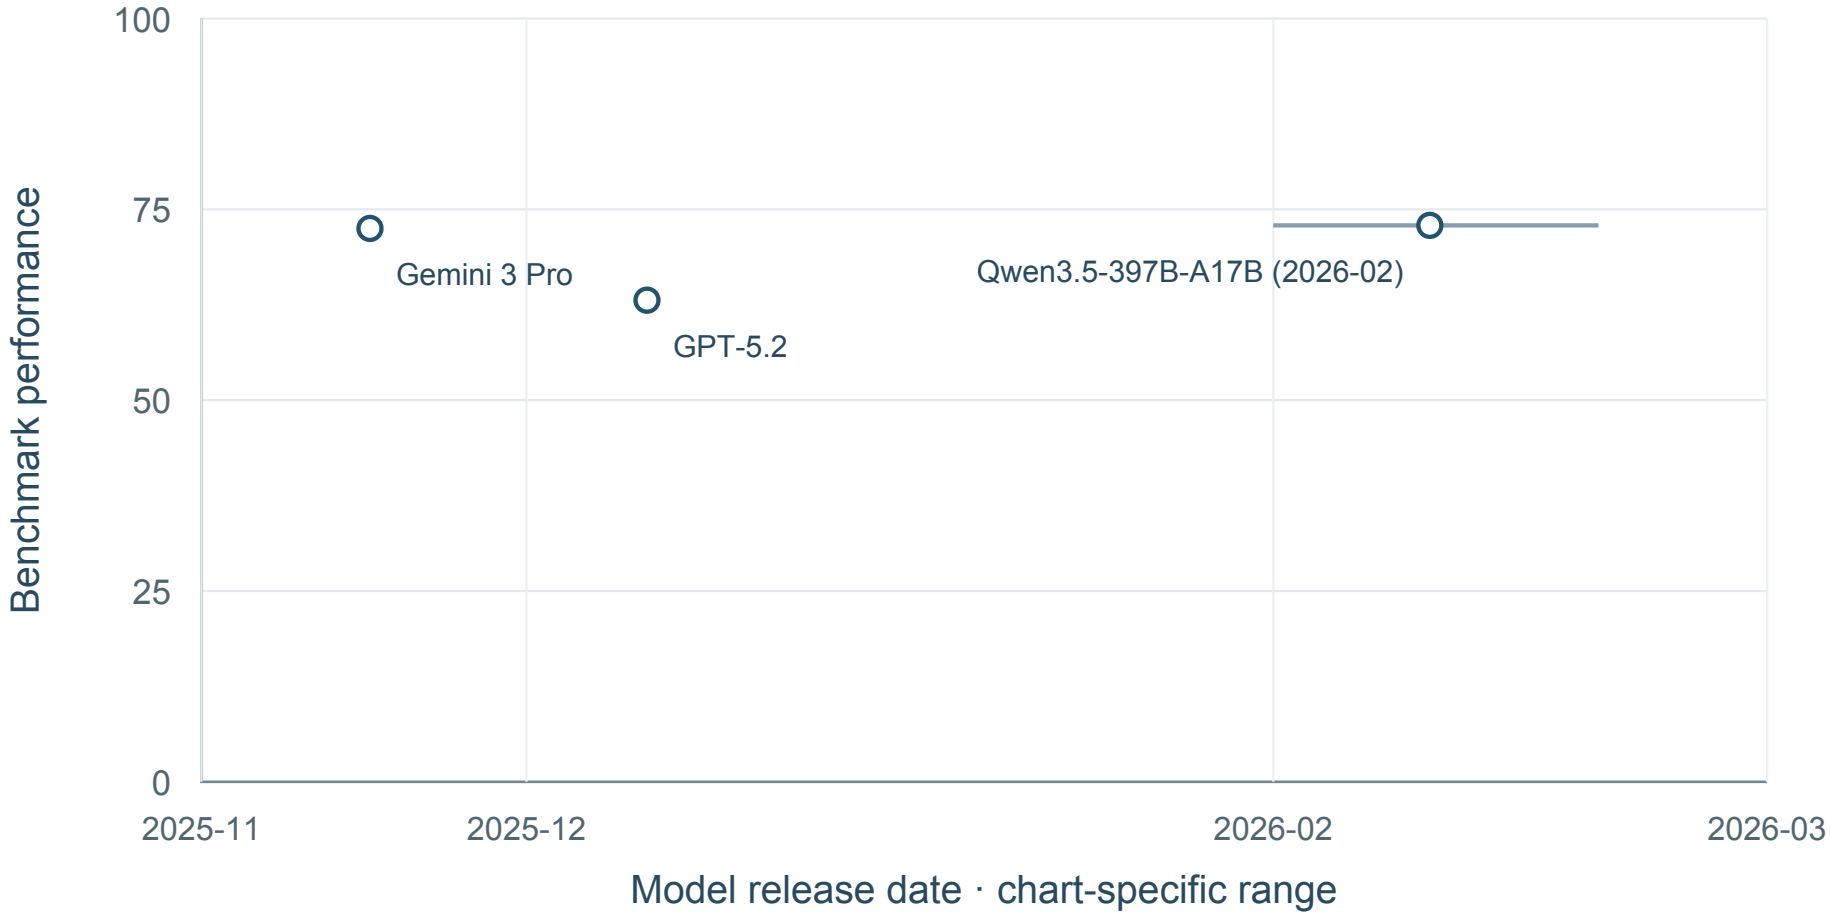

3 shown · 1 undated · 0 definition-held · sources: MC084


No mean curve: Fewer than five dated model configurations.

Result-source references: MC084. Exact point locators and raw values: data/F047_BFCL_values.csv.

Benchmark reference (APA): Patil, S. G., Mao, H., Yan, F., Ji, C. C.-J., Suresh, V., Stoica, I., & Gonzalez, J. E. (2025). The Berkeley function calling leaderboard (BFCL): From tool use to agentic evaluation of large language models. In Proceedings of the 42nd International Conference on Machine Learning (Vol. 267) (pp. 48371–48392). https://proceedings.mlr.press/v267/patil25a.html

BFCL: Reported BFCL score (%)

Thinking; FC format; MC081 own-model post-training comparison; BFCL v3; Overall

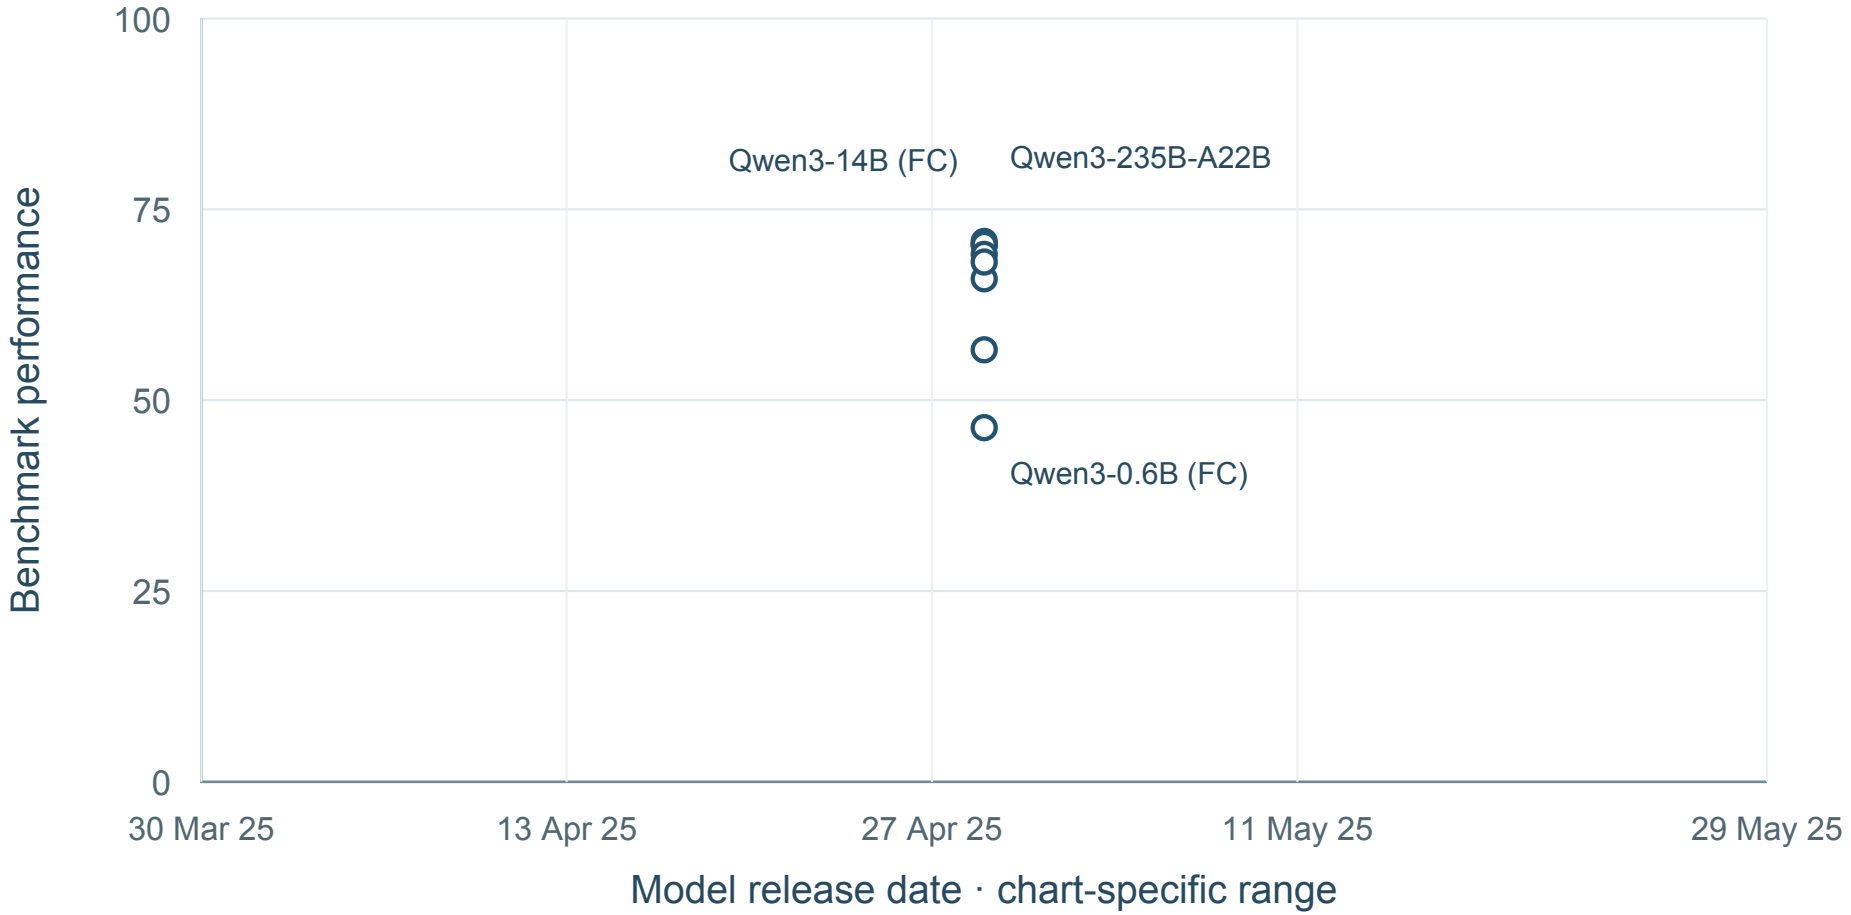

8 shown · 0 undated · 0 definition-held · sources: MC081


No mean curve: Fewer than four distinct release dates.

Result-source references: MC081. Exact point locators and raw values: data/F047_BFCL_values.csv.

Benchmark reference (APA): Patil, S. G., Mao, H., Yan, F., Ji, C. C.-J., Suresh, V., Stoica, I., & Gonzalez, J. E. (2025). The Berkeley function calling leaderboard (BFCL): From tool use to agentic evaluation of large language models. In Proceedings of the 42nd International Conference on Machine Learning (Vol. 267) (pp. 48371–48392). https://proceedings.mlr.press/v267/patil25a.html

BFCL: Reported BFCL score (%)

Non-thinking; FC format; MC081 own-model post-training comparison; BFCL v3; Overall

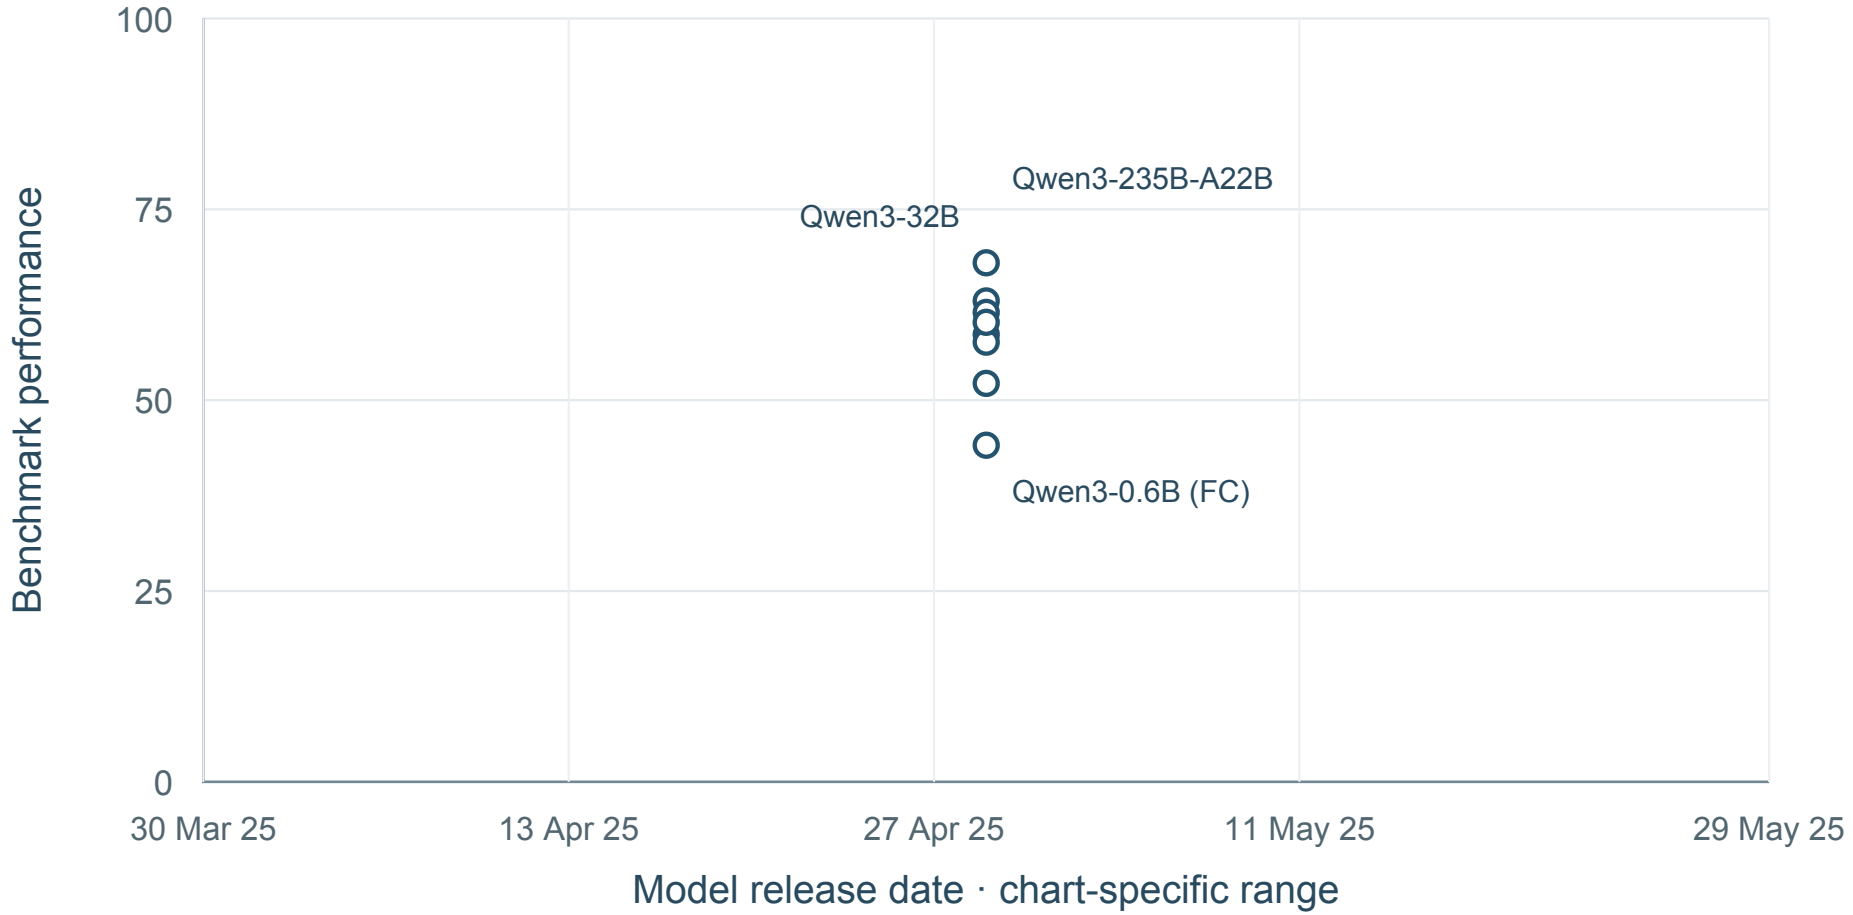

8 shown · 0 undated · 0 definition-held · sources: MC081

No mean curve: Fewer than four distinct release dates.

Result-source references: MC081. Exact point locators and raw values: data/F047_BFCL_values.csv.

Benchmark reference (APA): Patil, S. G., Mao, H., Yan, F., Ji, C. C.-J., Suresh, V., Stoica, I., & Gonzalez, J. E. (2025). The Berkeley function calling leaderboard (BFCL): From tool use to agentic evaluation of large language models. In Proceedings of the 42nd International Conference on Machine Learning (Vol. 267) (pp. 48371–48392). https://proceedings.mlr.press/v267/patil25a.html

F051 ComplexBench

Compose multiple constraints and dependencies in instructions

15 source values; 0 new; 1 separate conditions; 3 visible time points; 0 definition-held values; 0 visible mean curves.

Benchmark references (APA)

Wen, B., Ke, P., Gu, X., Wu, L., Huang, H., Zhou, J., Li, W., Hu, B., Gao, W., Xu, J., Liu, Y., Tang, J., Wang, H., & Huang, M. (2024). Benchmarking complex instruction-following with multiple constraints composition. arXiv. https://arxiv.org/abs/2407.03978

Workflow and article scope

Challenges: D

Define variables and coding rules; Interpret evidence and apply coding rules; Coordinate retrieval, tools and intermediate steps

Generic instruction composition; evaluate coding interpretations separately.

Manuscript anchors: Preparation and reporting, manuscript paragraph 33; Lu and Wang, Challenge E; manuscript paragraphs 20 and 31; Lu and Wang, Challenge D; manuscript paragraphs 9, 15–18 and 31


Result-source references: S051. Full references appear in the final bibliography.

Complete condition inventory

01. DRFR score | All categories; original RAL evaluator
15 values; 3 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S051.

ComplexBench: DRFR score

All categories; original RAL evaluator

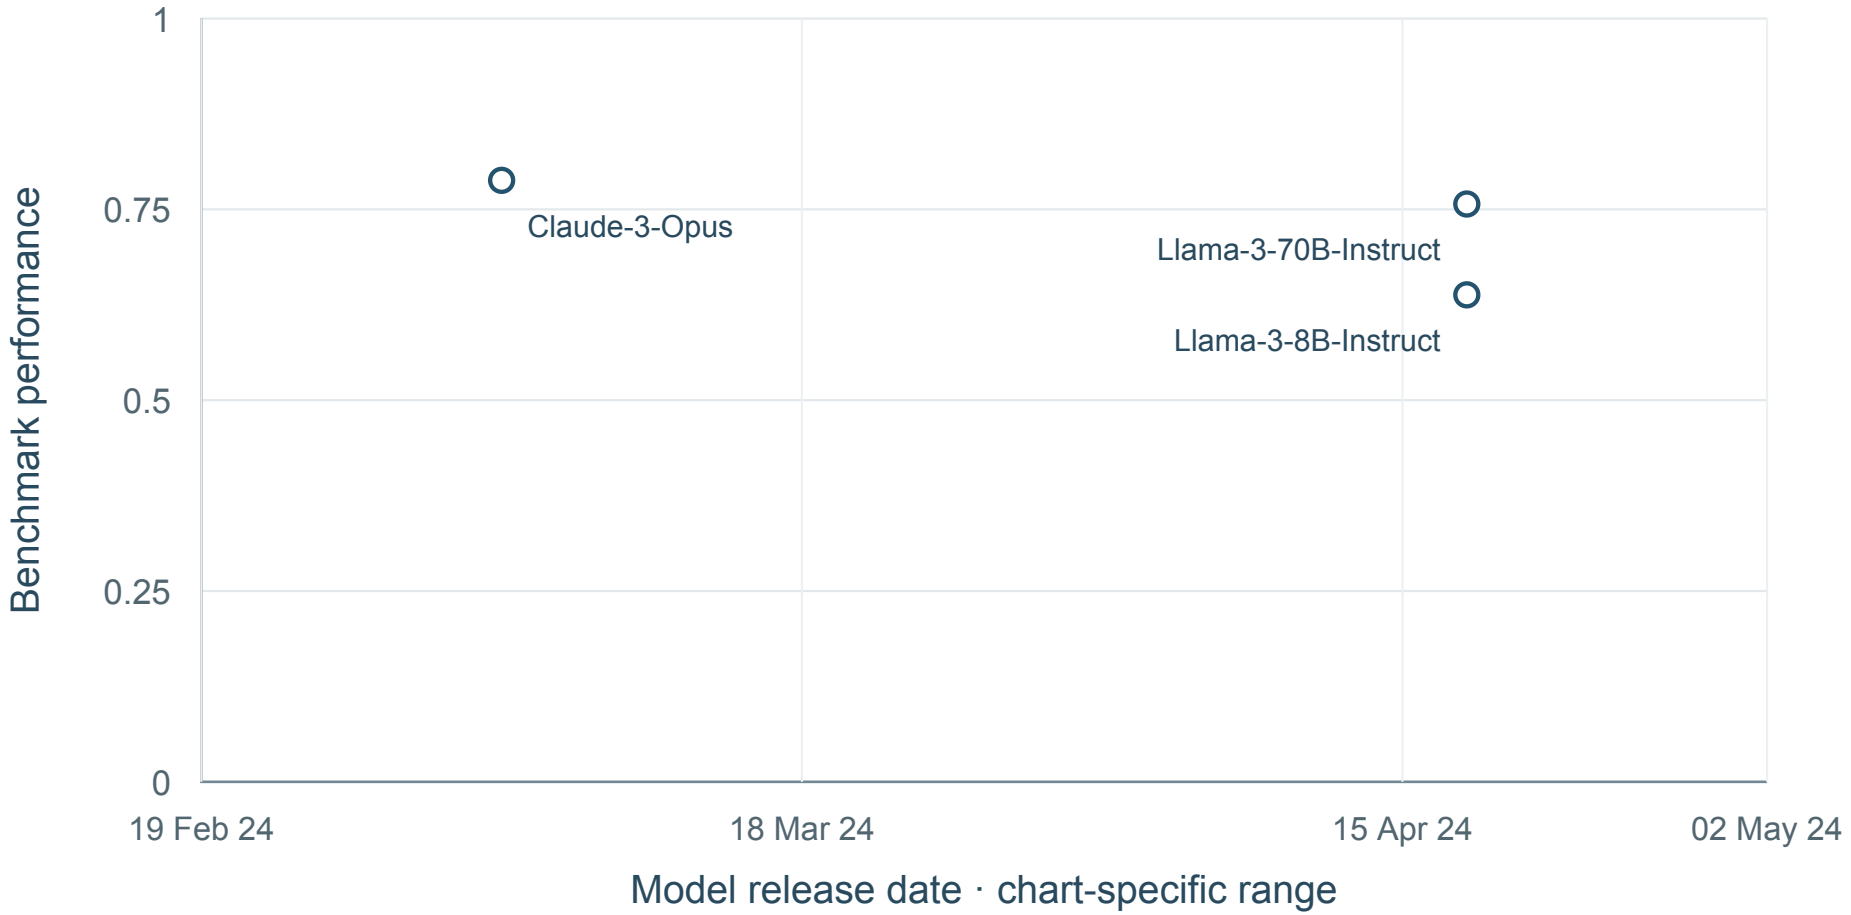

3 shown · 12 undated · 0 definition-held · sources: S051

No mean curve: Fewer than five dated model configurations.

Result-source references: S051. Exact point locators and raw values: data/F051_ComplexBench_values.csv.

Benchmark reference (APA): Wen, B., Ke, P., Gu, X., Wu, L., Huang, H., Zhou, J., Li, W., Hu, B., Gao, W., Xu, J., Liu, Y., Tang, J., Wang, H., & Huang, M. (2024). Benchmarking complex instruction-following with multiple constraints composition. arXiv. https://arxiv.org/abs/2407.03978

F059 ALCE

Generate answers supported by citations

26 source values; 0 new; 2 separate conditions; 4 visible time points; 0 definition-held values; 0 visible mean curves.

Benchmark references (APA)

Gao, T., Yen, H., Yu, J., & Chen, D. (2023). Enabling large language models to generate text with citations. Empirical Methods in Natural Language Processing (EMNLP). https://arxiv.org/abs/2305.14627

Workflow and article scope

Challenges: B

Locate relevant evidence; Verify source support and detect errors

Citation quality is one aspect of auditability, not a complete workflow audit.

Manuscript anchors: Source-based step comparisons, manuscript paragraph 31; Product accuracy and auditability, manuscript paragraphs 28–29

Result-source references: S054. Full references appear in the final bibliography.


Complete condition inventory

01. Citation recall | ASQA; prompt and model family named
13 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S054.

02. Citation precision | ASQA; prompt and model family named
13 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S054.

ALCE: Citation recall

ASQA; prompt and model family named

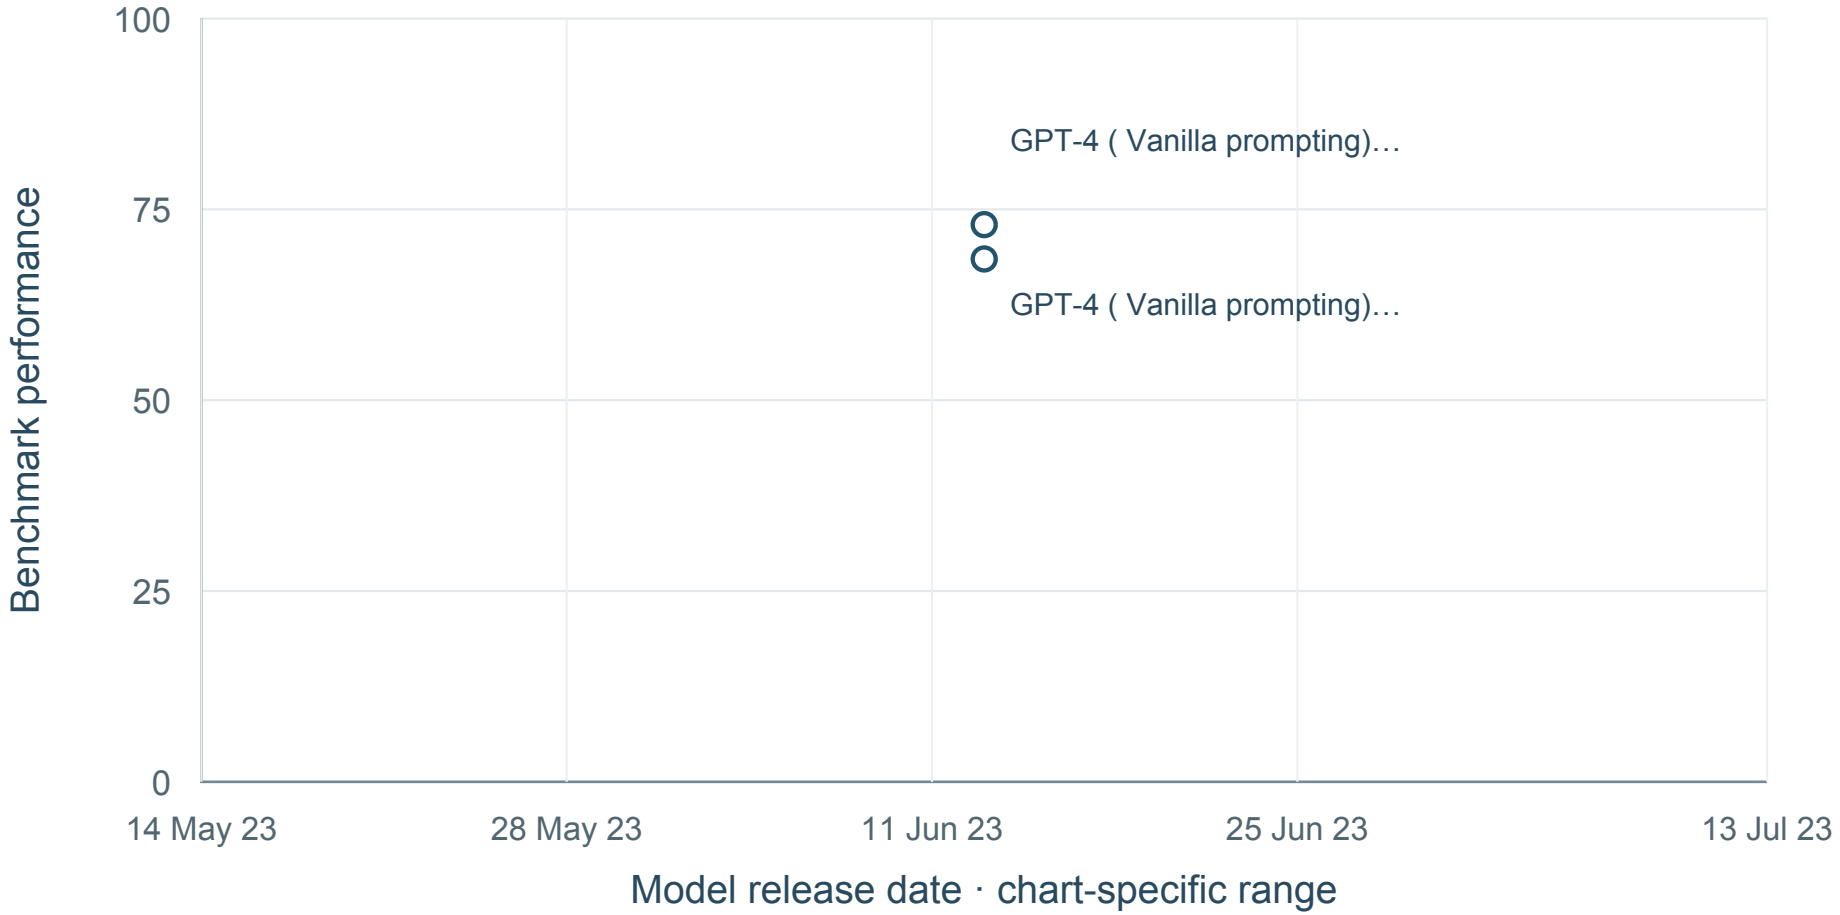

2 shown · 11 undated · 0 definition-held · sources: S054


No mean curve: Fewer than five dated model configurations.

Result-source references: S054. Exact point locators and raw values: data/F059_ALCE_values.csv.

Benchmark reference (APA): Gao, T., Yen, H., Yu, J., & Chen, D. (2023). Enabling large language models to generate text with citations. Empirical Methods in Natural Language Processing (EMNLP). https://arxiv.org/abs/2305.14627

ALCE: Citation precision

ASQA; prompt and model family named

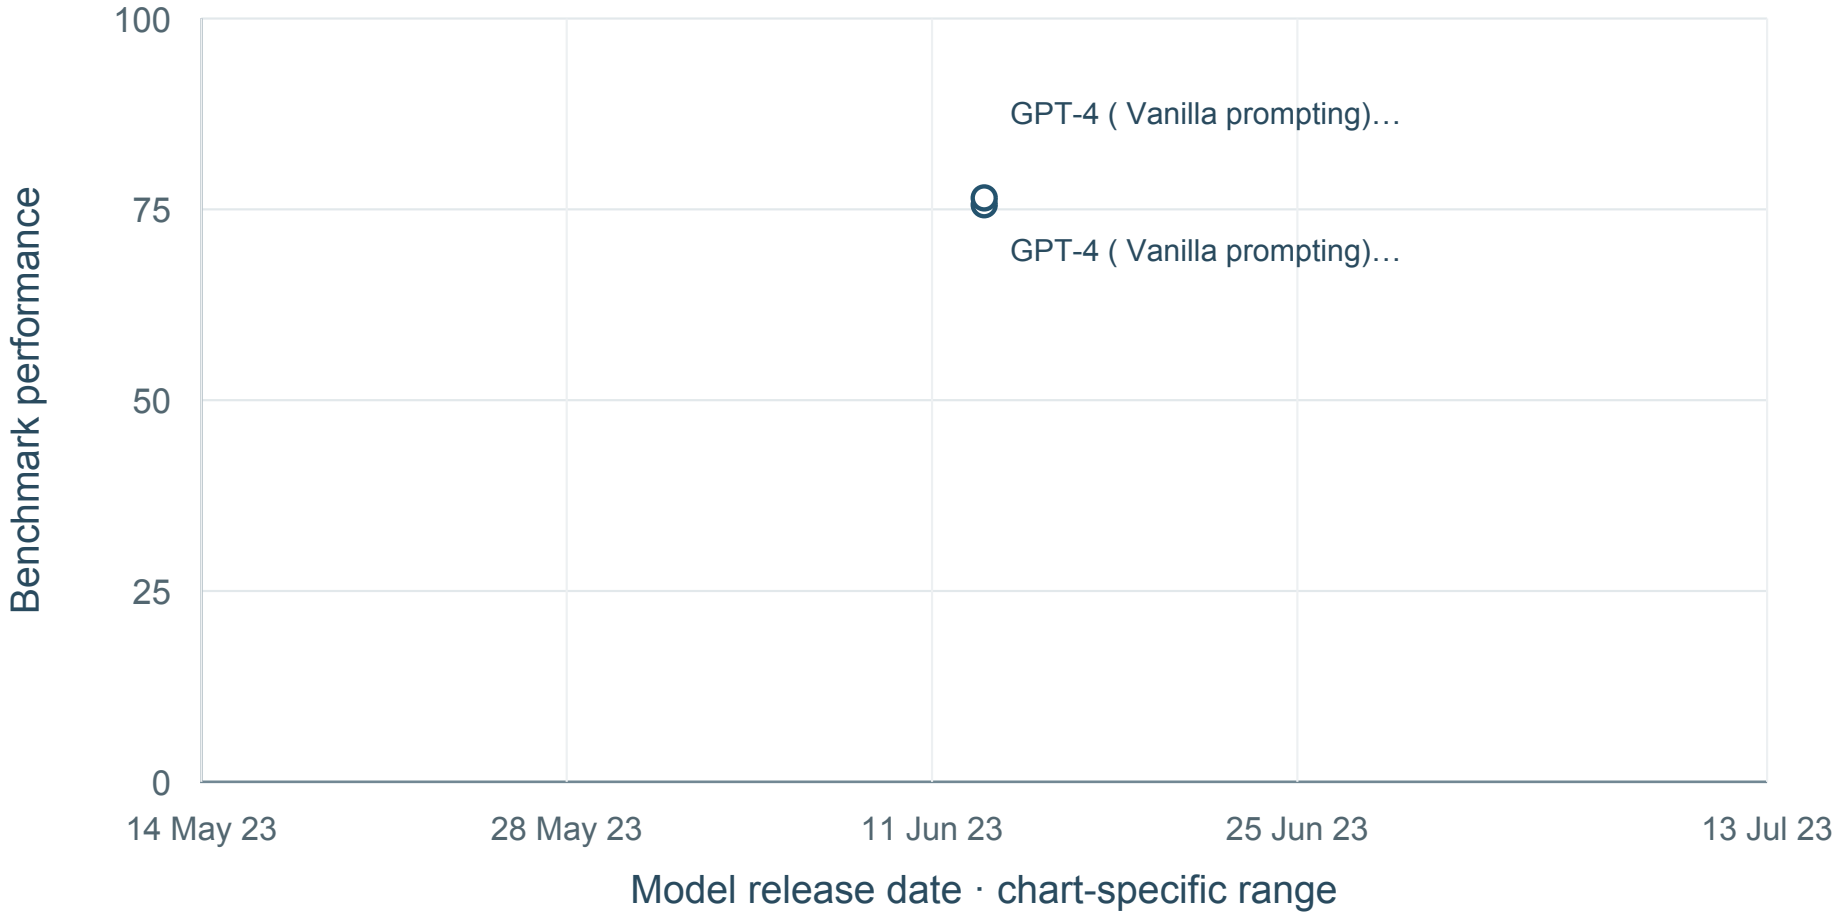

2 shown · 11 undated · 0 definition-held · sources: S054

No mean curve: Fewer than five dated model configurations.

Result-source references: S054. Exact point locators and raw values: data/F059_ALCE_values.csv.

Benchmark reference (APA): Gao, T., Yen, H., Yu, J., & Chen, D. (2023). Enabling large language models to generate text with citations. Empirical Methods in Natural Language Processing (EMNLP). https://arxiv.org/abs/2305.14627

F065 RoBBR

Retrieve and interpret methodological evidence for risk of bias

17 source values; 0 new; 3 separate conditions; 6 visible time points; 0 definition-held values; 0 visible mean curves.

Benchmark references (APA)

Wang, J., Cao, W., Bao, L., Zheng, Y., Pasternak, G., Wang, K., Wang, X., Paturi, R., & Bergen, L. (2024). Measuring risk of bias in biomedical reports: The RoBBR benchmark. arXiv. https://arxiv.org/abs/2411.18831

Workflow and article scope

Challenges: B

Locate relevant evidence; Interpret evidence and apply coding rules; Verify source support and detect errors

Biomedical risk-of-bias rules; cannot transfer unchanged to psychological study quality.

Manuscript anchors: Source-based step comparisons, manuscript paragraph 31; Lu and Wang, Challenge E; manuscript paragraphs 20 and 31; Product accuracy and auditability, manuscript paragraphs 28–29

Result-source references: S015. Full references appear in the final bibliography.

Complete condition inventory


01. Aspect Recall Ratio@Optimal | Paper v2; Support sentence retrieval; Cochrane test
7 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S015.

02. Accuracy | Paper v2; Support judgment selection; Cochrane test
5 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S015.

03. Macro-F1 | Paper v2; Risk-of-bias determination; Cochrane test
5 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S015.

RoBBR: Aspect Recall Ratio@Optimal

Paper v2; Support sentence retrieval; Cochrane test

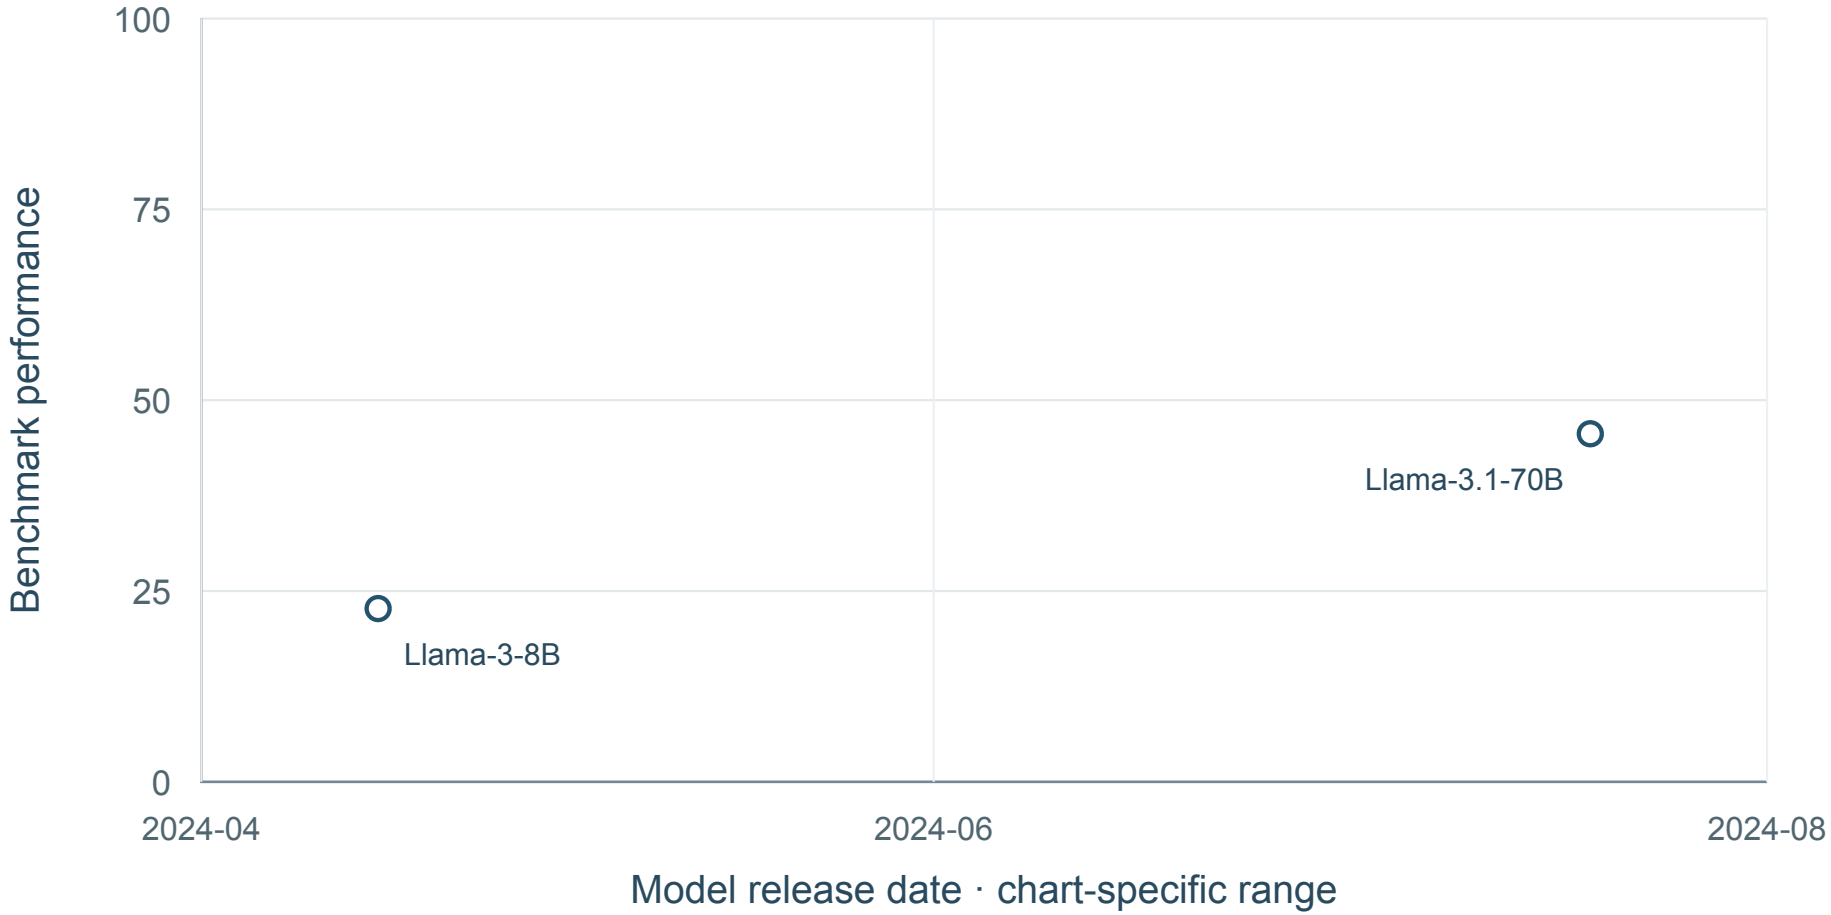

2 shown · 5 undated · 0 definition-held · sources: S015


No mean curve: Fewer than five dated model configurations.

Result-source references: S015. Exact point locators and raw values: data/F065_RoBBR_values.csv.

Benchmark reference (APA): Wang, J., Cao, W., Bao, L., Zheng, Y., Pasternak, G., Wang, K., Wang, X., Paturi, R., & Bergen, L. (2024). Measuring risk of bias in biomedical reports: The RoBBR benchmark. arXiv. https://arxiv.org/abs/2411.18831

RoBBR: Accuracy

Paper v2; Support judgment selection; Cochrane test

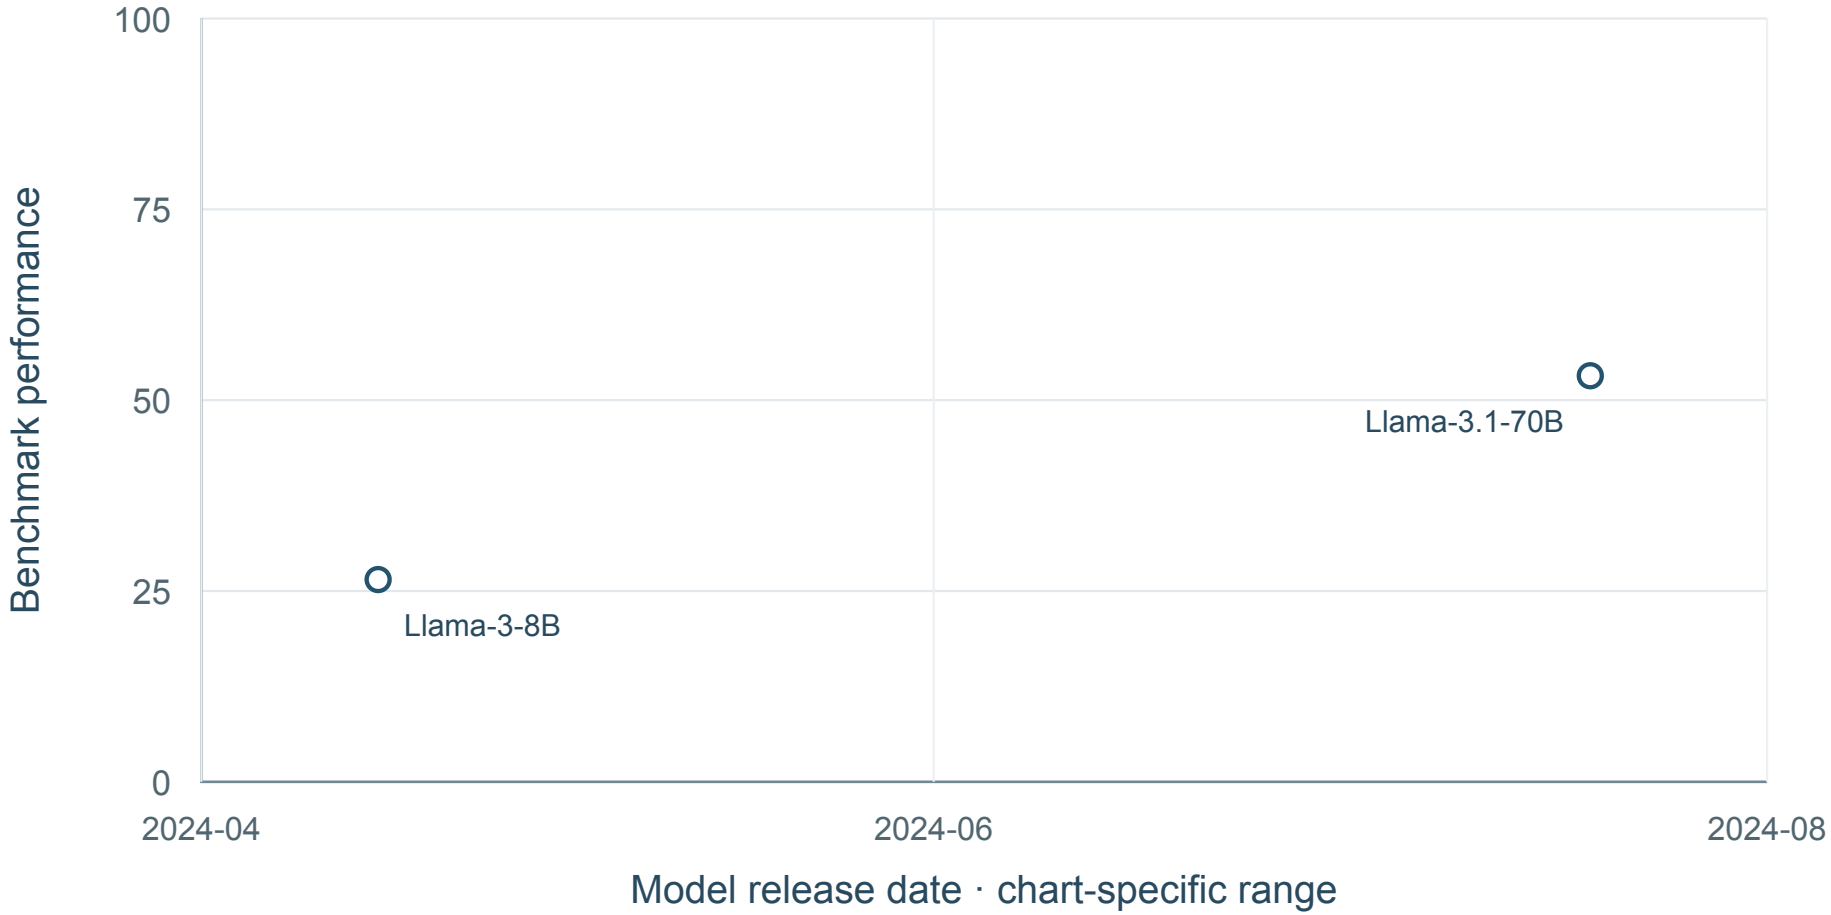

2 shown · 3 undated · 0 definition-held · sources: S015


No mean curve: Fewer than five dated model configurations.

Result-source references: S015. Exact point locators and raw values: data/F065_RoBBR_values.csv.

Benchmark reference (APA): Wang, J., Cao, W., Bao, L., Zheng, Y., Pasternak, G., Wang, K., Wang, X., Paturi, R., & Bergen, L. (2024). Measuring risk of bias in biomedical reports: The RoBBR benchmark. arXiv. https://arxiv.org/abs/2411.18831

RoBBR: Macro-F1

Paper v2; Risk-of-bias determination; Cochrane test

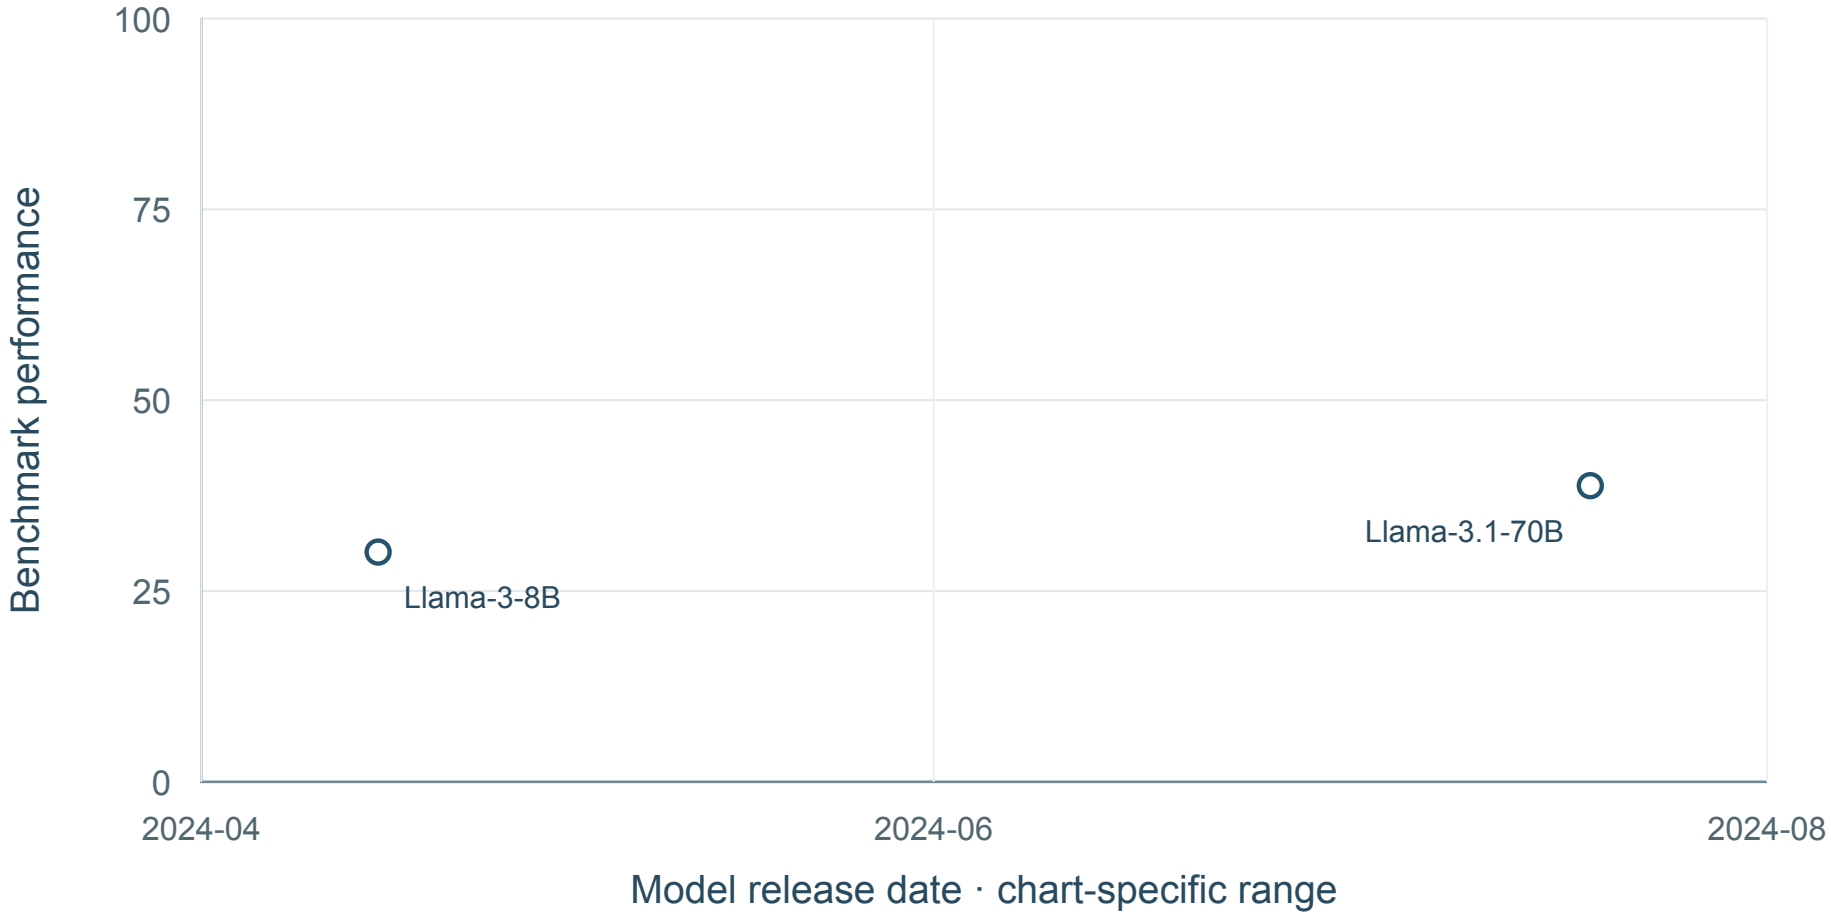

2 shown · 3 undated · 0 definition-held · sources: S015

No mean curve: Fewer than five dated model configurations.

Result-source references: S015. Exact point locators and raw values: data/F065_RoBBR_values.csv.

Benchmark reference (APA): Wang, J., Cao, W., Bao, L., Zheng, Y., Pasternak, G., Wang, K., Wang, X., Paturi, R., & Bergen, L. (2024). Measuring risk of bias in biomedical reports: The RoBBR benchmark. arXiv. https://arxiv.org/abs/2411.18831

F066 TrialReviewBench

Search, screen and extract results from clinical evidence

12 source values; 0 new; 4 separate conditions; 4 visible time points; 0 definition-held values; 0 visible mean curves.

Benchmark references (APA)

Wang, Z., Cao, L., Danek, B., Jin, Q., Lu, Z., & Sun, J. (2024). Accelerating clinical evidence synthesis with large language models. arXiv. https://arxiv.org/abs/2406.17755

Workflow and article scope

Challenges: B; D

Locate relevant evidence; Bind values to the correct unit; Coordinate retrieval, tools and intermediate steps; Assess the complete extraction product

Version/corpus mismatch must be resolved before a numerical time series.

Manuscript anchors: Source-based step comparisons, manuscript paragraph 31; Wrong-subgroup example, manuscript paragraph 29; Lu and Wang, Challenge D; manuscript paragraphs 9, 15–18 and 31; Comparative evaluation agenda, manuscript paragraph 31

Result-source references: S079. Full references appear in the final bibliography.

Complete condition inventory

01. Result extraction accuracy | Immunotherapy; source Figure 4d
3 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S079.


02. Result extraction accuracy | Radiation/Chemotherapy; source Figure 4d
3 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S079.

03. Result extraction accuracy | Hormone therapy; source Figure 4d
3 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S079.

04. Result extraction accuracy | Hyperthermia; source Figure 4d
3 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S079.

TrialReviewBench: Result extraction accuracy

Immunotherapy; source Figure 4d

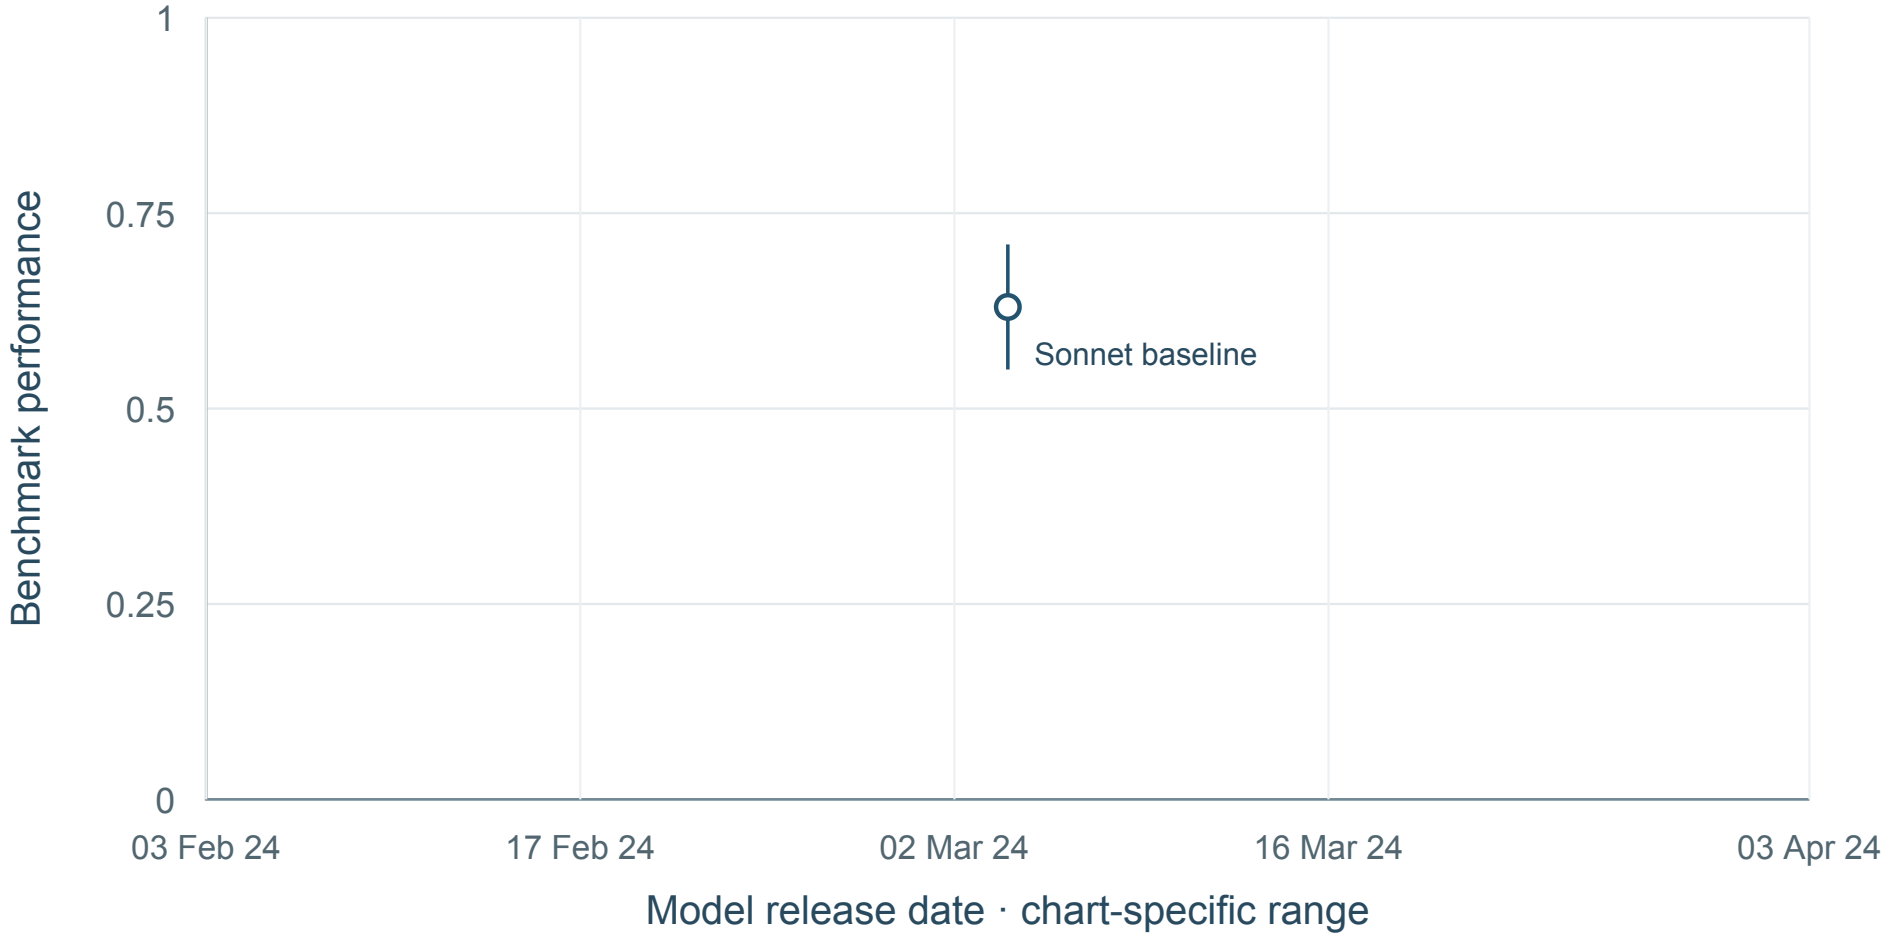

1 shown · 2 undated · 0 definition-held · sources: S079


No mean curve: Fewer than five dated model configurations.

Result-source references: S079. Exact point locators and raw values: data/F066_TrialReviewBench_values.csv.

Benchmark reference (APA): Wang, Z., Cao, L., Danek, B., Jin, Q., Lu, Z., & Sun, J. (2024). Accelerating clinical evidence synthesis with large language models. arXiv. https://arxiv.org/abs/2406.17755

TrialReviewBench: Result extraction accuracy

Radiation/Chemotherapy; source Figure 4d

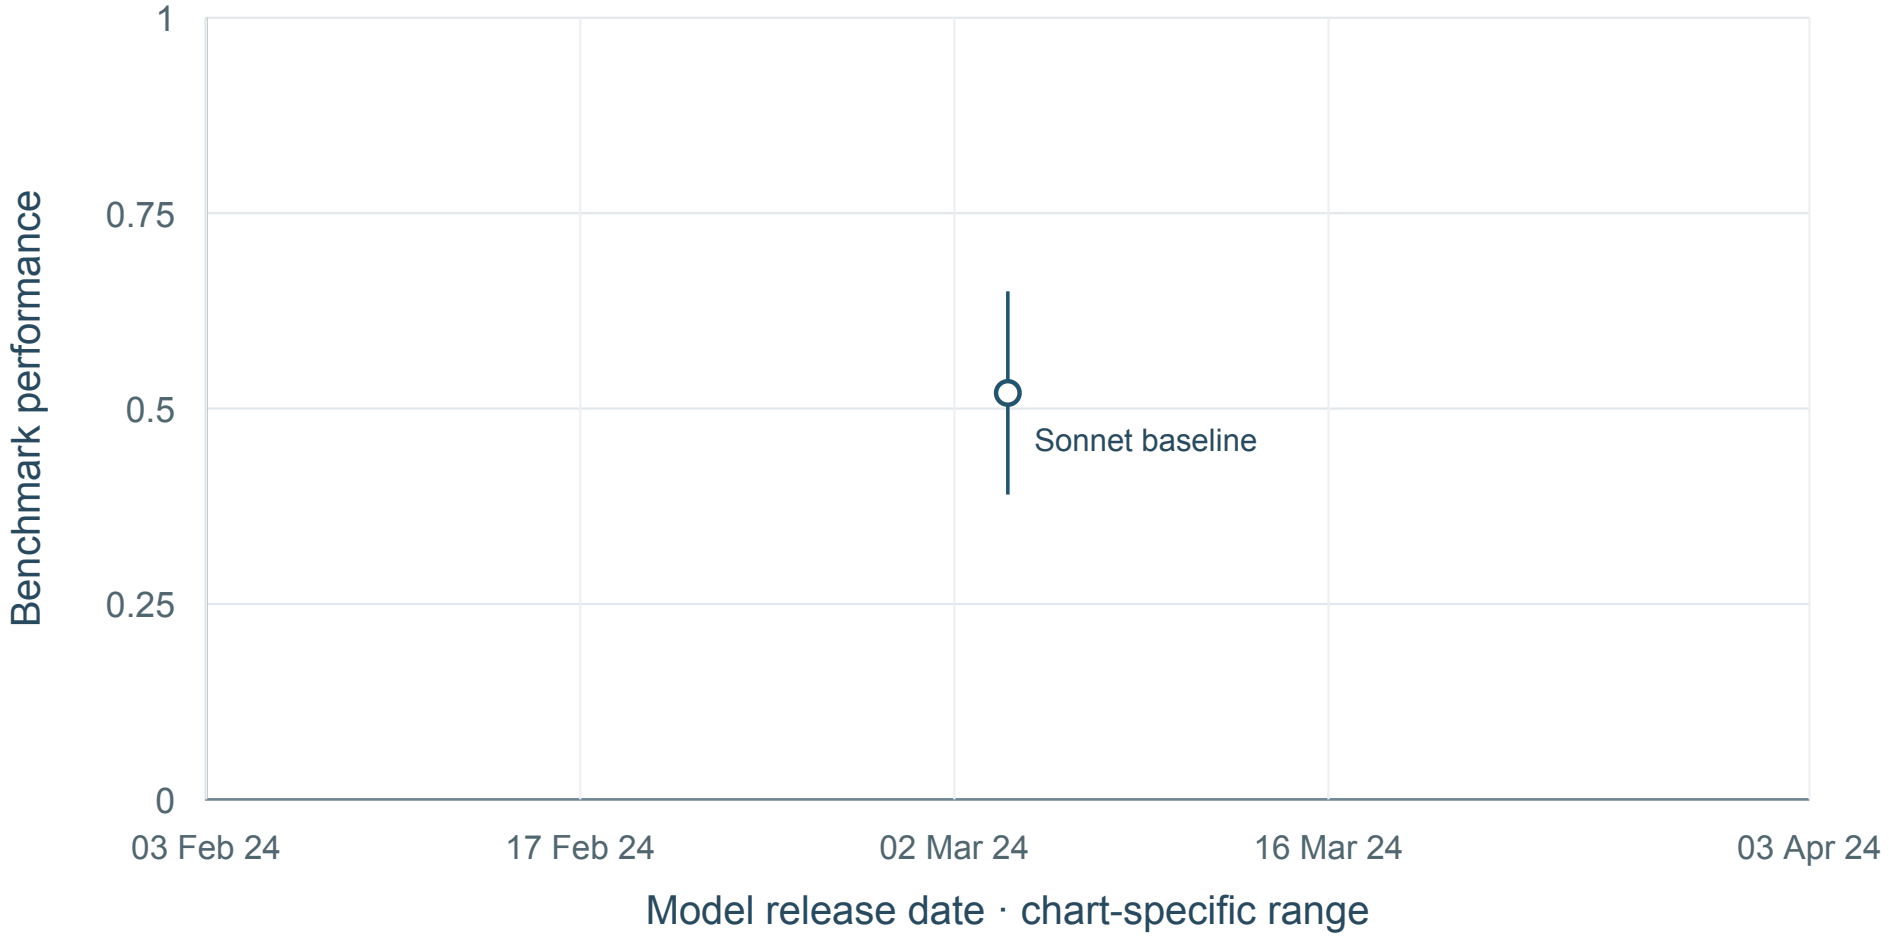

1 shown · 2 undated · 0 definition-held · sources: S079


No mean curve: Fewer than five dated model configurations.

Result-source references: S079. Exact point locators and raw values: data/F066_TrialReviewBench_values.csv.

Benchmark reference (APA): Wang, Z., Cao, L., Danek, B., Jin, Q., Lu, Z., & Sun, J. (2024). Accelerating clinical evidence synthesis with large language models. arXiv. https://arxiv.org/abs/2406.17755

TrialReviewBench: Result extraction accuracy

Hormone therapy; source Figure 4d

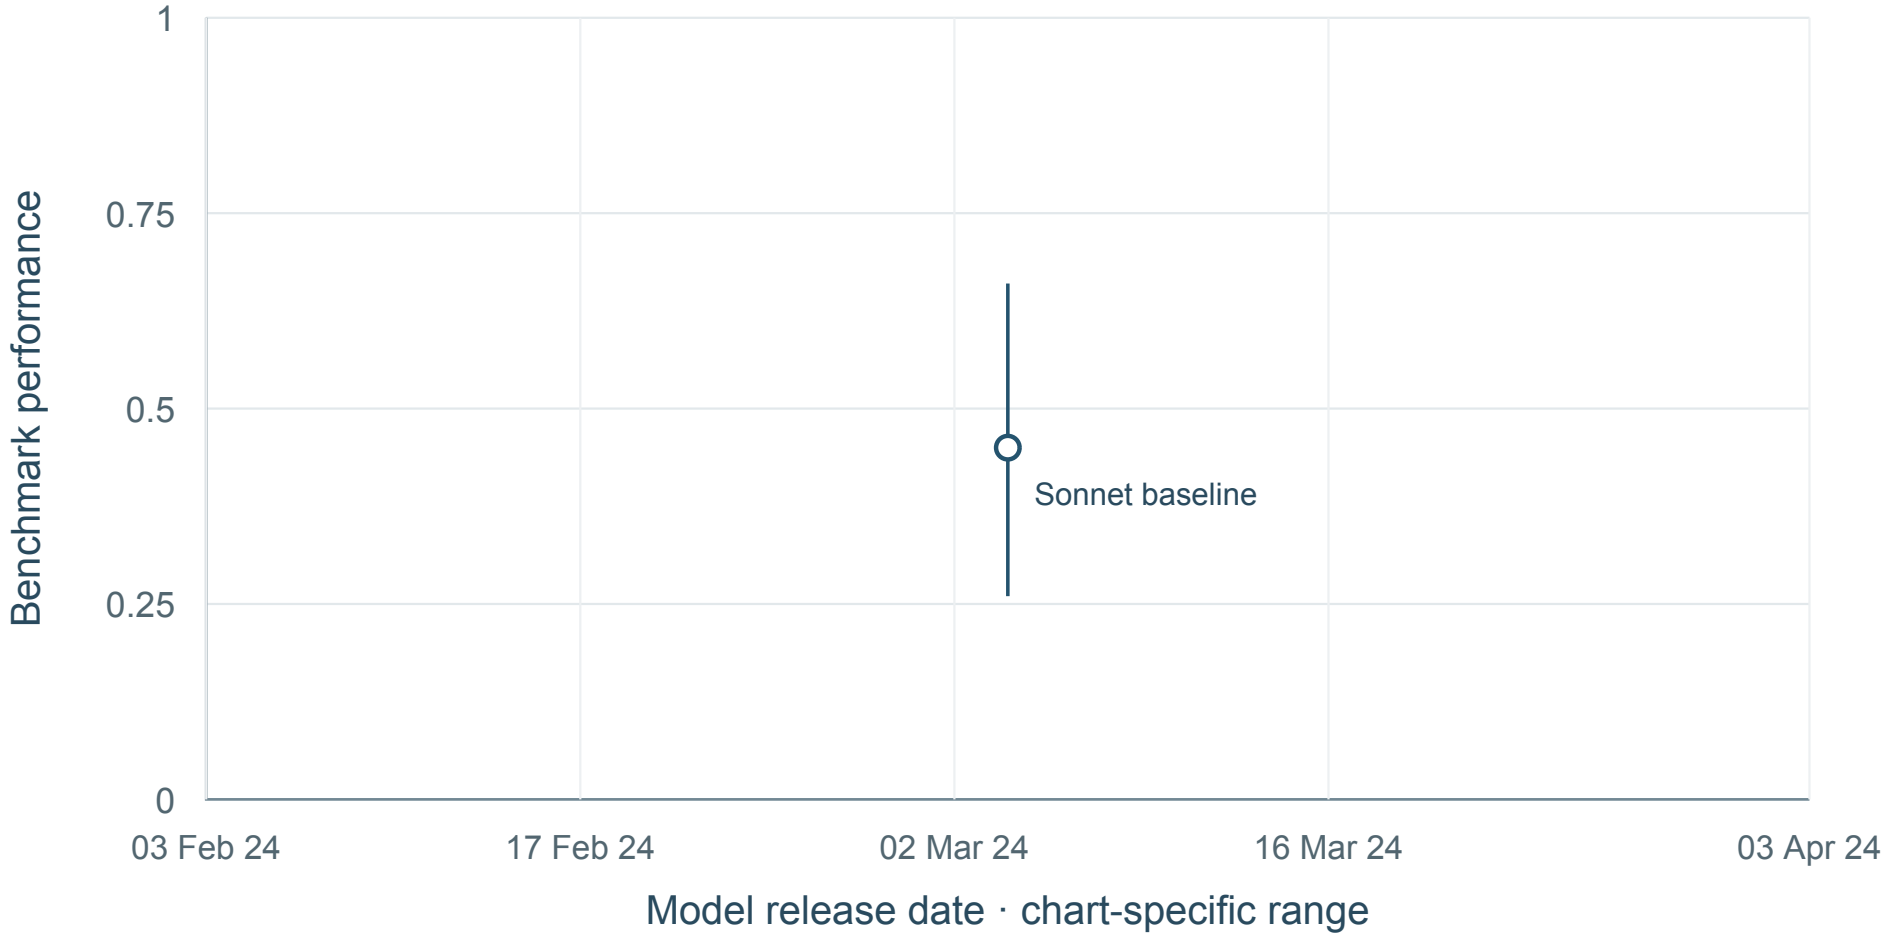

1 shown · 2 undated · 0 definition-held · sources: S079


No mean curve: Fewer than five dated model configurations.

Result-source references: S079. Exact point locators and raw values: data/F066_TrialReviewBench_values.csv.

Benchmark reference (APA): Wang, Z., Cao, L., Danek, B., Jin, Q., Lu, Z., & Sun, J. (2024). Accelerating clinical evidence synthesis with large language models. arXiv. https://arxiv.org/abs/2406.17755

TrialReviewBench: Result extraction accuracy

Hyperthermia; source Figure 4d

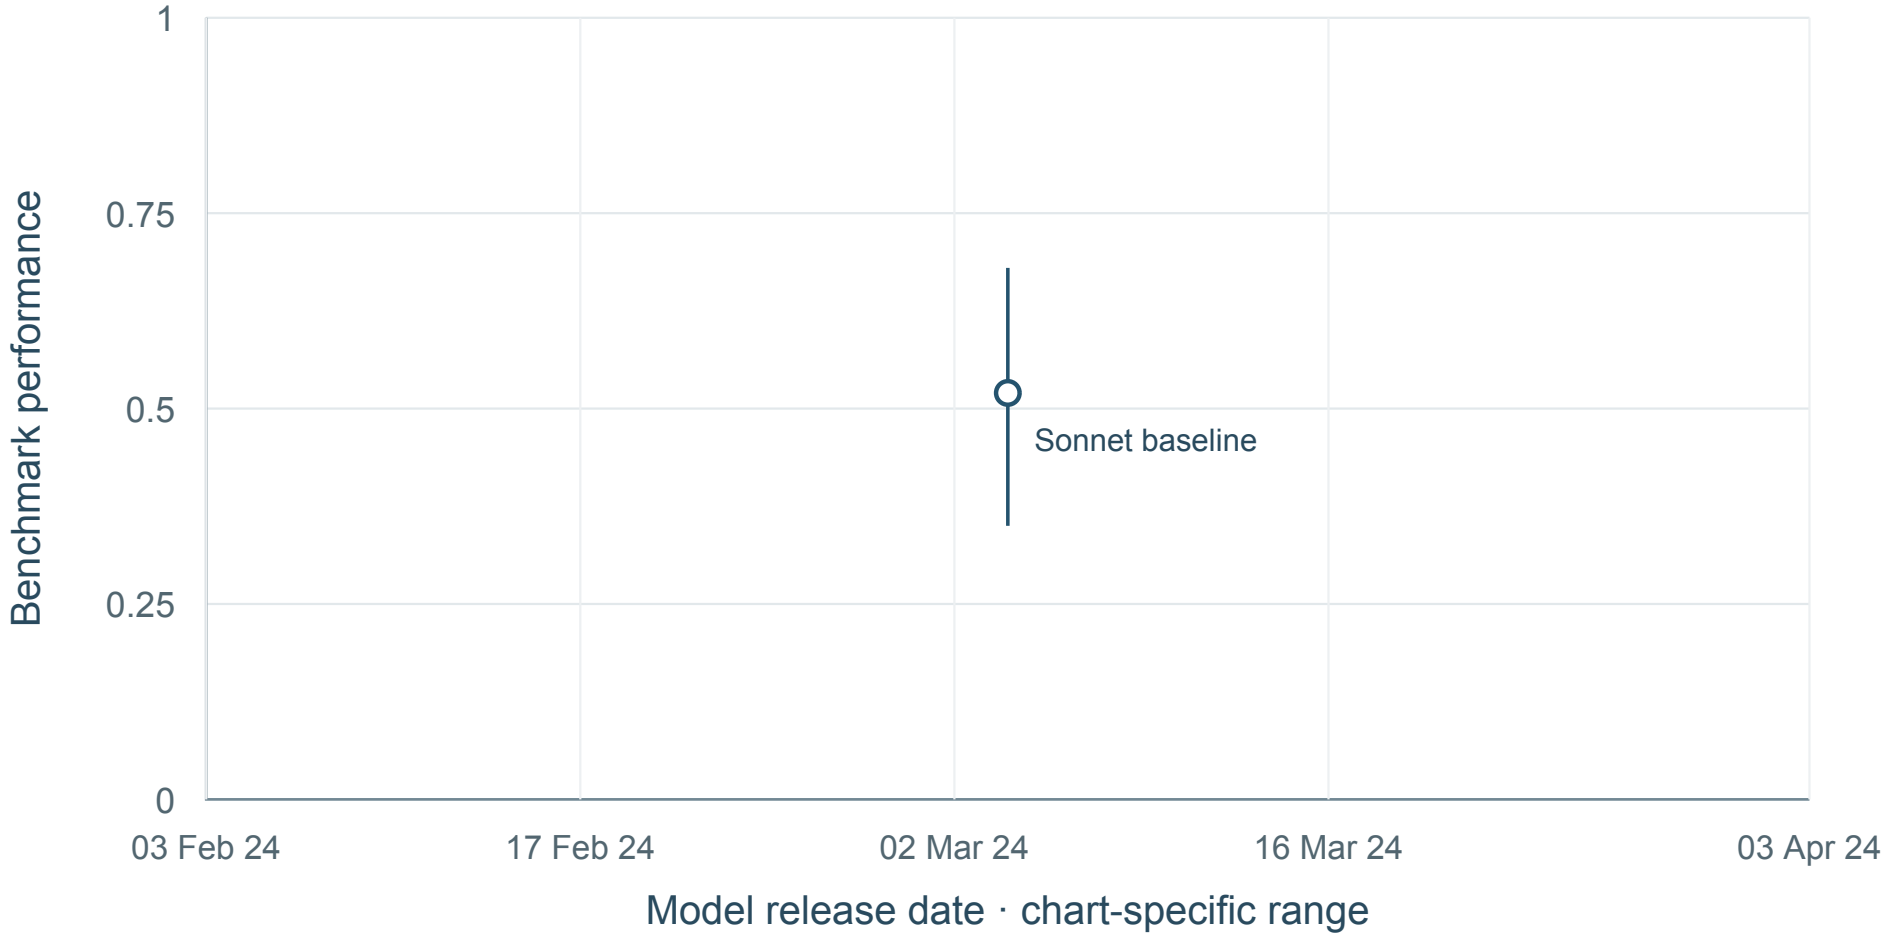

1 shown · 2 undated · 0 definition-held · sources: S079

No mean curve: Fewer than five dated model configurations.

Result-source references: S079. Exact point locators and raw values: data/F066_TrialReviewBench_values.csv.

Benchmark reference (APA): Wang, Z., Cao, L., Danek, B., Jin, Q., Lu, Z., & Sun, J. (2024). Accelerating clinical evidence synthesis with large language models. arXiv. https://arxiv.org/abs/2406.17755

F067 Manalyzer

End-to-end screening and multimodal meta-analysis extraction

152 source values; 0 new; 13 separate conditions; 56 visible time points; 0 definition-held values; 4 visible mean curves.

Benchmark references (APA)

Xu, W., Zhang, W., Ling, F., Fei, B., Hu, Y., Ma, R., Zhang, B., Ren, F., Lin, J., Ouyang, W., & Bai, L. (2025). Manalyzer: End-to-end automated Meta-analysis with Multi-agent system. arXiv. https://arxiv.org/abs/2505.20310

Workflow and article scope

Challenges: A; B; C; D

Locate relevant evidence; Bind values to the correct unit; Coordinate retrieval, tools and intermediate steps; Transform and calculate values; Assess the complete extraction product

Author system evaluation; independent benchmark history not established.

Manuscript anchors: Source-based step comparisons, manuscript paragraph 31; Wrong-subgroup example, manuscript paragraph 29; Lu and Wang, Challenge D; manuscript paragraphs 9, 15–18 and 31; Comparative evaluation agenda, manuscript paragraph 31

Result-source references: S019. Full references appear in the final bibliography.

Complete condition inventory

01. Hit rate: recall against human-extracted records | Original paper v1; Atmosphere; level 1; temperature 0
12 values; 4 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S019.

02. Hit rate: recall against human-extracted records | Original paper v1; Atmosphere; level 2; temperature 0
12 values; 4 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S019.

03. Hit rate: recall against human-extracted records | Original paper v1; Atmosphere; level 3; temperature 0
12 values; 4 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S019.

04. Hit rate: recall against human-extracted records | Original paper v1; Agriculture; level 1; temperature 0
12 values; 4 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S019.

05. Hit rate: recall against human-extracted records | Original paper v1; Agriculture; level 2; temperature 0
12 values; 4 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S019.

06. Hit rate: recall against human-extracted records | Original paper v1; Agriculture; level 3; temperature 0
12 values; 4 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S019.

07. Hit rate: recall against human-extracted records | Original paper v1; Environment; level 1; temperature 0
12 values; 4 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S019.

08. Hit rate: recall against human-extracted records | Original paper v1; Environment; level 2; temperature 0
12 values; 4 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S019.

09. Hit rate: recall against human-extracted records | Original paper v1; Environment; level 3; temperature 0
12 values; 4 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S019.

10. Accuracy | Original paper v1; screening; temperature 0
11 values; 5 time points; visible mean curve. Sources: S019.


11. Precision | Original paper v1; screening; temperature 0
11 values; 5 time points; visible mean curve. Sources: S019.

12. Recall | Original paper v1; screening; temperature 0
11 values; 5 time points; visible mean curve. Sources: S019.

13. F1 | Original paper v1; screening; temperature 0
11 values; 5 time points; visible mean curve. Sources: S019.

Manalyzer evaluation benchmark: Hit rate: recall against human-extracted records

Original paper v1; Atmosphere; level 1; temperature 0

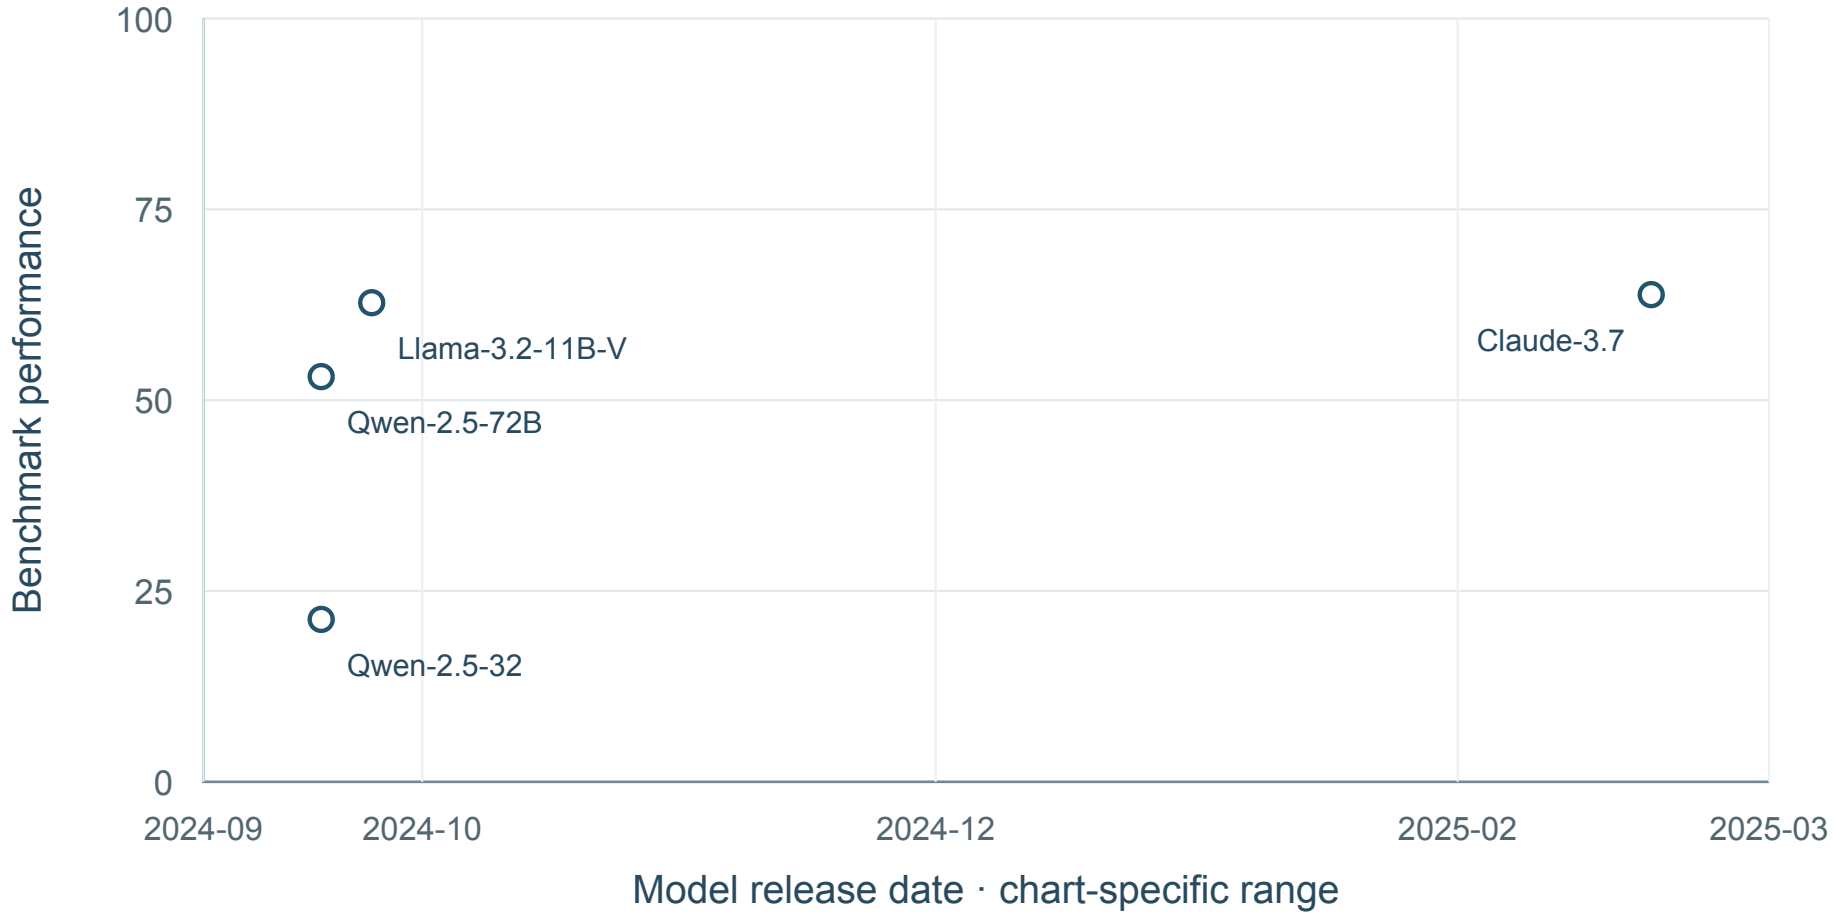

4 shown · 8 undated · 0 definition-held · sources: S019


No mean curve: Fewer than five dated model configurations.

Result-source references: S019. Exact point locators and raw values: data/F067_Manalyzer_values.csv.

Benchmark reference (APA): Xu, W., Zhang, W., Ling, F., Fei, B., Hu, Y., Ma, R., Zhang, B., Ren, F., Lin, J., Ouyang, W., & Bai, L. (2025). Manalyzer: End-to-end automated Meta-analysis with Multi-agent system. arXiv. https://arxiv.org/abs/2505.20310

Manalyzer evaluation benchmark: Hit rate: recall against human-extracted records

Original paper v1; Atmosphere; level 2; temperature 0

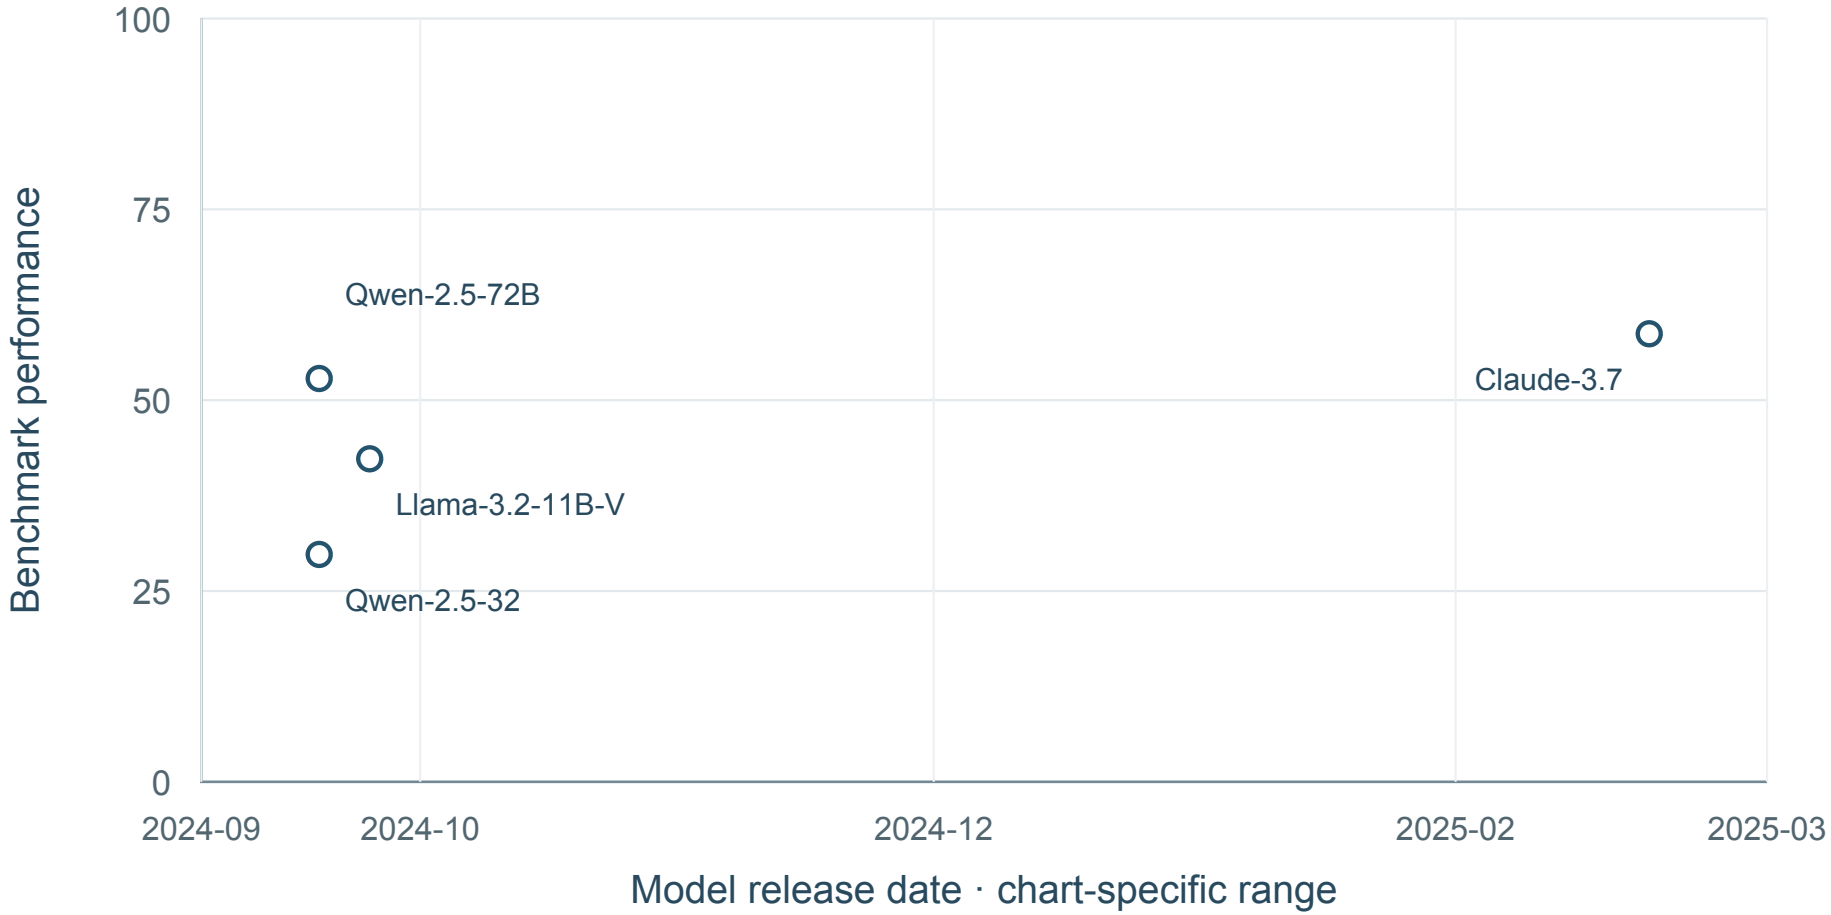

4 shown · 8 undated · 0 definition-held · sources: S019


No mean curve: Fewer than five dated model configurations.

Result-source references: S019. Exact point locators and raw values: data/F067_Manalyzer_values.csv.

Benchmark reference (APA): Xu, W., Zhang, W., Ling, F., Fei, B., Hu, Y., Ma, R., Zhang, B., Ren, F., Lin, J., Ouyang, W., & Bai, L. (2025). Manalyzer: End-to-end automated Meta-analysis with Multi-agent system. arXiv. https://arxiv.org/abs/2505.20310

Manalyzer evaluation benchmark: Hit rate: recall against human-extracted records

Original paper v1; Atmosphere; level 3; temperature 0

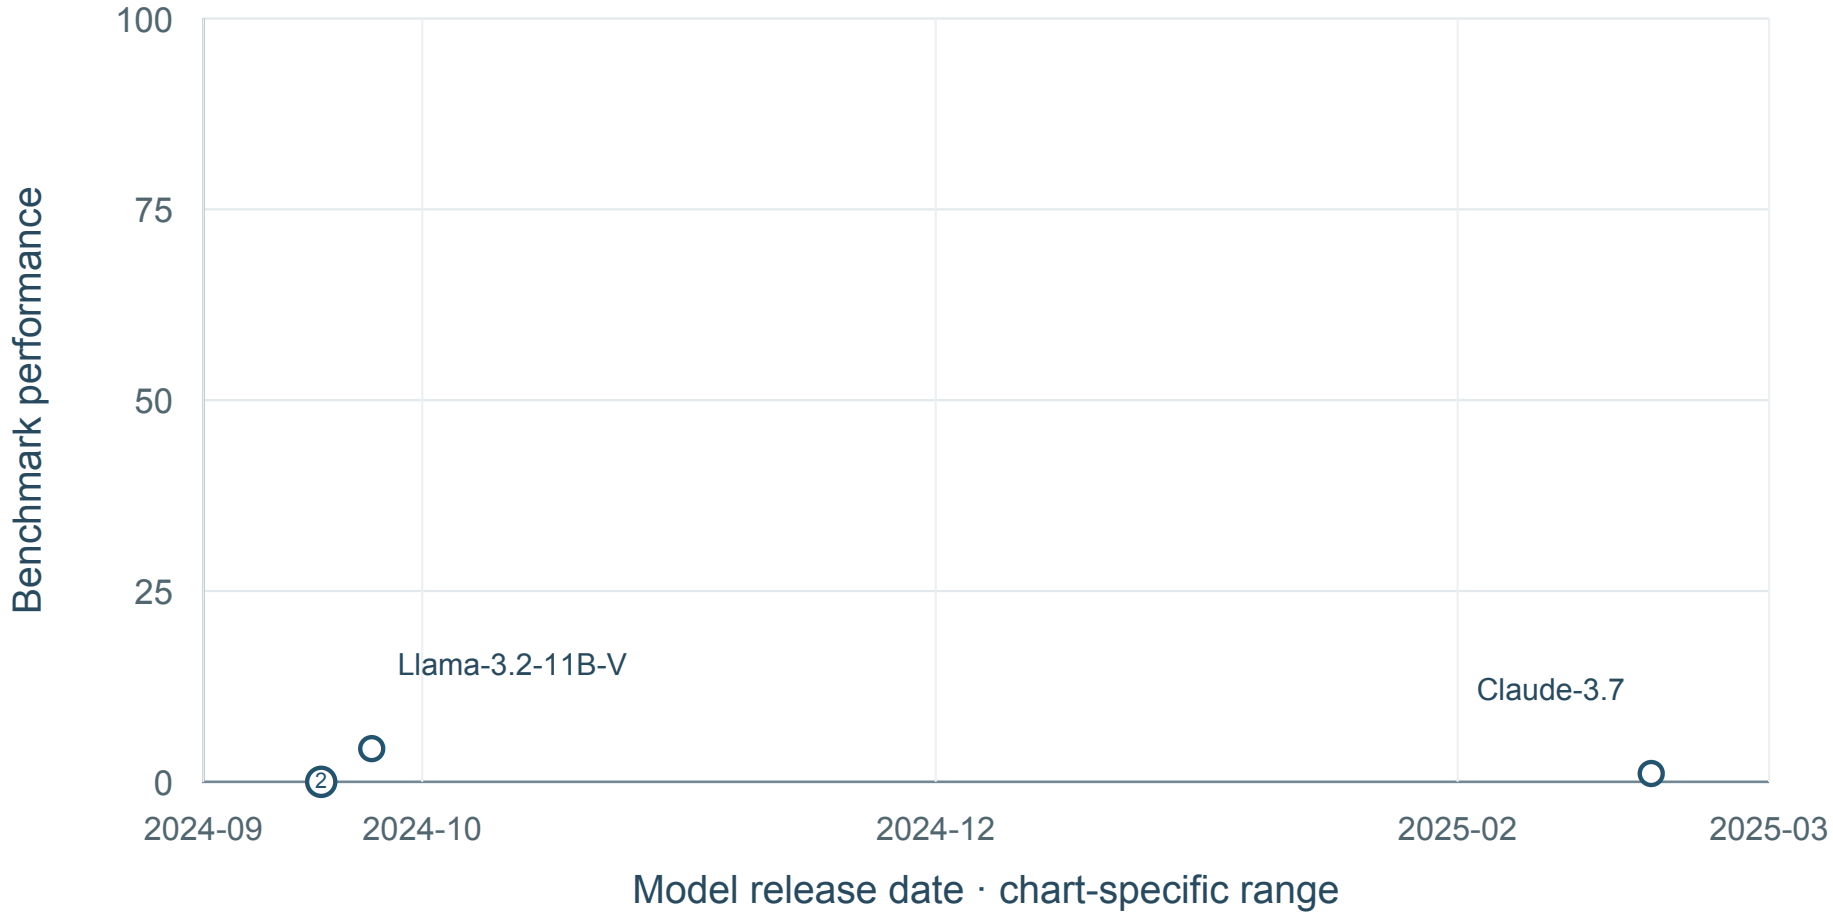

4 shown · 8 undated · 0 definition-held · sources: S019


No mean curve: Fewer than five dated model configurations.

Result-source references: S019. Exact point locators and raw values: data/F067_Manalyzer_values.csv.

Benchmark reference (APA): Xu, W., Zhang, W., Ling, F., Fei, B., Hu, Y., Ma, R., Zhang, B., Ren, F., Lin, J., Ouyang, W., & Bai, L. (2025). Manalyzer: End-to-end automated Meta-analysis with Multi-agent system. arXiv. https://arxiv.org/abs/2505.20310

Manalyzer evaluation benchmark: Hit rate: recall against human-extracted records

Original paper v1; Agriculture; level 1; temperature 0

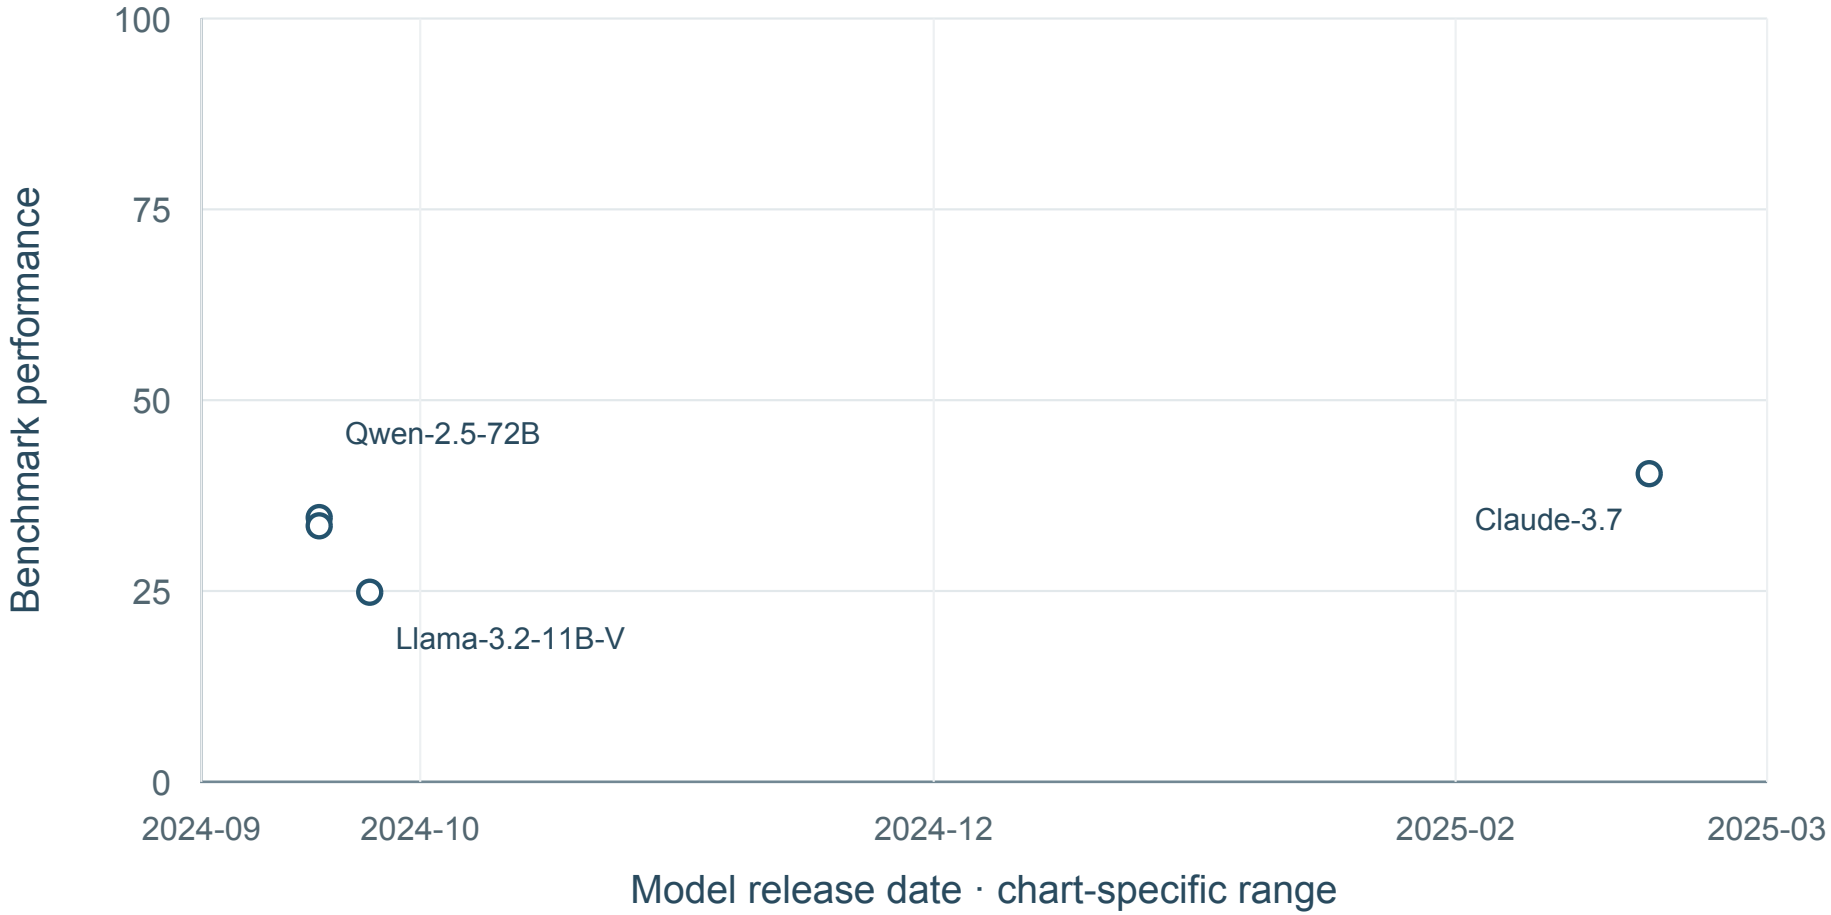

4 shown · 8 undated · 0 definition-held · sources: S019


No mean curve: Fewer than five dated model configurations.

Result-source references: S019. Exact point locators and raw values: data/F067_Manalyzer_values.csv.

Benchmark reference (APA): Xu, W., Zhang, W., Ling, F., Fei, B., Hu, Y., Ma, R., Zhang, B., Ren, F., Lin, J., Ouyang, W., & Bai, L. (2025). Manalyzer: End-to-end automated Meta-analysis with Multi-agent system. arXiv. https://arxiv.org/abs/2505.20310

Manalyzer evaluation benchmark: Hit rate: recall against human-extracted records

Original paper v1; Agriculture; level 2; temperature 0

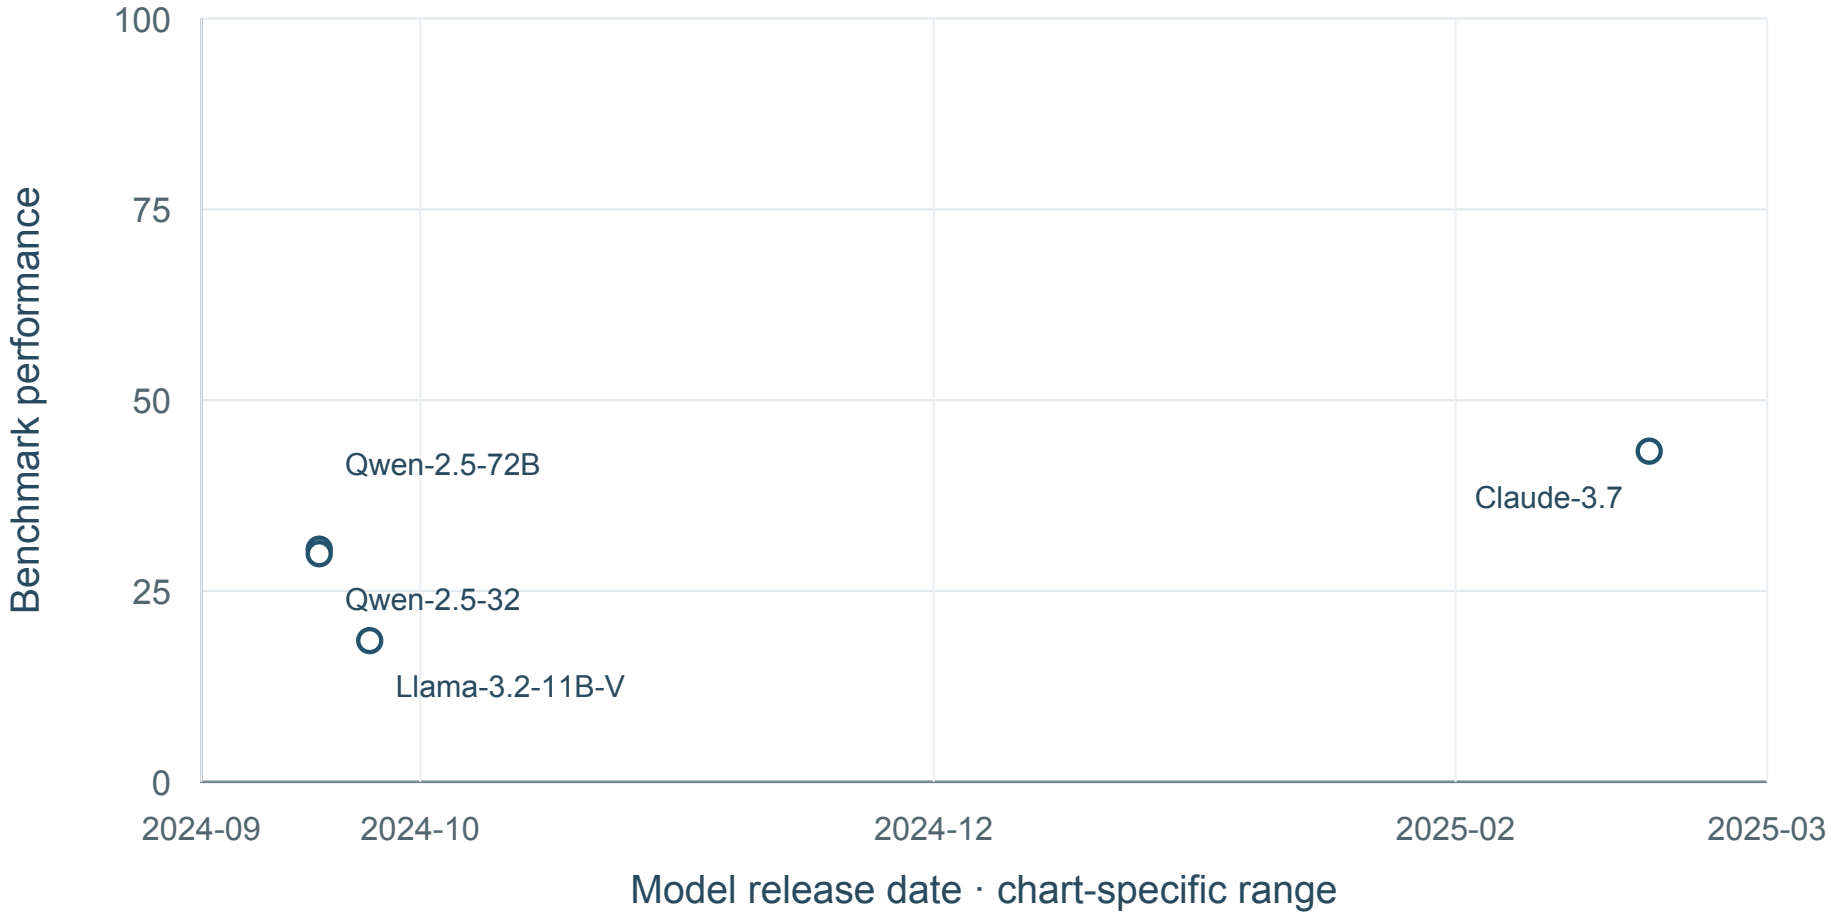

4 shown · 8 undated · 0 definition-held · sources: S019


No mean curve: Fewer than five dated model configurations.

Result-source references: S019. Exact point locators and raw values: data/F067_Manalyzer_values.csv.

Benchmark reference (APA): Xu, W., Zhang, W., Ling, F., Fei, B., Hu, Y., Ma, R., Zhang, B., Ren, F., Lin, J., Ouyang, W., & Bai, L. (2025). Manalyzer: End-to-end automated Meta-analysis with Multi-agent system. arXiv. https://arxiv.org/abs/2505.20310

Manalyzer evaluation benchmark: Hit rate: recall against human-extracted records

Original paper v1; Agriculture; level 3; temperature 0

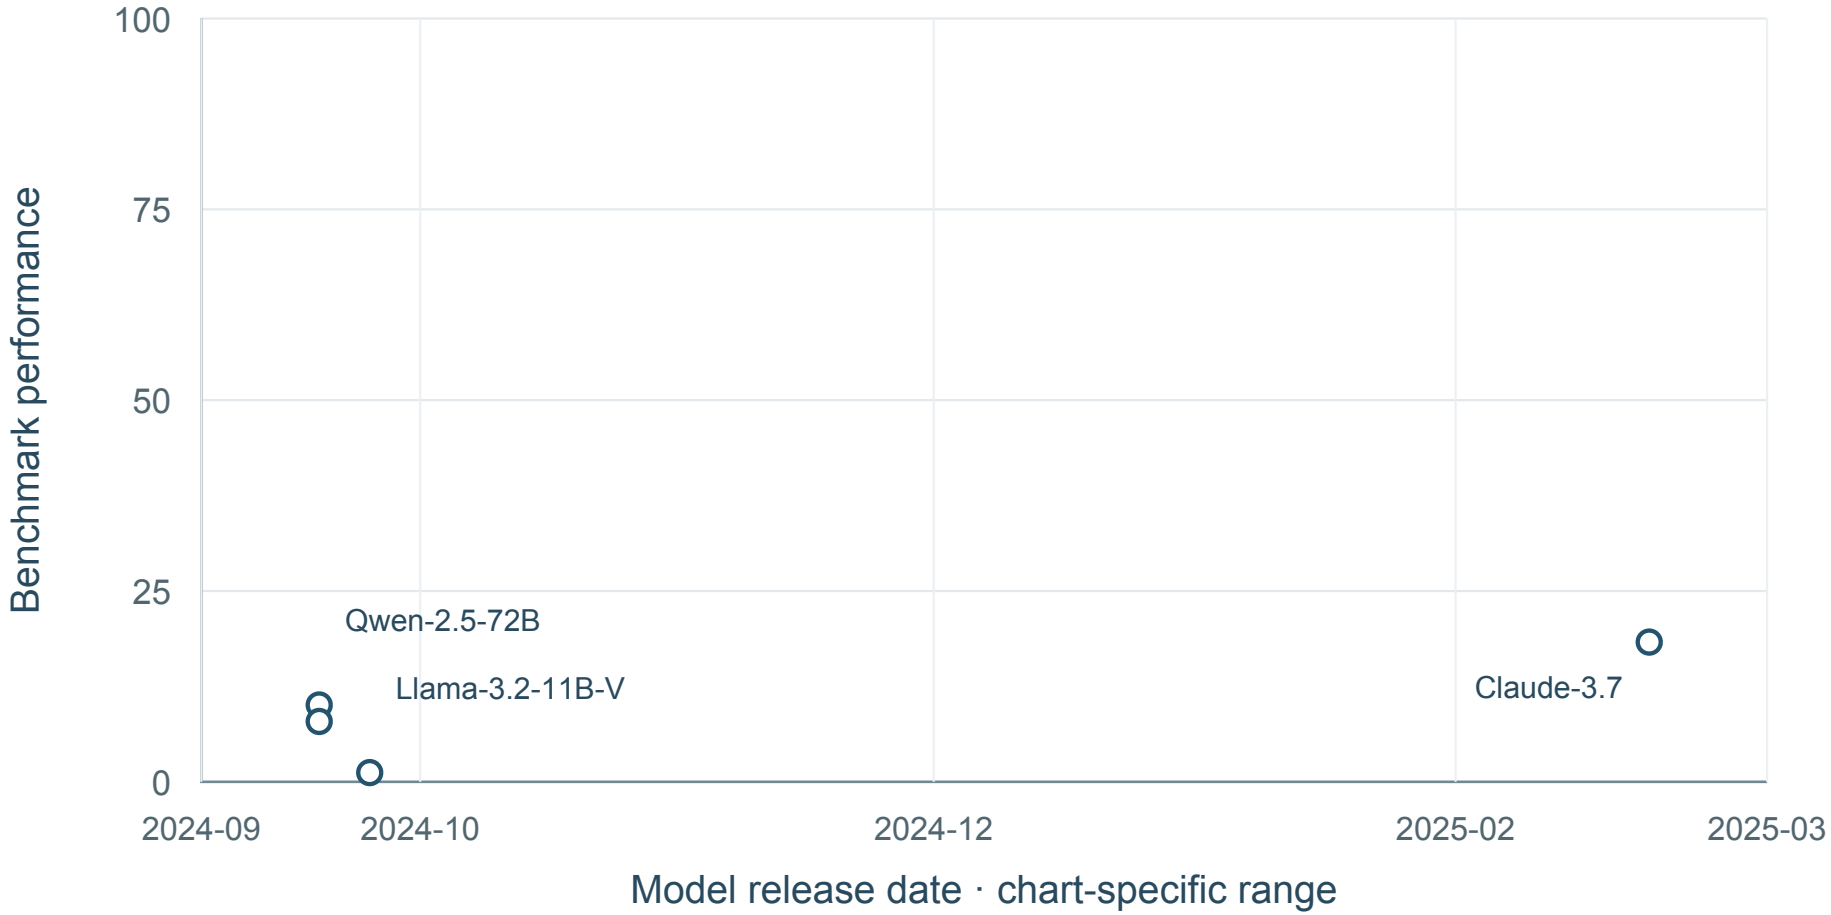

4 shown · 8 undated · 0 definition-held · sources: S019


No mean curve: Fewer than five dated model configurations.

Result-source references: S019. Exact point locators and raw values: data/F067_Manalyzer_values.csv.

Benchmark reference (APA): Xu, W., Zhang, W., Ling, F., Fei, B., Hu, Y., Ma, R., Zhang, B., Ren, F., Lin, J., Ouyang, W., & Bai, L. (2025). Manalyzer: End-to-end automated Meta-analysis with Multi-agent system. arXiv. https://arxiv.org/abs/2505.20310

Manalyzer evaluation benchmark: Hit rate: recall against human-extracted records

Original paper v1; Environment; level 1; temperature 0

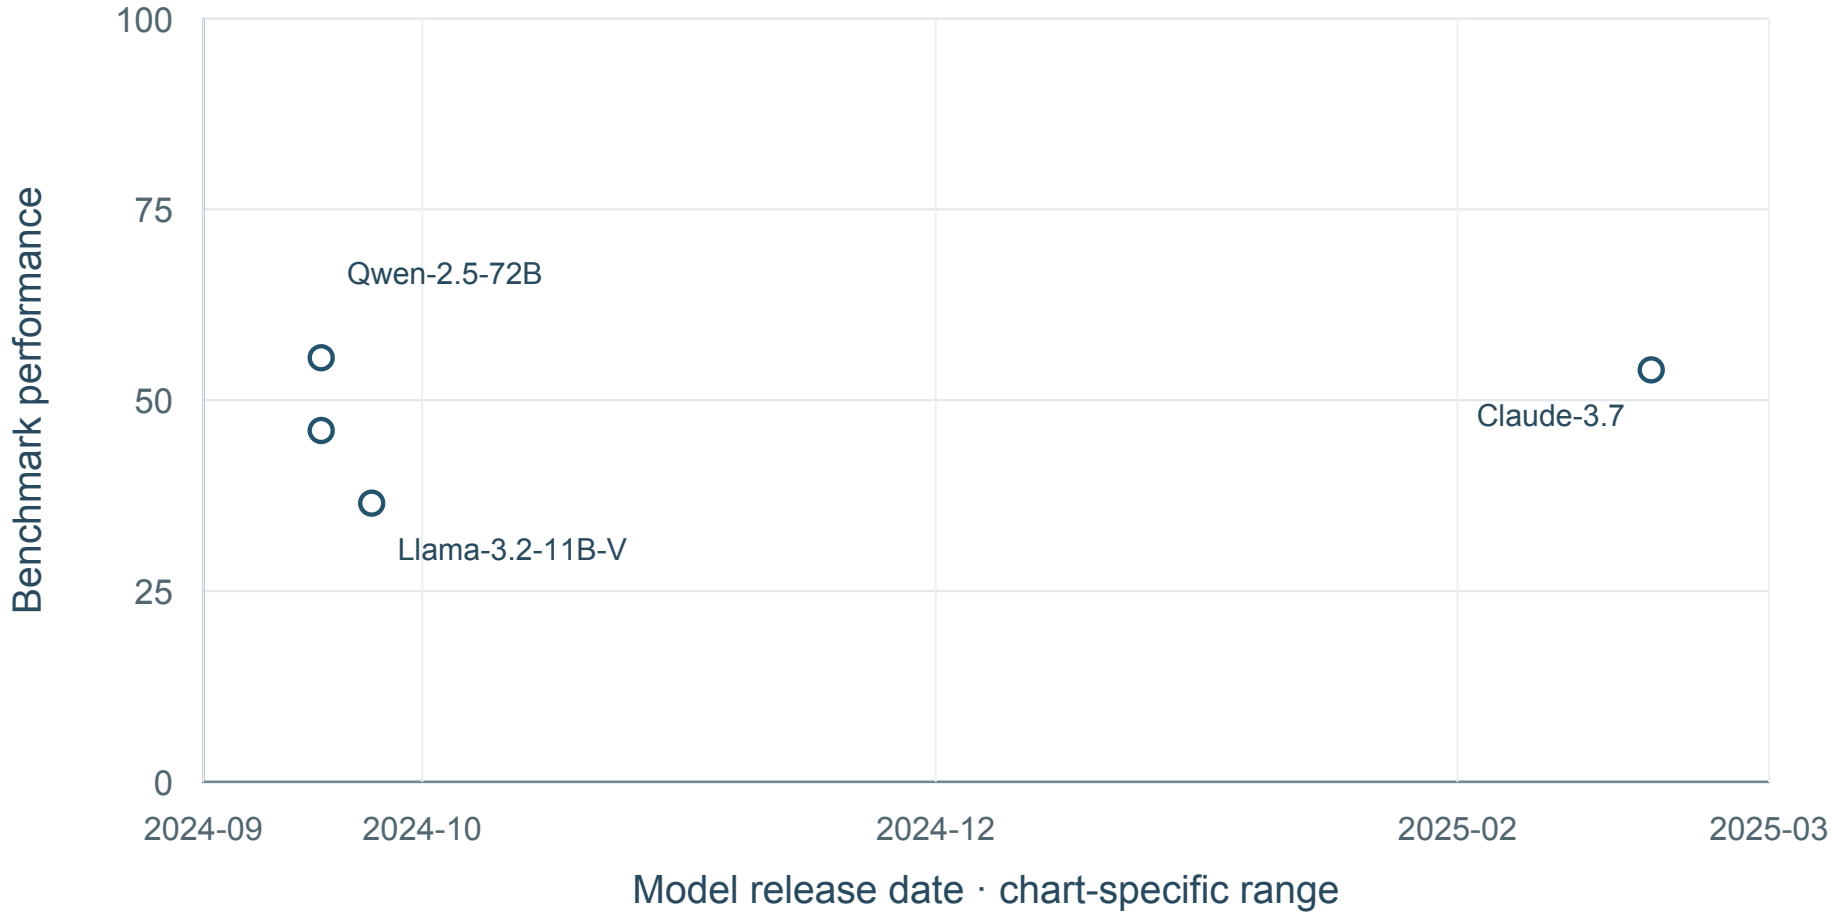

4 shown · 8 undated · 0 definition-held · sources: S019


No mean curve: Fewer than five dated model configurations.

Result-source references: S019. Exact point locators and raw values: data/F067_Manalyzer_values.csv.

Benchmark reference (APA): Xu, W., Zhang, W., Ling, F., Fei, B., Hu, Y., Ma, R., Zhang, B., Ren, F., Lin, J., Ouyang, W., & Bai, L. (2025). Manalyzer: End-to-end automated Meta-analysis with Multi-agent system. arXiv. https://arxiv.org/abs/2505.20310

Manalyzer evaluation benchmark: Hit rate: recall against human-extracted records

Original paper v1; Environment; level 2; temperature 0

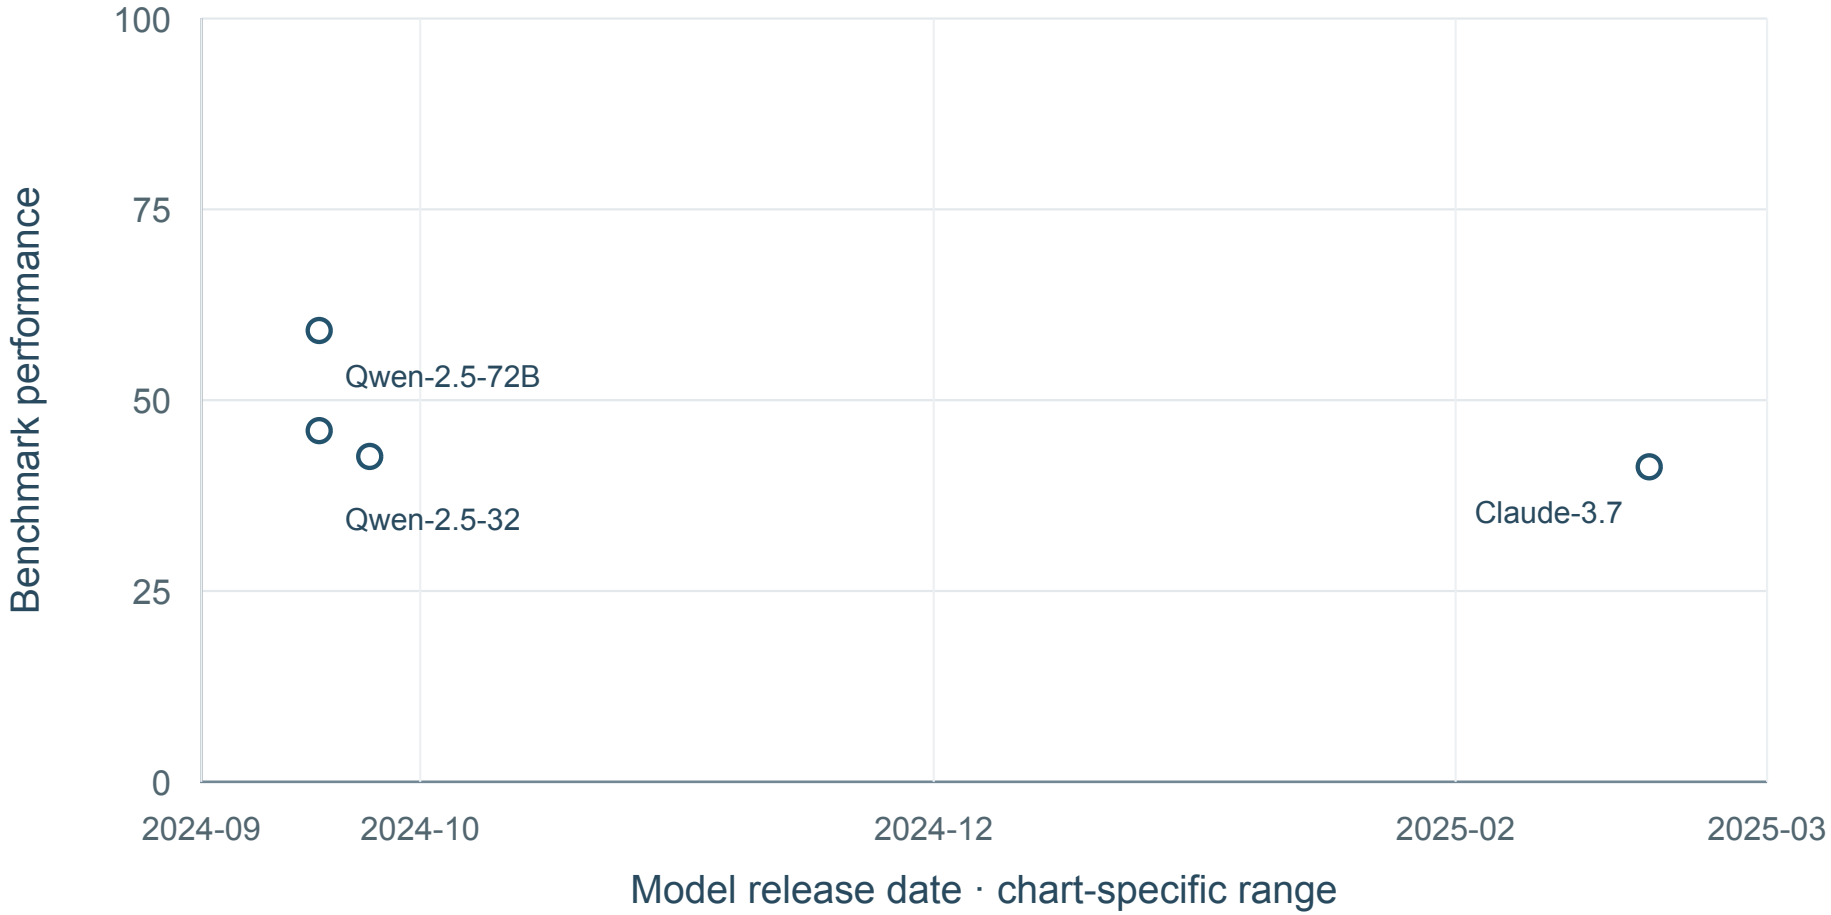

4 shown · 8 undated · 0 definition-held · sources: S019


No mean curve: Fewer than five dated model configurations.

Result-source references: S019. Exact point locators and raw values: data/F067_Manalyzer_values.csv.

Benchmark reference (APA): Xu, W., Zhang, W., Ling, F., Fei, B., Hu, Y., Ma, R., Zhang, B., Ren, F., Lin, J., Ouyang, W., & Bai, L. (2025). Manalyzer: End-to-end automated Meta-analysis with Multi-agent system. arXiv. https://arxiv.org/abs/2505.20310

Manalyzer evaluation benchmark: Hit rate: recall against human-extracted records

Original paper v1; Environment; level 3; temperature 0

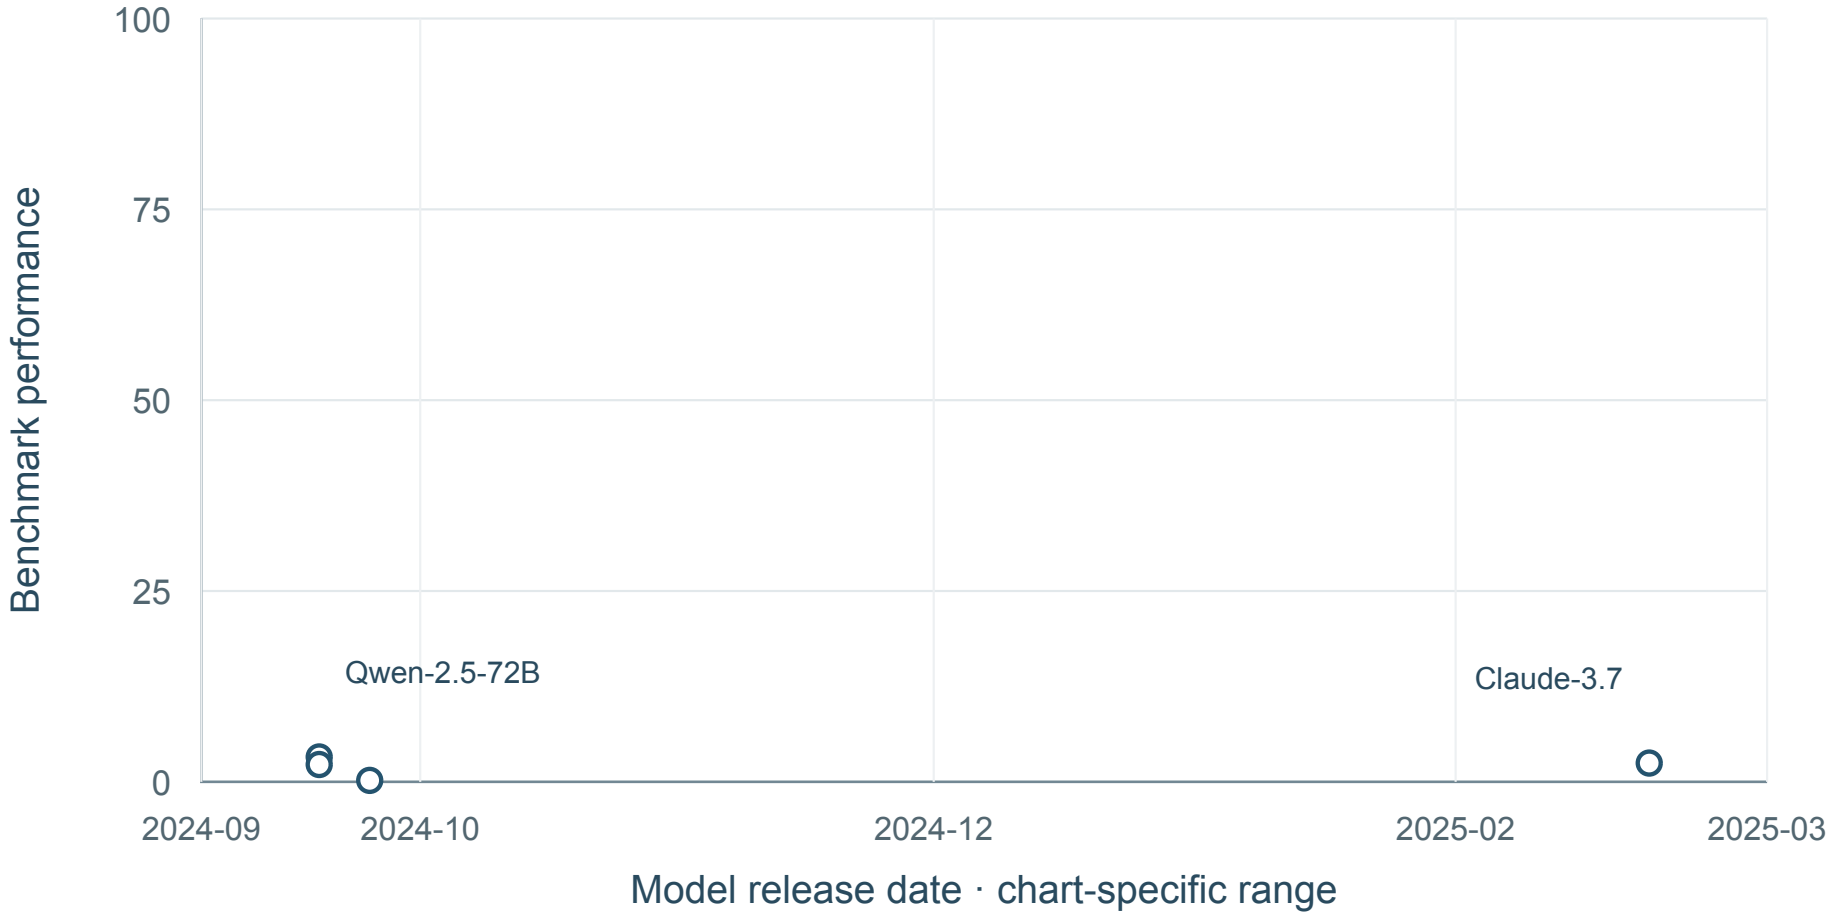

4 shown · 8 undated · 0 definition-held · sources: S019


No mean curve: Fewer than five dated model configurations.

Result-source references: S019. Exact point locators and raw values: data/F067_Manalyzer_values.csv.

Benchmark reference (APA): Xu, W., Zhang, W., Ling, F., Fei, B., Hu, Y., Ma, R., Zhang, B., Ren, F., Lin, J., Ouyang, W., & Bai, L. (2025). Manalyzer: End-to-end automated Meta-analysis with Multi-agent system. arXiv. https://arxiv.org/abs/2505.20310

Manalyzer evaluation benchmark: Accuracy

Original paper v1; screening; temperature 0

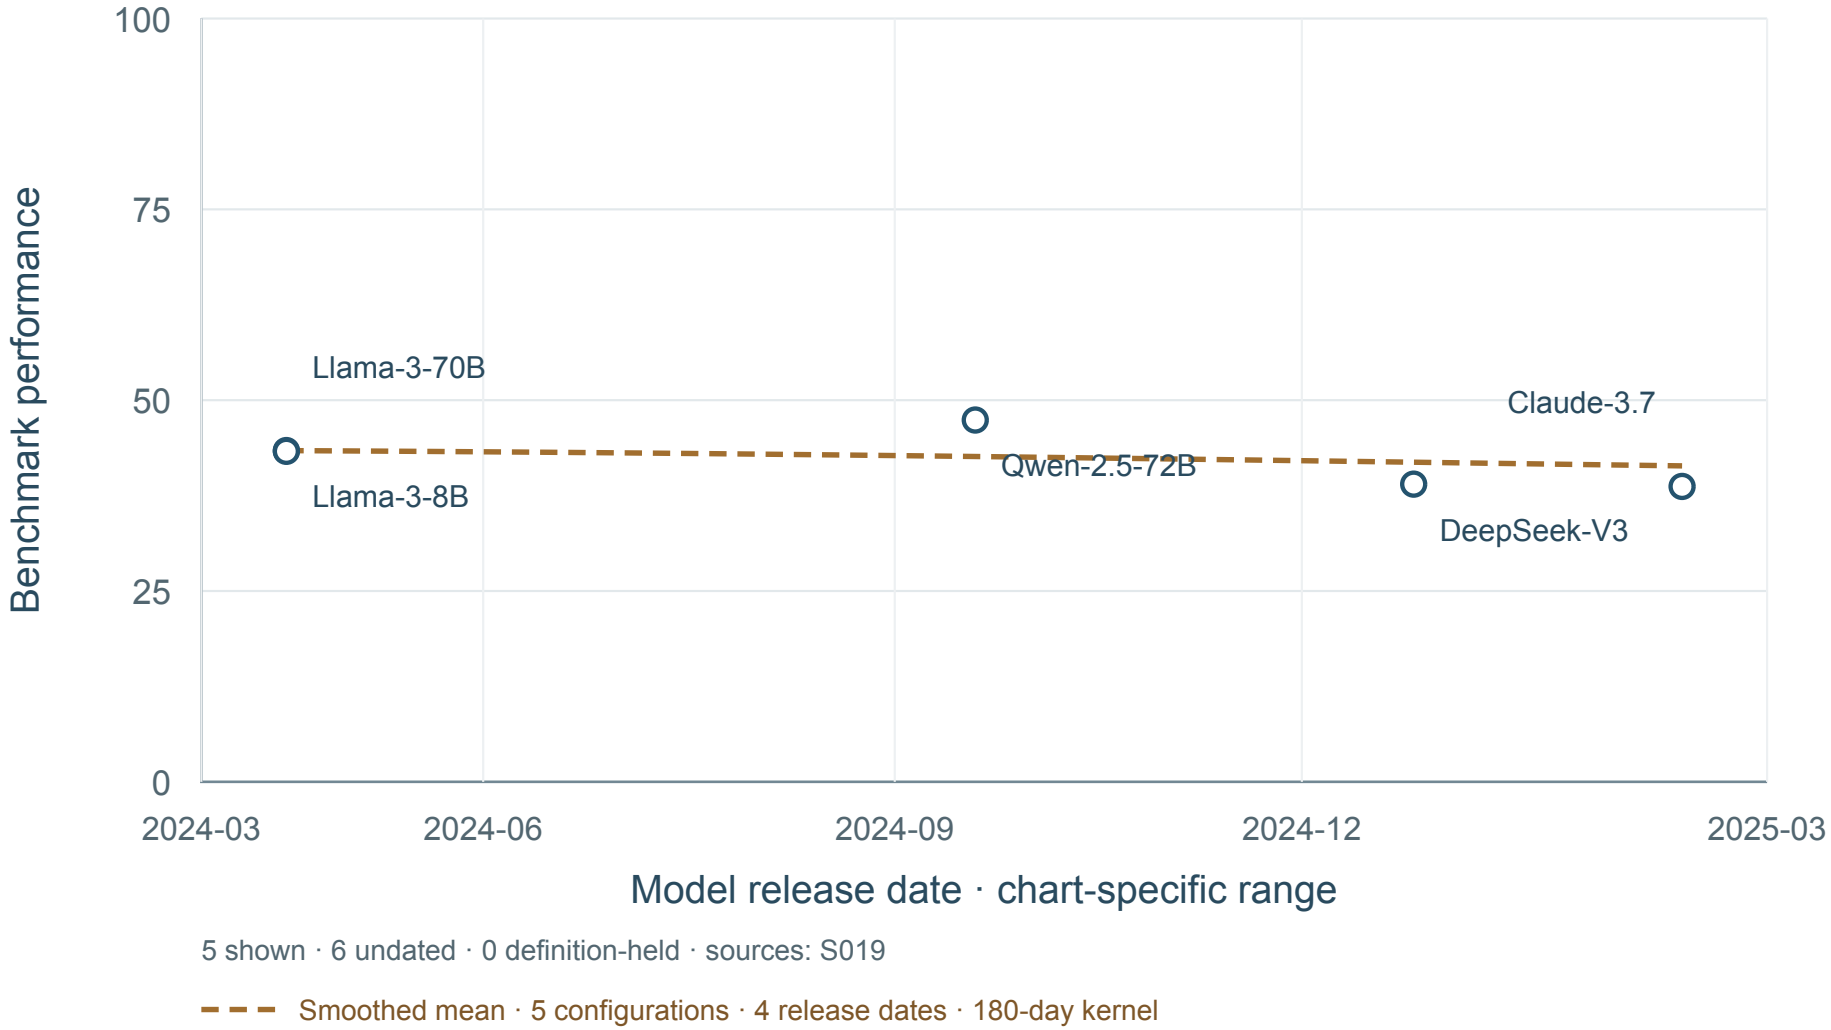

5 shown · 6 undated · 0 definition-held · sources: S019


Smoothed mean · 5 configurations · 4 release dates · 180-day kernel

Result-source references: S019. Exact point locators and raw values: data/F067_Manalyzer_values.csv.

Benchmark reference (APA): Xu, W., Zhang, W., Ling, F., Fei, B., Hu, Y., Ma, R., Zhang, B., Ren, F., Lin, J., Ouyang, W., & Bai, L. (2025). Manalyzer: End-to-end automated Meta-analysis with Multi-agent system. arXiv. https://arxiv.org/abs/2505.20310

Manalyzer evaluation benchmark: Precision

Original paper v1; screening; temperature 0

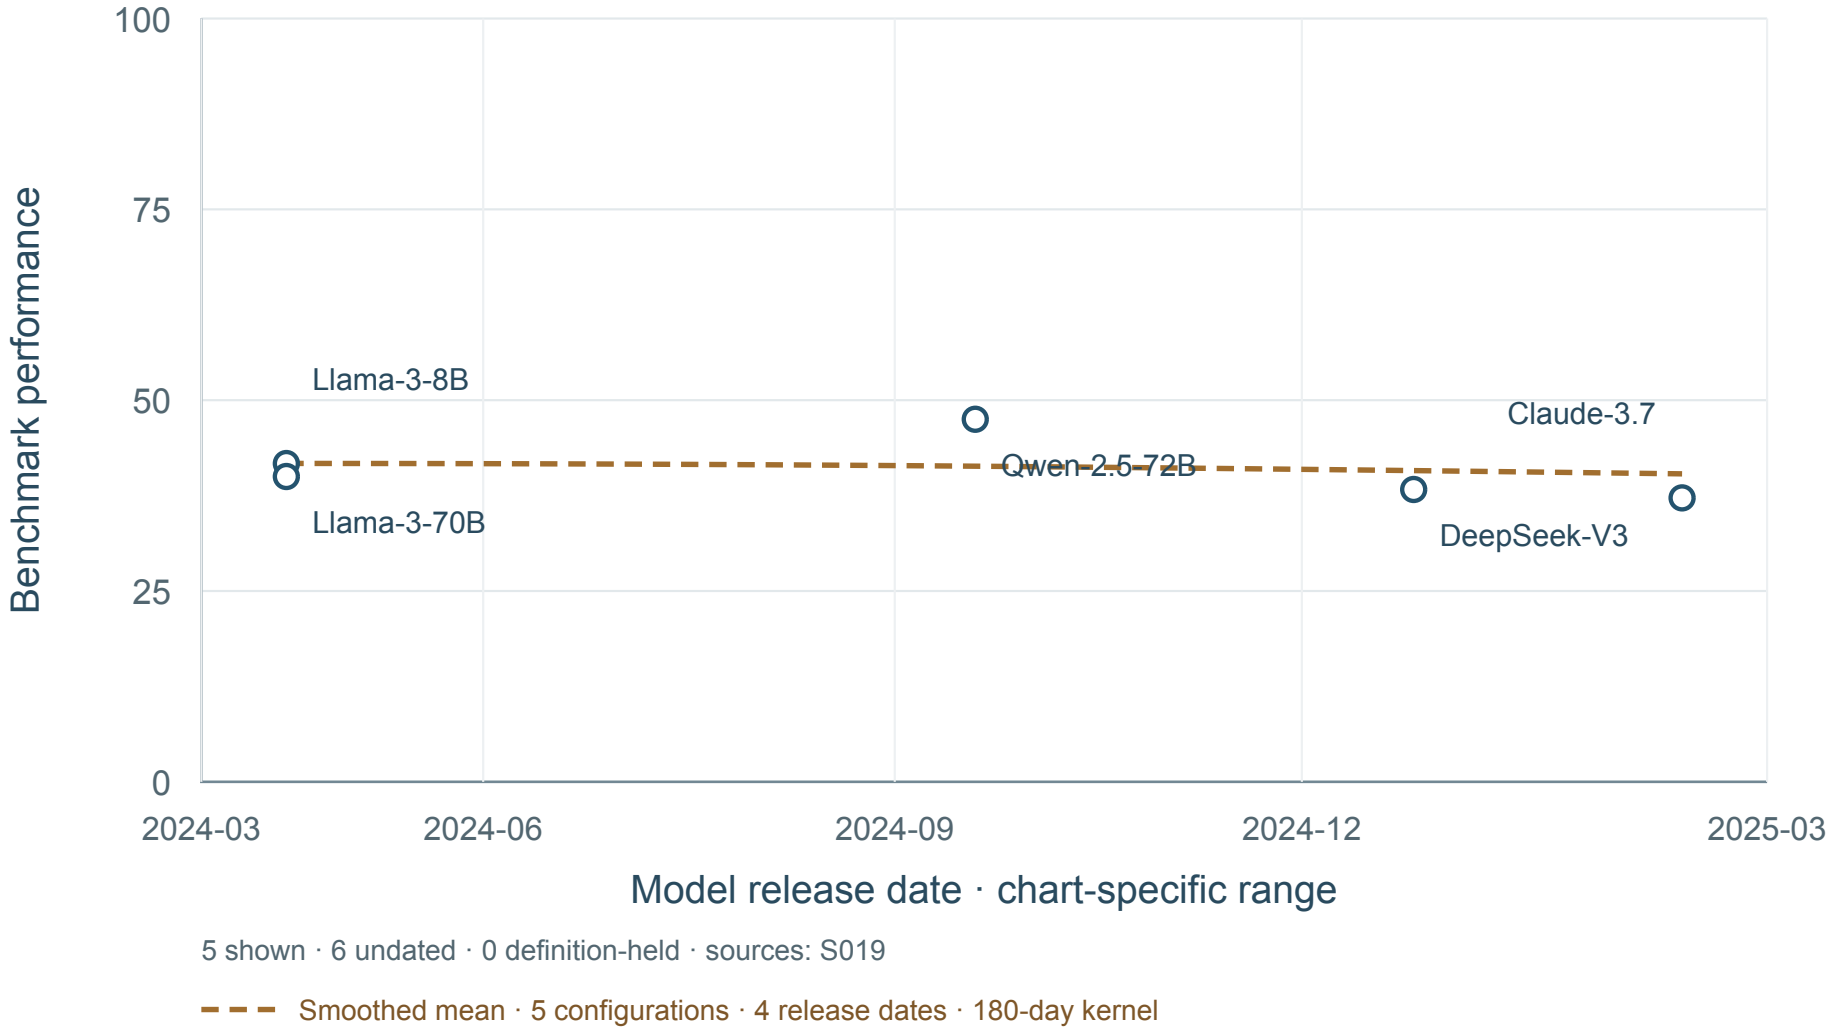

5 shown · 6 undated · 0 definition-held · sources: S019


Smoothed mean · 5 configurations · 4 release dates · 180-day kernel

Result-source references: S019. Exact point locators and raw values: data/F067_Manalyzer_values.csv.

Benchmark reference (APA): Xu, W., Zhang, W., Ling, F., Fei, B., Hu, Y., Ma, R., Zhang, B., Ren, F., Lin, J., Ouyang, W., & Bai, L. (2025). Manalyzer: End-to-end automated Meta-analysis with Multi-agent system. arXiv. https://arxiv.org/abs/2505.20310

Manalyzer evaluation benchmark: Recall

Original paper v1; screening; temperature 0

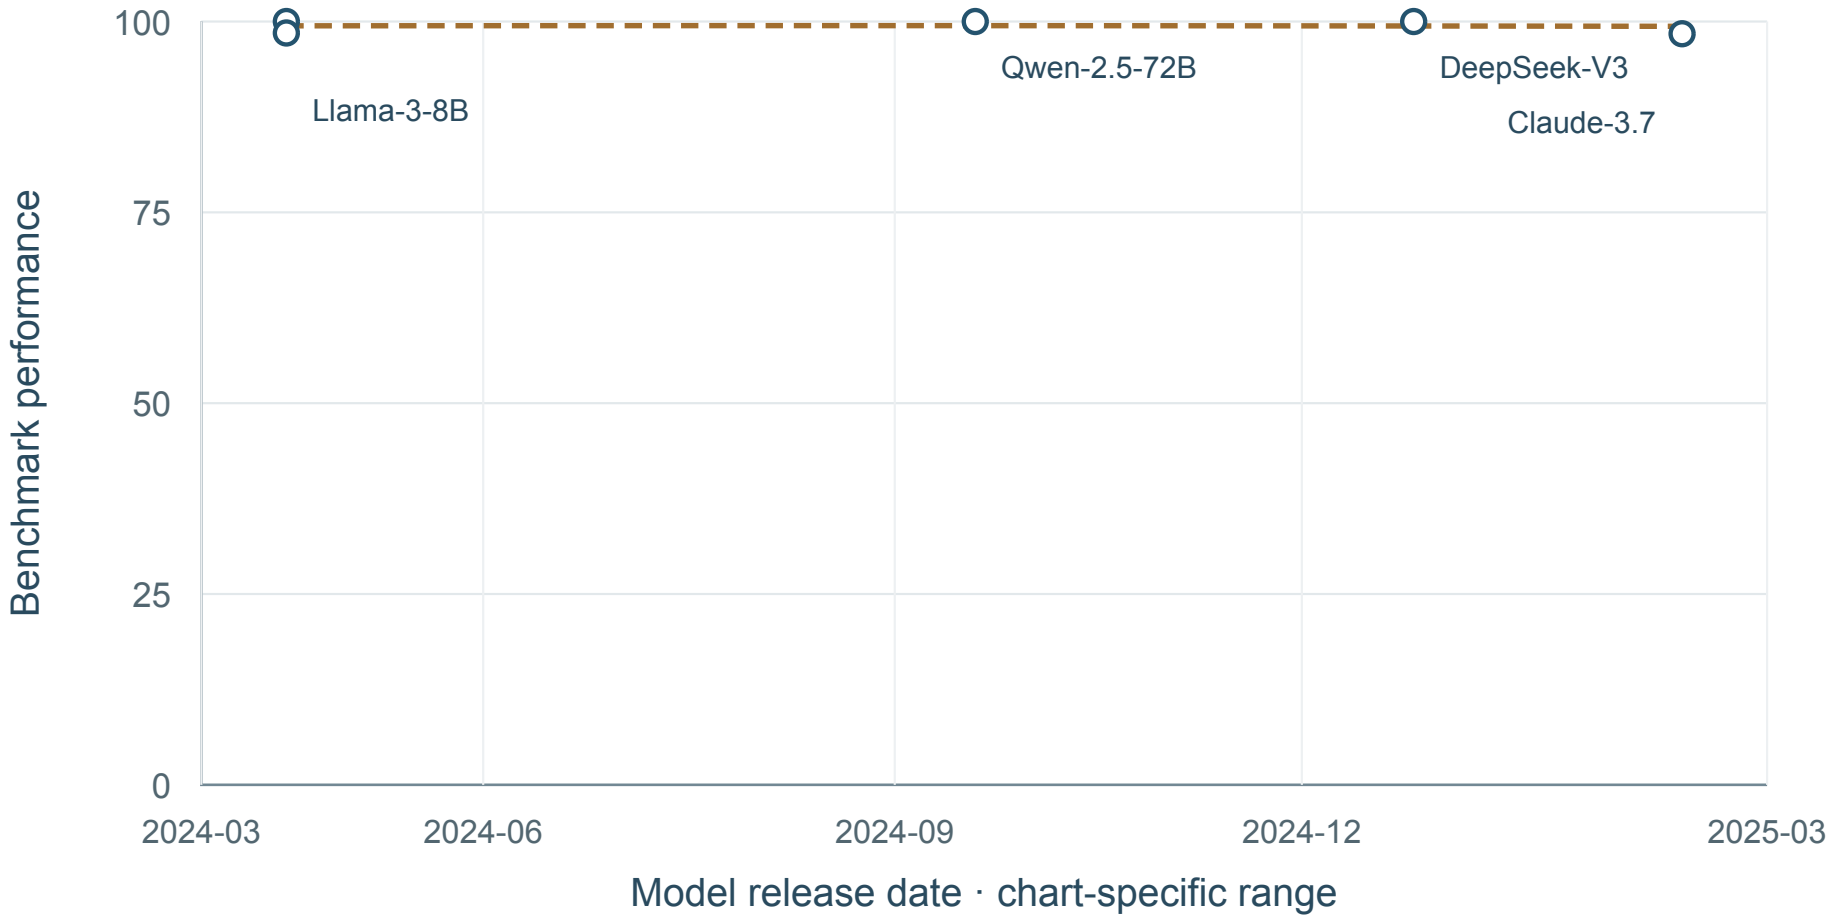

5 shown · 6 undated · 0 definition-held · sources: S019


Smoothed mean · 5 configurations · 4 release dates · 180-day kernel

Result-source references: S019. Exact point locators and raw values: data/F067_Manalyzer_values.csv.

Benchmark reference (APA): Xu, W., Zhang, W., Ling, F., Fei, B., Hu, Y., Ma, R., Zhang, B., Ren, F., Lin, J., Ouyang, W., & Bai, L. (2025). Manalyzer: End-to-end automated Meta-analysis with Multi-agent system. arXiv. https://arxiv.org/abs/2505.20310

Manalyzer evaluation benchmark: F1

Original paper v1; screening; temperature 0

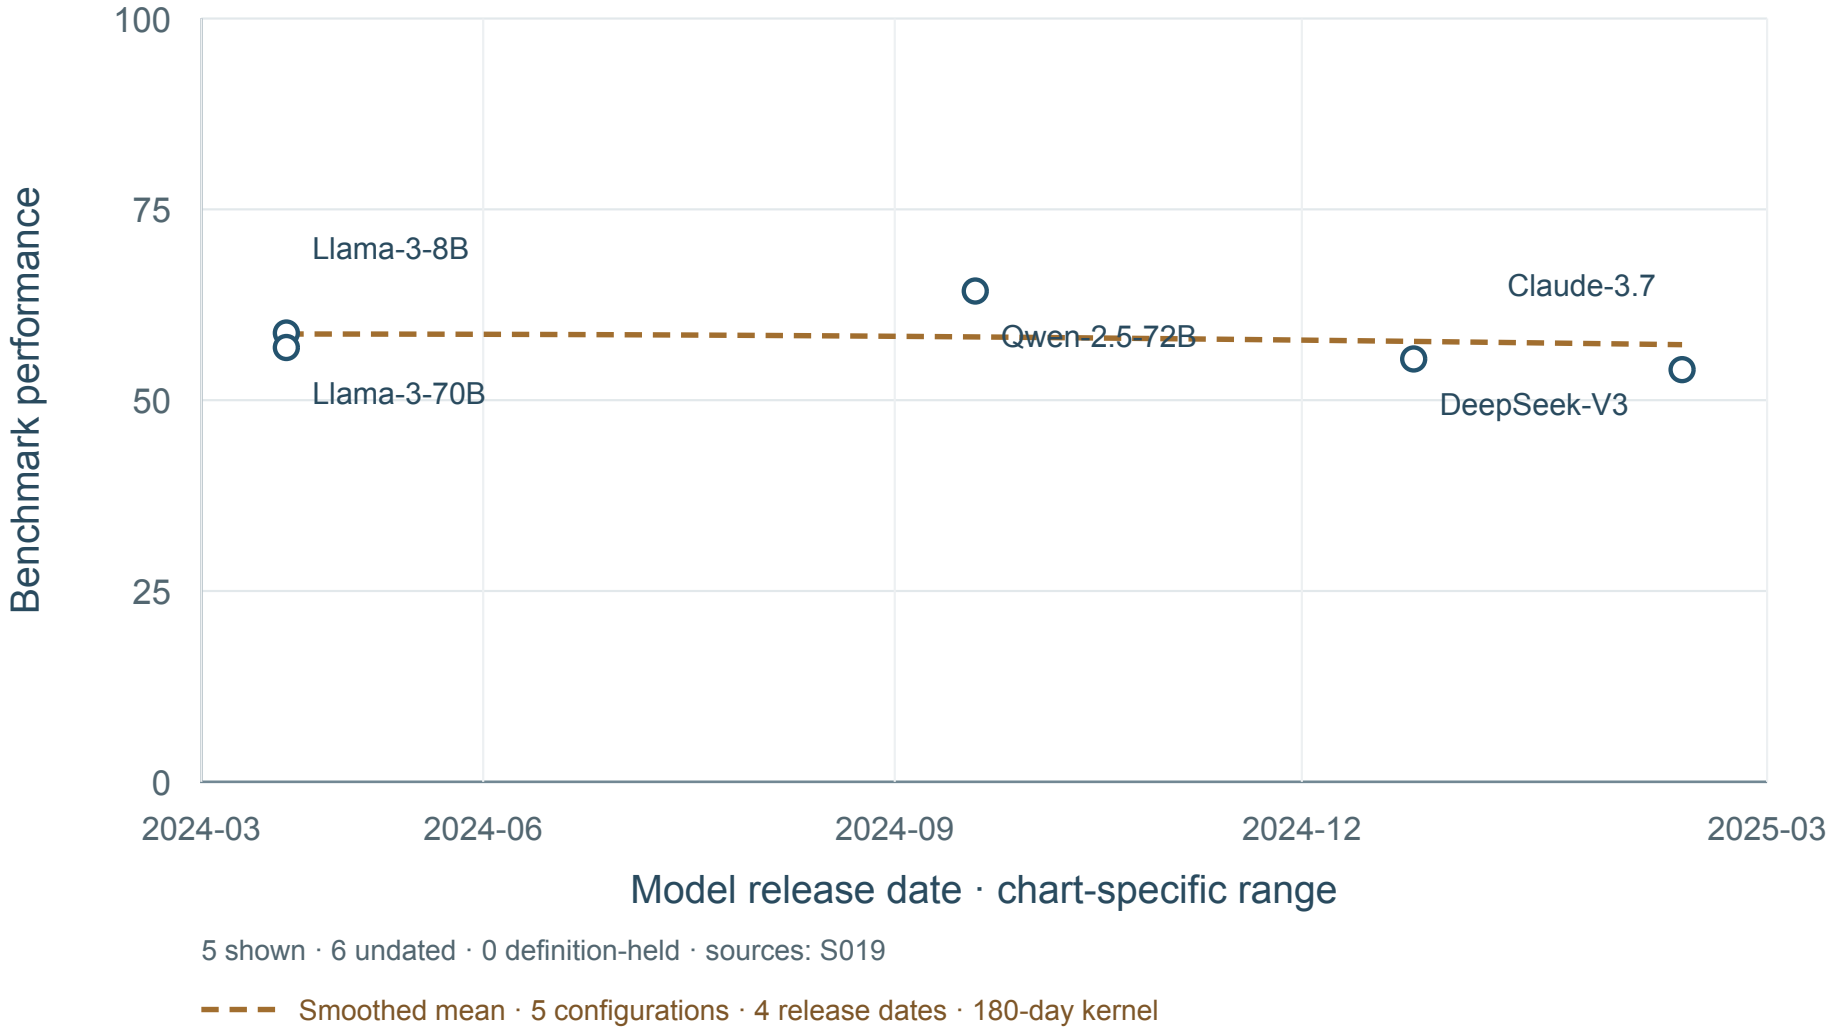

5 shown · 6 undated · 0 definition-held · sources: S019

Smoothed mean · 5 configurations · 4 release dates · 180-day kernel

Result-source references: S019. Exact point locators and raw values: data/F067_Manalyzer_values.csv.

Benchmark reference (APA): Xu, W., Zhang, W., Ling, F., Fei, B., Hu, Y., Ma, R., Zhang, B., Ren, F., Lin, J., Ouyang, W., & Bai, L. (2025). Manalyzer: End-to-end automated Meta-analysis with Multi-agent system. arXiv. https://arxiv.org/abs/2505.20310

F068 DTBench

Document-to-table extraction under a target schema

24 source values; 0 new; 3 separate conditions; 21 visible time points; 0 definition-held values; 3 visible mean curves.

Benchmark references (APA)

Guo, Y., Du, Z., Tang, N., Tang, K., Ge, C., & Gao, Y. (2026). DTBench: A synthetic benchmark for Document-to-Table extraction. arXiv. https://arxiv.org/abs/2602.13812

Workflow and article scope

Challenges: C

Define variables and coding rules; Bind values to the correct unit; Interpret evidence and apply coding rules; Transform and calculate values; Verify source support and detect errors; Assess the complete extraction product

Synthetic table-to-document construction is not equivalent to empirical study reports.

Manuscript anchors: Preparation and reporting, manuscript paragraph 33; Wrong-subgroup example, manuscript paragraph 29; Lu and Wang, Challenge E; manuscript paragraphs 20 and 31; Lu and Wang, Challenge C; manuscript paragraphs 15, 17–18 and 33; Product accuracy and auditability, manuscript paragraphs 28–29; Comparative evaluation agenda, manuscript paragraph 31

Result-source references: S058. Full references appear in the final bibliography.

Complete condition inventory


01. Cell extraction F1 | DTBench original; all capability types
8 values; 7 time points; visible mean curve. Sources: S058.

02. Direct extraction recall | DTBench original
8 values; 7 time points; visible mean curve. Sources: S058.

03. Indirect extraction recall | DTBench original
8 values; 7 time points; visible mean curve. Sources: S058.

DTBench: Cell extraction F1

DTBench original; all capability types

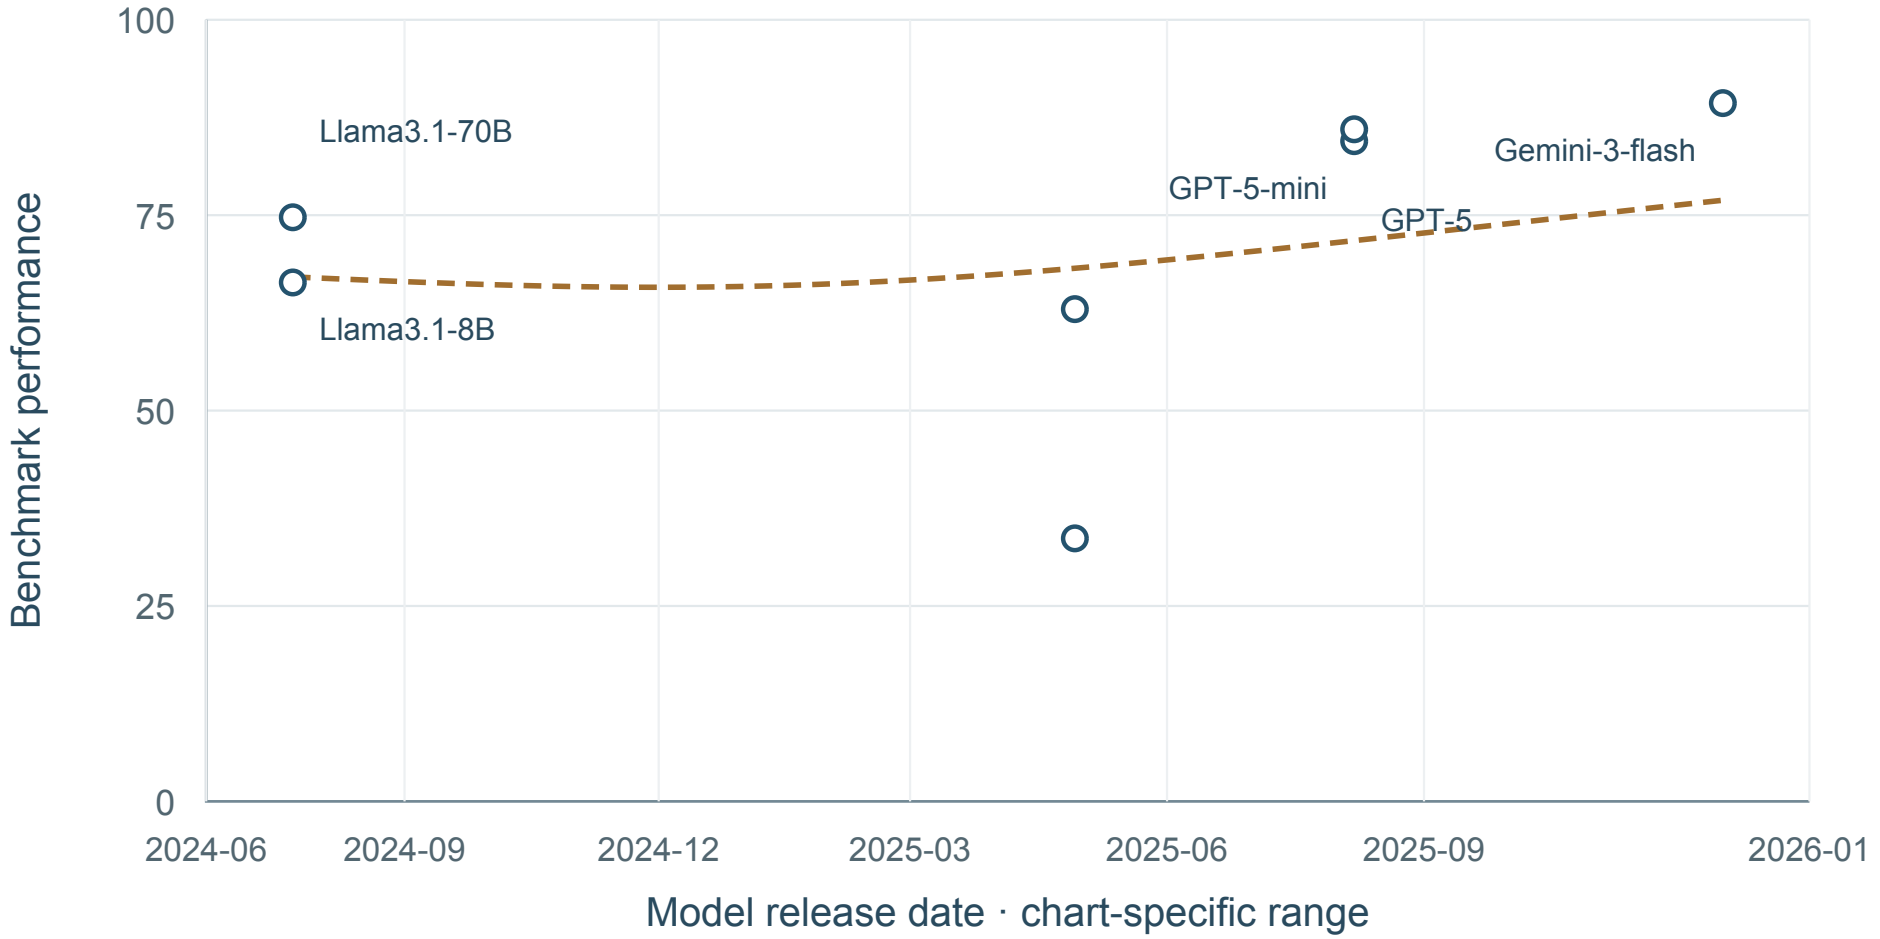

7 shown · 1 undated · 0 definition-held · sources: S058


Smoothed mean · 7 configurations · 4 release dates · 180-day kernel

Result-source references: S058. Exact point locators and raw values: data/F068_DTBench_values.csv.

Benchmark reference (APA): Guo, Y., Du, Z., Tang, N., Tang, K., Ge, C., & Gao, Y. (2026). DTBench: A synthetic benchmark for Document-to-Table extraction. arXiv. https://arxiv.org/abs/2602.13812

DTBench: Direct extraction recall

DTBench original

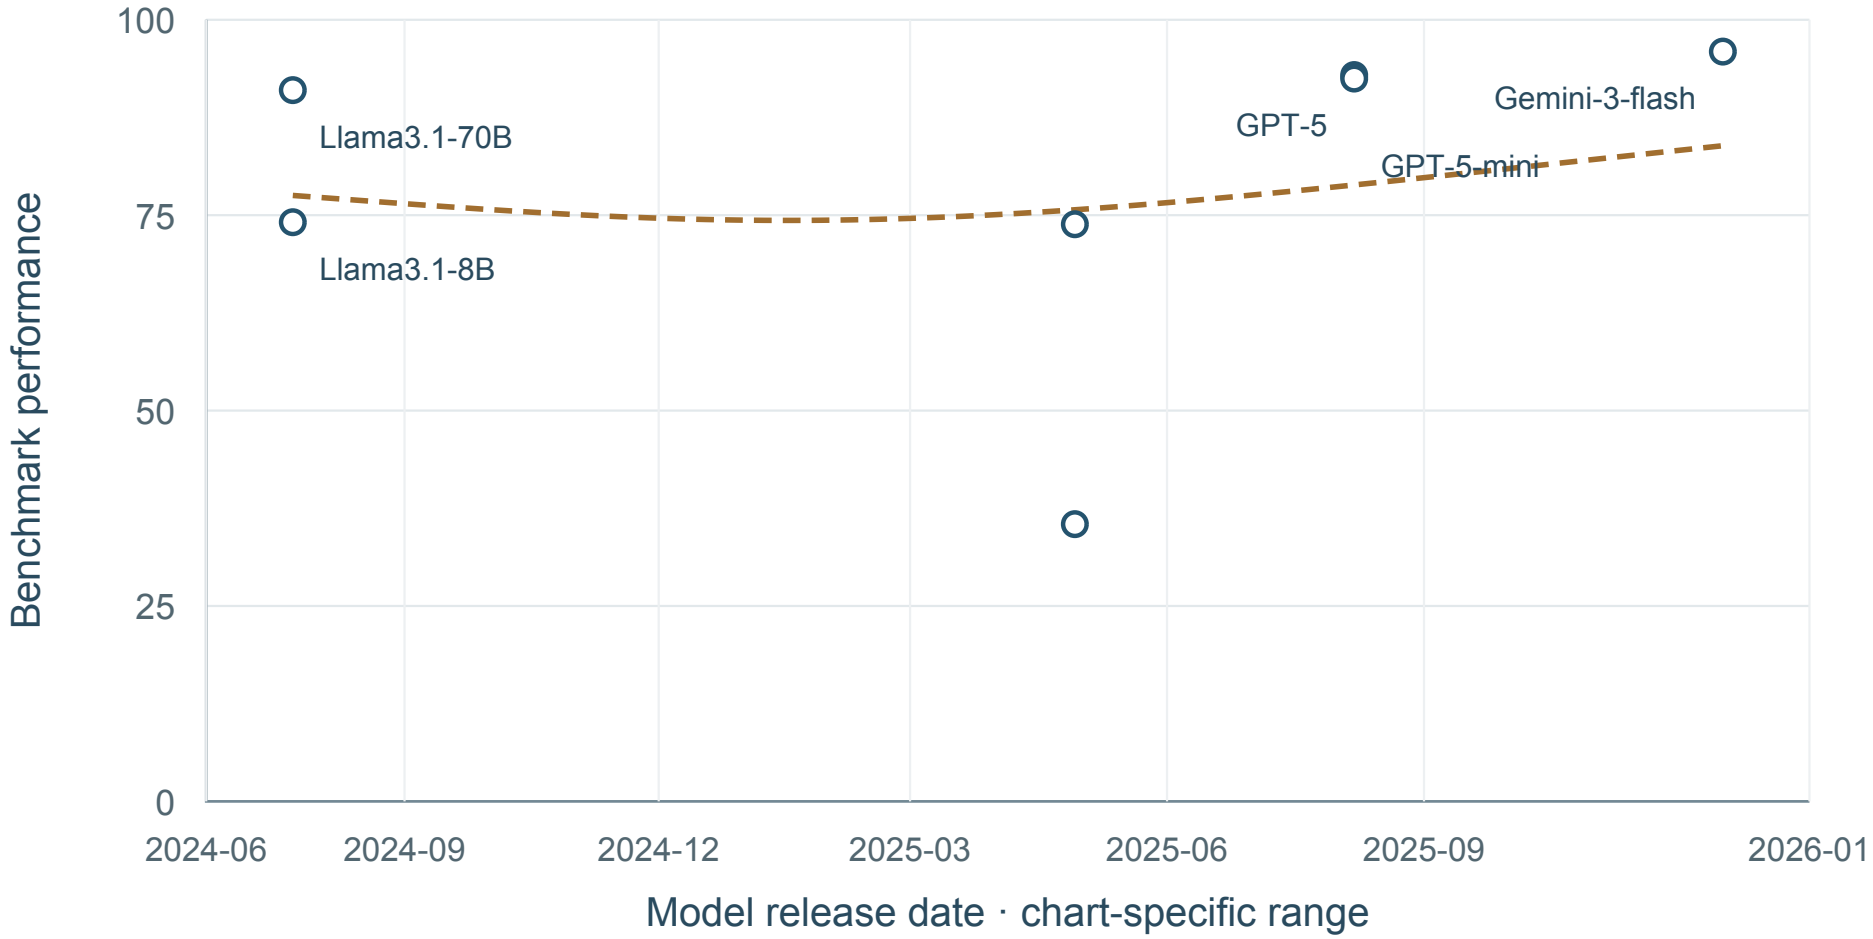


7 shown · 1 undated · 0 definition-held · sources: S058

Smoothed mean · 7 configurations · 4 release dates · 180-day kernel

Result-source references: S058. Exact point locators and raw values: data/F068_DTBench_values.csv.

Benchmark reference (APA): Guo, Y., Du, Z., Tang, N., Tang, K., Ge, C., & Gao, Y. (2026). DTBench: A synthetic benchmark for Document-to-Table extraction. arXiv. https://arxiv.org/abs/2602.13812

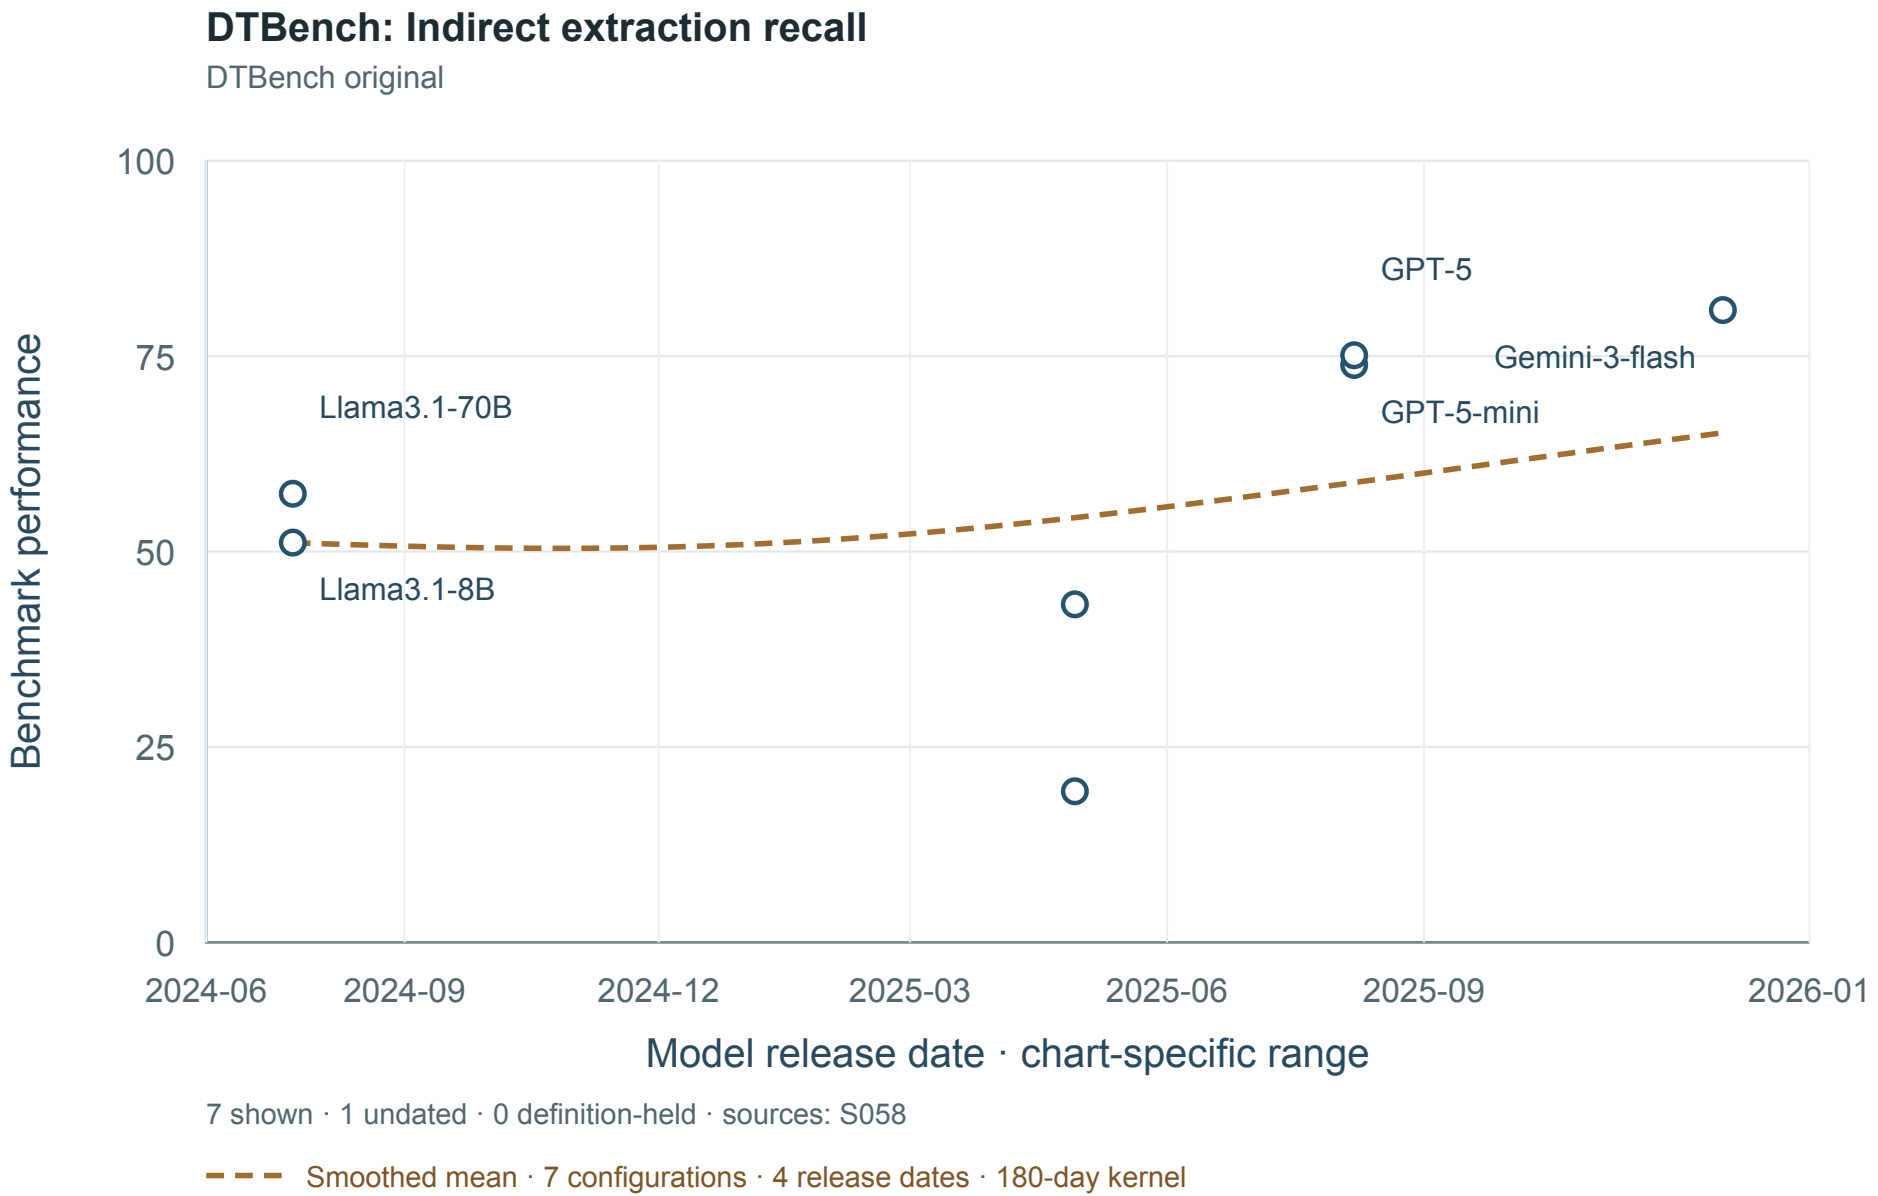

Result-source references: S058. Exact point locators and raw values: data/F068_DTBench_values.csv.

Benchmark reference (APA): Guo, Y., Du, Z., Tang, N., Tang, K., Ge, C., & Gao, Y. (2026). DTBench: A synthetic benchmark for Document-to-Table extraction. arXiv. https://arxiv.org/abs/2602.13812

F069 UNIKIE-BENCH

Schema-constrained and open-category key information extraction

30 source values; 0 new; 2 separate conditions; 4 visible time points; 0 definition-held values; 0 visible mean curves.

Benchmark references (APA)

Ji, Y., Xu, Z., Liu, Z., Chen, Z., Zhang, Q., Yang, Z., Lin, J., Gu, Y., Yu, G., & Sun, M. (2026). UNIKIE-BENCH: Benchmarking large multimodal models for key information extraction in visual documents. arXiv. https://arxiv.org/abs/2602.07038

Workflow and article scope

Challenges: A

Define variables and coding rules; Prepare and read source documents; Bind values to the correct unit; Interpret evidence and apply coding rules; Assess the complete extraction product

Visual business/document KIE; not scientific evidence synthesis by default.

Manuscript anchors: Preparation and reporting, manuscript paragraph 33; Lu and Wang, Challenges A–B; manuscript paragraphs 15–18; Wrong-subgroup example, manuscript paragraph 29; Lu and Wang, Challenge E; manuscript paragraphs 20 and 31; Comparative evaluation agenda, manuscript paragraph 31

Result-source references: S059. Full references appear in the final bibliography.


Complete condition inventory

01. Average KIE score | Constrained-category track; original Table 4
15 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S059.

02. Average KIE score | Open-category track; original Table 5
15 values; 2 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S059.

UNIKIE-BENCH: Average KIE score

Constrained-category track; original Table 4

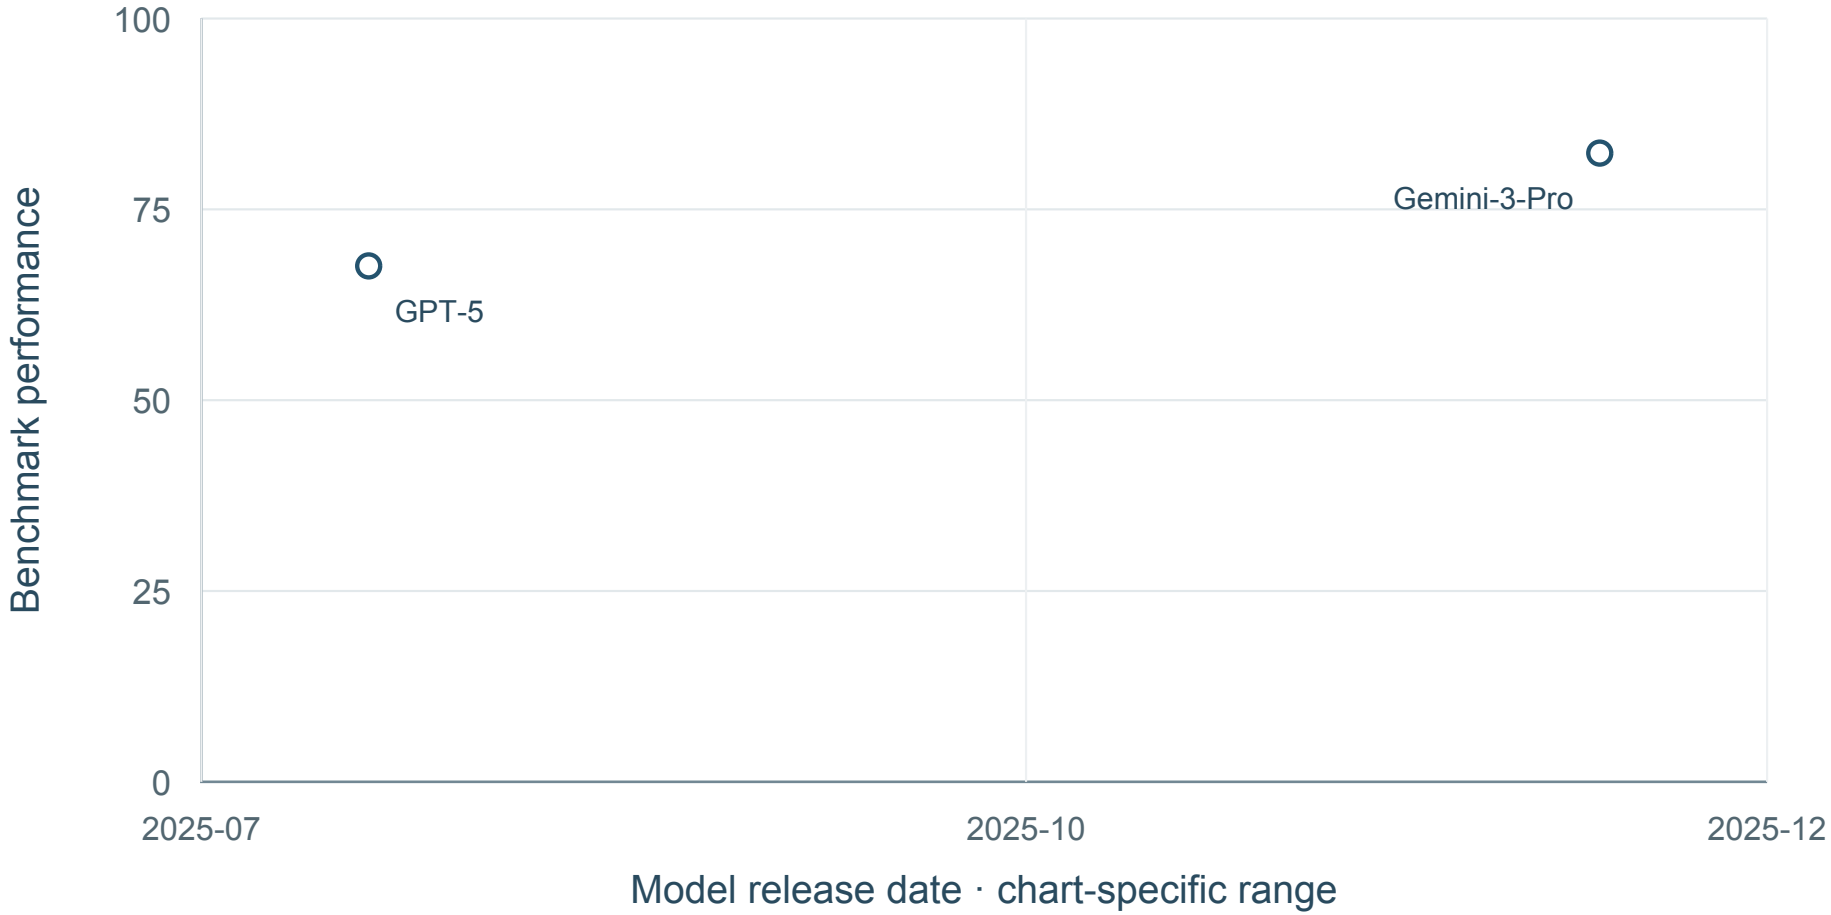

2 shown · 13 undated · 0 definition-held · sources: S059


No mean curve: Fewer than five dated model configurations.

Result-source references: S059. Exact point locators and raw values: data/F069_UNIKIE_BENCH_values.csv.

Benchmark reference (APA): Ji, Y., Xu, Z., Liu, Z., Chen, Z., Zhang, Q., Yang, Z., Lin, J., Gu, Y., Yu, G., & Sun, M. (2026). UNIKIE-BENCH: Benchmarking large multimodal models for key information extraction in visual documents. arXiv. https://arxiv.org/abs/2602.07038

UNIKIE-BENCH: Average KIE score

Open-category track; original Table 5

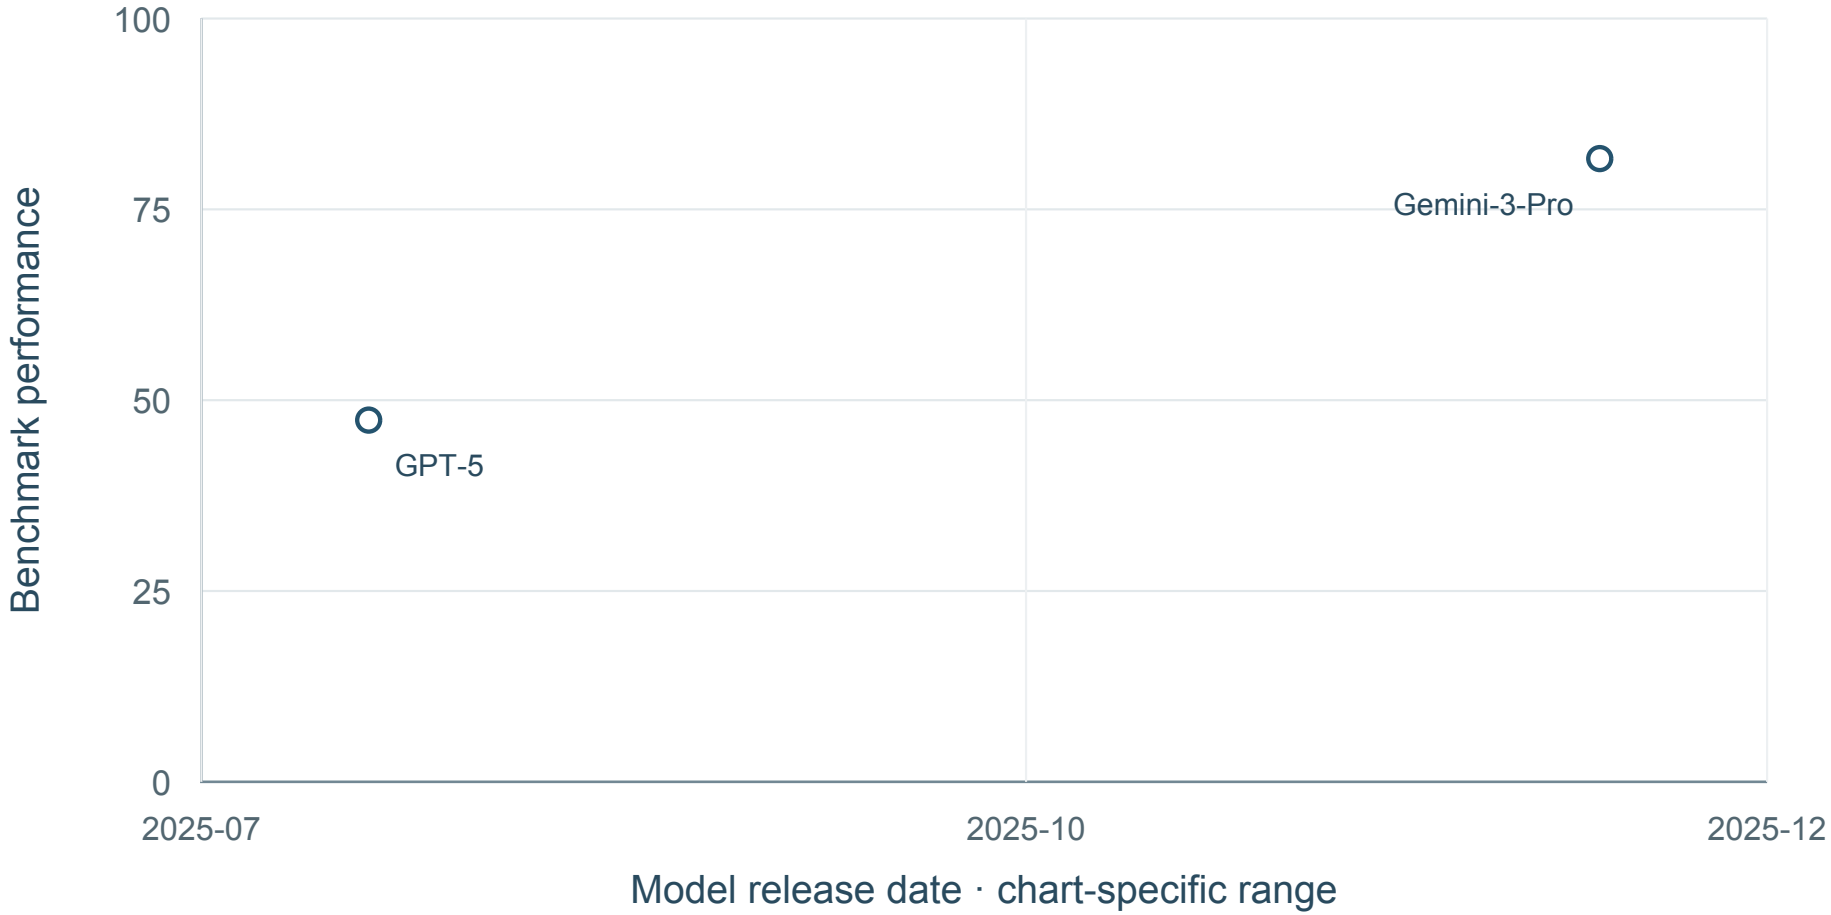

2 shown · 13 undated · 0 definition-held · sources: S059

No mean curve: Fewer than five dated model configurations.

Result-source references: S059. Exact point locators and raw values: data/F069_UNIKIE_BENCH_values.csv.

Benchmark reference (APA): Ji, Y., Xu, Z., Liu, Z., Chen, Z., Zhang, Q., Yang, Z., Lin, J., Gu, Y., Yu, G., & Sun, M. (2026). UNIKIE-BENCH: Benchmarking large multimodal models for key information extraction in visual documents. arXiv. https://arxiv.org/abs/2602.07038

F073 TableBench

Fact checking, numerical reasoning, data analysis and visualization over tables

336 source values; 4 new; 13 separate conditions; 40 visible time points; 0 definition-held values; 4 visible mean curves.

Benchmark references (APA)

Wu, X., Yang, J., Chai, L., Zhang, G., Liu, J., Du, X., Liang, D., Shu, D., Cheng, X., Sun, T., Niu, G., Li, T., & Li, Z. (2025). TableBench: A comprehensive and complex benchmark for table question answering. Proceedings of the AAAI Conference on Artificial Intelligence. https://arxiv.org/abs/2408.09174

Workflow and article scope

Challenges: A; C; D

Bind values to the correct unit; Coordinate retrieval, tools and intermediate steps; Transform and calculate values

886 test cases; financial/business-style tables differ from psychological reports.

Manuscript anchors: Wrong-subgroup example, manuscript paragraph 29; Lu and Wang, Challenge D; manuscript paragraphs 9, 15–18 and 31; Lu and Wang, Challenge C; manuscript paragraphs 15, 17–18 and 33

Result-source references: S017; MC045. Full references appear in the final bibliography.

Complete condition inventory

01. Overall score | Corrected/refined April 2025 release; agent track; Overall
47 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S017.

02. Fact checking score | Corrected/refined April 2025 release; agent track; Fact checking
46 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S017.

03. Numerical reasoning score | Corrected/refined April 2025 release; agent track; Numerical reasoning
46 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S017.

04. Data analysis score | Corrected/refined April 2025 release; agent track; Data analysis
46 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S017.

05. Visualization score | Corrected/refined April 2025 release; agent track; Visualization
46 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S017.

06. Overall score | Corrected/refined April 2025 release; DP
32 values; 11 time points; visible mean curve. Sources: S017.

07. Overall score | Corrected/refined April 2025 release; TCoT
23 values; 8 time points; visible mean curve. Sources: S017.

08. Overall score | Corrected/refined April 2025 release; SCoT
23 values; 8 time points; visible mean curve. Sources: S017.

09. Overall score | Corrected/refined April 2025 release; PoT
23 values; 8 time points; visible mean curve. Sources: S017.

10. Reported overall TableBench score | Mode not specified; MC045 M2; TableBench; frozen TableGPT2 comparison (revision unpinned); DP
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC045.


11. Reported overall TableBench score | Mode not specified; MC045 M2; TableBench; frozen TableGPT2 comparison (revision unpinned); TCoT
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC045.

12. Reported overall TableBench score | Mode not specified; MC045 M2; TableBench; frozen TableGPT2 comparison (revision unpinned); SCoT
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC045.

13. Reported overall TableBench score | Mode not specified; MC045 M2; TableBench; frozen TableGPT2 comparison (revision unpinned); PoT@1
1 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: MC045.

TableBench: Overall score

Corrected/refined April 2025 release; agent track; Overall

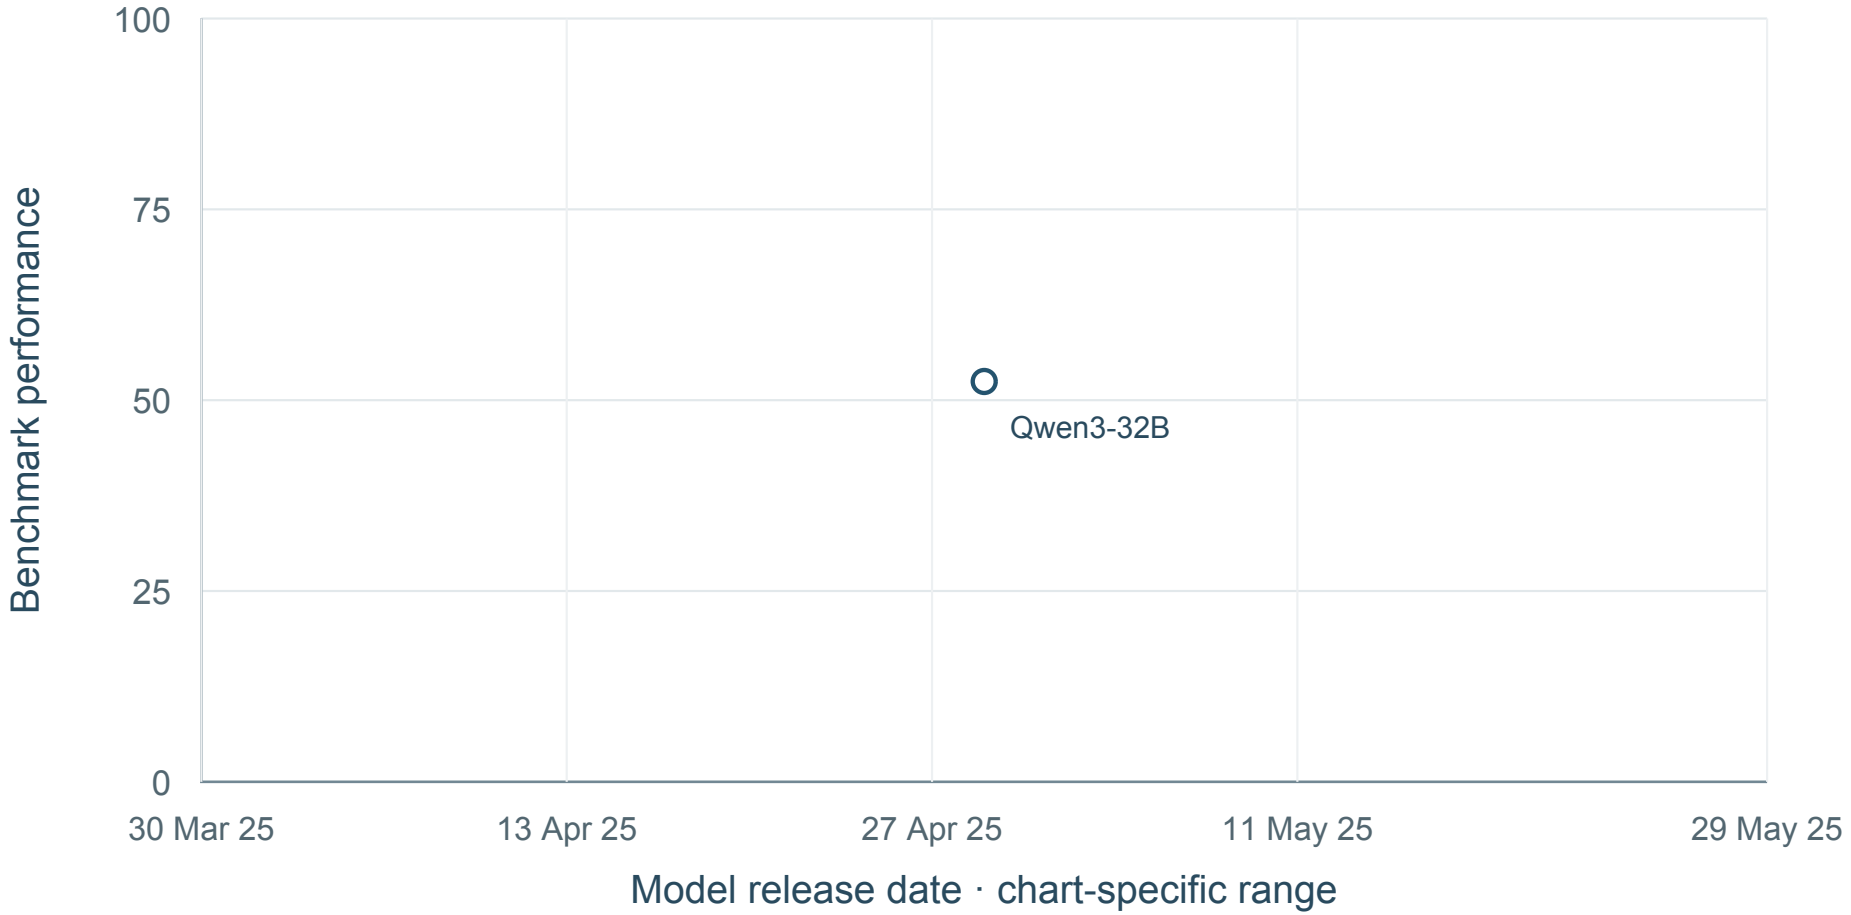

1 shown · 46 undated · 0 definition-held · sources: S017


No mean curve: Fewer than five dated model configurations.

Result-source references: S017. Exact point locators and raw values: data/F073_TableBench_values.csv.

Benchmark reference (APA): Wu, X., Yang, J., Chai, L., Zhang, G., Liu, J., Du, X., Liang, D., Shu, D., Cheng, X., Sun, T., Niu, G., Li, T., & Li, Z. (2025). TableBench: A comprehensive and complex benchmark for table question answering. Proceedings of the AAAI Conference on Artificial Intelligence. https://arxiv.org/abs/2408.09174

TableBench: Fact checking score

Corrected/refined April 2025 release; agent track; Fact checking

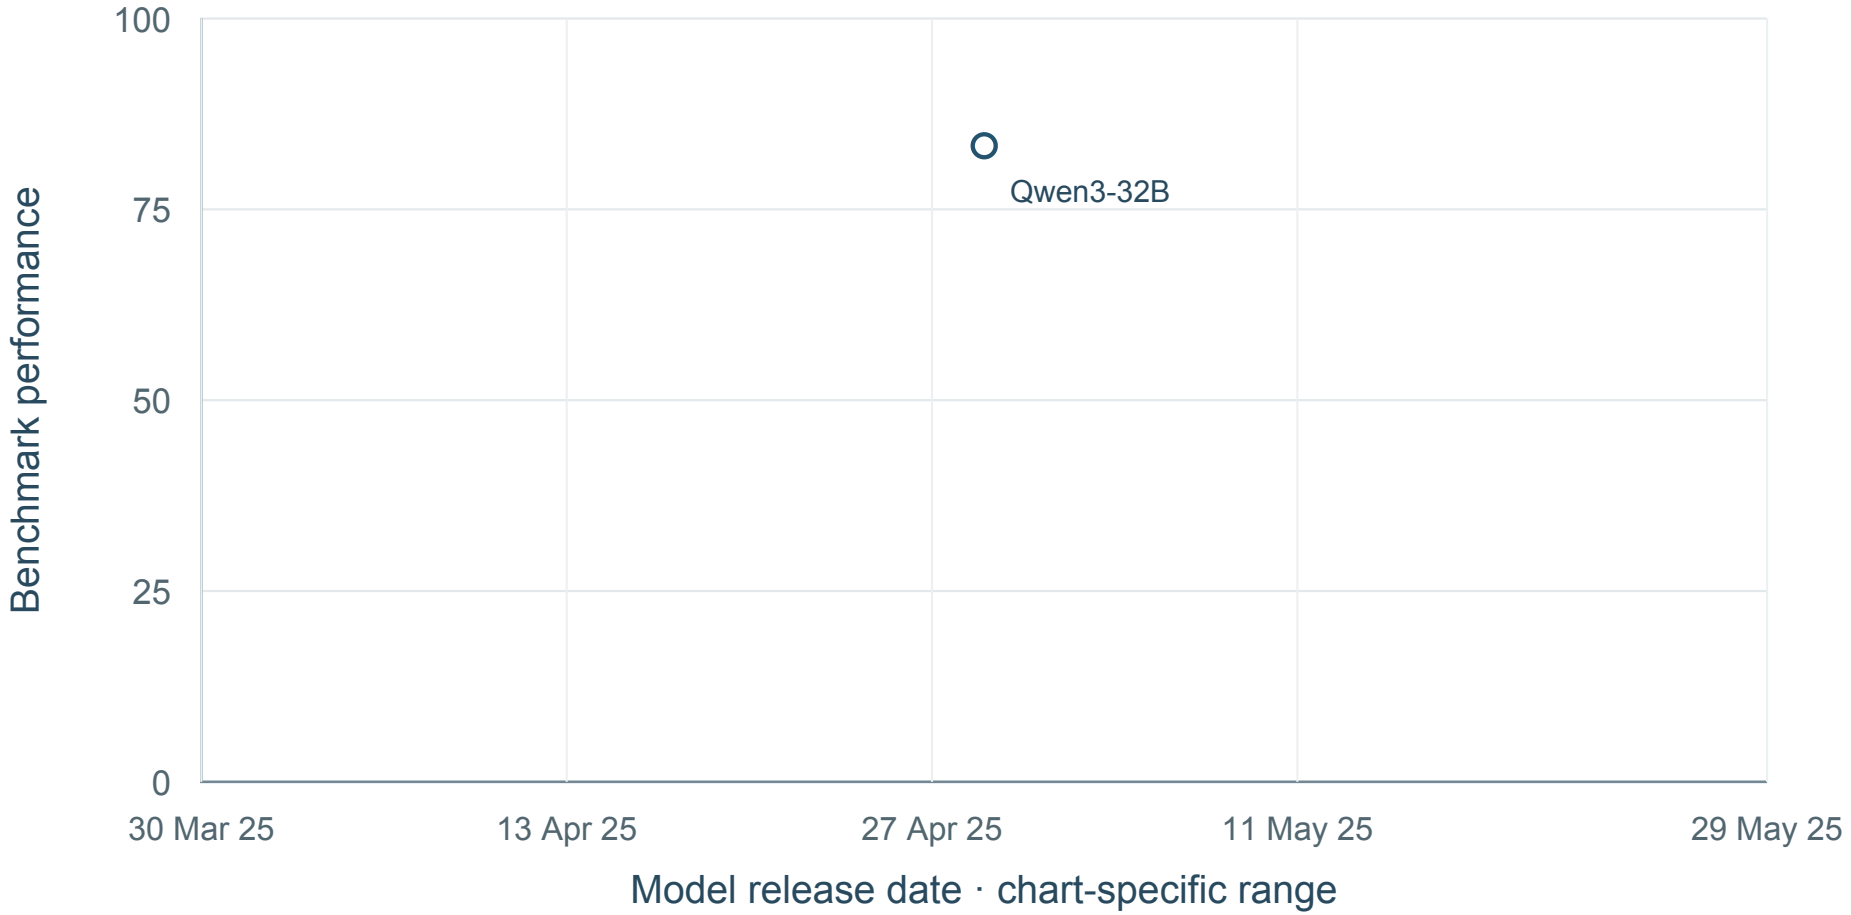

1 shown · 45 undated · 0 definition-held · sources: S017


No mean curve: Fewer than five dated model configurations.

Result-source references: S017. Exact point locators and raw values: data/F073_TableBench_values.csv.

Benchmark reference (APA): Wu, X., Yang, J., Chai, L., Zhang, G., Liu, J., Du, X., Liang, D., Shu, D., Cheng, X., Sun, T., Niu, G., Li, T., & Li, Z. (2025). TableBench: A comprehensive and complex benchmark for table question answering. Proceedings of the AAAI Conference on Artificial Intelligence. https://arxiv.org/abs/2408.09174

TableBench: Numerical reasoning score

Corrected/refined April 2025 release; agent track; Numerical reasoning

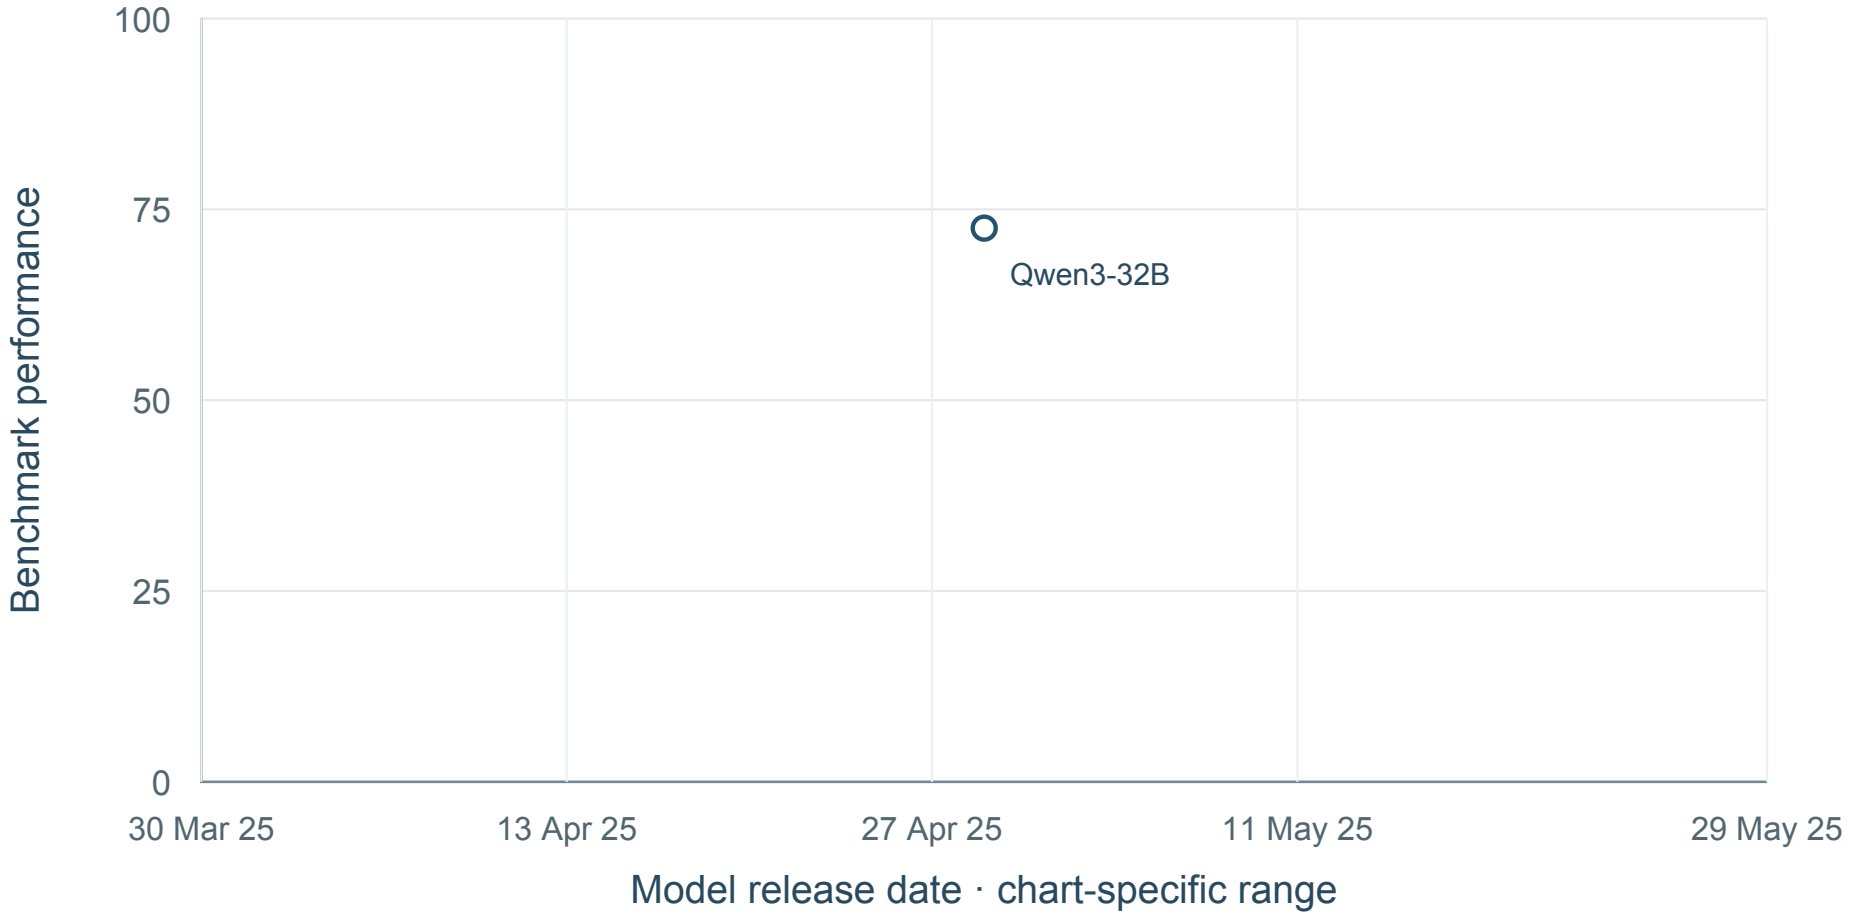

1 shown · 45 undated · 0 definition-held · sources: S017


No mean curve: Fewer than five dated model configurations.

Result-source references: S017. Exact point locators and raw values: data/F073_TableBench_values.csv.

Benchmark reference (APA): Wu, X., Yang, J., Chai, L., Zhang, G., Liu, J., Du, X., Liang, D., Shu, D., Cheng, X., Sun, T., Niu, G., Li, T., & Li, Z. (2025). TableBench: A comprehensive and complex benchmark for table question answering. Proceedings of the AAAI Conference on Artificial Intelligence. https://arxiv.org/abs/2408.09174

TableBench: Data analysis score

Corrected/refined April 2025 release; agent track; Data analysis

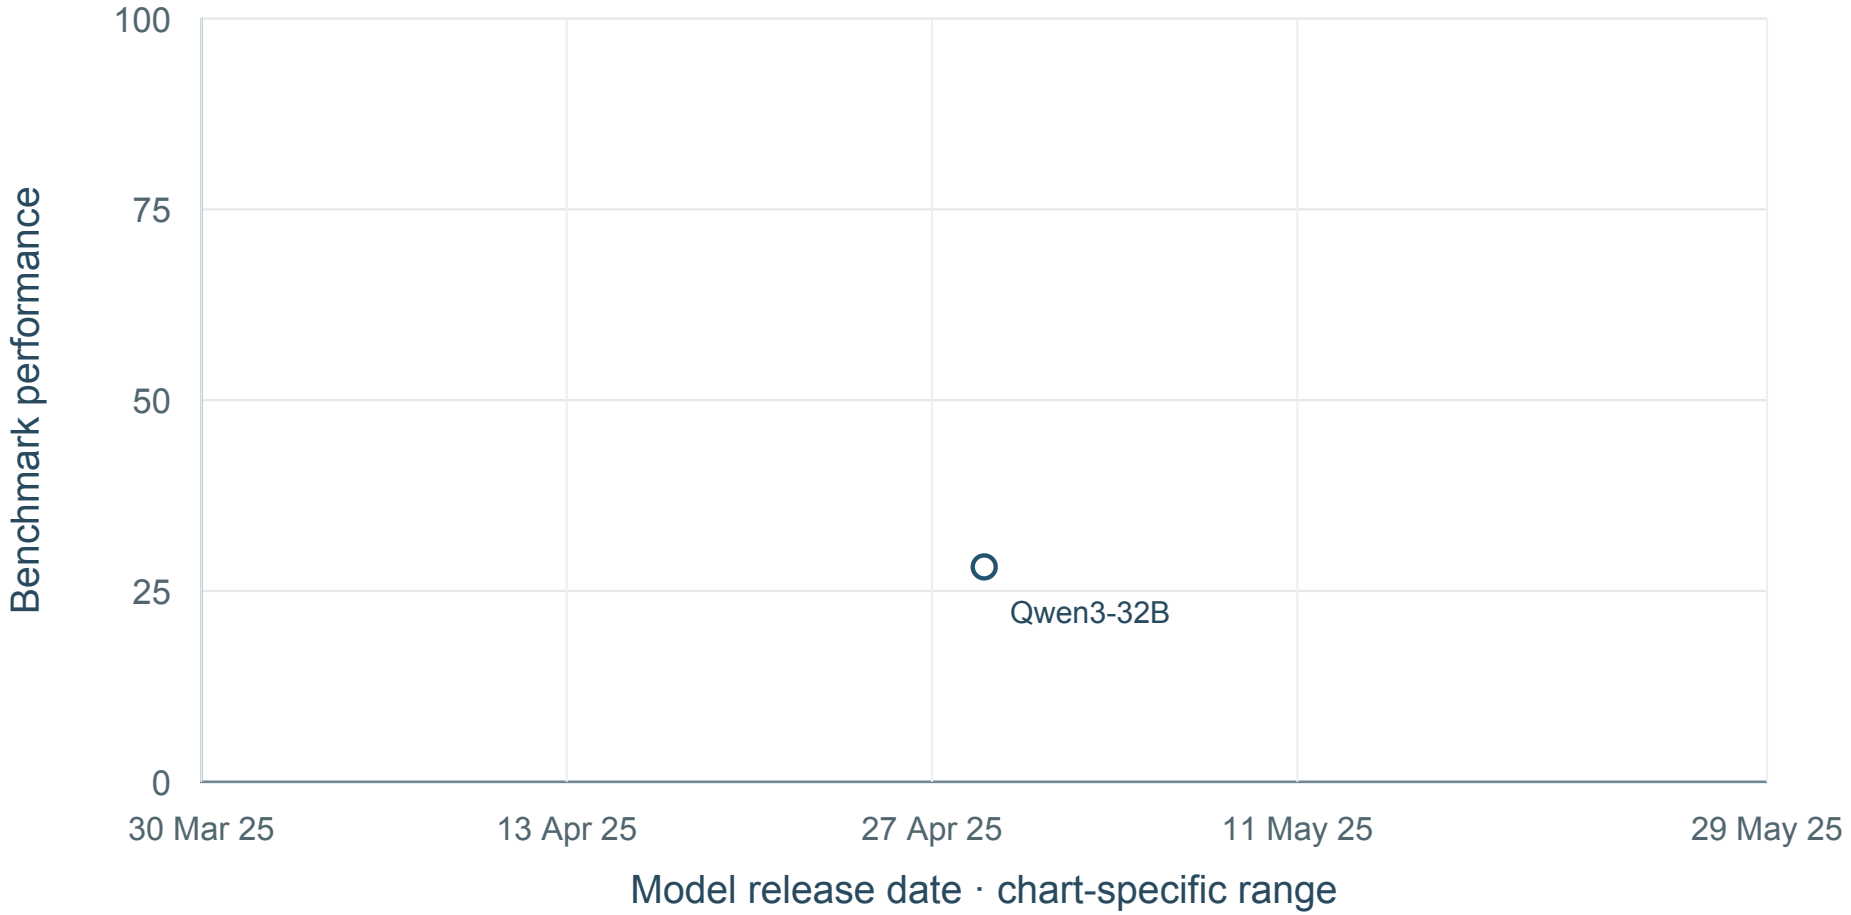

1 shown · 45 undated · 0 definition-held · sources: S017


No mean curve: Fewer than five dated model configurations.

Result-source references: S017. Exact point locators and raw values: data/F073_TableBench_values.csv.

Benchmark reference (APA): Wu, X., Yang, J., Chai, L., Zhang, G., Liu, J., Du, X., Liang, D., Shu, D., Cheng, X., Sun, T., Niu, G., Li, T., & Li, Z. (2025). TableBench: A comprehensive and complex benchmark for table question answering. Proceedings of the AAAI Conference on Artificial Intelligence. https://arxiv.org/abs/2408.09174

TableBench: Visualization score

Corrected/refined April 2025 release; agent track; Visualization

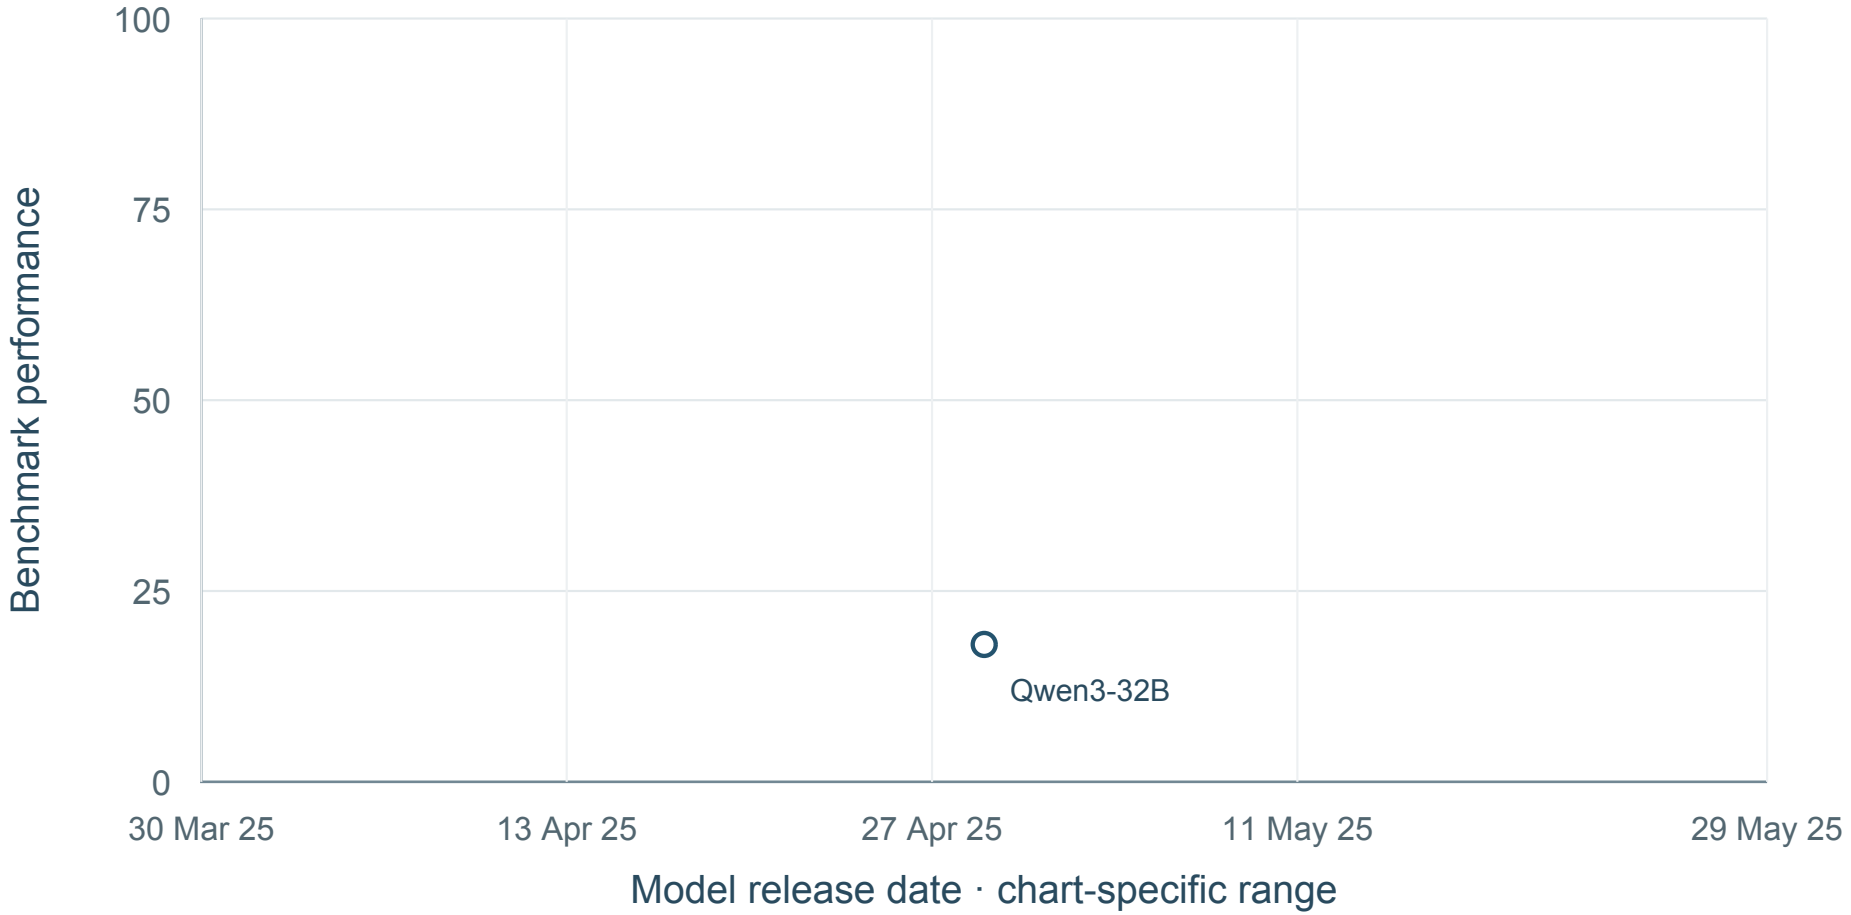

1 shown · 45 undated · 0 definition-held · sources: S017


No mean curve: Fewer than five dated model configurations.

Result-source references: S017. Exact point locators and raw values: data/F073_TableBench_values.csv.

Benchmark reference (APA): Wu, X., Yang, J., Chai, L., Zhang, G., Liu, J., Du, X., Liang, D., Shu, D., Cheng, X., Sun, T., Niu, G., Li, T., & Li, Z. (2025). TableBench: A comprehensive and complex benchmark for table question answering. Proceedings of the AAAI Conference on Artificial Intelligence. https://arxiv.org/abs/2408.09174

TableBench: Overall score

Corrected/refined April 2025 release; DP

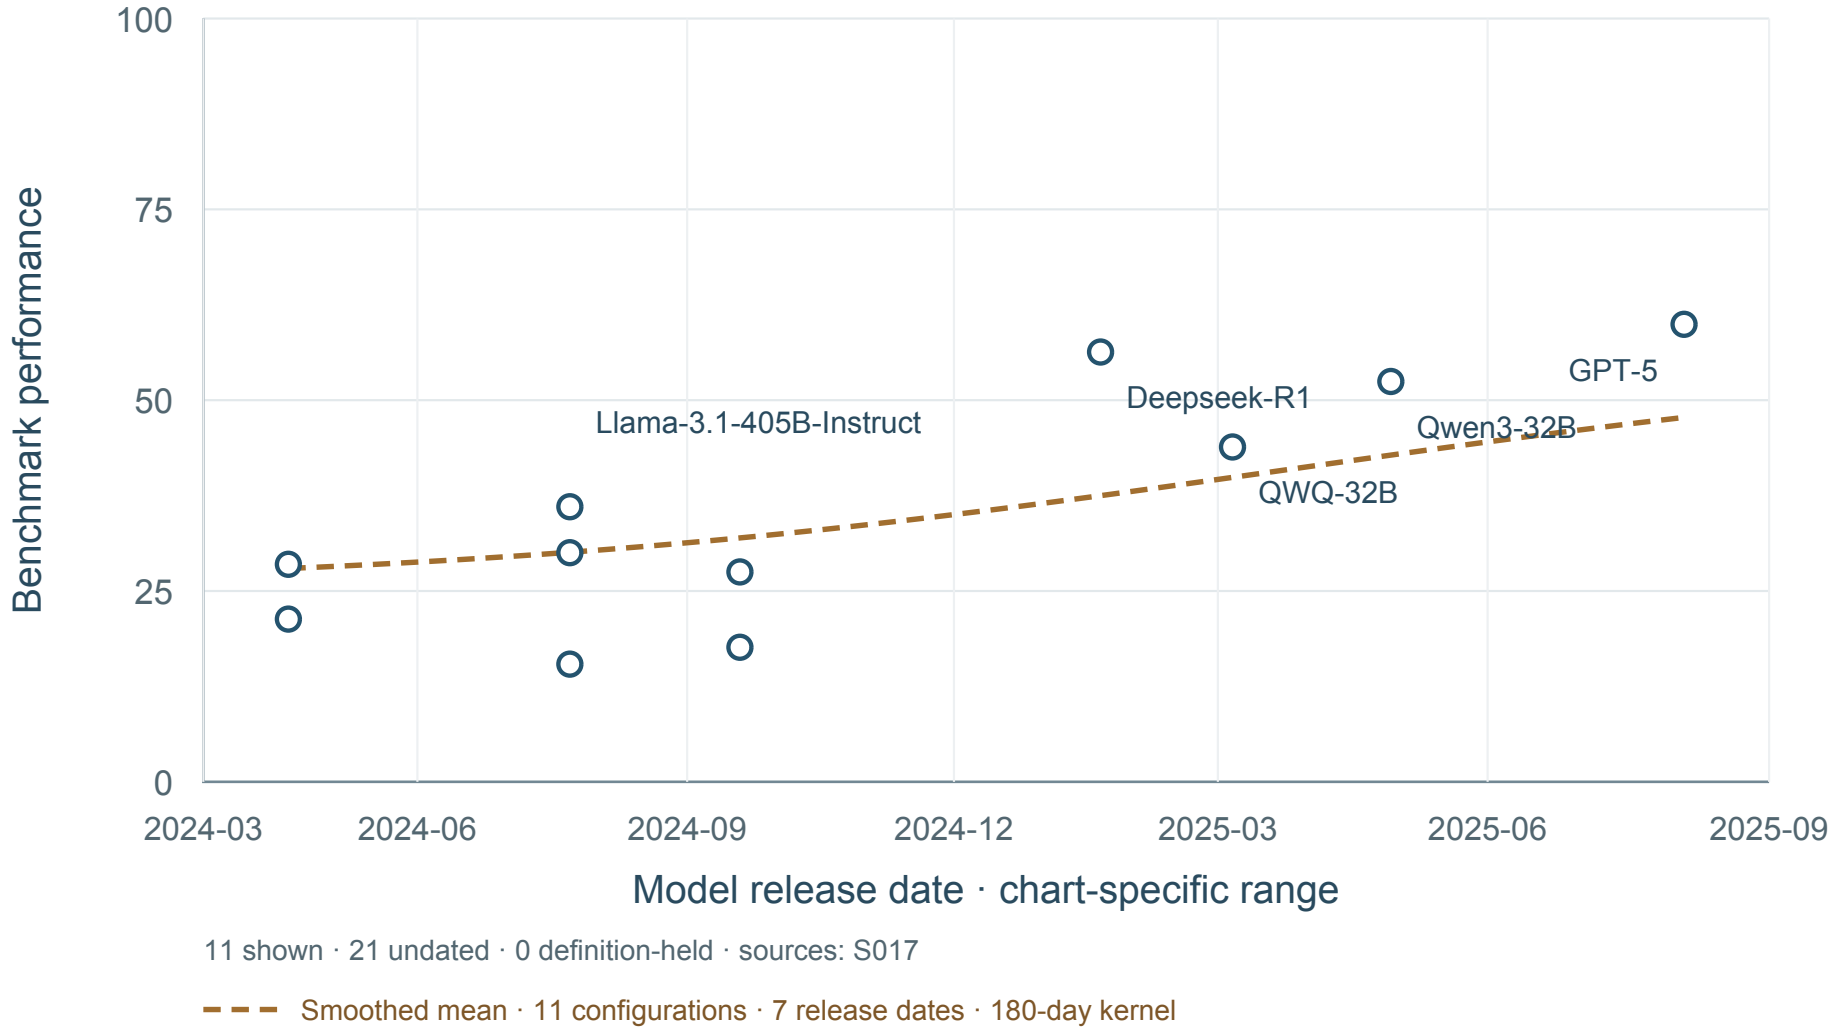

11 shown · 21 undated · 0 definition-held · sources: S017


Smoothed mean · 11 configurations · 7 release dates · 180-day kernel

Result-source references: S017. Exact point locators and raw values: data/F073_TableBench_values.csv.

Benchmark reference (APA): Wu, X., Yang, J., Chai, L., Zhang, G., Liu, J., Du, X., Liang, D., Shu, D., Cheng, X., Sun, T., Niu, G., Li, T., & Li, Z. (2025). TableBench: A comprehensive and complex benchmark for table question answering. Proceedings of the AAAI Conference on Artificial Intelligence. https://arxiv.org/abs/2408.09174

TableBench: Overall score

Corrected/refined April 2025 release; TCoT

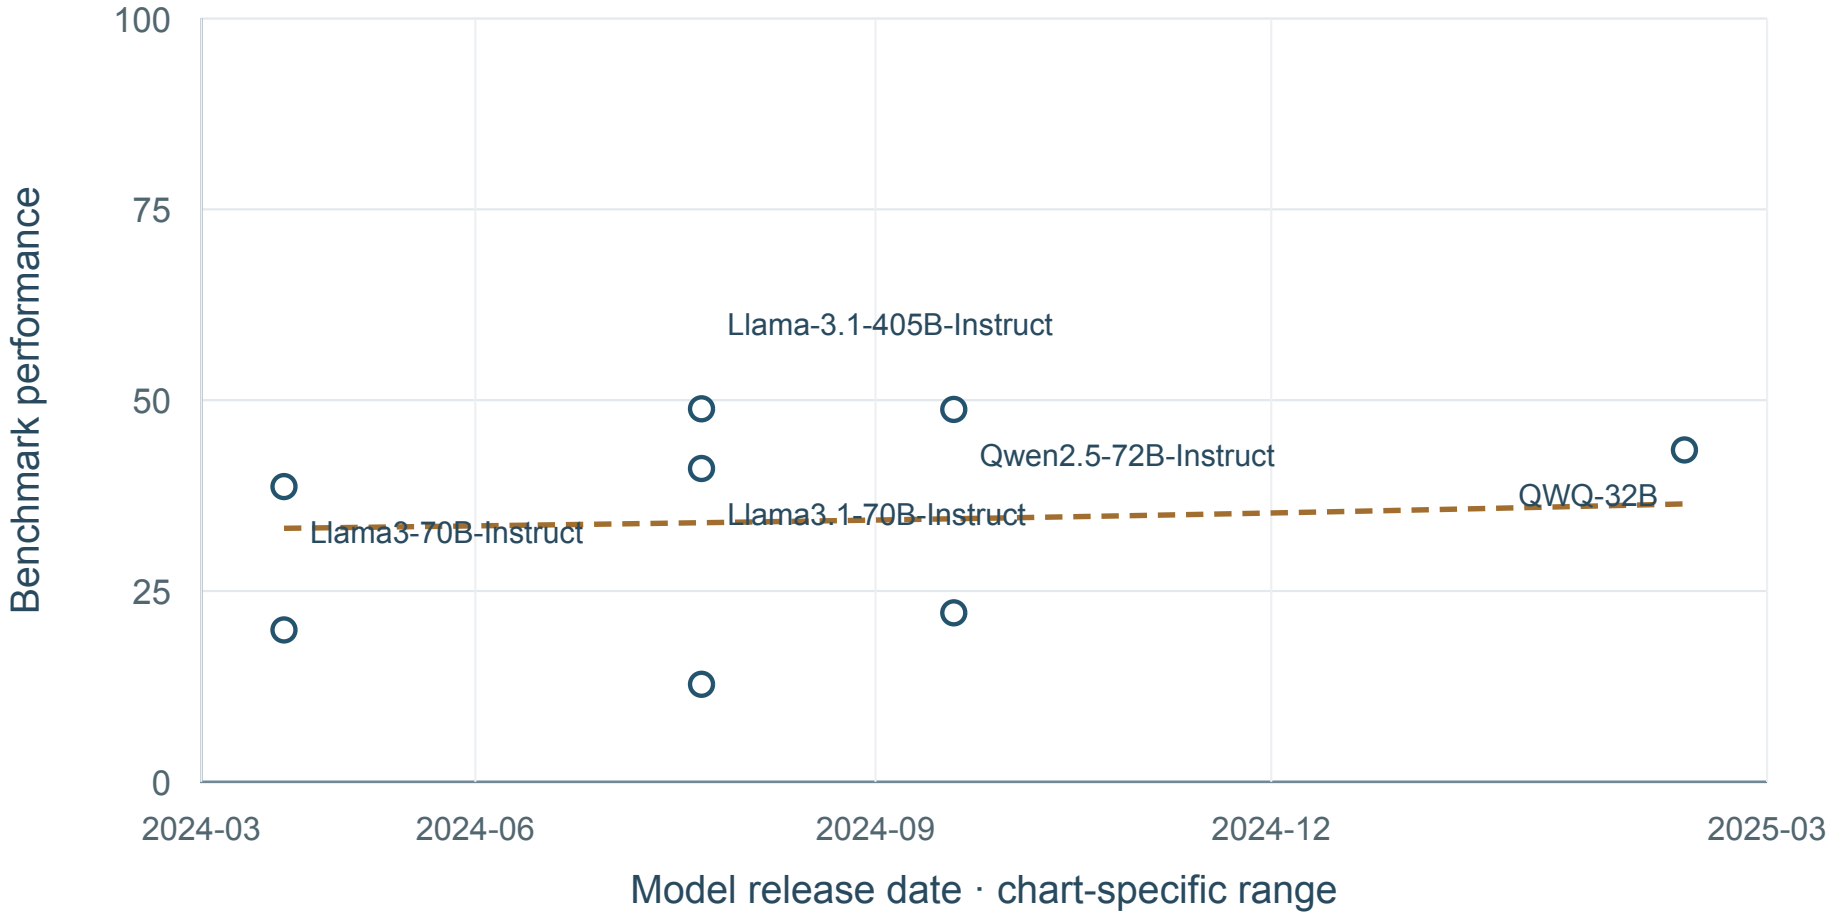

8 shown · 15 undated · 0 definition-held · sources: S017


Smoothed mean · 8 configurations · 4 release dates · 180-day kernel

Result-source references: S017. Exact point locators and raw values: data/F073_TableBench_values.csv.

Benchmark reference (APA): Wu, X., Yang, J., Chai, L., Zhang, G., Liu, J., Du, X., Liang, D., Shu, D., Cheng, X., Sun, T., Niu, G., Li, T., & Li, Z. (2025). TableBench: A comprehensive and complex benchmark for table question answering. Proceedings of the AAAI Conference on Artificial Intelligence. https://arxiv.org/abs/2408.09174

TableBench: Overall score

Corrected/refined April 2025 release; SCoT

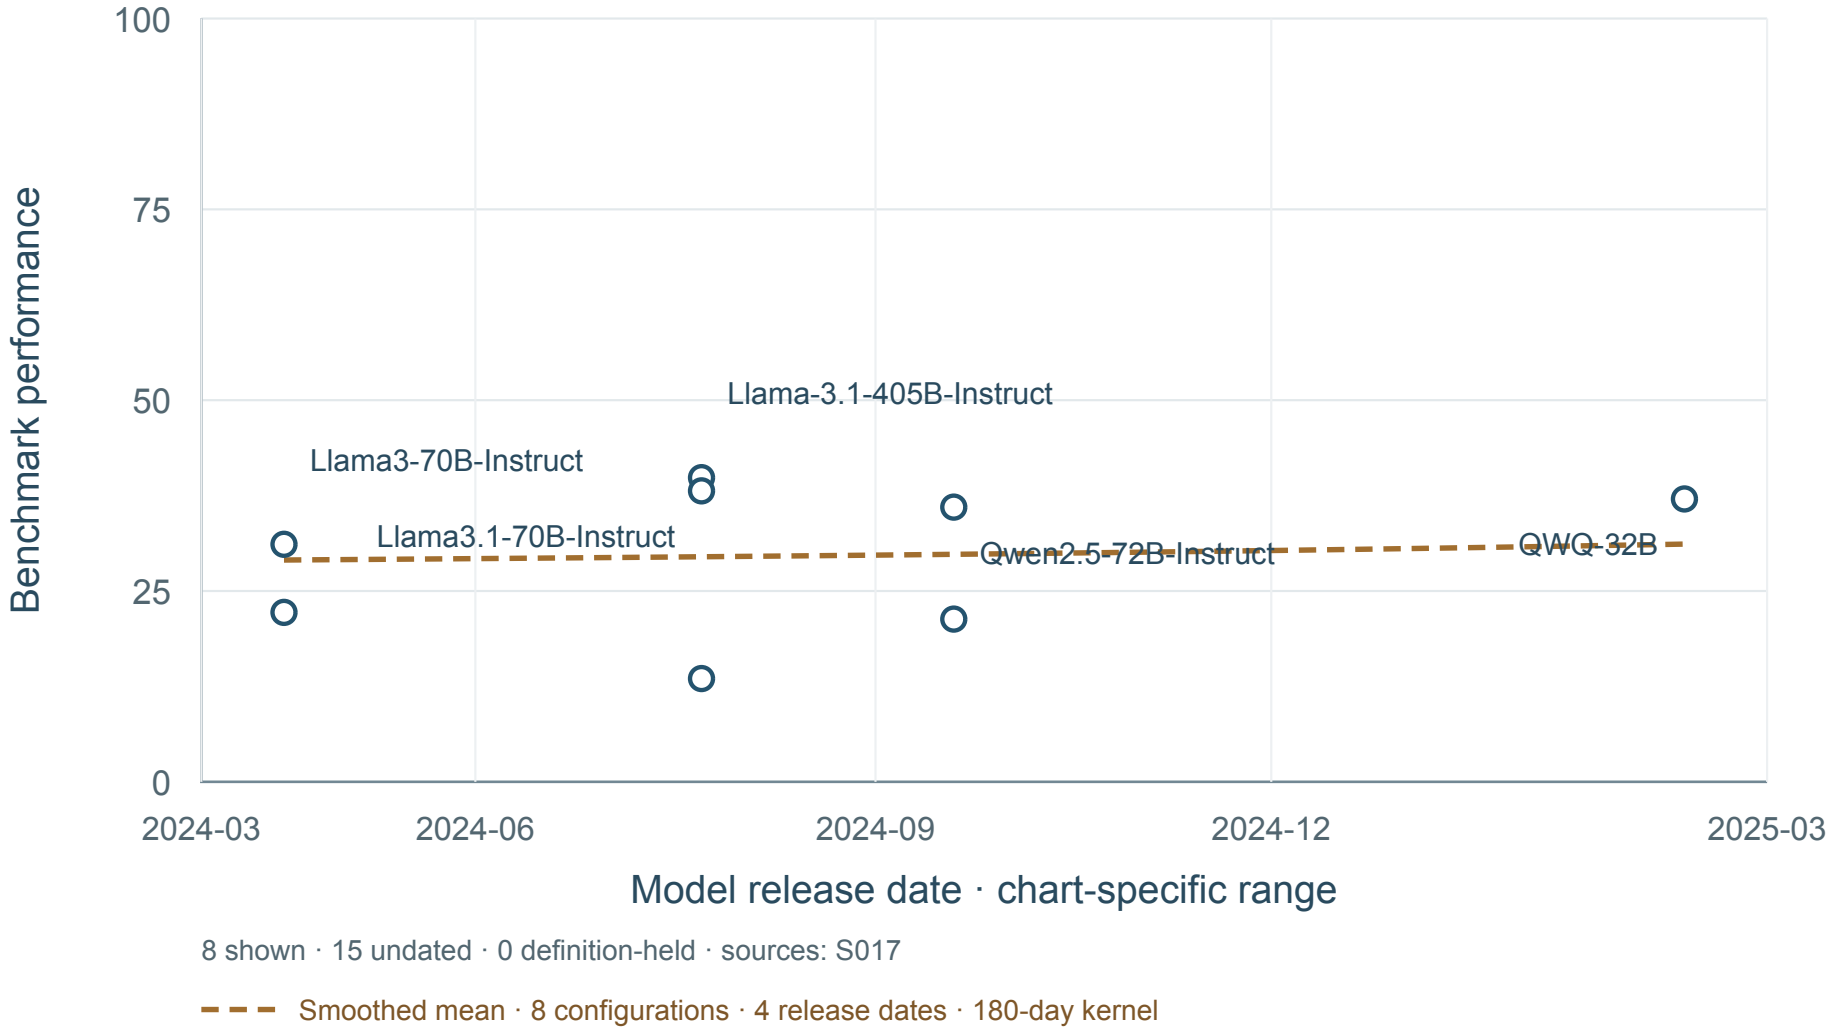

8 shown · 15 undated · 0 definition-held · sources: S017


Smoothed mean · 8 configurations · 4 release dates · 180-day kernel

Result-source references: S017. Exact point locators and raw values: data/F073_TableBench_values.csv.

Benchmark reference (APA): Wu, X., Yang, J., Chai, L., Zhang, G., Liu, J., Du, X., Liang, D., Shu, D., Cheng, X., Sun, T., Niu, G., Li, T., & Li, Z. (2025). TableBench: A comprehensive and complex benchmark for table question answering. Proceedings of the AAAI Conference on Artificial Intelligence. https://arxiv.org/abs/2408.09174

TableBench: Overall score

Corrected/refined April 2025 release; PoT

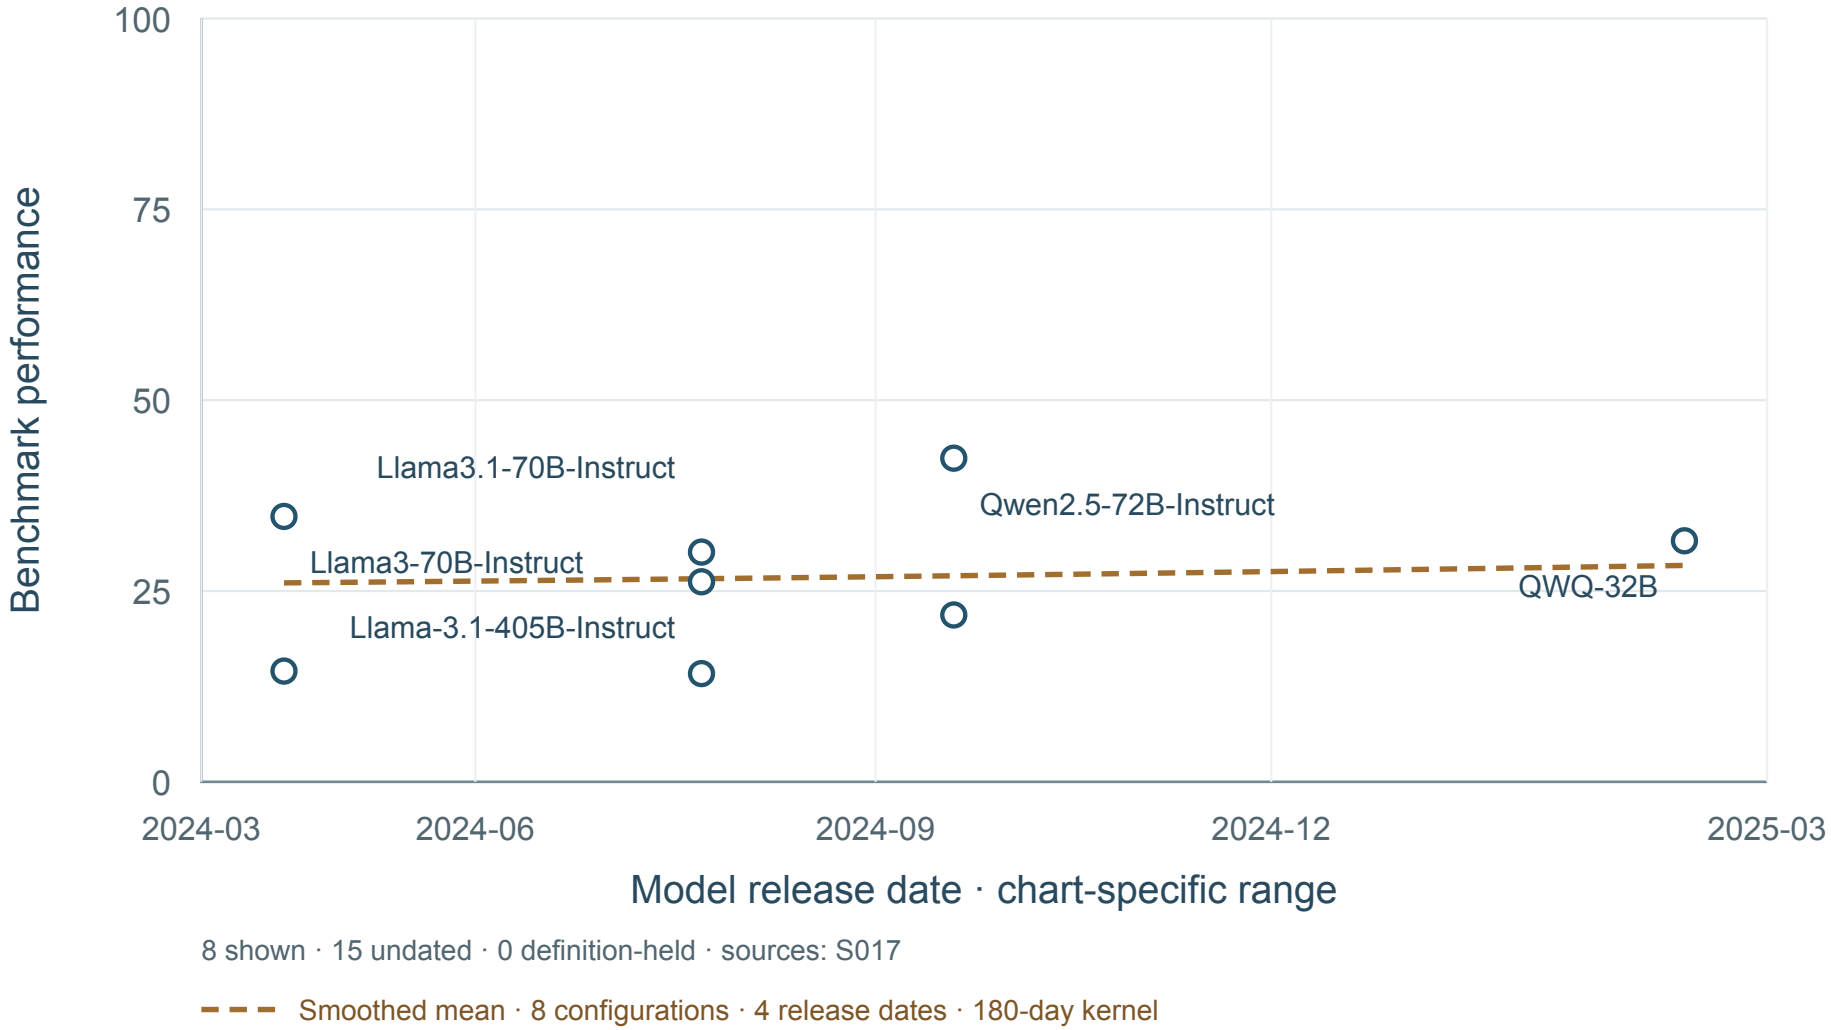

8 shown · 15 undated · 0 definition-held · sources: S017

Smoothed mean · 8 configurations · 4 release dates · 180-day kernel

Result-source references: S017. Exact point locators and raw values: data/F073_TableBench_values.csv.

Benchmark reference (APA): Wu, X., Yang, J., Chai, L., Zhang, G., Liu, J., Du, X., Liang, D., Shu, D., Cheng, X., Sun, T., Niu, G., Li, T., & Li, Z. (2025). TableBench: A comprehensive and complex benchmark for table question answering. Proceedings of the AAAI Conference on Artificial Intelligence. https://arxiv.org/abs/2408.09174

F074 SUC

Structured table understanding, lookup and manipulation

10 source values; 0 new; 2 separate conditions; 0 visible time points; 0 definition-held values; 0 visible mean curves.

Benchmark references (APA)

Sui, Y., Zhou, M., Zhou, M., Han, S., & Zhang, D. (2023). Table meets LLM: Can large language models understand structured table data? A benchmark and empirical study. arXiv. https://arxiv.org/abs/2305.13062

Workflow and article scope

Challenges: A

Define variables and coding rules; Bind values to the correct unit; Interpret evidence and apply coding rules

Tests explicitly discussed table-understanding limitations; not full review extraction.

Manuscript anchors: Preparation and reporting, manuscript paragraph 33; Wrong-subgroup example, manuscript paragraph 29; Lu and Wang, Challenge E; manuscript paragraphs 20 and 31

Result-source references: S064. Full references appear in the final bibliography.


Complete condition inventory

01. Cell lookup accuracy | GPT-4; serialization format as named
5 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S064.

02. Row retrieval accuracy | GPT-4; serialization format as named
5 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S064.

SUC / Table Meets LLM: Cell lookup accuracy

GPT-4; serialization format as named

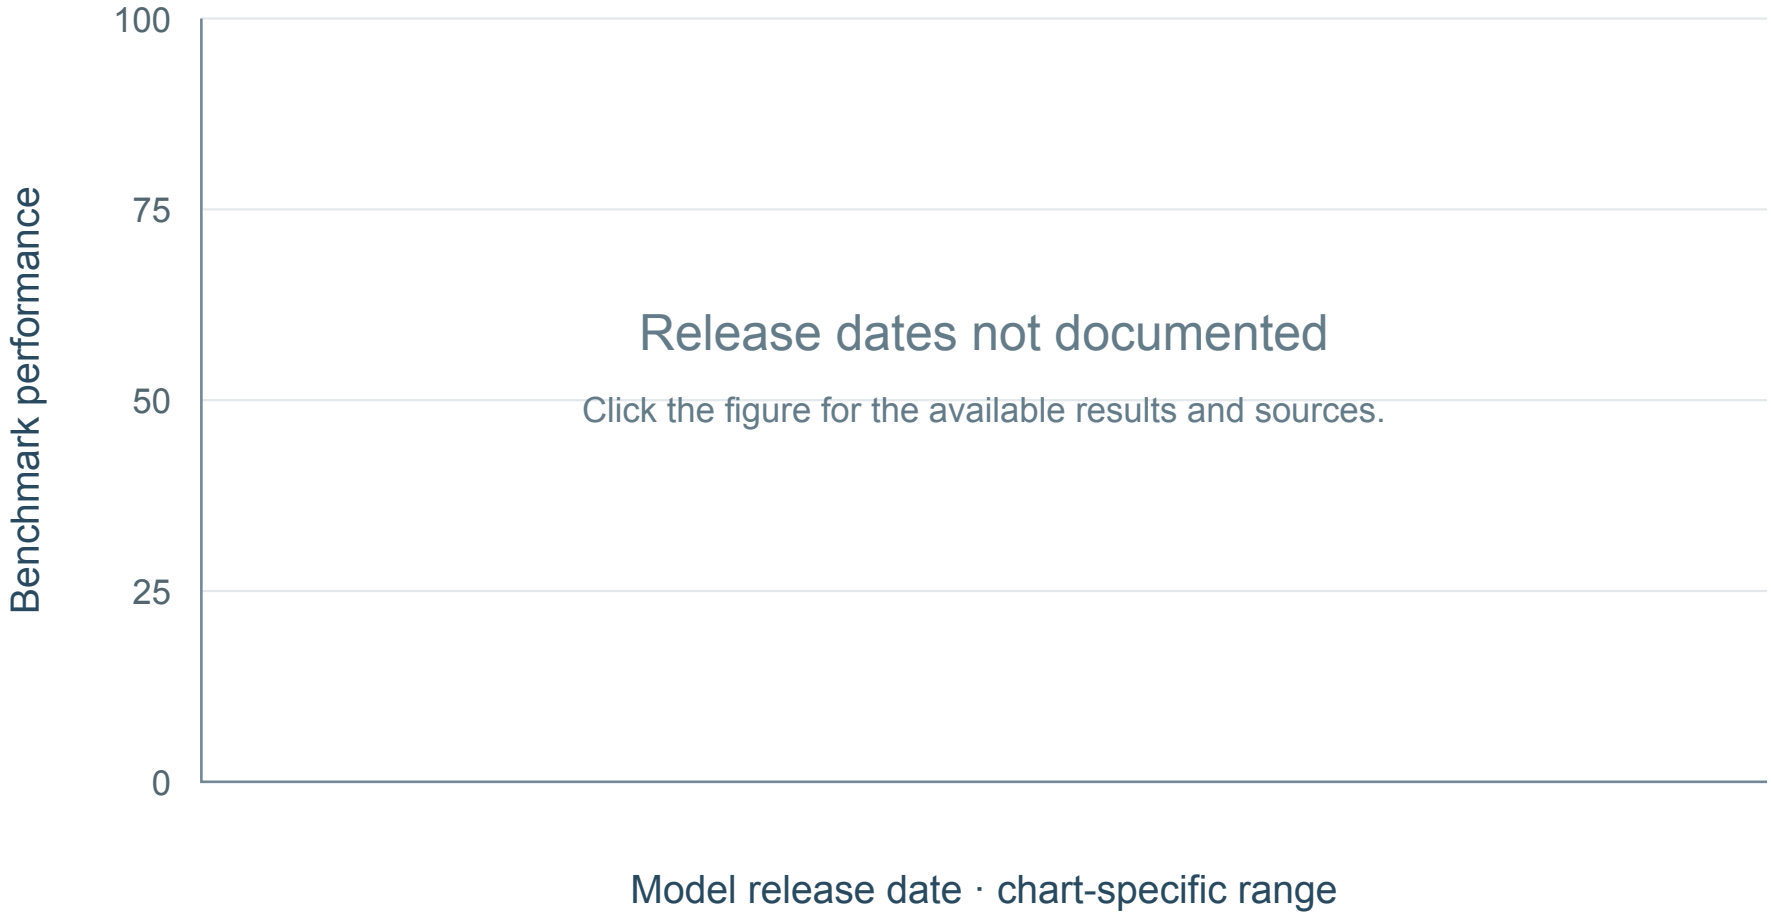

0 shown · 5 undated · 0 definition-held · sources: S064

No mean curve: Fewer than five dated model configurations.

Result-source references: S064. Exact point locators and raw values: data/F074_SUC_values.csv.

Benchmark reference (APA): Sui, Y., Zhou, M., Zhou, M., Han, S., & Zhang, D. (2023). Table meets LLM: Can large language models understand structured table data? A benchmark and empirical study. arXiv. https://arxiv.org/abs/2305.13062

F075 NUPA

Numerical understanding and processing across representations

12 source values; 0 new; 4 separate conditions; 12 visible time points; 0 definition-held values; 0 visible mean curves.

Benchmark references (APA)

Yang, H., Hu, Y., Kang, S., Lin, Z., & Zhang, M. (2024). Number cookbook: Number understanding of language models and how to improve it. arXiv. https://arxiv.org/abs/2411.03766

Workflow and article scope

Challenges: C

Transform and calculate values

Elementary number handling complements mathematics reasoning; not effect-size extraction.

Manuscript anchors: Lu and Wang, Challenge C; manuscript paragraphs 15, 17–18 and 33

Result-source references: S066. Full references appear in the final bibliography.

Complete condition inventory

01. Exact match | Integer addition; L difficulty; shot count in model label; 5-shot
3 values; 3 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S066.


02. Exact match | Integer addition; L difficulty; shot count in model label; No few-shot demonstrations
3 values; 3 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S066.

03. Exact match | Float maximum; L difficulty; shot count in model label; 5-shot
3 values; 3 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S066.

04. Exact match | Float maximum; L difficulty; shot count in model label; No few-shot demonstrations
3 values; 3 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S066.

Number Cookbook / NUPA: Exact match

Integer addition; L difficulty; shot count in model label; 5-shot

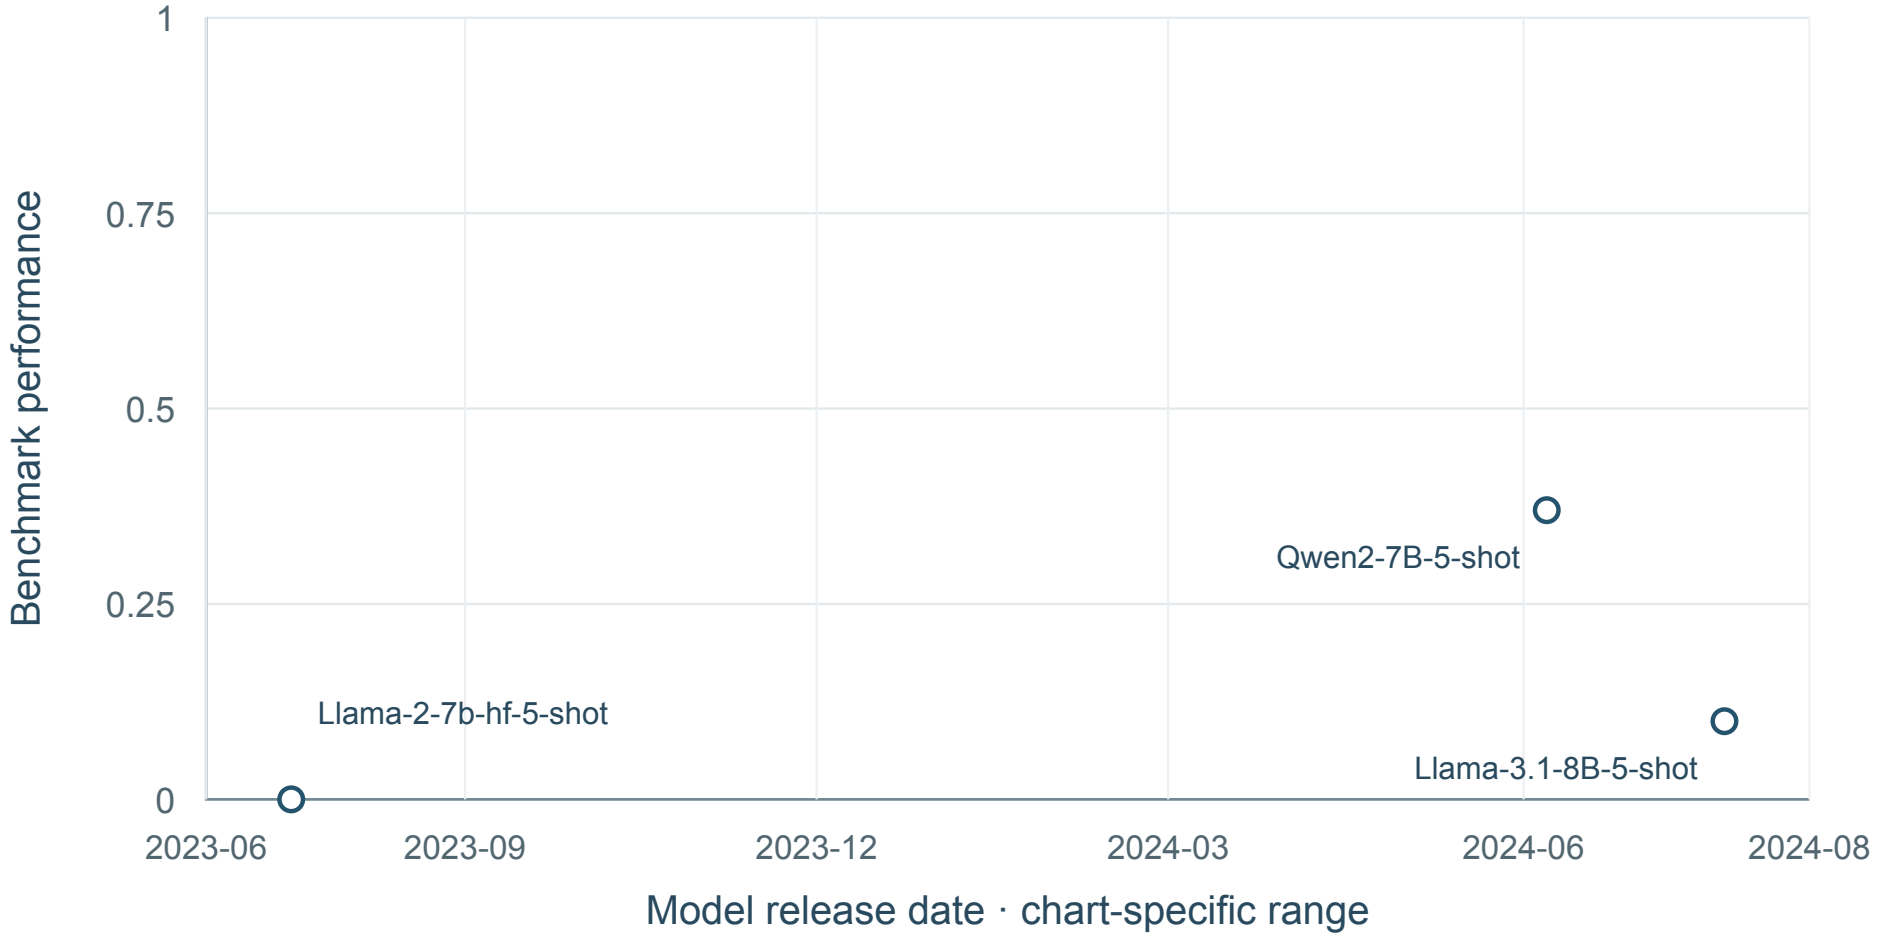

3 shown · 0 undated · 0 definition-held · sources: S066


No mean curve: Fewer than five dated model configurations.

Result-source references: S066. Exact point locators and raw values: data/F075_NUPA_values.csv.

Benchmark reference (APA): Yang, H., Hu, Y., Kang, S., Lin, Z., & Zhang, M. (2024). Number cookbook: Number understanding of language models and how to improve it. arXiv. https://arxiv.org/abs/2411.03766

Number Cookbook / NUPA: Exact match

Integer addition; L difficulty; shot count in model label; No few-shot demonstrations

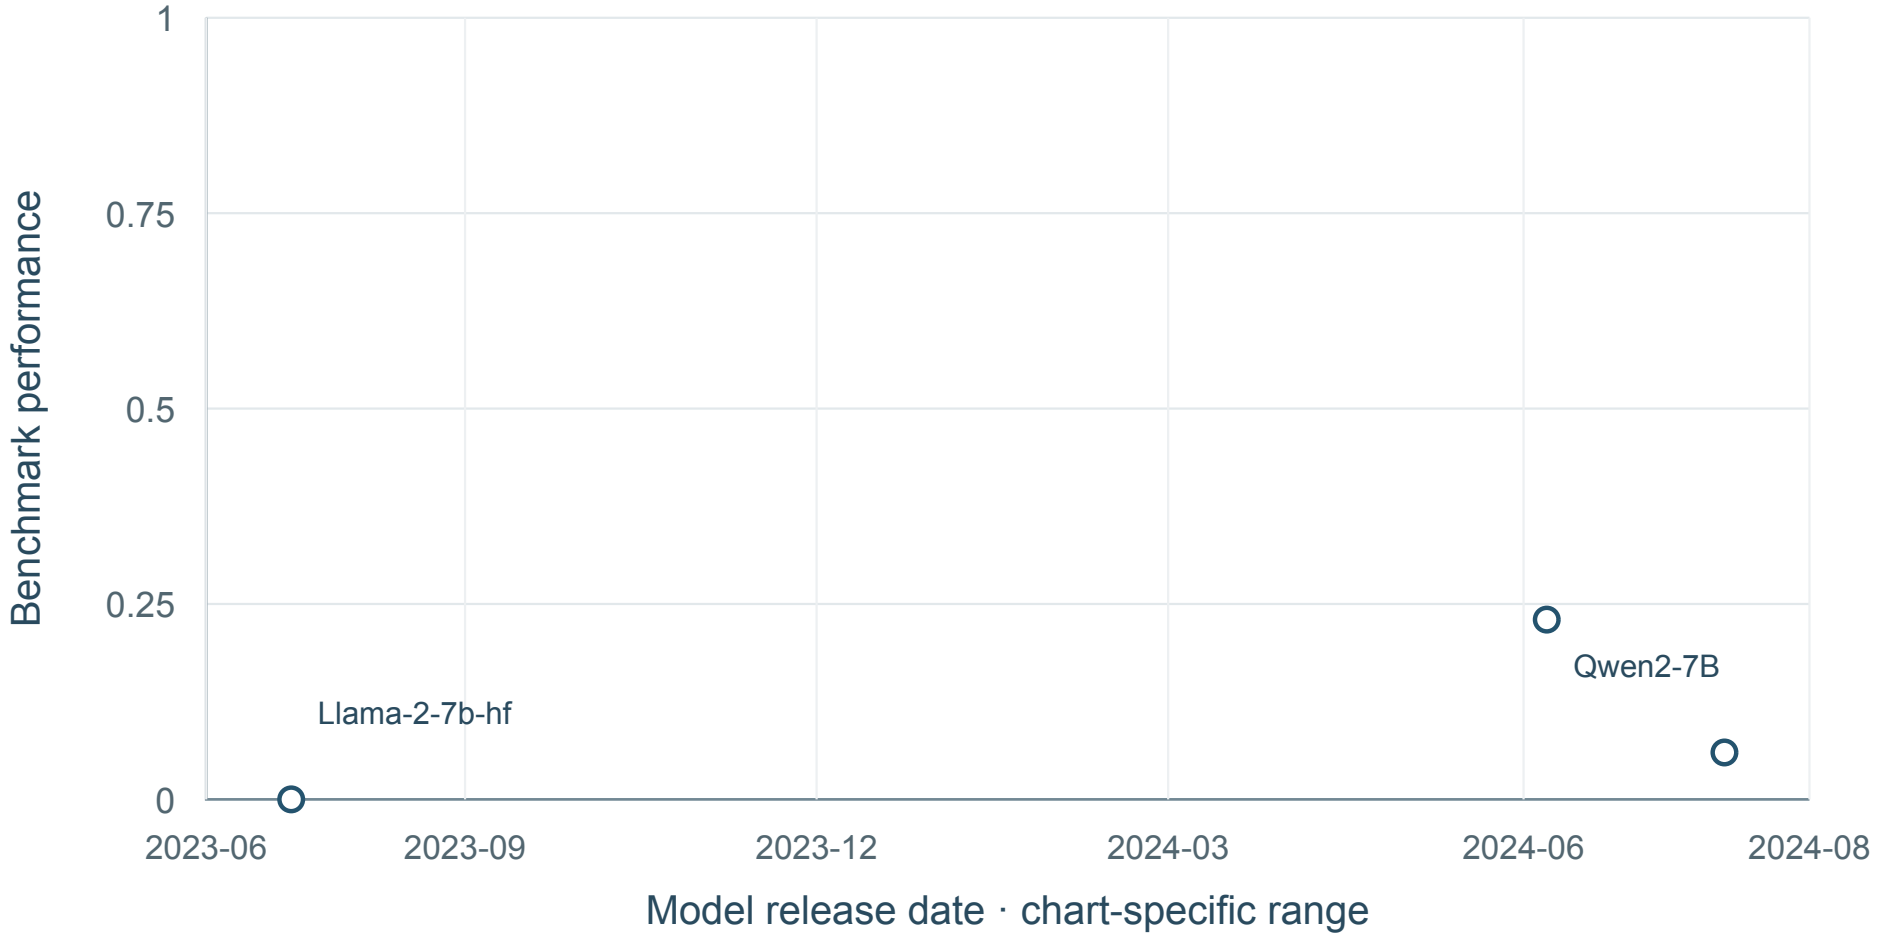

3 shown · 0 undated · 0 definition-held · sources: S066


No mean curve: Fewer than five dated model configurations.

Result-source references: S066. Exact point locators and raw values: data/F075_NUPA_values.csv.

Benchmark reference (APA): Yang, H., Hu, Y., Kang, S., Lin, Z., & Zhang, M. (2024). Number cookbook: Number understanding of language models and how to improve it. arXiv. https://arxiv.org/abs/2411.03766

Number Cookbook / NUPA: Exact match

Float maximum; L difficulty; shot count in model label; 5-shot

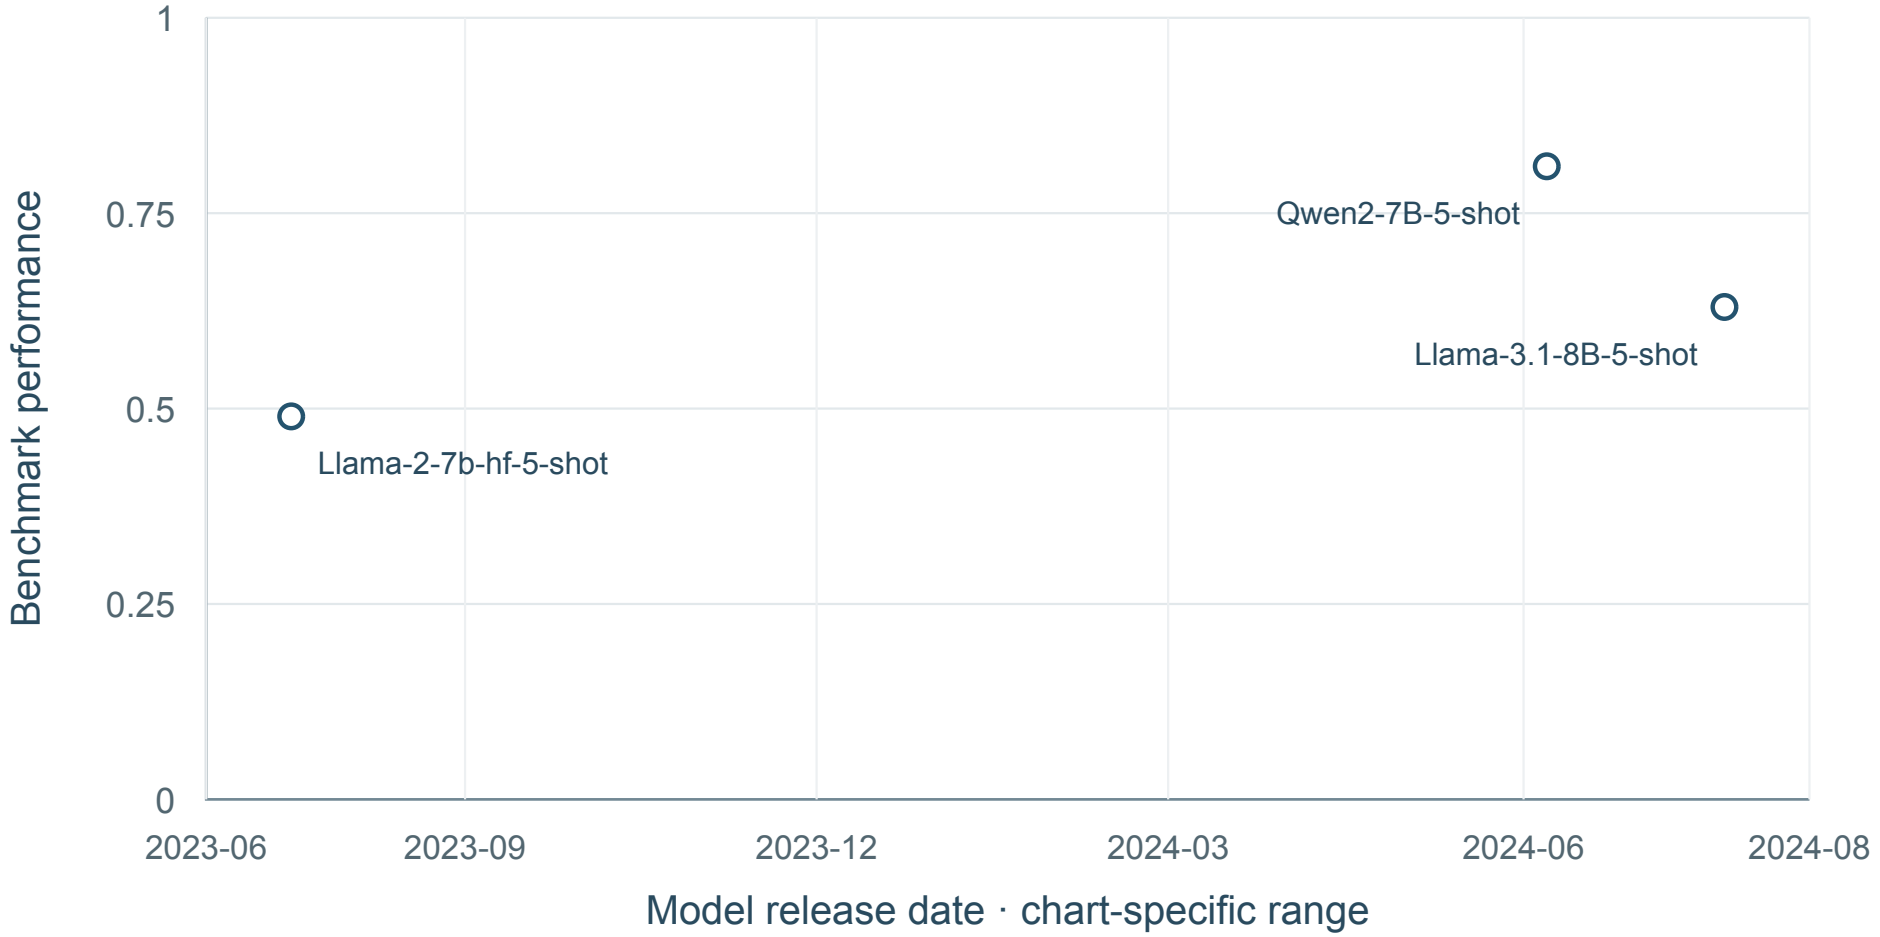

3 shown · 0 undated · 0 definition-held · sources: S066


No mean curve: Fewer than five dated model configurations.

Result-source references: S066. Exact point locators and raw values: data/F075_NUPA_values.csv.

Benchmark reference (APA): Yang, H., Hu, Y., Kang, S., Lin, Z., & Zhang, M. (2024). Number cookbook: Number understanding of language models and how to improve it. arXiv. https://arxiv.org/abs/2411.03766

Number Cookbook / NUPA: Exact match

Float maximum; L difficulty; shot count in model label; No few-shot demonstrations

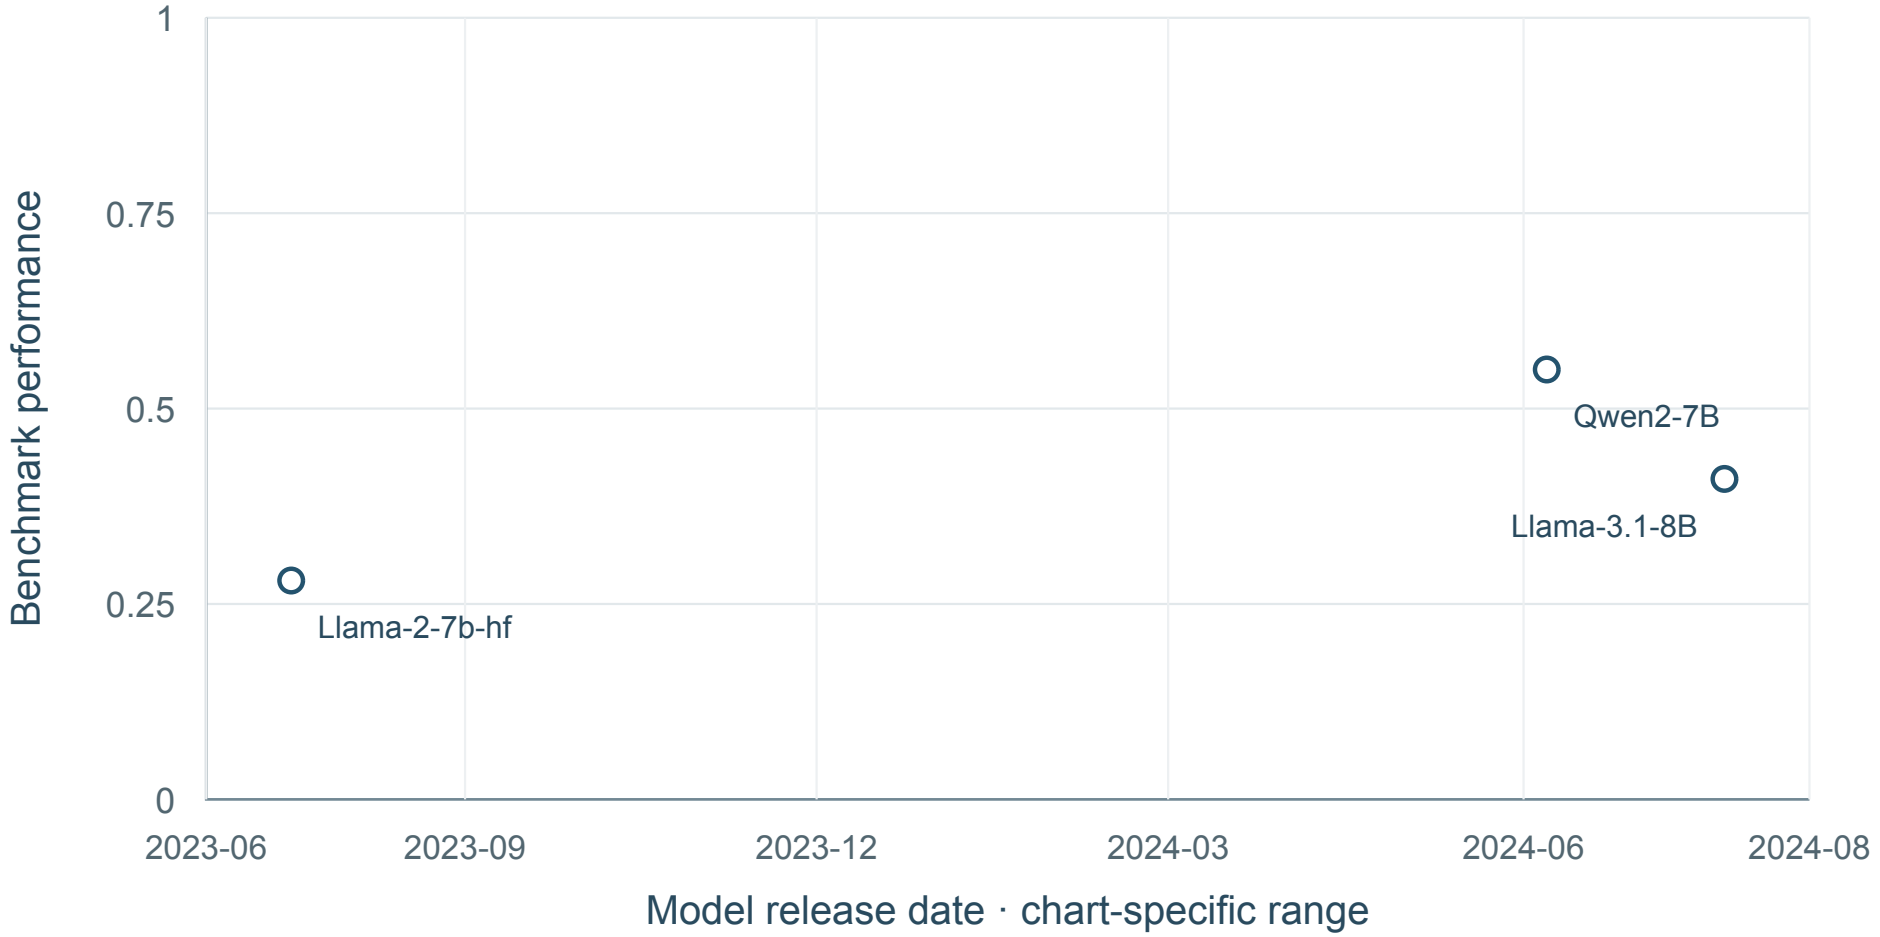

3 shown · 0 undated · 0 definition-held · sources: S066

No mean curve: Fewer than five dated model configurations.

Result-source references: S066. Exact point locators and raw values: data/F075_NUPA_values.csv.

Benchmark reference (APA): Yang, H., Hu, Y., Kang, S., Lin, Z., & Zhang, M. (2024). Number cookbook: Number understanding of language models and how to improve it. arXiv. https://arxiv.org/abs/2411.03766

F076 Symbolic manipulation

Copy, reverse and add symbol sequences

5 source values; 0 new; 1 separate conditions; 1 visible time points; 0 definition-held values; 0 visible mean curves.

Benchmark references (APA)

Qian, J., Wang, H., Li, Z., Li, S., & Yan, X. (2023). Limitations of language models in arithmetic and symbolic induction. In Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers) (pp. 9285–9298). https://doi.org/10.18653/v1/2023.acl-long.516

Workflow and article scope

Challenges: C

Define variables and coding rules; Interpret evidence and apply coding rules; Transform and calculate values

Artificial symbol tasks; distinguish original models from newer replications.

Manuscript anchors: Preparation and reporting, manuscript paragraph 33; Lu and Wang, Challenge E; manuscript paragraphs 20 and 31; Lu and Wang, Challenge C; manuscript paragraphs 15, 17–18 and 33


Result-source references: S078. Full references appear in the final bibliography.

Complete condition inventory

01. Copy accuracy | In-distribution repeated symbols; five digits
5 values; 1 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S078.

Qian et al. symbolic manipulation test suite: Copy accuracy

In-distribution repeated symbols; five digits

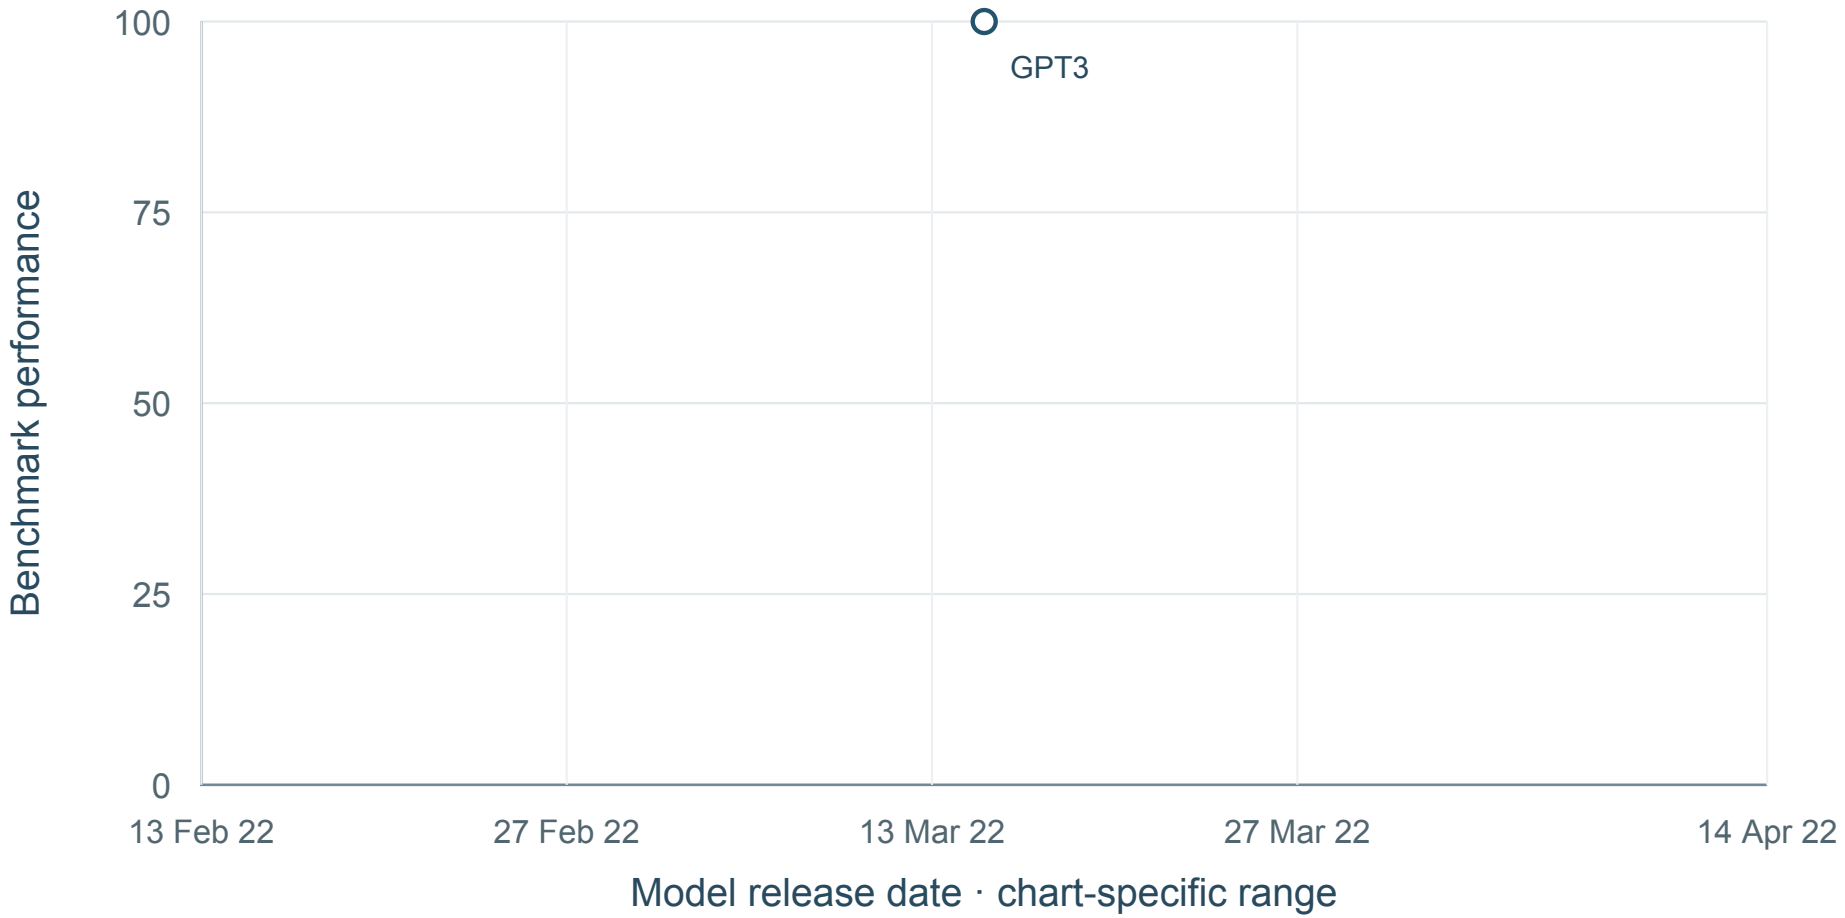

1 shown · 4 undated · 0 definition-held · sources: S078

No mean curve: Fewer than five dated model configurations.

Result-source references: S078. Exact point locators and raw values: data/F076_Symbolic_manipulation_values.csv.

Benchmark reference (APA): Qian, J., Wang, H., Li, Z., Li, S., & Yan, X. (2023). Limitations of language models in arithmetic and symbolic induction. In Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers) (pp. 9285–9298). https://doi.org/10.18653/v1/2023.acl-long.516

F077 ProcessBench

Identify the first incorrect step in a mathematical solution

25 source values; 0 new; 1 separate conditions; 13 visible time points; 0 definition-held values; 1 visible mean curves.

Benchmark references (APA)

Zheng, C., Zhang, Z., Zhang, B., Lin, R., Lu, K., Yu, B., Liu, D., Zhou, J., & Lin, J. (2025). ProcessBench: Identifying process errors in mathematical reasoning. The 63rd Annual Meeting of the Association for Computational Linguistics. https://arxiv.org/abs/2412.06559

Workflow and article scope

Challenges: C; D

Coordinate retrieval, tools and intermediate steps; Transform and calculate values; Verify source support and detect errors

Model verification task; not evidence that human reviewers detect the same errors.

Manuscript anchors: Lu and Wang, Challenge D; manuscript paragraphs 9, 15–18 and 31; Lu and Wang, Challenge C; manuscript paragraphs 15, 17–18 and 33; Product accuracy and auditability, manuscript paragraphs 28–29


Result-source references: S060. Full references appear in the final bibliography.

Complete condition inventory

01. Process error identification F1 | Average of four math subsets; original Table 3
25 values; 13 time points; visible mean curve. Sources: S060.

ProcessBench: Process error identification F1

Average of four math subsets; original Table 3

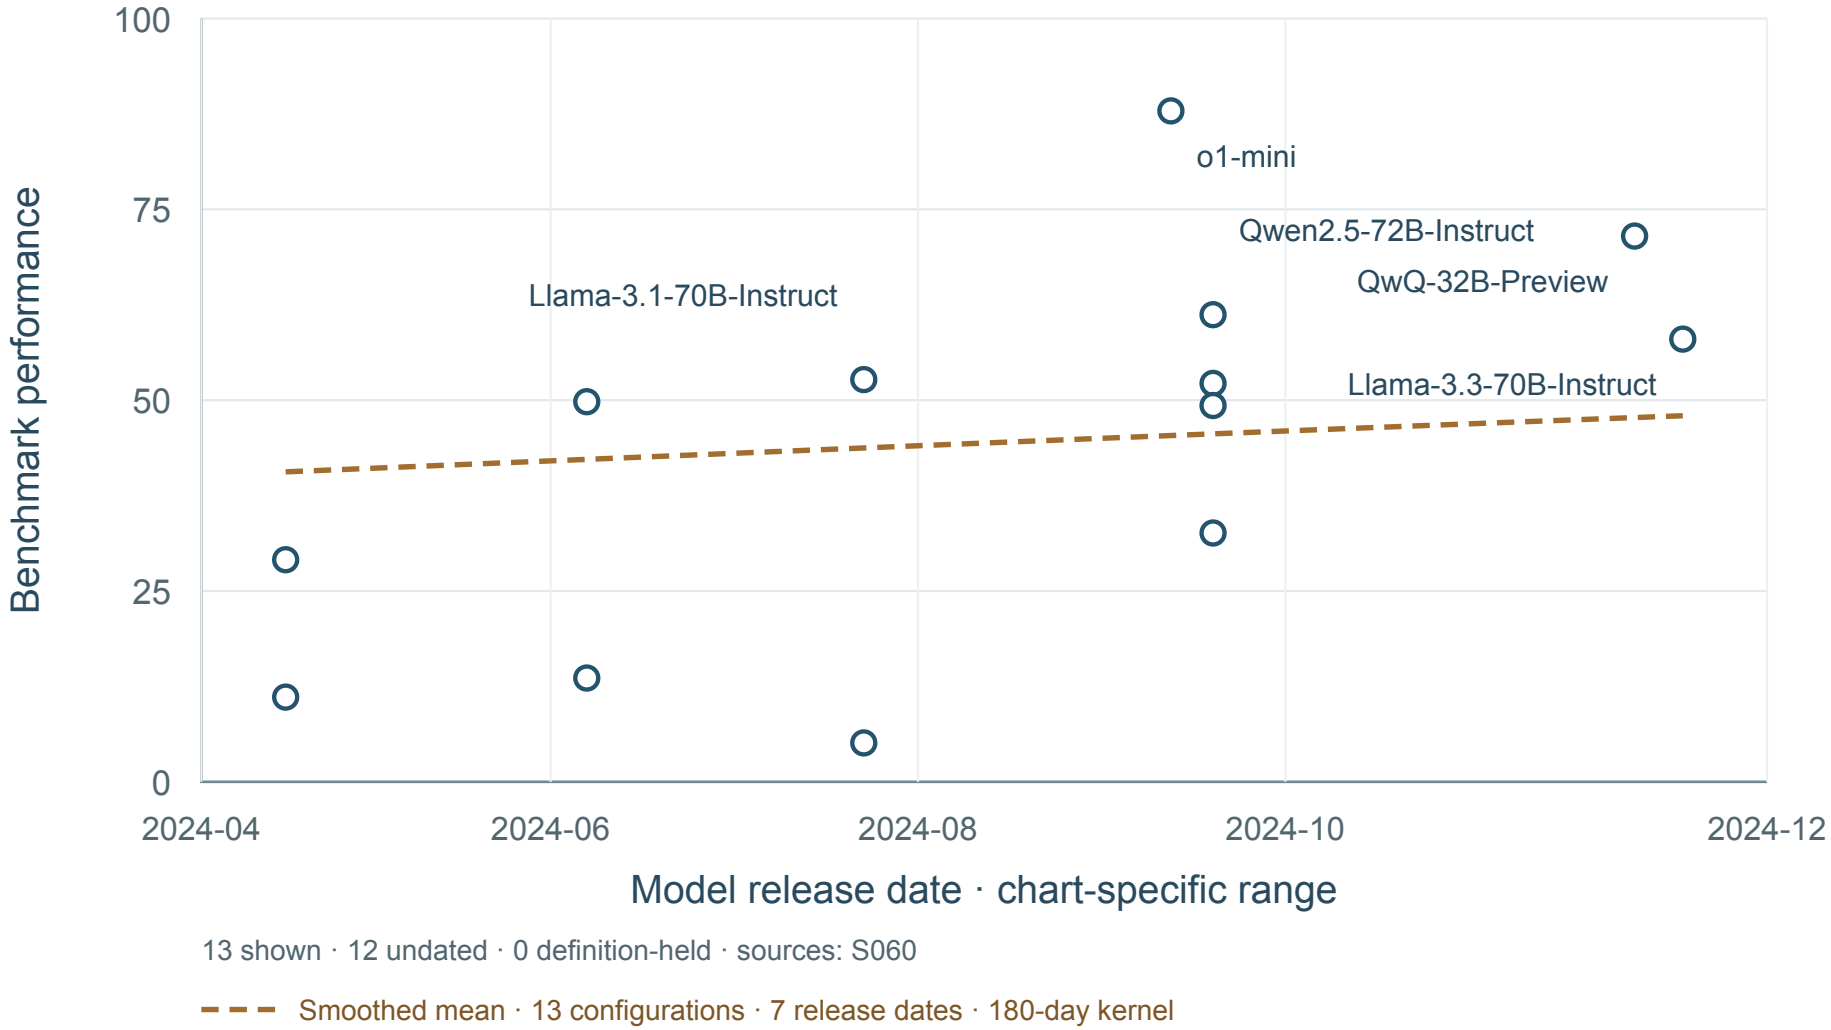

13 shown · 12 undated · 0 definition-held · sources: S060

Smoothed mean · 13 configurations · 7 release dates · 180-day kernel

Result-source references: S060. Exact point locators and raw values: data/F077_ProcessBench_values.csv.

Benchmark reference (APA): Zheng, C., Zhang, Z., Zhang, B., Lin, R., Lu, K., Yu, B., Liu, D., Zhou, J., & Lin, J. (2025). ProcessBench: Identifying process errors in mathematical reasoning. The 63rd Annual Meeting of the Association for Computational Linguistics. https://arxiv.org/abs/2412.06559

F078 NIAH

Retrieve a planted sentence at varying depth and context length

6 source values; 0 new; 1 separate conditions; 6 visible time points; 0 definition-held values; 0 visible mean curves.

Benchmark references (APA)

gkamradt. (n.d.). LLMTest_NeedleInAHaystack [Source code]. GitHub. Retrieved October 30, 2026, from https://github.com/gkamradt/LLMTest_NeedleInAHaystack

Workflow and article scope

Challenges: B

Locate relevant evidence

Directly discussed in Lu and Wang as insufficient for semantic, dispersed-evidence reasoning.

Manuscript anchors: Source-based step comparisons, manuscript paragraph 31


Result-source references: S035. Full references appear in the final bibliography.

Complete condition inventory

01. Retrieval accuracy | HELMET comparison; 128K literal NIAH
6 values; 6 time points; no visible mean curve: Release-date coverage shorter than 90 days. Sources: S035.

Needle in a Haystack: Retrieval accuracy

HELMET comparison; 128K literal NIAH

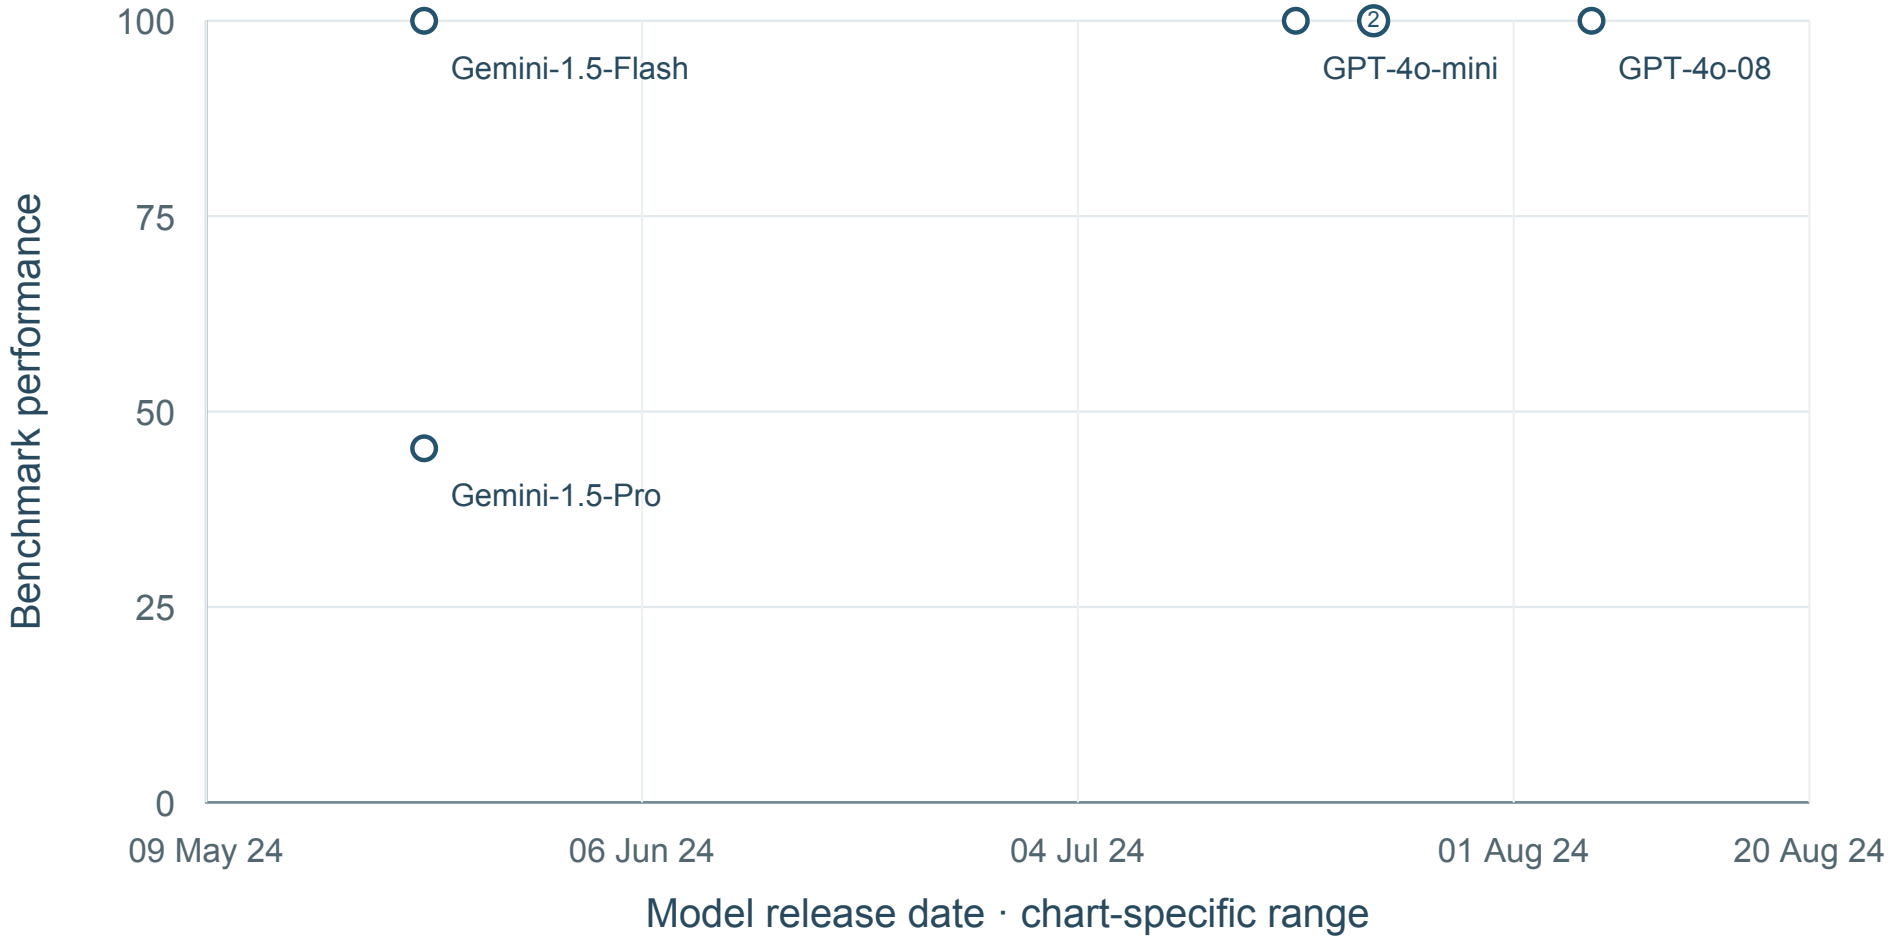

6 shown · 0 undated · 0 definition-held · sources: S035

No mean curve: Release-date coverage shorter than 90 days.

Result-source references: S035. Exact point locators and raw values: data/F078_NIAH_values.csv.

Benchmark reference (APA): gkamradt. (n.d.). LLMTest_NeedleInAHaystack [Source code]. GitHub. Retrieved October 30, 2026, from https://github.com/gkamradt/LLMTest_NeedleInAHaystack

F079 LooGLE

Short- and long-dependency comprehension across realistic long documents; Long-context comprehension under more realistic complex tasks

26 source values; 0 new; 2 separate conditions; 5 visible time points; 0 definition-held values; 1 visible mean curves.

Benchmark references (APA)

Li, J., Wang, M., Zheng, Z., & Zhang, M. (2023). LooGLE: Can long-context language models understand long contexts?. arXiv. https://arxiv.org/abs/2311.04939

He, Z., Wang, Y., Li, J., Liang, K., & Zhang, M. (2025). LooGLE v2: Are LLMs ready for real world long dependency challenges?. arXiv. https://arxiv.org/abs/2510.22548

Workflow and article scope

Challenges: B; C; D

Locate relevant evidence; Coordinate retrieval, tools and intermediate steps; Transform and calculate values; Verify source support and detect errors

Directly cited in Lu and Wang; mixed metrics and judge versions limit pooling.; Successor rather than continuation of the original LooGLE score scale.

Manuscript anchors: Source-based step comparisons, manuscript paragraph 31; Lu and Wang, Challenge D; manuscript paragraphs 9, 15–18 and 31; Lu and Wang, Challenge C; manuscript paragraphs 15, 17–18 and 33; Product accuracy and auditability, manuscript paragraphs 28–29

Result-source references: S061; S062. Full references appear in the final bibliography.


Complete condition inventory

01. GPT-4 judge score | Long-dependency tasks; subtask family named
16 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S061.

02. Average task score | LooGLE v2; original Table 2
10 values; 5 time points; visible mean curve. Sources: S062.

LooGLE v2: Average task score

LooGLE v2; original Table 2

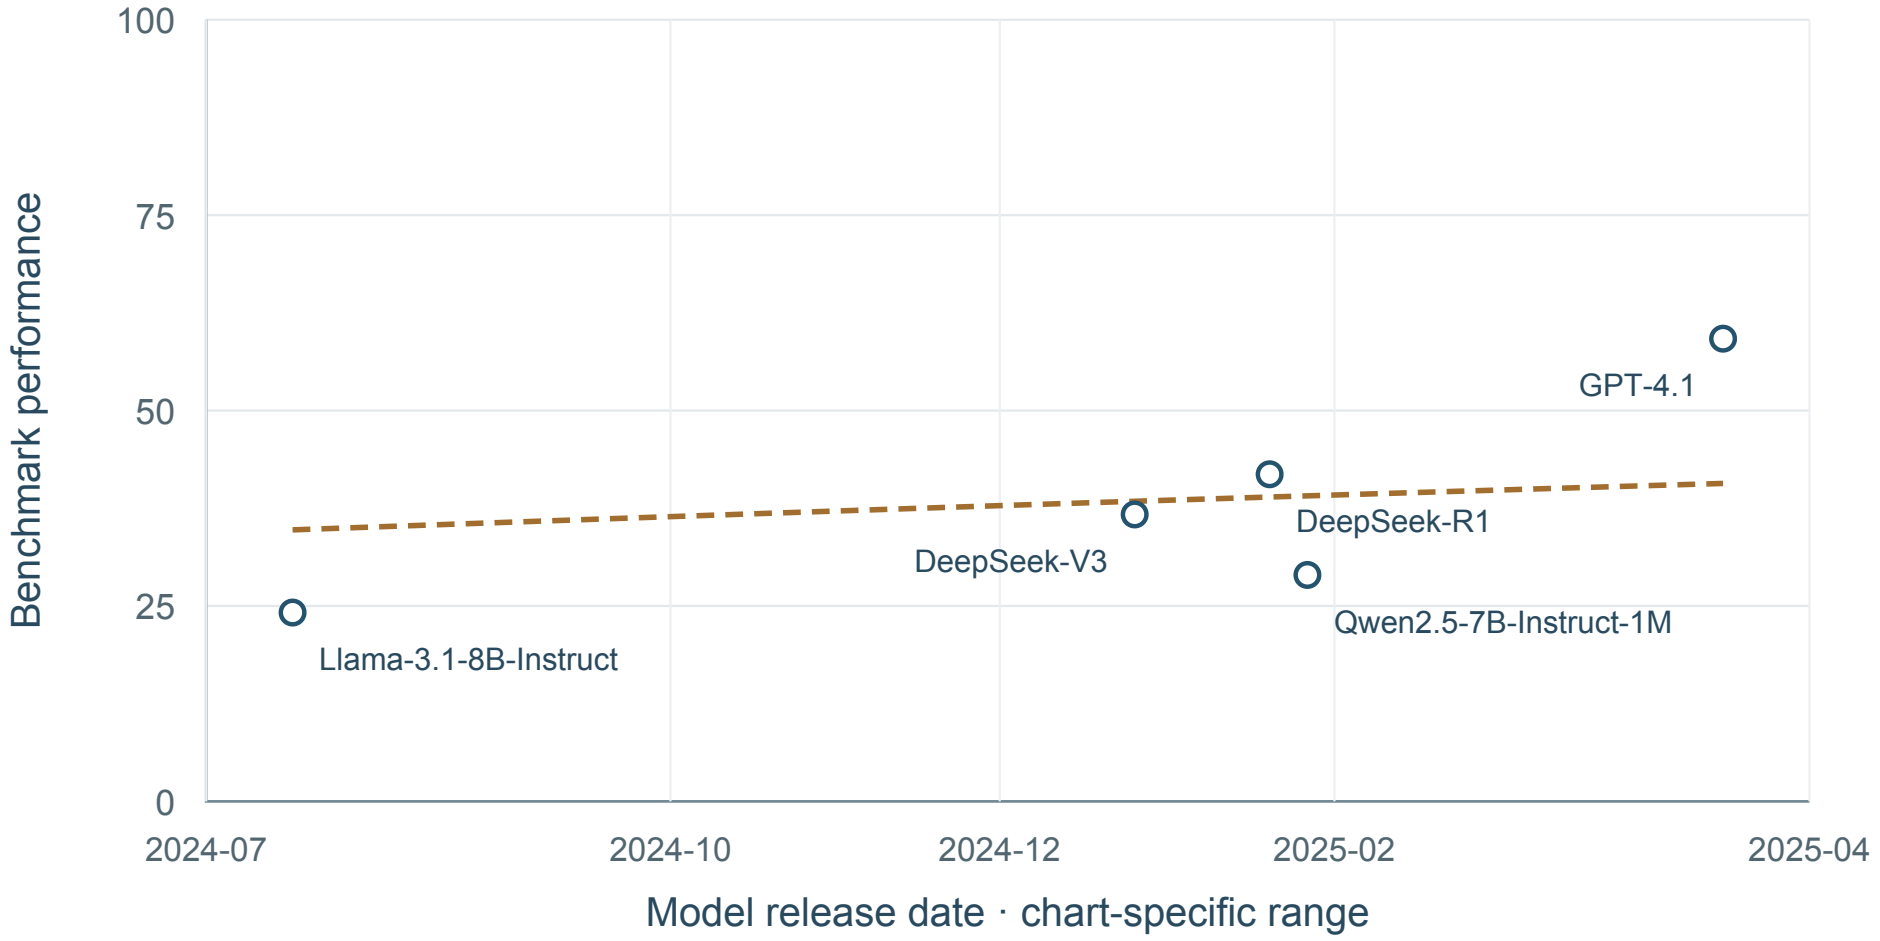

5 shown · 5 undated · 0 definition-held · sources: S062

Smoothed mean · 5 configurations · 5 release dates · 180-day kernel

Result-source references: S062. Exact point locators and raw values: data/F079_LooGLE_values.csv.

Benchmark reference (APA): He, Z., Wang, Y., Li, J., Liang, K., & Zhang, M. (2025). LooGLE v2: Are LLMs ready for real world long dependency challenges?. arXiv. https://arxiv.org/abs/2510.22548

F080 MM-NIAH

Retrieve, count and reason over evidence in long multimodal documents

18 source values; 0 new; 2 separate conditions; 6 visible time points; 0 definition-held values; 0 visible mean curves.

Benchmark references (APA)

Wang, W., Zhang, S., Ren, Y., Duan, Y., Li, T., Liu, S., Hu, M., Chen, Z., Zhang, K., Lu, L., Zhu, X., Luo, P., Qiao, Y., Dai, J., Shao, W., & Wang, W. (2024). Needle in a multimodal haystack. arXiv. https://arxiv.org/abs/2406.07230

Workflow and article scope

Challenges: A; B

Locate relevant evidence; Bind values to the correct unit

Diagnostic multimodal haystacks rather than systematic-review full-text extraction.

Manuscript anchors: Source-based step comparisons, manuscript paragraph 31; Wrong-subgroup example, manuscript paragraph 29

Result-source references: S063. Full references appear in the final bibliography.


Complete condition inventory

01. Answer accuracy | 32K context; original MM-NIAH
9 values; 3 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S063.

02. Answer accuracy | 64K context; original MM-NIAH
9 values; 3 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S063.

MM-NIAH: Answer accuracy

32K context; original MM-NIAH

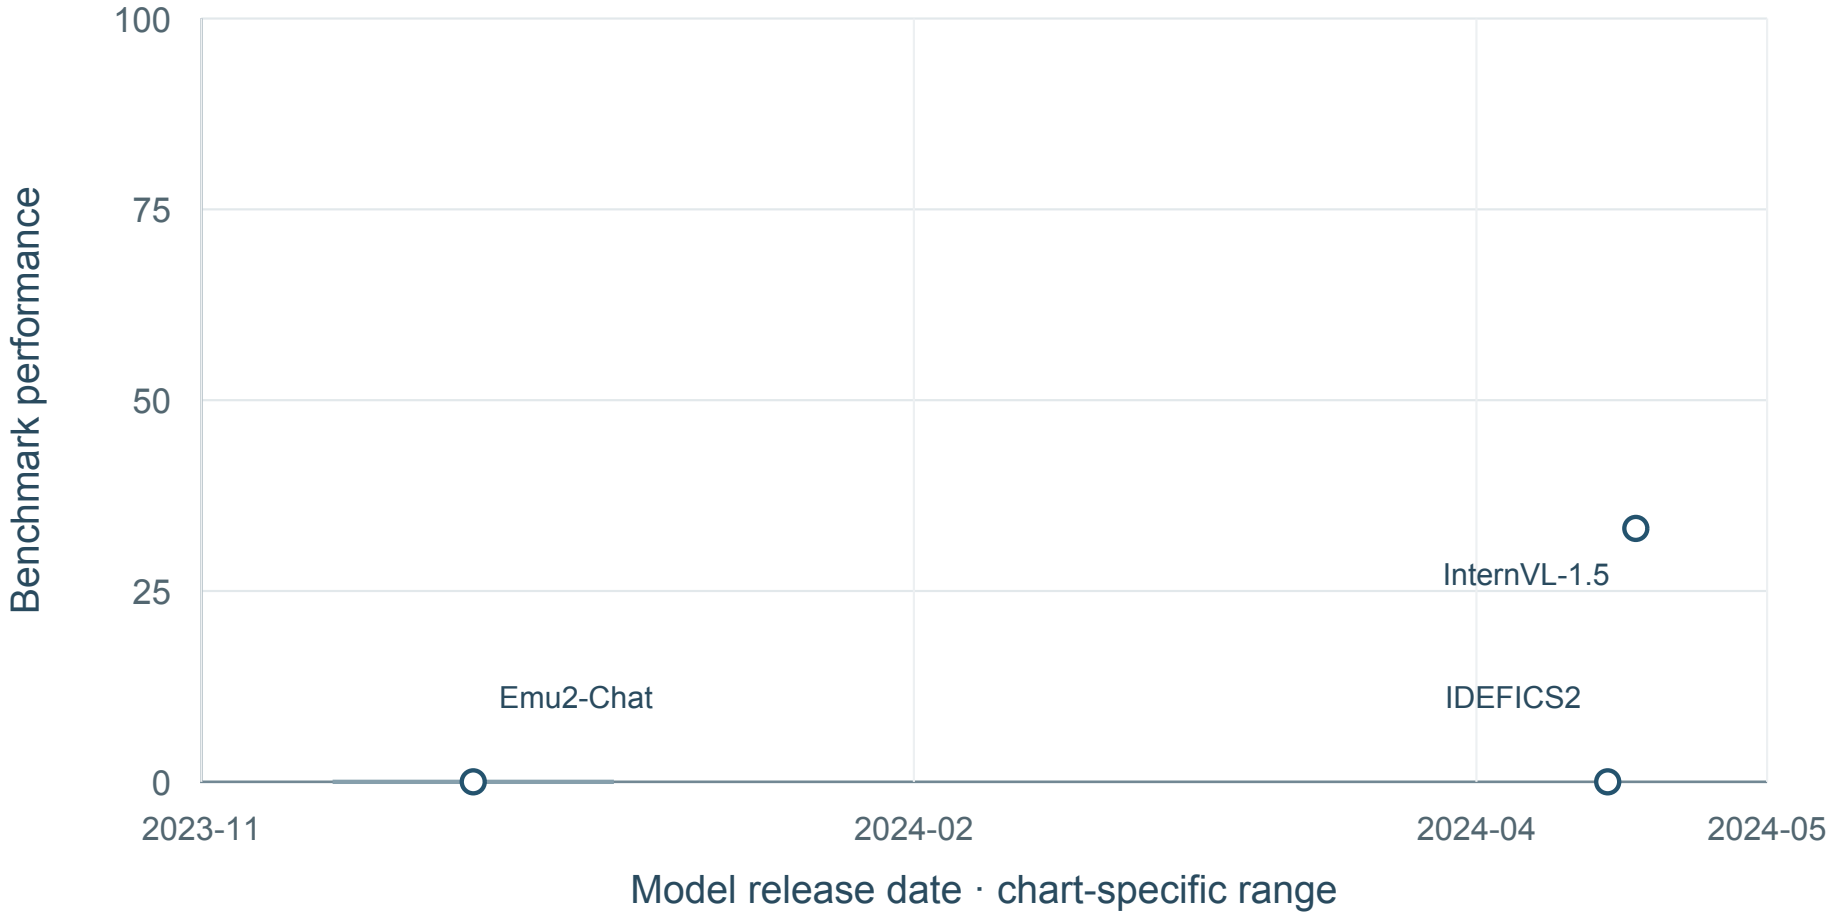

3 shown · 6 undated · 0 definition-held · sources: S063


No mean curve: Fewer than five dated model configurations.

Result-source references: S063. Exact point locators and raw values: data/F080_MM_NIAH_values.csv.

Benchmark reference (APA): Wang, W., Zhang, S., Ren, Y., Duan, Y., Li, T., Liu, S., Hu, M., Chen, Z., Zhang, K., Lu, L., Zhu, X., Luo, P., Qiao, Y., Dai, J., Shao, W., & Wang, W. (2024). Needle in a multimodal haystack. arXiv. https://arxiv.org/abs/2406.07230

MM-NIAH: Answer accuracy

64K context; original MM-NIAH

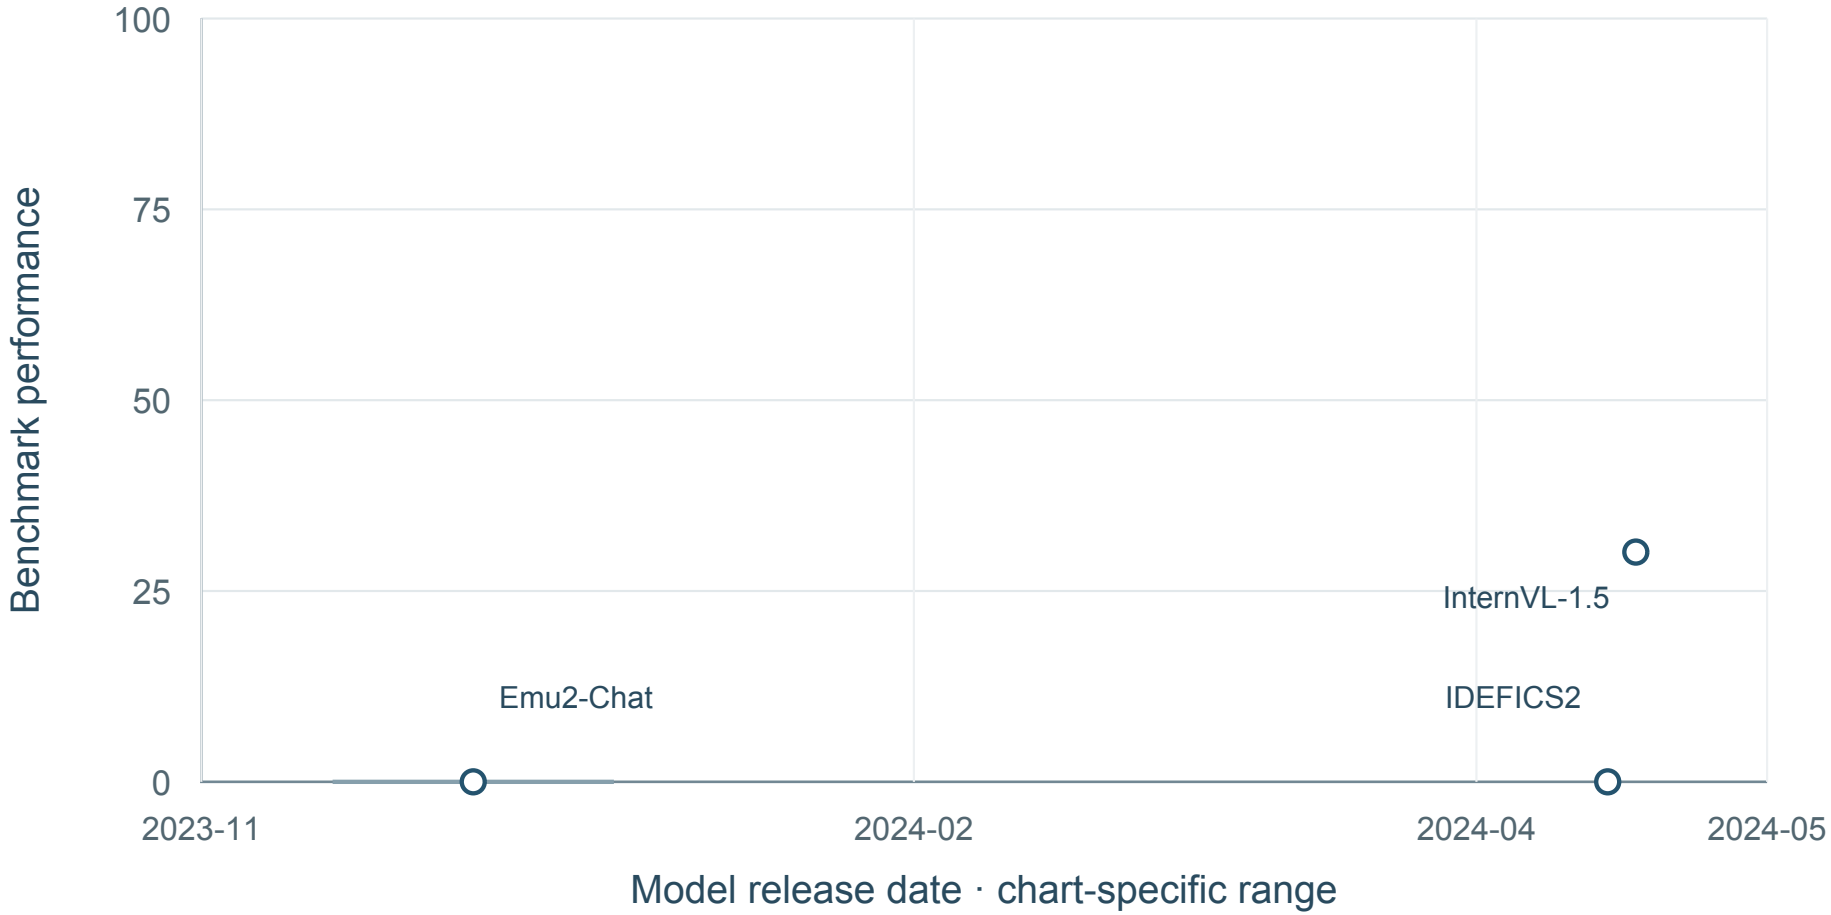

3 shown · 6 undated · 0 definition-held · sources: S063

No mean curve: Fewer than five dated model configurations.

Result-source references: S063. Exact point locators and raw values: data/F080_MM_NIAH_values.csv.

Benchmark reference (APA): Wang, W., Zhang, S., Ren, Y., Duan, Y., Li, T., Liu, S., Hu, M., Chen, Z., Zhang, K., Lu, L., Zhu, X., Luo, P., Qiao, Y., Dai, J., Shao, W., & Wang, W. (2024). Needle in a multimodal haystack. arXiv. https://arxiv.org/abs/2406.07230

F081 VaxScope

Normalize document-level structured evidence from immunization systematic reviews

24 source values; 0 new; 8 separate conditions; 0 visible time points; 0 definition-held values; 0 visible mean curves.

Benchmark references (APA)

İlgen, B., Awotoro, E., & Hattab, G. (2026). VaxScope: Document-level structured evidence extraction from immunization systematic reviews. In BioNLP 2026 (pp. 853–863). https://doi.org/10.18653/v1/2026.bionlp-1.69

Workflow and article scope

Challenges: B

Define variables and coding rules; Locate relevant evidence; Bind values to the correct unit; Interpret evidence and apply coding rules; Assess the complete extraction product

Related to B through distributed evidence aggregation; its abstract-level baselines do not test long-context-length robustness. Medical review domain; transfer to psychological coding remains untested.

Manuscript anchors: Preparation and reporting, manuscript paragraph 33; Source-based step comparisons, manuscript paragraph 31; Wrong-subgroup example, manuscript paragraph 29; Lu and Wang, Challenge E; manuscript paragraphs 20 and 31; Comparative evaluation agenda, manuscript paragraph 31

Result-source references: S021. Full references appear in the final bibliography.

Complete condition inventory

01. Average of task-specific F1 scores | Held-out expert gold set; Abs.
3 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S021.

02. Average of task-specific F1 scores | Held-out expert gold set; Abs.+Snp.
3 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S021.

03. Exact Match | Held-out non-null annotated cases; Num. studies; Regex
3 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S021.

04. Near-Miss | Held-out non-null annotated cases; Num. studies; Regex
3 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S021.

05. Exact Match | Held-out non-null annotated cases; Num. participants; Regex
3 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S021.


06. Near-Miss | Held-out non-null annotated cases; Num. participants; Regex
3 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S021.

07. Exact Match | Held-out non-null annotated cases; Date of last search; Regex
3 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S021.

08. Near-Miss | Held-out non-null annotated cases; Date of last search; Regex
3 values; 0 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S021.

VaxScope: Average of task-specific F1 scores

Held-out expert gold set; Abs.

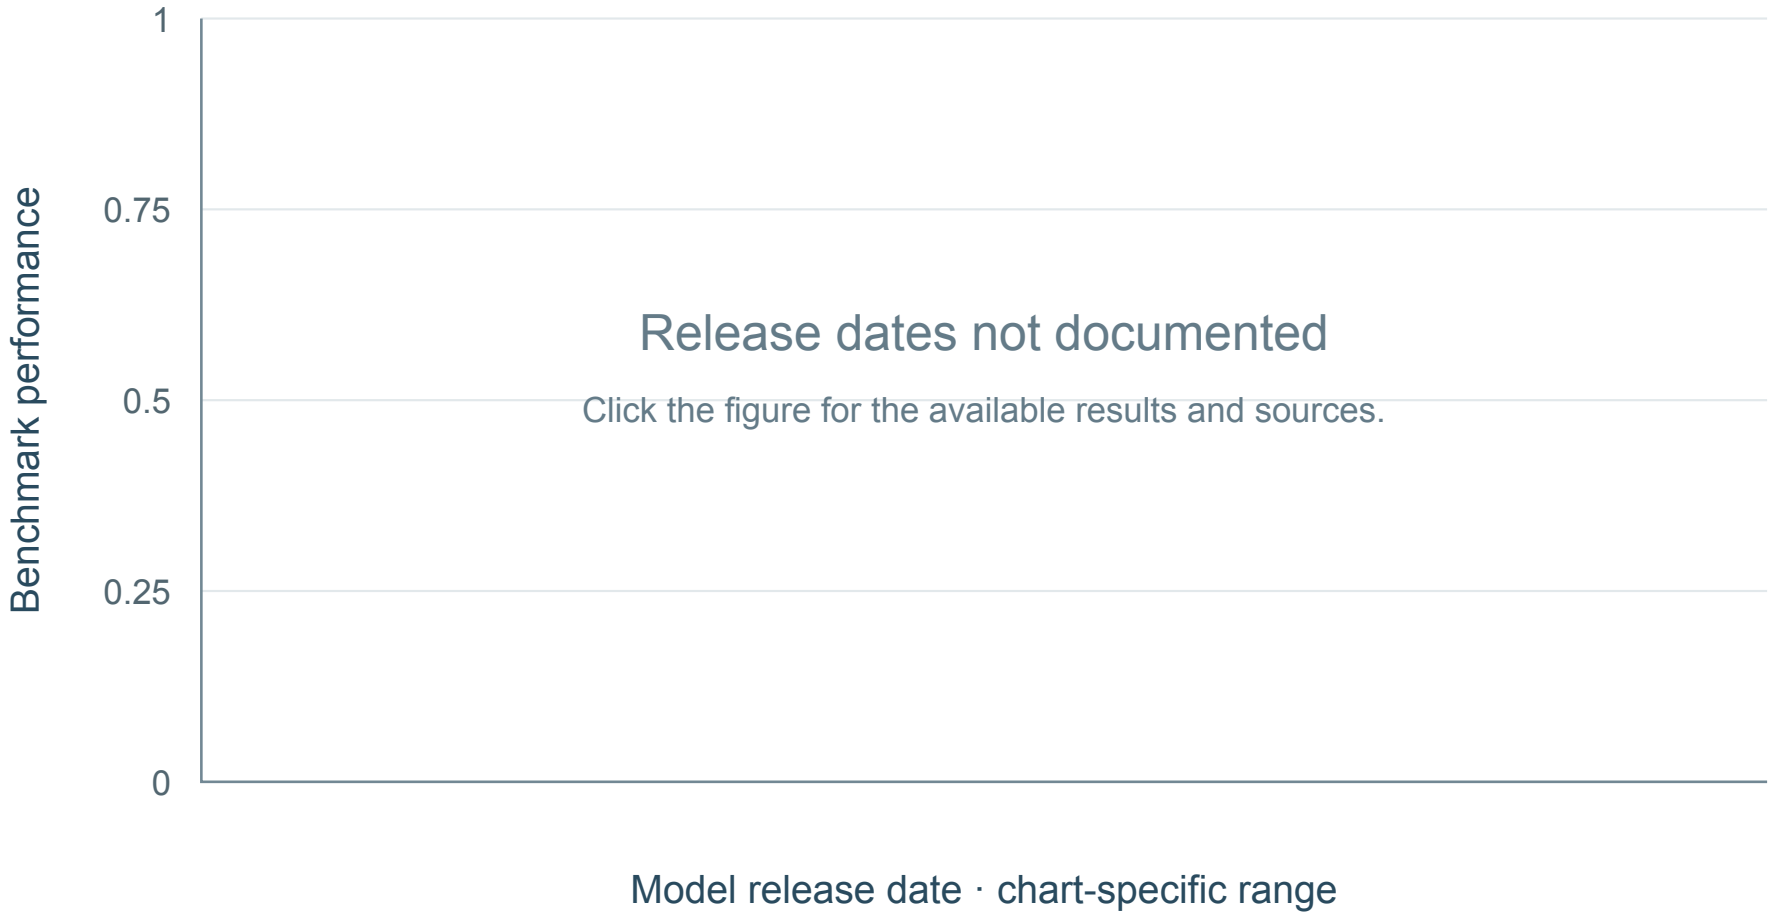

0 shown · 3 undated · 0 definition-held · sources: S021

No mean curve: Fewer than five dated model configurations.

Result-source references: S021. Exact point locators and raw values: data/F081_VaxScope_values.csv.

Benchmark reference (APA): İlgen, B., Awotoro, E., & Hattab, G. (2026). VaxScope: Document-level structured evidence extraction from immunization systematic reviews. In BioNLP 2026 (pp. 853–863). https://doi.org/10.18653/v1/2026.bionlp-1.69

F082 CONSORT diagrams

Recover participant counts, grouping and flow under a target schema

72 source values; 0 new; 12 separate conditions; 48 visible time points; 0 definition-held values; 0 visible mean curves.

Benchmark references (APA)

Stachura, D., Przechera, B., Opałek, M., Sadowska, E., Borowiack, E., & Nowak, A. (2026). Expert-guided schema-based structured extraction from CONSORT diagrams using vision-language models. In BioNLP 2026 (pp. 955–969). https://doi.org/10.18653/v1/2026.bionlp-1.77

Workflow and article scope

Challenges: A

Define variables and coding rules; Prepare and read source documents; Bind values to the correct unit; Interpret evidence and apply coding rules; Assess the complete extraction product

Scientific diagrams only; does not test full-paper meta-analytic coding.

Manuscript anchors: Preparation and reporting, manuscript paragraph 33; Lu and Wang, Challenges A–B; manuscript paragraphs 15–18; Wrong-subgroup example, manuscript paragraph 29; Lu and Wang, Challenge E; manuscript paragraphs 20 and 31; Comparative evaluation agenda, manuscript paragraph 31

Result-source references: S020. Full references appear in the final bibliography.

Complete condition inventory

01. Group F1 | 200 diagrams; zero-shot; deterministic decoding; diagram only; basic prompt
4 values; 4 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S020.

02. Leaf Micro F1 | 200 diagrams; zero-shot; deterministic decoding; diagram only; basic prompt
4 values; 4 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S020.

03. Exact Field Accuracy | 200 diagrams; zero-shot; deterministic decoding; diagram only; basic prompt
4 values; 4 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S020.

04. Whole-diagram Exact Match | 200 diagrams; zero-shot; deterministic decoding; diagram only; basic prompt
4 values; 4 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S020.

05. Group F1 | 200 diagrams; zero-shot; deterministic decoding; diagram only; expert prompt
7 values; 4 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S020.

06. Leaf Micro F1 | 200 diagrams; zero-shot; deterministic decoding; diagram only; expert prompt
7 values; 4 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S020.

07. Exact Field Accuracy | 200 diagrams; zero-shot; deterministic decoding; diagram only; expert prompt
7 values; 4 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S020.


08. Whole-diagram Exact Match | 200 diagrams; zero-shot; deterministic decoding; diagram only; expert prompt
7 values; 4 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S020.

09. Group F1 | 200 diagrams; zero-shot; deterministic decoding; diagram only; stepwise
7 values; 4 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S020.

10. Leaf Micro F1 | 200 diagrams; zero-shot; deterministic decoding; diagram only; stepwise
7 values; 4 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S020.


11. Exact Field Accuracy | 200 diagrams; zero-shot; deterministic decoding; diagram only; stepwise
7 values; 4 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S020.

12. Whole-diagram Exact Match | 200 diagrams; zero-shot; deterministic decoding; diagram only; stepwise
7 values; 4 time points; no visible mean curve: Fewer than five dated model configurations. Sources: S020.

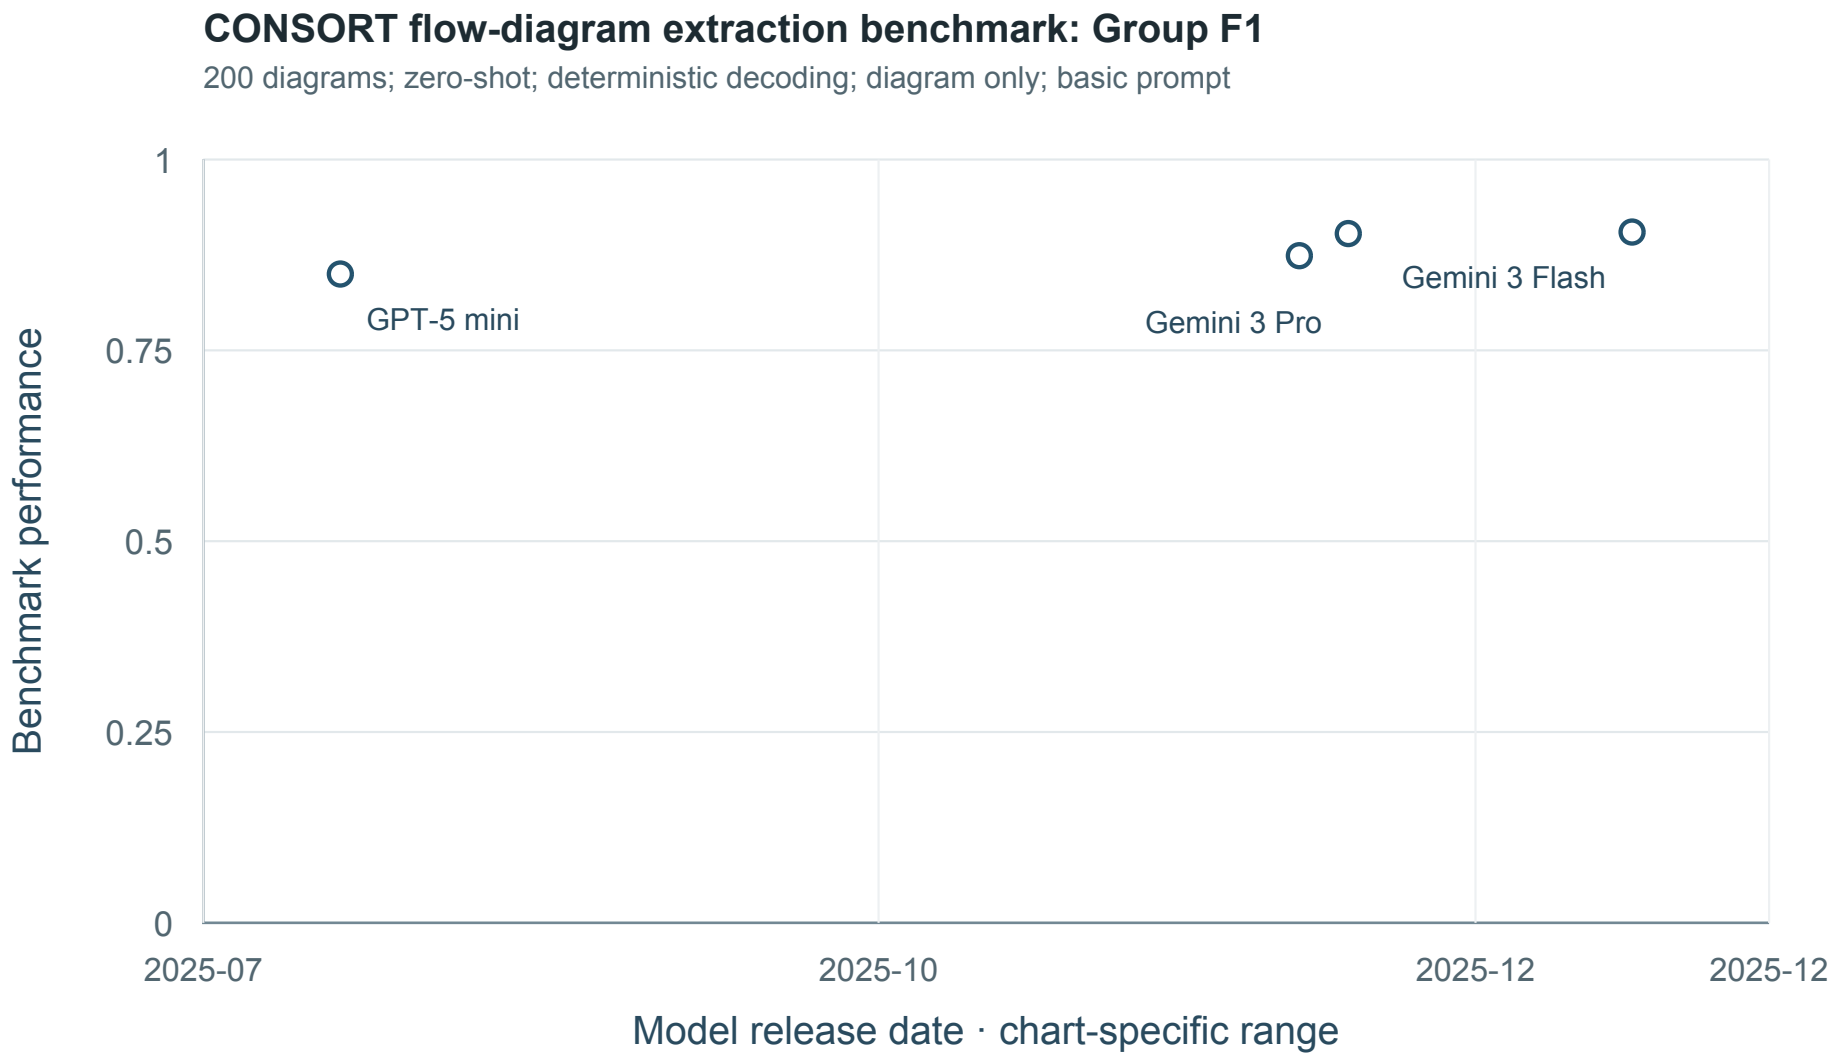

Result-source references: S020. Exact point locators and raw values: data/F082_CONSORT_diagrams_values.csv.

Benchmark reference (APA): Stachura, D., Przechera, B., Opałek, M., Sadowska, E., Borowiack, E., & Nowak, A. (2026). Expert-guided schema-based structured extraction from CONSORT diagrams using vision-language models. In BioNLP 2026 (pp. 955–969). https://doi.org/10.18653/v1/2026.bionlp-1.77

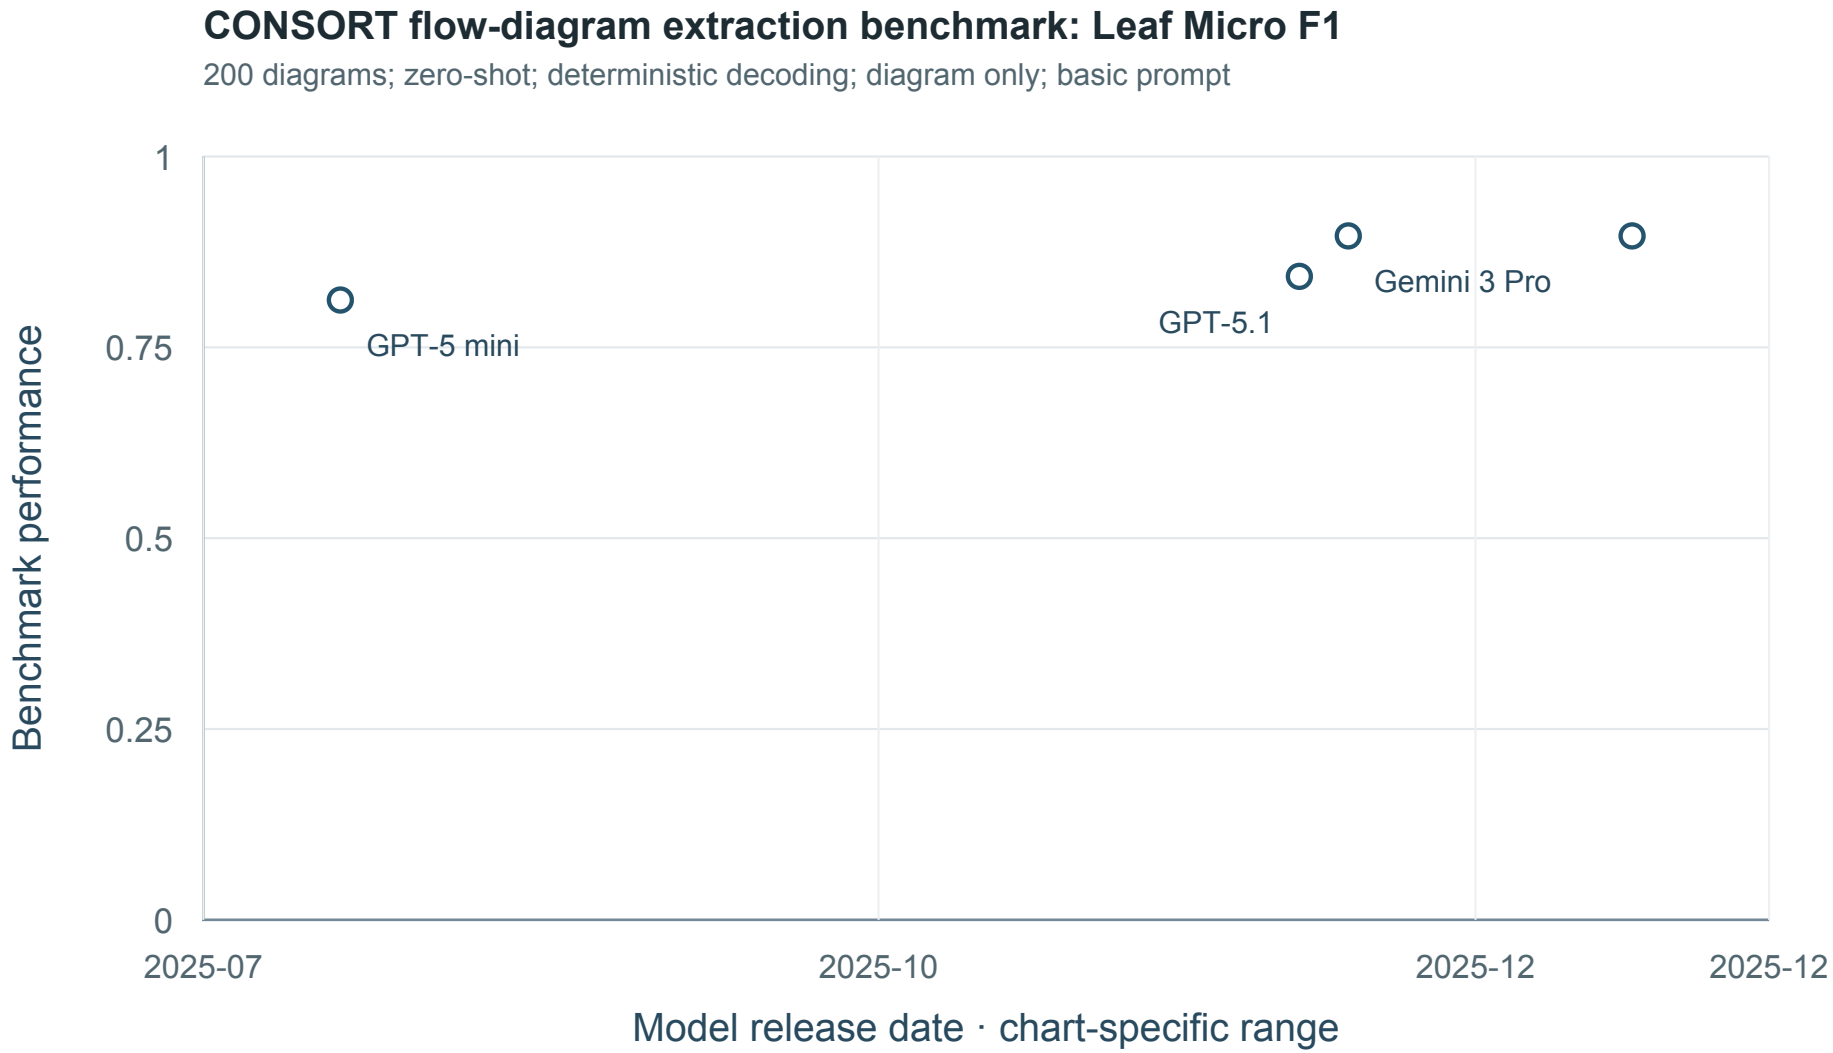


Result-source references: S020. Exact point locators and raw values: data/F082_CONSORT_diagrams_values.csv.

Benchmark reference (APA): Stachura, D., Przechera, B., Opałek, M., Sadowska, E., Borowiack, E., & Nowak, A. (2026). Expert-guided schema-based structured extraction from CONSORT diagrams using vision-language models. In BioNLP 2026 (pp. 955–969). https://doi.org/10.18653/v1/2026.bionlp-1.77

CONSORT flow-diagram extraction benchmark: Exact Field Accuracy

200 diagrams; zero-shot; deterministic decoding; diagram only; basic prompt

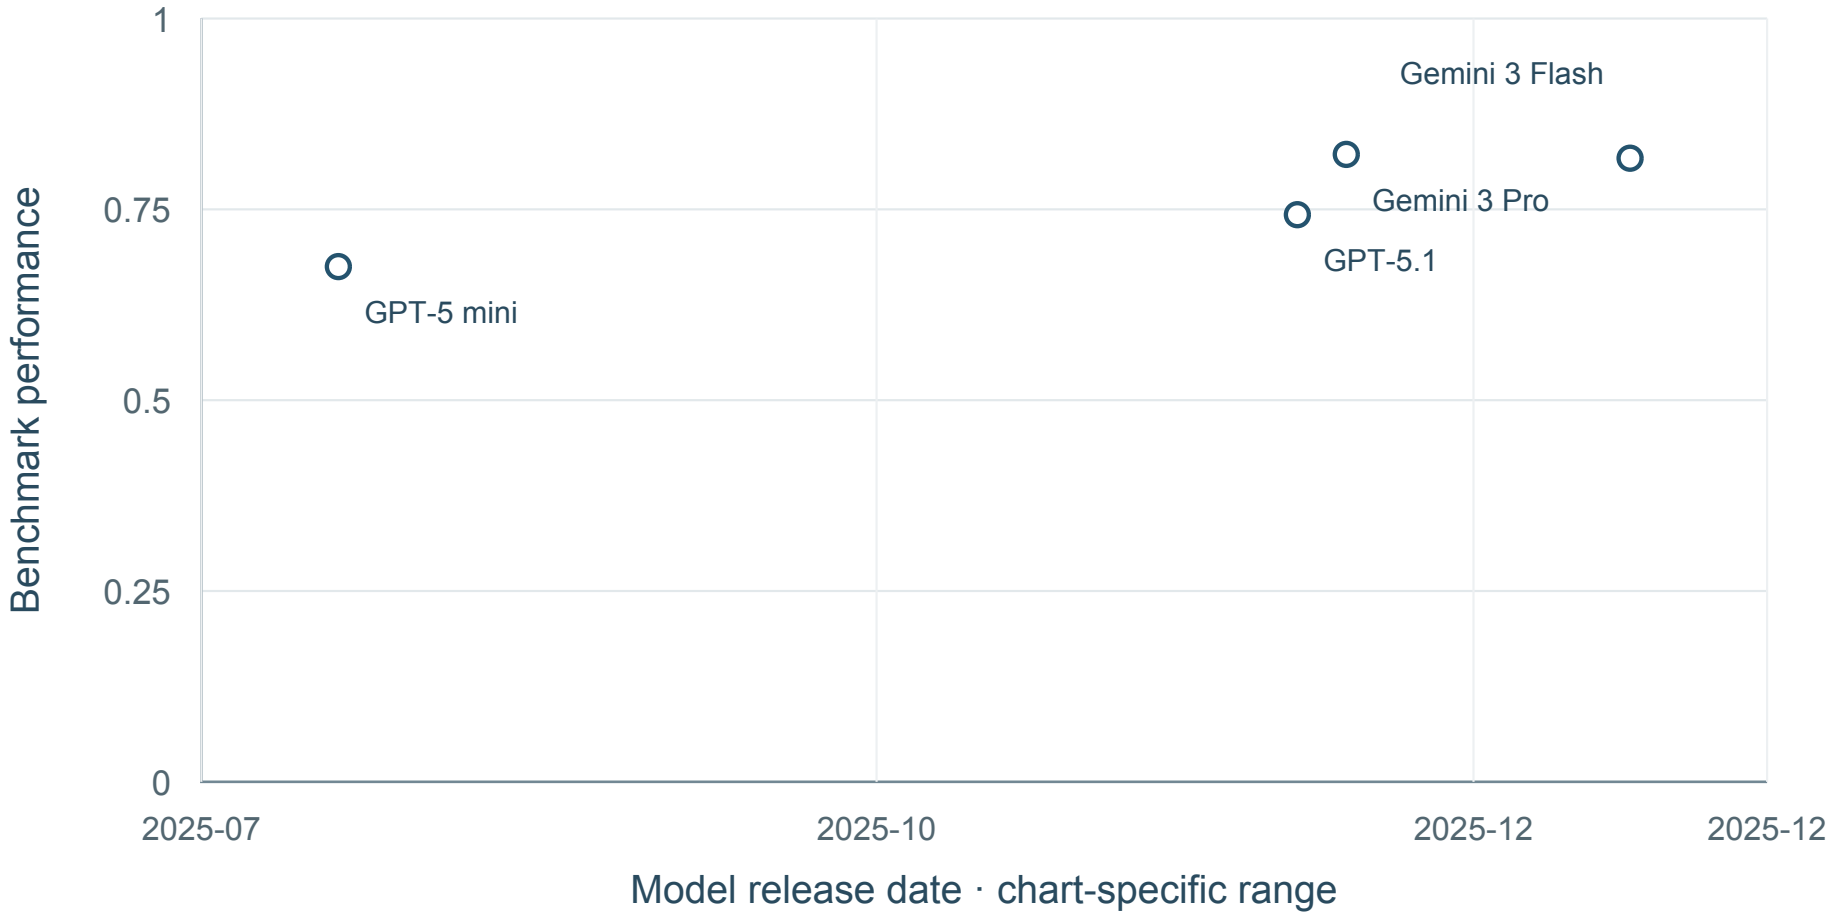

4 shown · 0 undated · 0 definition-held · sources: S020


No mean curve: Fewer than five dated model configurations.

Result-source references: S020. Exact point locators and raw values: data/F082_CONSORT_diagrams_values.csv.

Benchmark reference (APA): Stachura, D., Przechera, B., Opałek, M., Sadowska, E., Borowiack, E., & Nowak, A. (2026). Expert-guided schema-based structured extraction from CONSORT diagrams using vision-language models. In BioNLP 2026 (pp. 955–969). https://doi.org/10.18653/v1/2026.bionlp-1.77

CONSORT flow-diagram extraction benchmark: Whole-diagram Exact Match

200 diagrams; zero-shot; deterministic decoding; diagram only; basic prompt

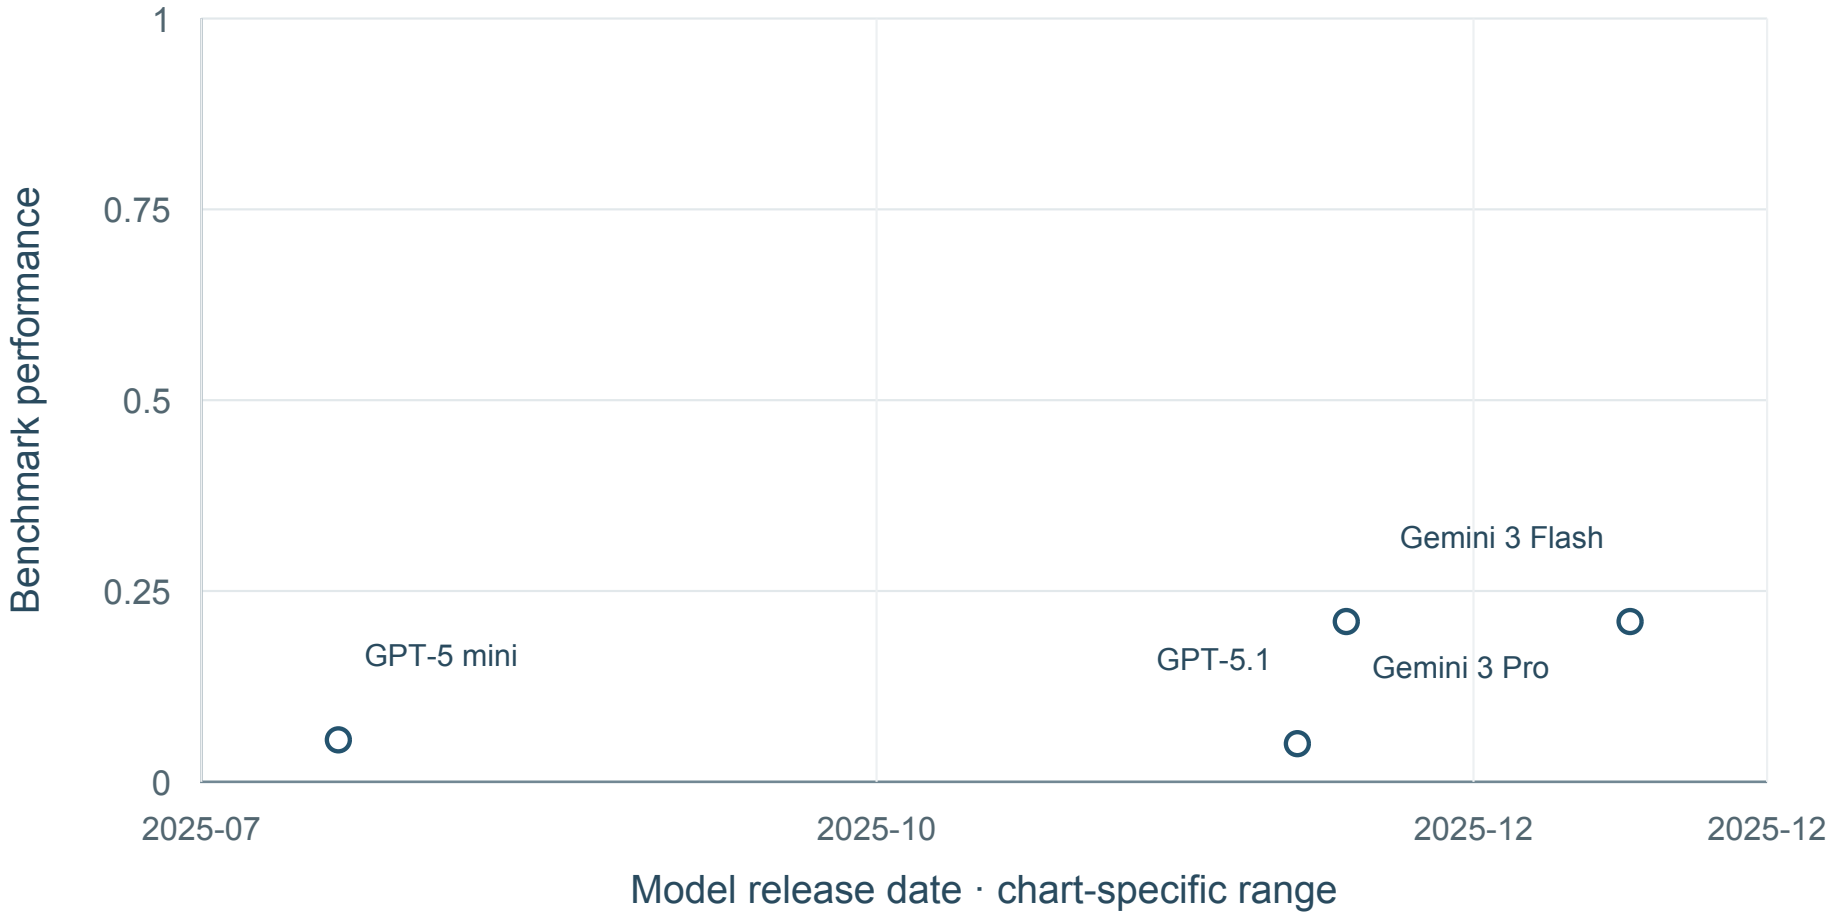


4 shown · 0 undated · 0 definition-held · sources: S020

No mean curve: Fewer than five dated model configurations.

Result-source references: S020. Exact point locators and raw values: data/F082_CONSORT_diagrams_values.csv.

Benchmark reference (APA): Stachura, D., Przechera, B., Opałek, M., Sadowska, E., Borowiack, E., & Nowak, A. (2026). Expert-guided schema-based structured extraction from CONSORT diagrams using vision-language models. In BioNLP 2026 (pp. 955–969). https://doi.org/10.18653/v1/2026.bionlp-1.77

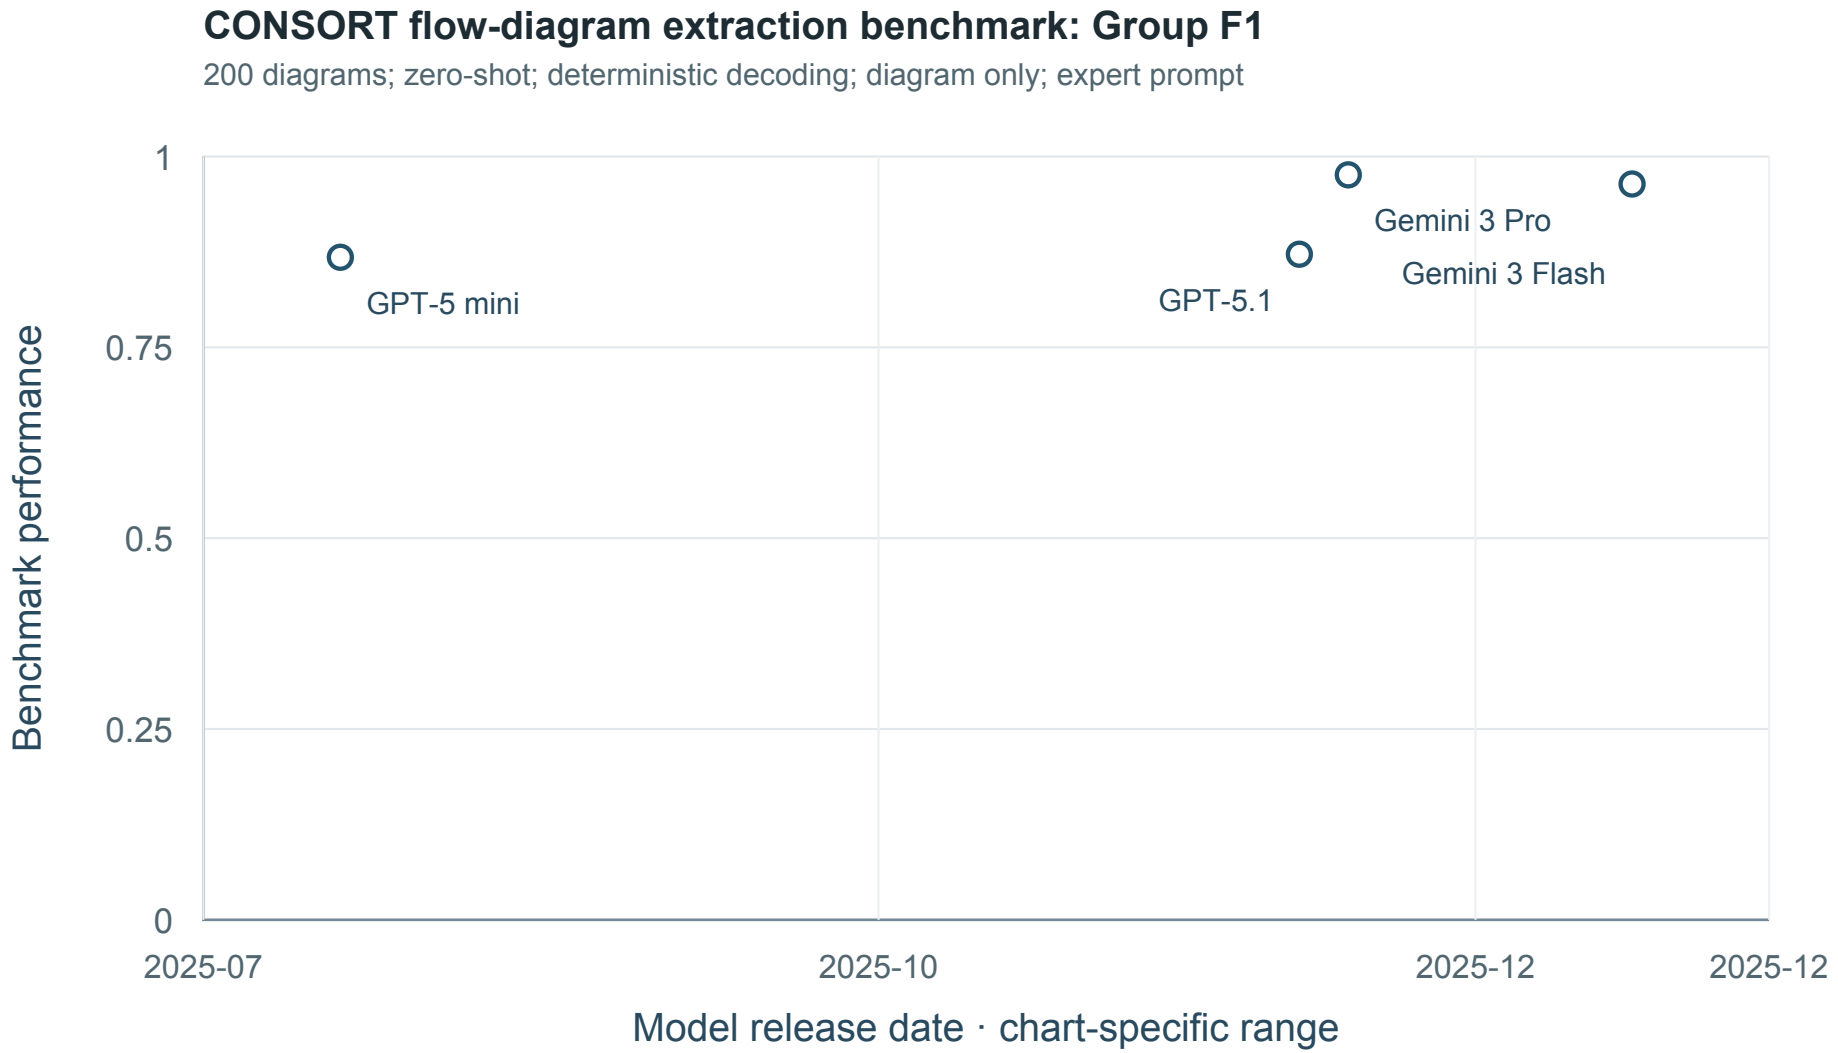


Result-source references: S020. Exact point locators and raw values: data/F082_CONSORT_diagrams_values.csv.

Benchmark reference (APA): Stachura, D., Przechera, B., Opałek, M., Sadowska, E., Borowiack, E., & Nowak, A. (2026). Expert-guided schema-based structured extraction from CONSORT diagrams using vision-language models. In BioNLP 2026 (pp. 955–969). https://doi.org/10.18653/v1/2026.bionlp-1.77

CONSORT flow-diagram extraction benchmark: Leaf Micro F1

200 diagrams; zero-shot; deterministic decoding; diagram only; expert prompt

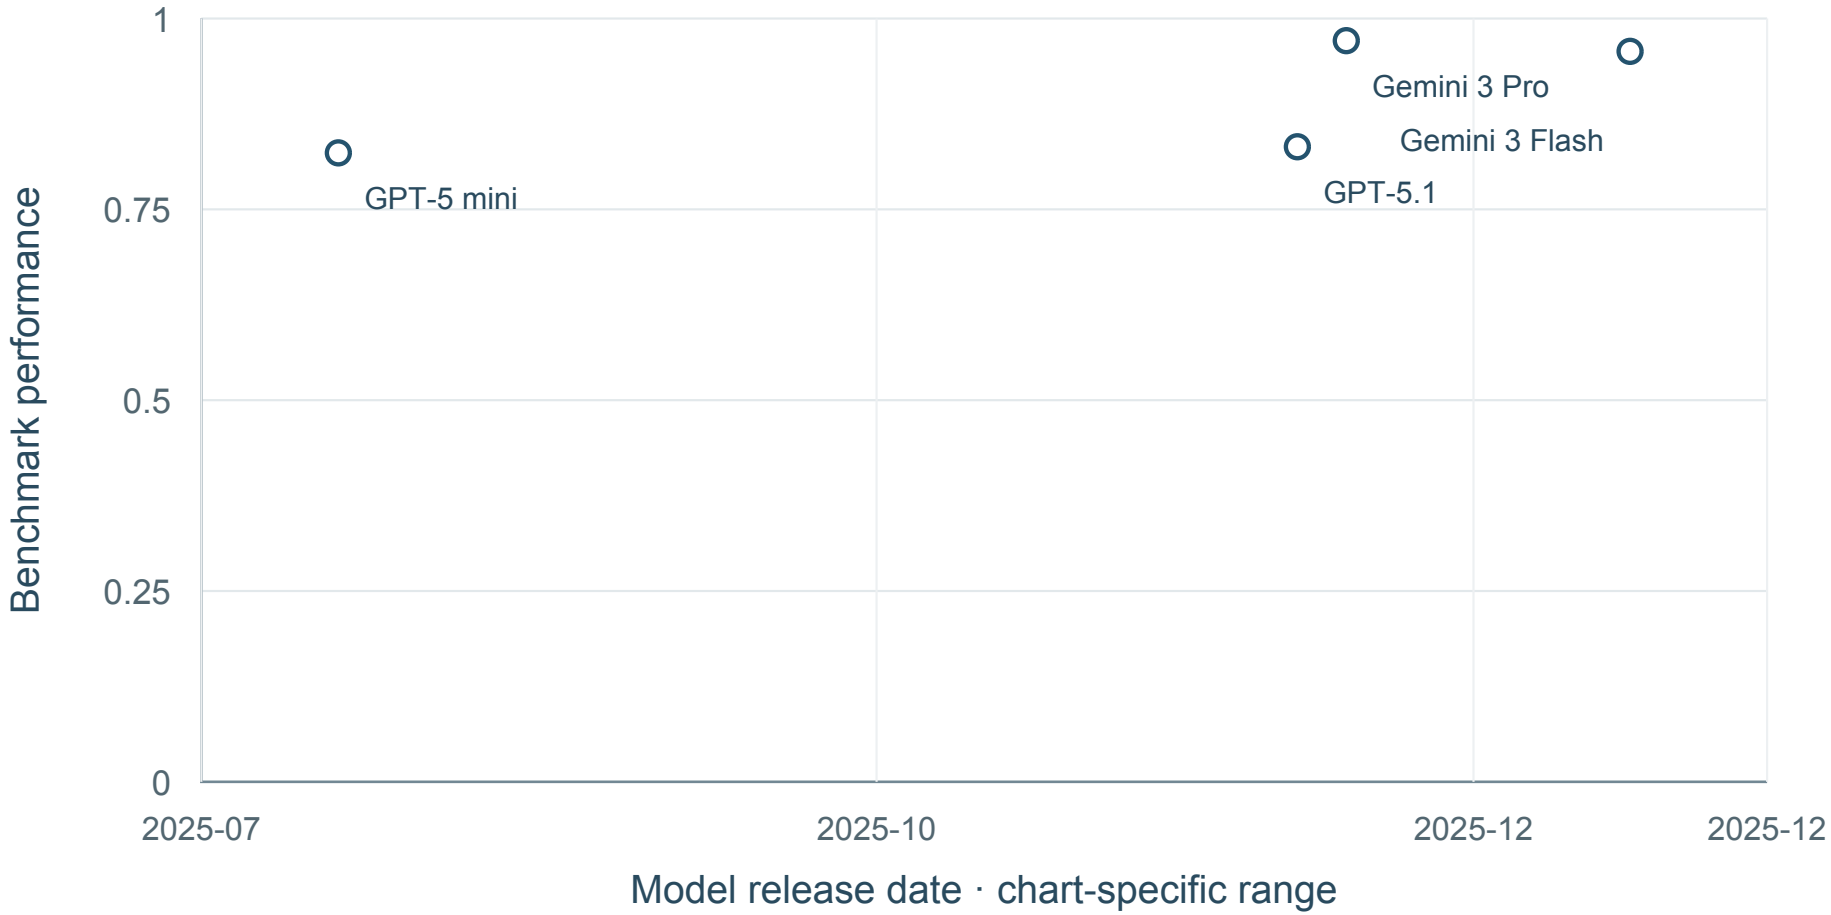

4 shown · 3 undated · 0 definition-held · sources: S020


No mean curve: Fewer than five dated model configurations.

Result-source references: S020. Exact point locators and raw values: data/F082_CONSORT_diagrams_values.csv.

Benchmark reference (APA): Stachura, D., Przechera, B., Opałek, M., Sadowska, E., Borowiack, E., & Nowak, A. (2026). Expert-guided schema-based structured extraction from CONSORT diagrams using vision-language models. In BioNLP 2026 (pp. 955–969). https://doi.org/10.18653/v1/2026.bionlp-1.77

CONSORT flow-diagram extraction benchmark: Exact Field Accuracy

200 diagrams; zero-shot; deterministic decoding; diagram only; expert prompt

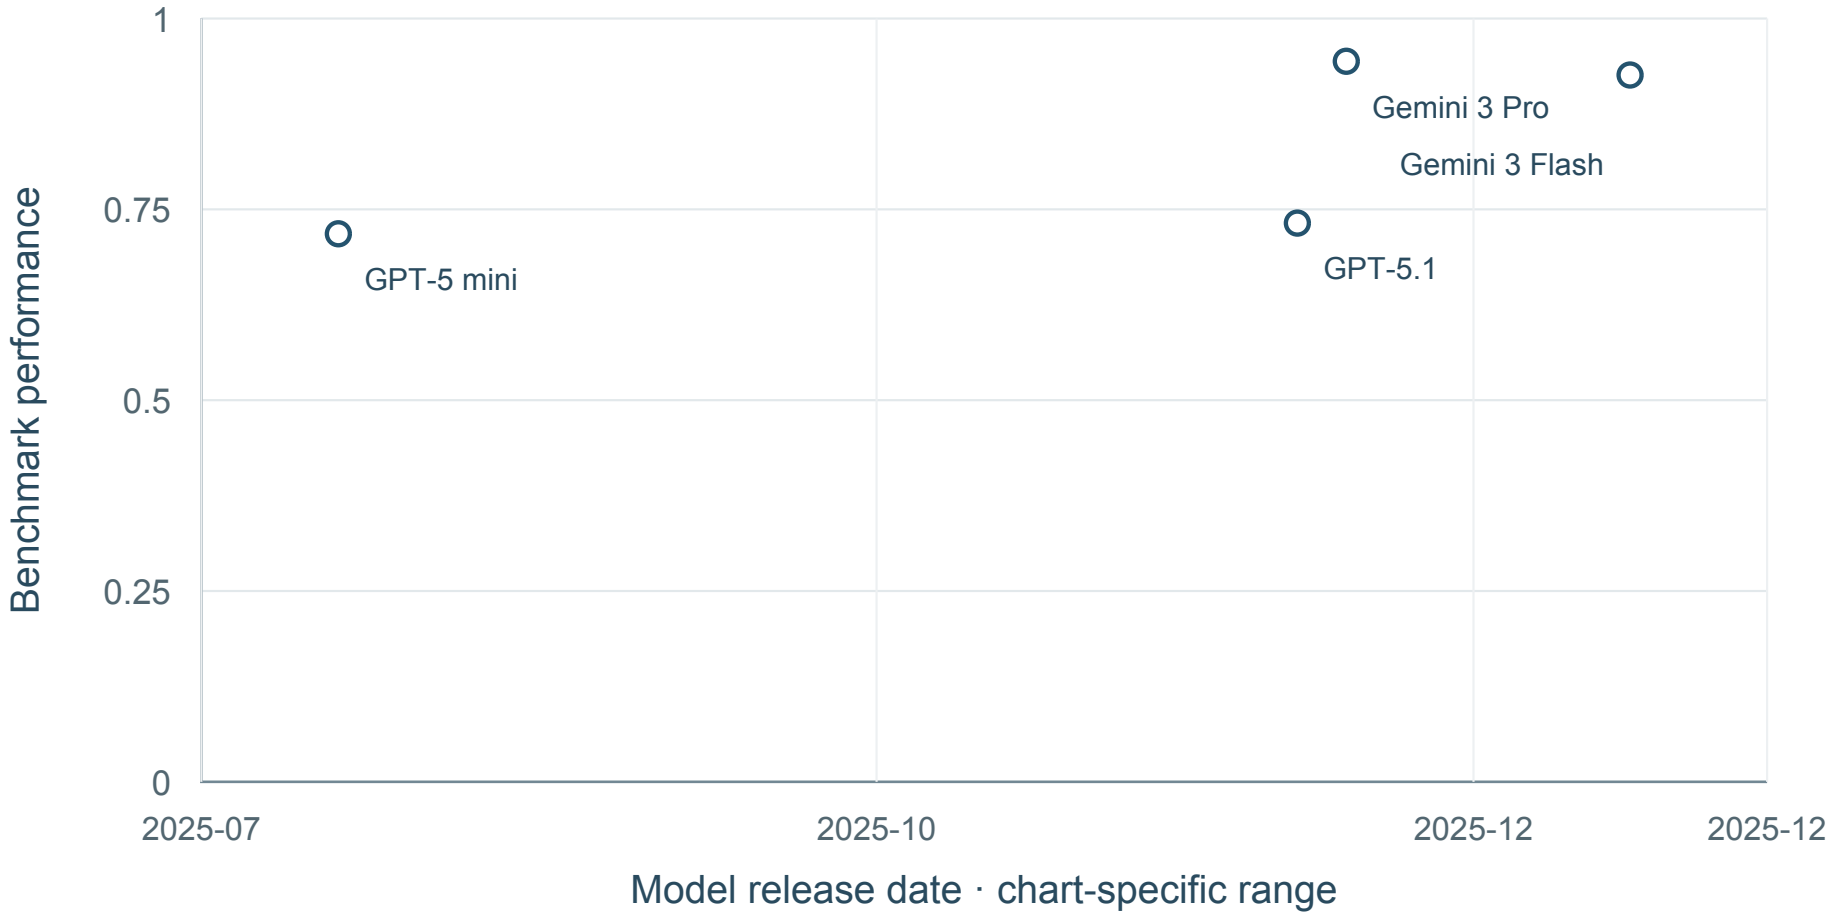

4 shown · 3 undated · 0 definition-held · sources: S020


No mean curve: Fewer than five dated model configurations.

Result-source references: S020. Exact point locators and raw values: data/F082_CONSORT_diagrams_values.csv.

Benchmark reference (APA): Stachura, D., Przechera, B., Opałek, M., Sadowska, E., Borowiack, E., & Nowak, A. (2026). Expert-guided schema-based structured extraction from CONSORT diagrams using vision-language models. In BioNLP 2026 (pp. 955–969). https://doi.org/10.18653/v1/2026.bionlp-1.77

CONSORT flow-diagram extraction benchmark: Whole-diagram Exact Match

200 diagrams; zero-shot; deterministic decoding; diagram only; expert prompt

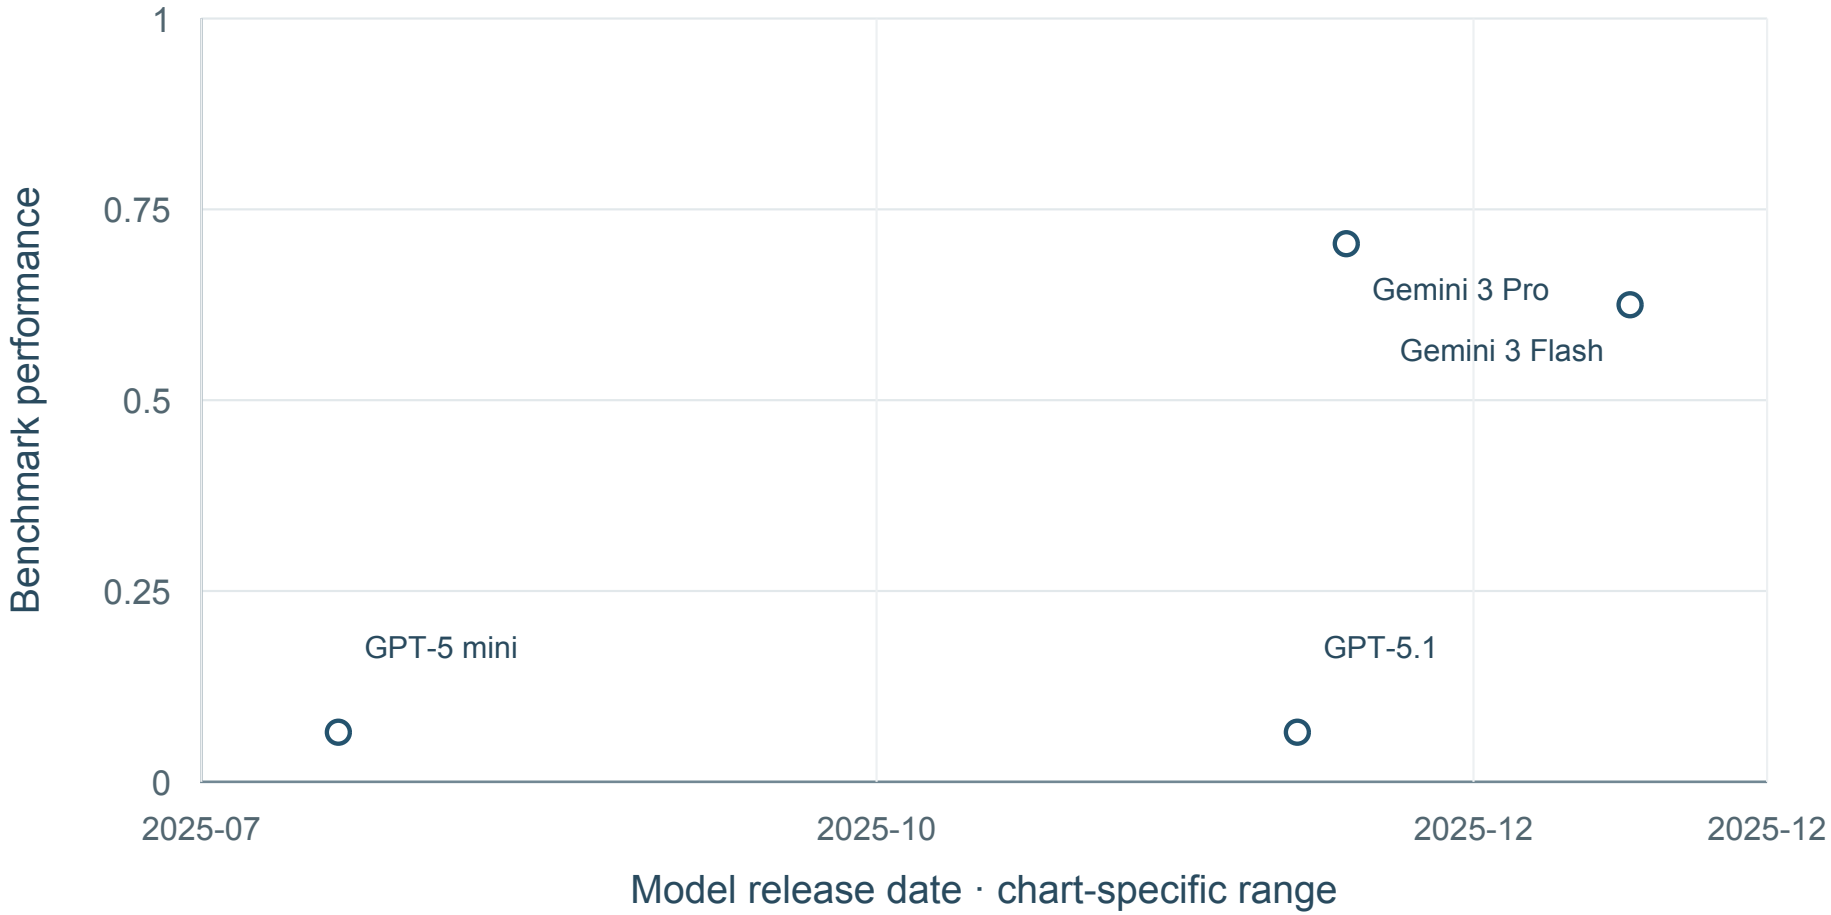

4 shown · 3 undated · 0 definition-held · sources: S020


No mean curve: Fewer than five dated model configurations.

Result-source references: S020. Exact point locators and raw values: data/F082_CONSORT_diagrams_values.csv.

Benchmark reference (APA): Stachura, D., Przechera, B., Opałek, M., Sadowska, E., Borowiack, E., & Nowak, A. (2026). Expert-guided schema-based structured extraction from CONSORT diagrams using vision-language models. In BioNLP 2026 (pp. 955–969). https://doi.org/10.18653/v1/2026.bionlp-1.77

CONSORT flow-diagram extraction benchmark: Group F1

200 diagrams; zero-shot; deterministic decoding; diagram only; stepwise

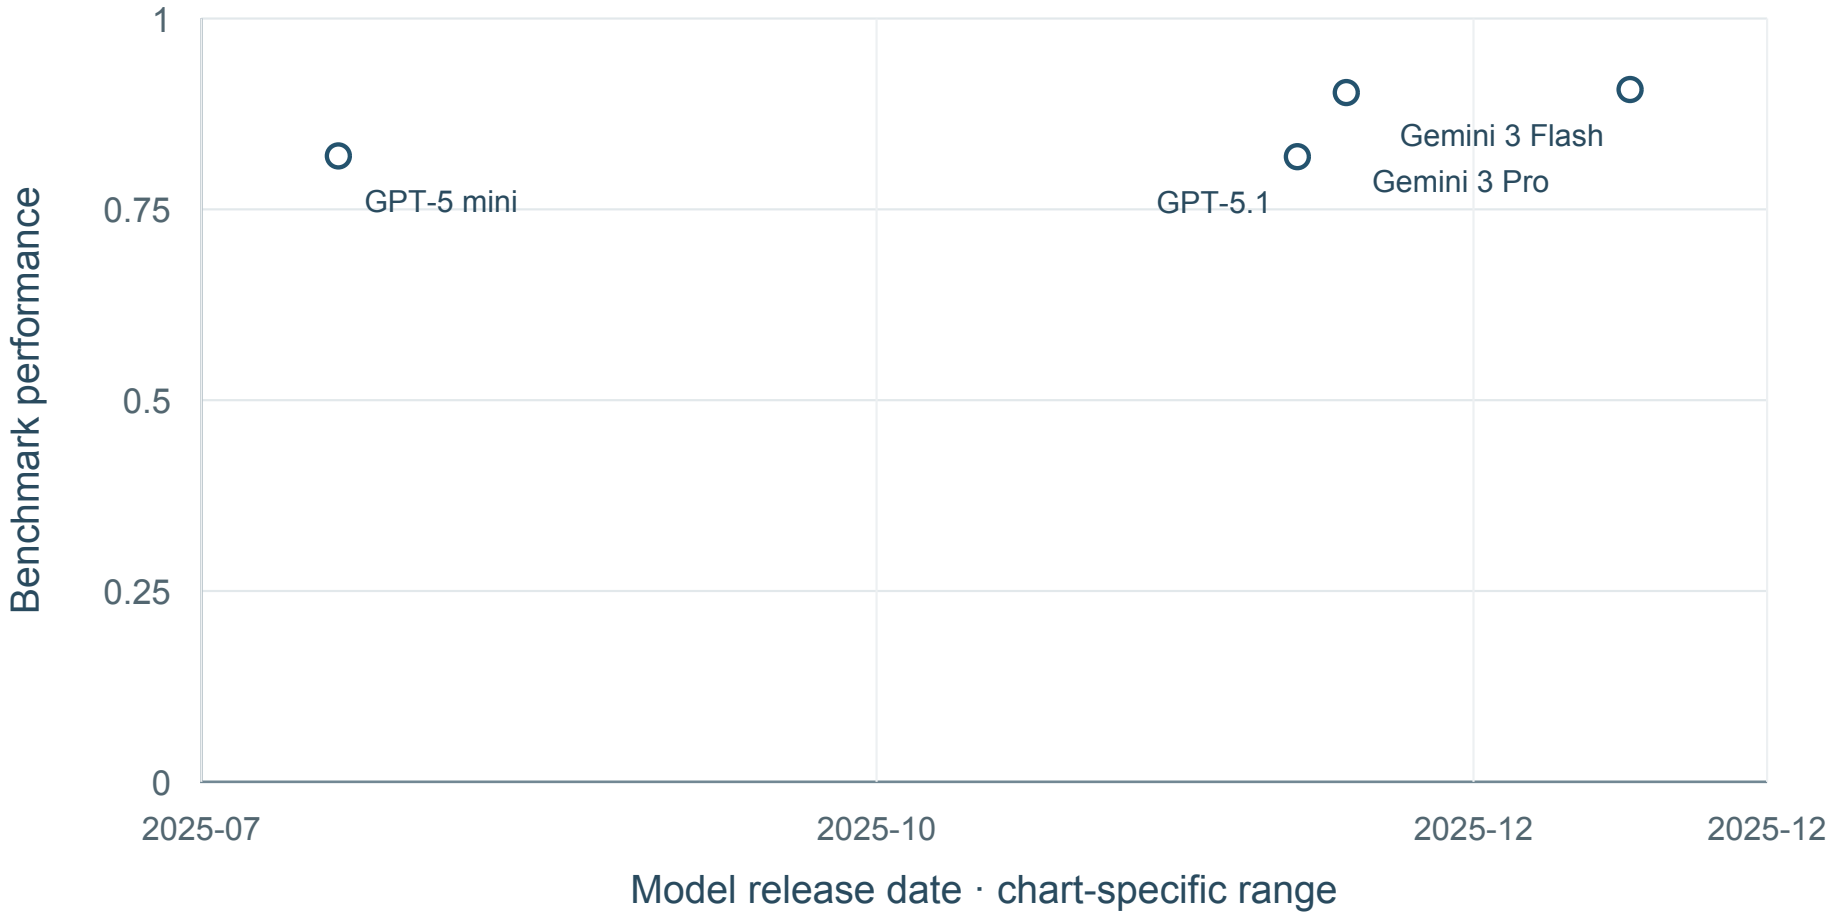


4 shown · 3 undated · 0 definition-held · sources: S020

No mean curve: Fewer than five dated model configurations.

Result-source references: S020. Exact point locators and raw values: data/F082_CONSORT_diagrams_values.csv.

Benchmark reference (APA): Stachura, D., Przechera, B., Opałek, M., Sadowska, E., Borowiack, E., & Nowak, A. (2026). Expert-guided schema-based structured extraction from CONSORT diagrams using vision-language models. In BioNLP 2026 (pp. 955–969). https://doi.org/10.18653/v1/2026.bionlp-1.77

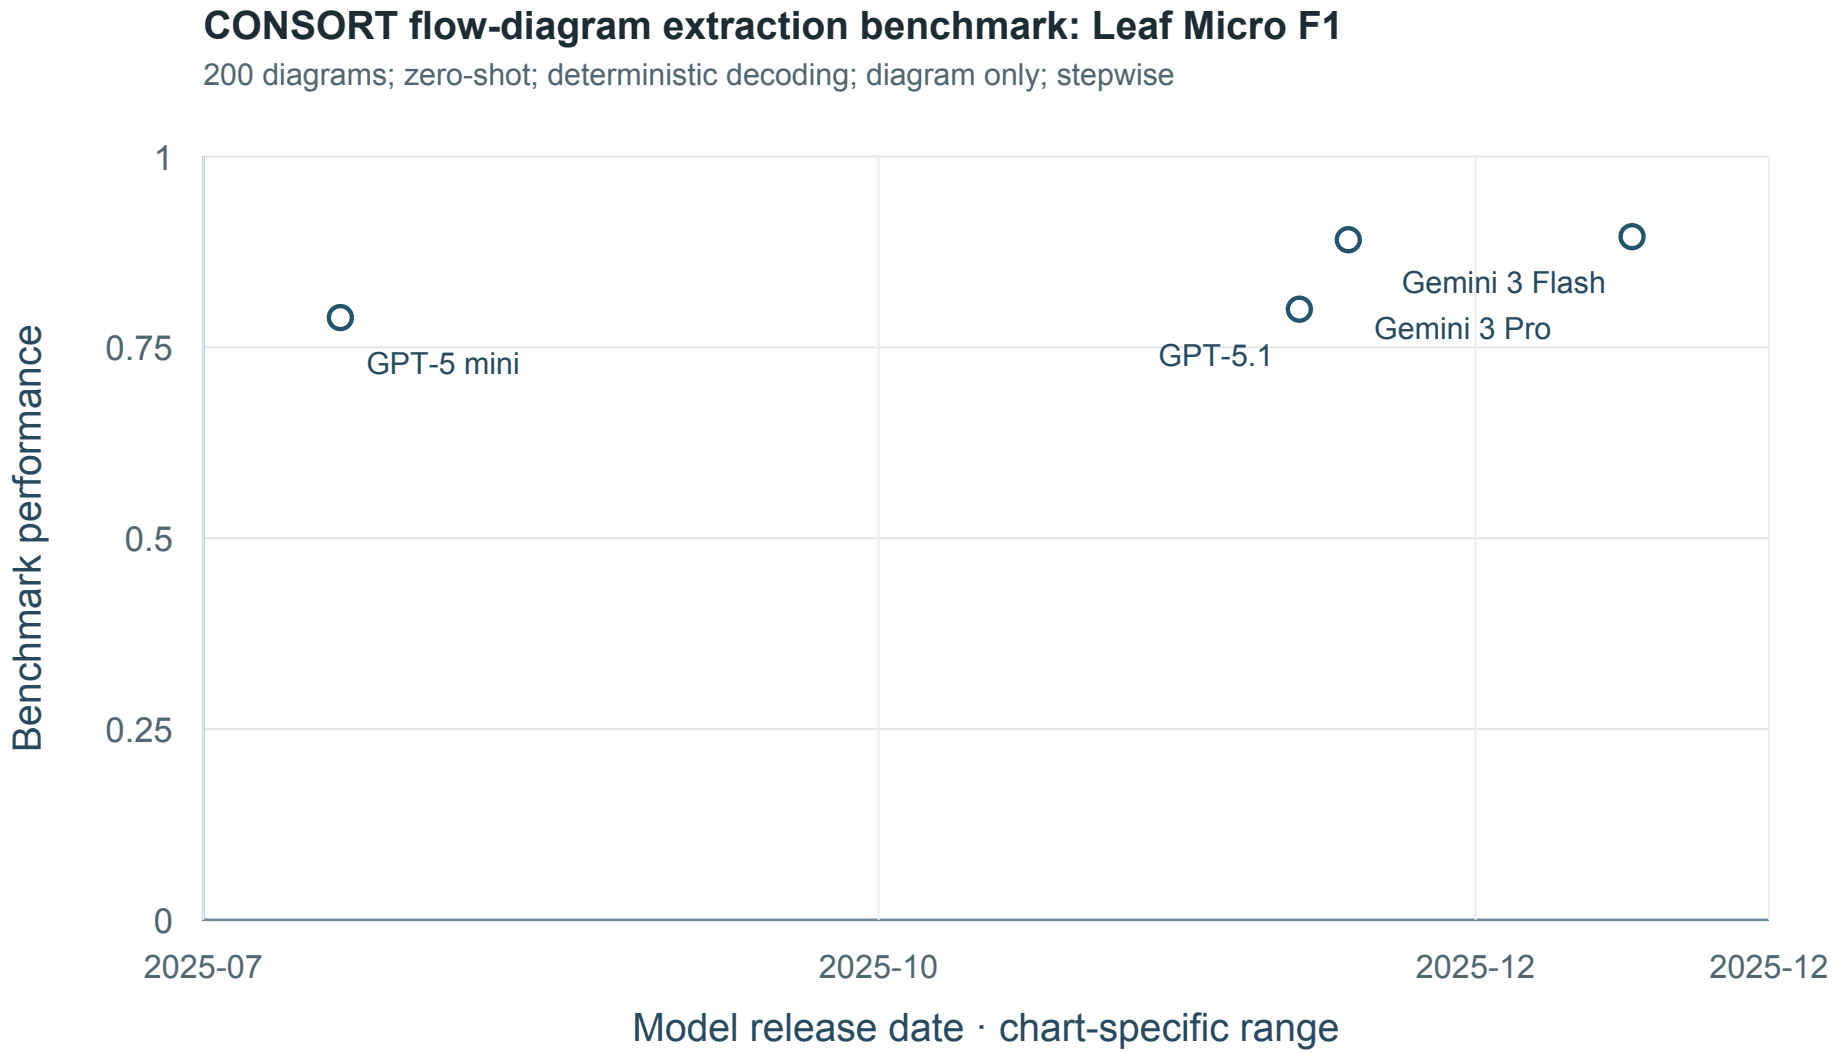


Result-source references: S020. Exact point locators and raw values: data/F082_CONSORT_diagrams_values.csv.

Benchmark reference (APA): Stachura, D., Przechera, B., Opałek, M., Sadowska, E., Borowiack, E., & Nowak, A. (2026). Expert-guided schema-based structured extraction from CONSORT diagrams using vision-language models. In BioNLP 2026 (pp. 955–969). https://doi.org/10.18653/v1/2026.bionlp-1.77

CONSORT flow-diagram extraction benchmark: Exact Field Accuracy

200 diagrams; zero-shot; deterministic decoding; diagram only; stepwise

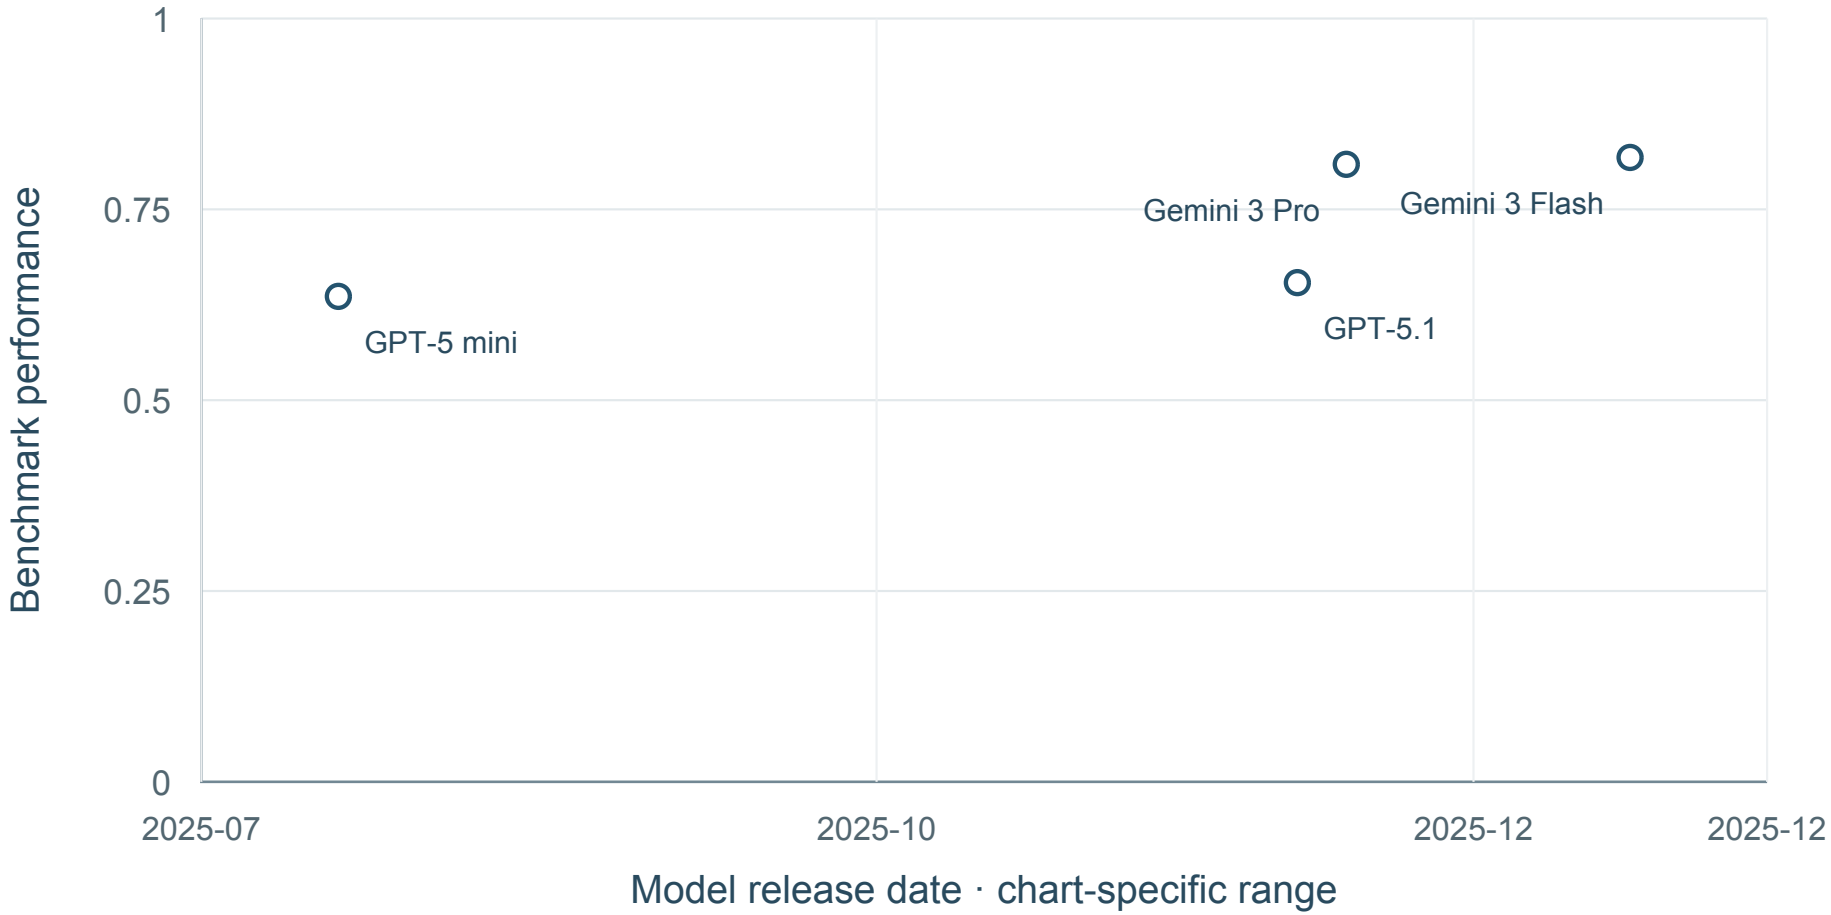

4 shown · 3 undated · 0 definition-held · sources: S020


No mean curve: Fewer than five dated model configurations.

Result-source references: S020. Exact point locators and raw values: data/F082_CONSORT_diagrams_values.csv.

Benchmark reference (APA): Stachura, D., Przechera, B., Opałek, M., Sadowska, E., Borowiack, E., & Nowak, A. (2026). Expert-guided schema-based structured extraction from CONSORT diagrams using vision-language models. In BioNLP 2026 (pp. 955–969). https://doi.org/10.18653/v1/2026.bionlp-1.77

CONSORT flow-diagram extraction benchmark: Whole-diagram Exact Match

200 diagrams; zero-shot; deterministic decoding; diagram only; stepwise

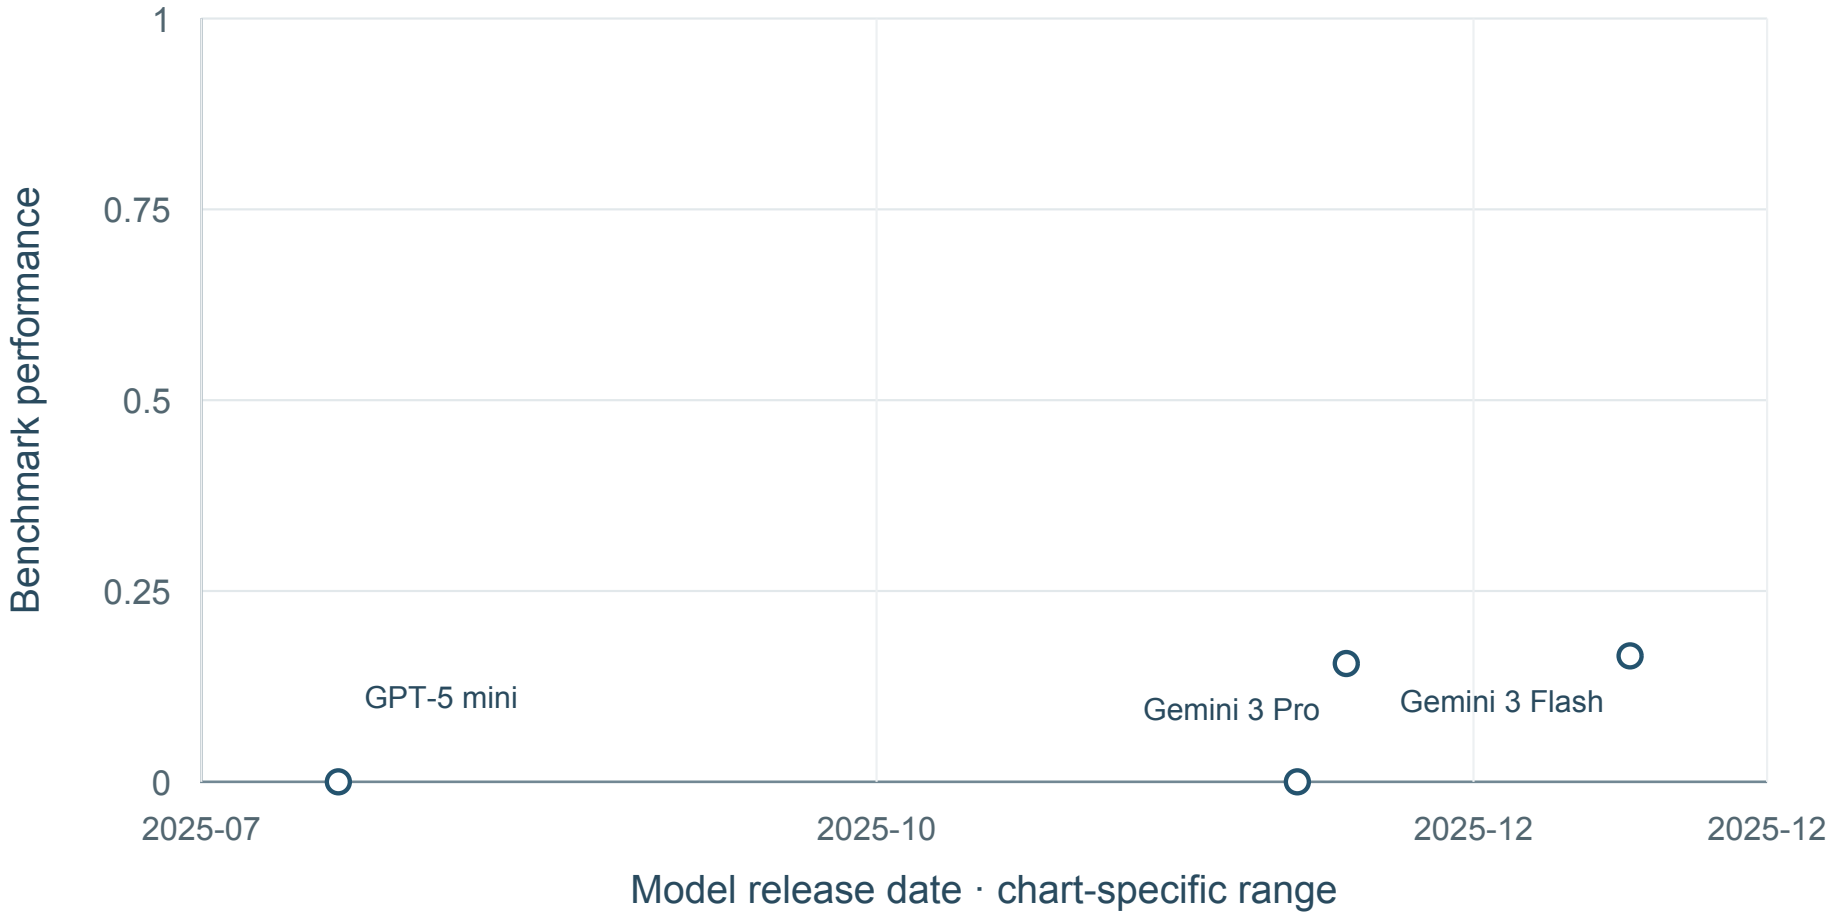

4 shown · 3 undated · 0 definition-held · sources: S020

No mean curve: Fewer than five dated model configurations.

Result-source references: S020. Exact point locators and raw values: data/F082_CONSORT_diagrams_values.csv.

Benchmark reference (APA): Stachura, D., Przechera, B., Opałek, M., Sadowska, E., Borowiack, E., & Nowak, A. (2026). Expert-guided schema-based structured extraction from CONSORT diagrams using vision-language models. In BioNLP 2026 (pp. 955–969). https://doi.org/10.18653/v1/2026.bionlp-1.77

Result-source bibliography

These references identify where scores were reported. They can differ from the paper introducing a benchmark. Every observation retains its own source URL and exact locator in the article observation table and the HTML benchmark page.

[S001] THUDM. (n.d.). LongBench v2 leaderboard. LongBench v2. Retrieved October 30, 2026, from https://longbench2.github.io/

[S002] OmniDocBench leaderboard. (n.d.). www.idp-leaderboard.org. Retrieved October 23, 2026, from https://www.idp-leaderboard.org/benchmarks/omnidocbench/

[S003] Gemini Team. (2024). Gemini 1.5: Unlocking multimodal understanding across millions of tokens of context [Technical report / model card]. https://storage.googleapis.com/deepmind-media/gemini/gemini_v1_5_report.pdf

[S004] Google DeepMind. (n.d.). Gemini 2 5 Pro Model Card [Technical report / model card]. https://storage.googleapis.com/deepmind-media/Model-Cards/Gemini-2-5-Pro-Model-Card.pdf

[S005] Google DeepMind. (n.d.). Gemini 3 Flash Model Card [Technical report / model card]. https://storage.googleapis.com/deepmind-media/Model-Cards/Gemini-3-Flash-Model-Card.pdf

[S006] OpenAI. (n.d.). Gpt 5 6. OpenAI. Retrieved October 23, 2026, from https://openai.com/index/gpt-5-6/

[S009] NVIDIA. (n.d.). RULER. GitHub. Retrieved October 30, 2026, from https://raw.githubusercontent.com/NVIDIA/RULER/main/README.md

[S010] adobe-research. (n.d.). NoLiMa. GitHub. Retrieved October 30, 2026, from https://raw.githubusercontent.com/adobe-research/NoLiMa/main/README.md

[S011] DocMath-Eval. (n.d.). DocMath-Eval testmini model scores [Data table]. DocMath-Eval. Retrieved October 30, 2026, from https://docmath-eval.github.io/static/js/model_scores_testmini.js

[S012] Qwen. (n.d.). Qwen2.5-VL-72B-Instruct [Model card]. Hugging Face. Retrieved October 30, 2026, from https://huggingface.co/Qwen/Qwen2.5-VL-72B-Instruct/raw/main/README.md

[S013] deepseek-ai. (n.d.). MATH500. GitHub. Retrieved October 30, 2026, from https://raw.githubusercontent.com/deepseek-ai/DeepSeek-R1/main/README.md

[S014] Laurent, J. M., Janizek, J. D., Ruzo, M., Hinks, M. M., Hammerling, M. J., Narayanan, S., Ponnapati, M., White, A. D., & Rodriques, S. G. (2024). LAB-Bench: Measuring capabilities of language models for biology research. arXiv. https://arxiv.org/abs/2407.10362

[S015] Wang, J., Cao, W., Bao, L., Zheng, Y., Pasternak, G., Wang, K., Wang, X., Paturi, R., & Bergen, L. (2024). Measuring risk of bias in biomedical reports: The RoBBR benchmark. arXiv. https://arxiv.org/abs/2411.18831

[S017] TableBench. (n.d.). TableBench leaderboard: Corrected/refined evaluation. TableBench. Retrieved October 30, 2026, from https://tablebench.github.io/

[S018] Berkeley Function Calling Leaderboard. (n.d.). BFCL v4 overall results [CSV data table]. UC Berkeley. Retrieved October 30, 2026, from https://gorilla.cs.berkeley.edu/data_overall.csv

[S019] Xu, W., Zhang, W., Ling, F., Fei, B., Hu, Y., Ma, R., Zhang, B., Ren, F., Lin, J., Ouyang, W., & Bai, L. (2025). Manalyzer: End-to-end automated Meta-analysis with Multi-agent system. arXiv. https://arxiv.org/abs/2505.20310

[S020] Stachura, D., Przechera, B., Opałek, M., Sadowska, E., Borowiack, E., & Nowak, A. (2026). Expert-guided schema-based structured extraction from CONSORT diagrams using vision-language models. In BioNLP 2026 (pp. 955–969). https://doi.org/10.18653/v1/2026.bionlp-1.77

[S021] İlgen, B., Awotoro, E., & Hattab, G. (2026). VaxScope: Document-level structured evidence extraction from immunization systematic reviews. In BioNLP 2026 (pp. 853–863). https://doi.org/10.18653/v1/2026.bionlp-1.69

[S022] Li, Z., Abulaiti, A., Lu, Y., Chen, X., Zheng, J., Lin, H., Han, X., & Sun, L. (2024). READoc: A unified benchmark for realistic document structured extraction. arXiv. https://arxiv.org/abs/2409.05137

[S023] Poznanski, J., Rangapur, A., Borchardt, J., Dunkelberger, J., Huff, R., Lin, D., Rangapur, A., Wilhelm, C., Lo, K., & Soldaini, L. (2025). olmOCR: Unlocking trillions of tokens in PDFs with vision language models. arXiv. https://arxiv.org/abs/2502.18443

[S024] Poznanski, J., Soldaini, L., & Lo, K. (2025). olmOCR 2: Unit test rewards for document OCR. arXiv. https://arxiv.org/abs/2510.19817

[S025] Li, Z., Lin, Z., Liu, Q., Zhang, Z., Zhang, S., Guo, Z., Song, J., Zhang, J., Bai, X., & Liu, Y. (2026). MDPBench: A benchmark for multilingual document parsing in real-world scenarios. arXiv. https://arxiv.org/abs/2603.28130

[S026] Li, Z., Ma, Z., Chen, J., Zhang, J., Su, Z., Zhang, Y., Yu, Z., Liu, R., Lv, X., Li, B., Gao, J., Zhang, Z., Yuan, C., Li, B., & Hu, W. (2026). How far is document parsing from solved? PureDocBench: A source-traceable benchmark across clean, degraded, and real-world settings. arXiv. https://arxiv.org/abs/2605.07492

[S027] Yang, M., Yu, X. V., Li, P., Guo, X., Qi, Z., Kim, K., Ye, L., Luo, X., Bi, J., Zhang, H., Riaz, H., Zhang, X., Xiao, Y., Liu, B., Tang, T., Zhao, Y., Lin, Q., Wang, Z., Liu, M., … He, Z. (2026). Dr. DocBench: A comprehensive benchmark for expert-level and difficult document parsing. arXiv. https://arxiv.org/abs/2606.01393

[S029] Masry, A., Islam, M. S., Ahmed, M., Bajaj, A., Kabir, F., Kartha, A., Laskar, M. T. R., Rahman, M., Rahman, S., Shahmohammadi, M., Thakkar, M., Parvez, M. R., Hoque, E., & Joty, S. (2025). ChartQAPro: A more diverse and challenging benchmark for chart question answering. Findings of the Association for Computational Linguistics: ACL 2025. https://arxiv.org/abs/2504.05506v2

[S030] Cheng, Z., Dong, H., Wang, Z., Jia, R., Guo, J., Gao, Y., Han, S., Lou, J.-G., & Zhang, D. (2021). HiTab: A hierarchical table dataset for question answering and natural language generation. arXiv. https://arxiv.org/abs/2108.06712

[S031] Chen, Z., Chen, W., Smiley, C., Shah, S., Borova, I., Langdon, D., Moussa, R., Beane, M., Huang, T.-H., Routledge, B., & Wang, W. Y. (2021). FinQA: A dataset of numerical reasoning over financial data. arXiv. https://arxiv.org/abs/2109.00122

[S033] Ma, Y., Zang, Y., Chen, L., Chen, M., Jiao, Y., Li, X., Lu, X., Liu, Z., Ma, Y., Dong, X., Zhang, P., Pan, L., Jiang, Y.-G., Wang, J., Cao, Y., & Sun, A. (2024). MMLongBench-Doc: Benchmarking Long-context document understanding with visualizations. arXiv. https://arxiv.org/abs/2407.01523

[S034] Bai, Y., Lv, X., Zhang, J., Lyu, H., Tang, J., Huang, Z., Du, Z., Liu, X., Zeng, A., Hou, L., Dong, Y., Tang, J., & Li, J. (2023). LongBench: A bilingual, multitask benchmark for long context understanding. arXiv. https://arxiv.org/abs/2308.14508

[S035] Yen, H., Gao, T., Hou, M., Ding, K., Fleischer, D., Izsak, P., Wasserblat, M., & Chen, D. (2025). HELMET: How to evaluate long-context language models effectively and thoroughly. International Conference on Learning Representations (ICLR). https://arxiv.org/abs/2410.02694

[S036] Zhang, X., Chen, Y., Hu, S., Xu, Z., Chen, J., Hao, M. K., Han, X., Thai, Z. L., Wang, S., Liu, Z., & Sun, M. (2024). ∞bench: Extending long context evaluation beyond 100k tokens. Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers). https://arxiv.org/abs/2402.13718

[S039] Mirzadeh, I., Alizadeh, K., Shahrokhi, H., Tuzel, O., Bengio, S., & Farajtabar, M. (2024). GSM-Symbolic: Understanding the limitations of mathematical reasoning in large language models. arXiv. https://arxiv.org/abs/2410.05229

[S043] Cai, H., Cai, X., Chang, J., Li, S., Yao, L., Wang, C., Gao, Z., Wang, H., Li, Y., Lin, M., Yang, S., Wang, J., Xu, M., Huang, J., Fang, X., Zhuang, J., Yin, Y., Li, Y., Chen, C., … Ke, G. (2024). SciAssess: Benchmarking LLM proficiency in scientific literature analysis. arXiv. https://arxiv.org/abs/2403.01976

[S046] Siegel, Z. S., Kapoor, S., Nadgir, N., Stroebl, B., & Narayanan, A. (2024). CORE-Bench: Fostering the credibility of published research through a computational reproducibility agent benchmark. arXiv. https://arxiv.org/abs/2409.11363

[S047] Mialon, G., Fourrier, C., Swift, C., Wolf, T., LeCun, Y., & Scialom, T. (2023). GAIA: a benchmark for general AI assistants. arXiv. https://arxiv.org/abs/2311.12983

[S048] Zhao, Y., Li, Y., Li, C., & Zhang, R. (2022). MultiHiertt: Numerical reasoning over multi hierarchical tabular and textual data. arXiv. https://arxiv.org/abs/2206.01347

[S051] Wen, B., Ke, P., Gu, X., Wu, L., Huang, H., Zhou, J., Li, W., Hu, B., Gao, W., Xu, J., Liu, Y., Tang, J., Wang, H., & Huang, M. (2024). Benchmarking complex instruction-following with multiple constraints composition. arXiv. https://arxiv.org/abs/2407.03978

[S054] Gao, T., Yen, H., Yu, J., & Chen, D. (2023). Enabling large language models to generate text with citations. Empirical Methods in Natural Language Processing (EMNLP). https://arxiv.org/abs/2305.14627

[S058] Guo, Y., Du, Z., Tang, N., Tang, K., Ge, C., & Gao, Y. (2026). DTBench: A synthetic benchmark for Document-to-Table extraction. arXiv. https://arxiv.org/abs/2602.13812

[S059] Ji, Y., Xu, Z., Liu, Z., Chen, Z., Zhang, Q., Yang, Z., Lin, J., Gu, Y., Yu, G., & Sun, M. (2026). UNIKIE-BENCH: Benchmarking large multimodal models for key information extraction in visual documents. arXiv. https://arxiv.org/abs/2602.07038

[S060] Zheng, C., Zhang, Z., Zhang, B., Lin, R., Lu, K., Yu, B., Liu, D., Zhou, J., & Lin, J. (2025). ProcessBench: Identifying process errors in mathematical reasoning. The 63rd Annual Meeting of the Association for Computational Linguistics. https://arxiv.org/abs/2412.06559

[S061] Li, J., Wang, M., Zheng, Z., & Zhang, M. (2023). LooGLE: Can long-context language models understand long contexts?. arXiv. https://arxiv.org/abs/2311.04939

[S062] He, Z., Wang, Y., Li, J., Liang, K., & Zhang, M. (2025). LooGLE v2: Are LLMs ready for real world long dependency challenges?. arXiv. https://arxiv.org/abs/2510.22548

[S063] Wang, W., Zhang, S., Ren, Y., Duan, Y., Li, T., Liu, S., Hu, M., Chen, Z., Zhang, K., Lu, L., Zhu, X., Luo, P., Qiao, Y., Dai, J., Shao, W., & Wang, W. (2024). Needle in a multimodal haystack. arXiv. https://arxiv.org/abs/2406.07230

[S064] Sui, Y., Zhou, M., Zhou, M., Han, S., & Zhang, D. (2023). Table meets LLM: Can large language models understand structured table data? A benchmark and empirical study. arXiv. https://arxiv.org/abs/2305.13062

[S065] Yang, Z., Qi, P., Zhang, S., Bengio, Y., Cohen, W. W., Salakhutdinov, R., & Manning, C. D. (2018). HotpotQA: A dataset for diverse, explainable Multi-hop question answering. arXiv. https://arxiv.org/abs/1809.09600

[S066] Yang, H., Hu, Y., Kang, S., Lin, Z., & Zhang, M. (2024). Number cookbook: Number understanding of language models and how to improve it. arXiv. https://arxiv.org/abs/2411.03766

[S071] Zhu, F., Lei, W., Huang, Y., Wang, C., Zhang, S., Lv, J., Feng, F., & Chua, T.-S. (2021). TAT-QA: A question answering benchmark on a hybrid of tabular and textual content in finance. In Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers) (pp. 3277–3287). https://doi.org/10.18653/v1/2021.acl-long.254

[S072] Dasigi, P., Lo, K., Beltagy, I., Cohan, A., Smith, N. A., & Gardner, M. (2021). A dataset of information-seeking questions and answers anchored in research papers. In Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (pp. 4599–4610). https://doi.org/10.18653/v1/2021.naacl-main.365

[S074] Trivedi, H., Balasubramanian, N., Khot, T., & Sabharwal, A. (2021). MuSiQue: Multihop questions via Single-hop question composition. arXiv. https://arxiv.org/abs/2108.00573

[S078] Qian, J., Wang, H., Li, Z., Li, S., & Yan, X. (2022). Limitations of language models in arithmetic and symbolic induction. arXiv. https://arxiv.org/abs/2208.05051

[S079] Wang, Z., Cao, L., Danek, B., Jin, Q., Lu, Z., & Sun, J. (2024). Accelerating clinical evidence synthesis with large language models. arXiv. https://arxiv.org/abs/2406.17755

[MC007] Qwen Team. (n.d.). Qwen/Qwen3-235B-A22B-Instruct-2507 [Model card / technical evaluation]. Retrieved October 31, 2026, from https://huggingface.co/Qwen/Qwen3-235B-A22B-Instruct-2507

[MC008] Qwen Team. (n.d.). Qwen/Qwen3-235B-A22B-Thinking-2507 [Model card / technical evaluation]. Retrieved October 31, 2026, from https://huggingface.co/Qwen/Qwen3-235B-A22B-Thinking-2507

[MC009] Qwen Team. (n.d.). Qwen/Qwen3-30B-A3B-Thinking-2507 [Model card / technical evaluation]. Retrieved October 31, 2026, from https://huggingface.co/Qwen/Qwen3-30B-A3B-Thinking-2507

[MC010] Qwen Team. (n.d.). Qwen/Qwen3-4B-Instruct-2507 [Model card / technical evaluation]. Retrieved October 31, 2026, from https://huggingface.co/Qwen/Qwen3-4B-Instruct-2507

[MC014] Qwen Team. (n.d.). Qwen/Qwen3.5-9B [Model card / technical evaluation]. Retrieved October 31, 2026, from https://huggingface.co/Qwen/Qwen3.5-9B

[MC015] DeepSeek-AI. (n.d.). deepseek-ai/DeepSeek-R1-0528 [Model card / technical evaluation]. Retrieved October 31, 2026, from https://huggingface.co/deepseek-ai/DeepSeek-R1-0528

[MC016] DeepSeek-AI. (n.d.). deepseek-ai/DeepSeek-V3 [Model card / technical evaluation]. Retrieved October 31, 2026, from https://huggingface.co/deepseek-ai/DeepSeek-V3

[MC023] Microsoft. (n.d.). microsoft/phi-4 [Model card / technical evaluation]. Retrieved October 31, 2026, from https://huggingface.co/microsoft/phi-4

[MC029] Mistral AI. (n.d.). mistralai/Mistral-Small-3.2-24B-Instruct-2506 [Model card / technical evaluation]. Retrieved October 31, 2026, from https://huggingface.co/mistralai/Mistral-Small-3.2-24B-Instruct-2506

[MC031] MiniMax. (n.d.). MiniMaxAI/MiniMax-Text-01 [Model card / technical evaluation]. Retrieved October 31, 2026, from https://huggingface.co/MiniMaxAI/MiniMax-Text-01

[MC033] Moonshot AI. (n.d.). moonshotai/Kimi-K2.5 [Model card / technical evaluation]. Retrieved October 31, 2026, from https://huggingface.co/moonshotai/Kimi-K2.5

[MC041] Nanonets. (n.d.). nanonets/Nanonets-OCR2-3B [Model card / technical evaluation]. Retrieved October 31, 2026, from https://huggingface.co/nanonets/Nanonets-OCR2-3B

[MC045] TableGPT Team. (n.d.). tablegpt/TableGPT2-7B [Model card / technical evaluation]. Retrieved October 31, 2026, from https://huggingface.co/tablegpt/TableGPT2-7B

[MC042] rednote-hilab. (n.d.). rednote-hilab/dots.ocr [Model card / technical evaluation]. Retrieved October 31, 2026, from https://huggingface.co/rednote-hilab/dots.ocr

[MC047] IBM Granite Team. (n.d.). ibm-granite/granite-3.2-8b-instruct [Model card / technical evaluation]. Retrieved October 31, 2026, from https://huggingface.co/ibm-granite/granite-3.2-8b-instruct

[MC048] Technology Innovation Institute. (n.d.). tiiuae/Falcon3-10B-Instruct [Model card / technical evaluation]. Retrieved October 31, 2026, from https://huggingface.co/tiiuae/Falcon3-10B-Instruct

[MC049] LG AI Research. (n.d.). LGAI-EXAONE/EXAONE-4.0-32B [Model card / technical evaluation]. Retrieved October 31, 2026, from https://huggingface.co/LGAI-EXAONE/EXAONE-4.0-32B

[MC050] NVIDIA. (n.d.). nvidia/Llama-3_1-Nemotron-Ultra-253B-v1 [Model card / technical evaluation]. Retrieved October 31, 2026, from https://huggingface.co/nvidia/Llama-3_1-Nemotron-Ultra-253B-v1

[MC051] Meta. (n.d.). Meta Llama 3.3 official model card [Model card / technical evaluation]. Retrieved October 31, 2026, from https://raw.githubusercontent.com/meta-llama/llama-models/main/models/llama3_3/MODEL_CARD.md

[MC052] Meta. (n.d.). Meta Llama 3.1 official model card [Model card / technical evaluation]. Retrieved October 31, 2026, from https://raw.githubusercontent.com/meta-llama/llama-models/main/models/llama3_1/MODEL_CARD.md

[MC054] Meta. (n.d.). Meta Llama 4 official model card [Model card / technical evaluation]. Retrieved October 31, 2026, from https://raw.githubusercontent.com/meta-llama/llama-models/main/models/llama4/MODEL_CARD.md

[MC055] Google. (n.d.). Google Gemma 3 official documentation source [Model card / technical evaluation]. Retrieved October 31, 2026, from https://raw.githubusercontent.com/google-gemma/docs/main/docs/models/gemma-3/index.md

[MC057] Qwen Team. (2025). Qwen3 technical report. arXiv. https://arxiv.org/abs/2505.09388

[MC058] Qwen Team. (2024). Qwen2.5 technical report. arXiv. https://arxiv.org/abs/2412.15115

[MC069] OpenAI. (n.d.). GPT-5.6 release and system-card links [Model card / technical evaluation]. Retrieved October 31, 2026, from https://openai.com/index/gpt-5-6/

[MC073] GLM-4.5 Team. (2025). GLM-4.5: Agentic, reasoning, and coding (ARC) foundation models. arXiv. https://arxiv.org/abs/2508.06471

[MC075] Qwen Team. (2025). Qwen3-VL technical report. arXiv. https://arxiv.org/abs/2511.21631

[MC079] AI21 Labs. (n.d.). Jamba 1.5 Large public model-card page [Model card / technical evaluation]. Retrieved October 31, 2026, from https://huggingface.co/ai21labs/AI21-Jamba-1.5-Large

[MC083] Qwen Team. (n.d.). Qwen3.5 27B model card [Model card / technical evaluation]. Retrieved October 31, 2026, from https://huggingface.co/Qwen/Qwen3.5-27B/raw/main/README.md

[MC084] Qwen Team. (n.d.). Qwen3.5 397B model card [Model card / technical evaluation]. Retrieved October 31, 2026, from https://huggingface.co/Qwen/Qwen3.5-397B-A17B/raw/main/README.md

[MC091] Qwen Team. (n.d.). Qwen3.8 27B model card [Model card / technical evaluation]. Retrieved October 31, 2026, from https://huggingface.co/Qwen/Qwen3.8-27B/raw/main/README.md

[MC095] Moonshot AI. (n.d.). Kimi K3 model card [Model card / technical evaluation]. Retrieved October 31, 2026, from https://huggingface.co/moonshotai/Kimi-K3/raw/main/README.md

[MC096] OpenAI. (n.d.). GPT6 Astra official release evaluations [Model card / technical evaluation]. Retrieved October 31, 2026, from https://openai.com/index/gpt-6-astra/

[MC098] Qwen Team. (n.d.). Qwen3.6 27B model card [Model card / technical evaluation]. Retrieved October 31, 2026, from https://huggingface.co/Qwen/Qwen3.6-27B/raw/main/README.md

[MC099] Qwen Team. (n.d.). Qwen3.6 35B model card [Model card / technical evaluation]. Retrieved October 31, 2026, from https://huggingface.co/Qwen/Qwen3.6-35B-A3B/raw/main/README.md

[MC081] Qwen Team. (2025). Qwen3 technical report. arXiv. https://arxiv.org/abs/2505.09388

[MC061] Anthropic. (n.d.). Claude Sonnet 4.6 system card [Model card / technical evaluation]. Retrieved October 31, 2026, from https://anthropic.com/claude-sonnet-4-6-system-card

[MC062] Anthropic. (n.d.). Claude Opus 4.6 system card [Model card / technical evaluation]. Retrieved October 31, 2026, from https://anthropic.com/claude-opus-4-6-system-card

[MC044] Z.ai. (n.d.). zai-org/GLM-OCR [Model card / technical evaluation]. Retrieved October 31, 2026, from https://huggingface.co/zai-org/GLM-OCR

[MC076] Cohere. (n.d.). Command A technical report [Model card / technical evaluation]. Retrieved October 31, 2026, from https://cohere.com/research/papers/command-a-technical-report.pdf

[MC013] Qwen Team. (n.d.). Qwen/Qwen3-VL-8B-Instruct [Model card / technical evaluation]. Retrieved October 31, 2026, from https://huggingface.co/Qwen/Qwen3-VL-8B-Instruct

[MC037] OpenGVLab. (n.d.). OpenGVLab/InternVL3_5-8B [Model card / technical evaluation]. Retrieved October 31, 2026, from https://huggingface.co/OpenGVLab/InternVL3_5-8B

[MC038] PaddleOCR Team. (n.d.). PaddlePaddle/PaddleOCR-VL [Model card / technical evaluation]. Retrieved October 31, 2026, from https://huggingface.co/PaddlePaddle/PaddleOCR-VL

[MC100] PaddleOCR Team. (n.d.). PaddleOCR VL1.6 model card [Model card / technical evaluation]. Retrieved October 31, 2026, from https://huggingface.co/PaddlePaddle/PaddleOCR-VL-1.6/raw/main/README.md

Model-release evidence

Model-release dates are documented separately in model-releases.html and data/release_date_audit.csv. The article observation table includes the release APA reference, URL, locator, precision and available interval for each point. Release months are intervals; checkpoint and result dates alone are insufficient.

Reproducibility

Use reproducibility/reproduce.py with a new output directory. Reproduction reads frozen data and makes no model or network calls. Original source observations are retained unchanged. The HTML supplement, vector figures, source locators, decisions, full kernel grids and article registers accompany this PDF.