

## Abstract Diagrams for the Working Mathematician

Roman Maksimovich

### Abstract

Within the niche of mathematicians, there's a niche of those who need to draw diagrams related to pure mathematics. Within *that* niche there's a niche of people who have experience in programming and feel comfortable writing code to produce graphics. This article is for them. It's a survey of the available tools and a showcase of a library I wrote specifically to simplify the process of drawing diagrams in differential geometry, topology, set theory, etc.

### 1 Introduction

Back in high school, I was attending a seminar on differential geometry, and I wanted to practice my  $\text{\LaTeX}$  skills by typesetting the lecture notes. I found myself needing to draw simple surfaces such as those seen in Figure 1.

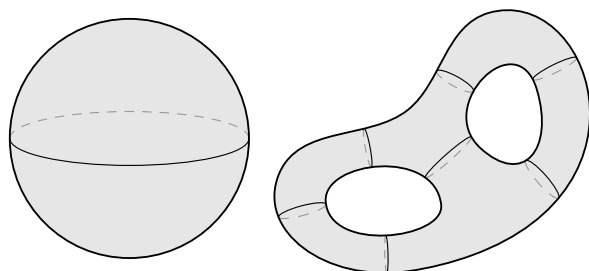


Figure 1: Basic two-dimensional manifolds

At that point I realized I wasn't sure how to draw this. I started by considering some of the available tools:

- **Inkscape** (<https://www.inkscape.org>)

This is a popular and versatile GUI program for drawing vectorized graphics, suitable when the diagram is simple enough to be drawn by hand with some precision assistance. This assumption holds for the left-hand side of Figure 1, but not for the right-hand side. The reason is that each “cross section ring” has to be drawn at a precisely calculated position, where it meets its bounding paths at equal angles, as illustrated on Figure 2.

Besides, it would be useful to tweak the count and positions of these “cross sections” to see what works best for the picture, and this is not something that can be achieved with a GUI tool like **Inkscape**. Pass.

- **$\text{\LaTeX}$ 's `picture` environment**

There are native drawing capabilities to  $\text{\LaTeX}$ ,

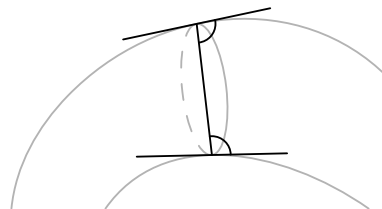


Figure 2: A good position for drawing a cross section ring, equal angles with the tangent lines

but they are severely limited. For instance, a straight line segment can be drawn like so:

```
\begin{picture}(15,30)
  \put(0,0){\line(1,2){15}}
\end{picture}
```

This yields the line shown on the right-hand side. The command `\line(m,n){l}` creates a line whose slope is  $n/m$  and whose horizontal projection is  $l$  units long. However, both  $n$  and  $m$  must not exceed 6, and must be coprime. The reason for these weird restrictions is the mechanism behind the `picture` environment: instead of producing true vector graphics, it tries to assemble the diagram from glyphs found in  $\text{\TeX}$ 's fonts, and these fonts only provide a small variety of sloped straight lines (if you are reading this article digitally, you can zoom in on the straight line above and see that it's actually three aligned forward slashes).

To be fair, `picture` is also capable of drawing an arbitrary Bézier curve by putting it together from many black squares. Still, this is a pretty rudimentary tool unsuited for complicated technical drawing, and it's mainly used to define custom symbols rather than full diagrams. Pass.

- **The `TikZ` package** (<https://tikz.dev>)

For the absolute majority of  $\text{\TeX}$  users, this is the go-to tool for technical drawing, and reasonably so. `TikZ` has a comprehensive manual and a rich ecosystem of libraries to suit virtually your every need. Clearly, both manifolds on Figure 1 can be drawn with `TikZ`.

However, my high school self was positively intimidated by the `TikZ` manual (1321 pages?!), and besides, I wanted to write an *algorithm* that could calculate the best positions for cross section rings, not just a  $\text{\TeX}$  macro. I was fascinated by the **C** programming language at the time, and I wanted to write a *function* which would accept two paths as arguments, as well as the desired number of cross sections, and return the coordinates at which they would look best.  $\text{\TeX}$  certainly tries to provide some features of

a full programming language, but in truth it is more of a markup language, poorly suited for writing general-purpose algorithms. Hence, I passed on `TikZ` also. Alternatives to the `TikZ` package (such as `pstricks`, `xypic`, `dratex`, etc.) suffer from the same and more disadvantages.

Then, in a stroke of luck, I heard about this vector graphics language called **Asymptote** (<https://asymptote.sourceforge.io>), and I knew that it was the one. **Asymptote** was initially introduced in 2004 at the University of Alberta by Andy Hammerlindl, John Bowman, and Tom Prince. It is based on the old METAPOST language, which in turn was based on Donald Knuth's METAFONT program. However, **Asymptote** has a C-like syntax and is indeed a full programming language with data structures, IEEE floating-point number support, control flow structures like `if`, `for`, and `while`, etc., as well as very high-level features such as default arguments and first-class functions (i.e. functions that can be returned or passed to other functions as values).

Readers of *TUGboat* may have already read about **Asymptote** in [2] and [1].

Soon after learning about **Asymptote**, I started writing my own library for this language, one that I later came to use whenever I needed to create a diagram in abstract mathematics.

## 2 Module smoothmanifold

### 2.1 The basics of Asymptote

An **Asymptote** user produces graphics by writing code in a file with the `.asy` extension, then invoking the `asy` program on the command line to compile the code to a picture in a format such as PDF, SVG, PostScript, or a number of others. Additionally, one may write **Asymptote** code directly in a  $\text{\LaTeX}$  document by means of the `asymptote` package. This approach removes the necessity to manually include images, but the code becomes harder to debug.

An example code snippet can look like this:

```
settings.outformat = "eps";
size(4cm);
path p = (0,1) .. (1,0) .. (2,1) .. (3,0);
path q = (0,0) .. (1,1) .. (2,0) .. (3,1);
draw(p); draw(q);
pair[] points = intersectionpoints(p, q);
for (int i = 0; i < points.length; ++i) {
    dot(Label((string)i, align = W),
        points[i], linewidth(4pt));
}
```

The result of compiling this code is an Encapsulated PostScript file shown in Figure 3. Take




Figure 3: A sample picture produced by **Asymptote**

note of **Asymptote**'s support of arrays and its native `intersectionpoints` function (whereas a `TikZ` user would load additional libraries to gain this functionality).

**Asymptote** has other outstanding features such as powerful three-dimensional drawing, rich support for mathematical functions, but most importantly, the ease with which the language can be extended or modified. In the following subsections, I will outline the most prominent features of my own library (which now counts more than 6000 lines of code) and how they allow for effortless drawing of abstract diagrams.

### 2.2 Smooth objects and cross sections

As you recall, my original goal was drawing two-dimensional manifolds like those in Figure 1, so this was the first functionality I programmed into my library, `smoothmanifold`. A simple torus can be drawn by writing

```
import smoothmanifold;
smooth s = smooth(
    ellipse((0,0), 2, 1)
).addhole(
    ellipse((0,0), 1.1, .37),
    sections = new real[][]{
        r(0, 60, 3), r(90, 90, 1),
        r(180, 60, 3), r(270, 90, 1)
    }
);
config.section.freedom = .9;
size(5cm);
draw(s, dpar(
    mode = free, viewdir = 3.0*dir(90)
));
```

Compiling this code (assuming that the file `smoothmanifold.asy` is located where **Asymptote** can find it) yields the picture in Figure 4.

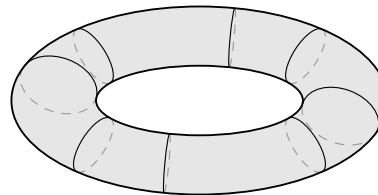


Figure 4: A torus

You can see that the code is relatively high-level: instead of drawing cross section rings manually, we

build a *smooth object* with the `smooth` constructor, then add a hole to it with `addhole`, whose `sections` parameter allows to configure the positions of cross sections. It's not crucial for the reader to understand what exactly goes on in that `real[] []` array, suffice it to say that it tells `smoothmanifold` roughly where we want it to draw cross section rings around the given hole.

After creating the smooth object and assigning it to the variable `s`, we set some configuration values. The `config.section.freedom` value determines how much leeway is given to the section finding algorithm (to be explained later), and the `size()` function allows us to set the picture's size.

Finally, we draw the smooth object, providing a `dpar` (drawing parameters) structure, where we specify how the object (and its cross sections) should be drawn. The `viewdir` parameter is the "direction of view", and it helps coordinate the widths of different cross section rings, such that together they create the illusion of a 3D object.


Interested readers may consult the full `smoothmanifold` manual [3] for more detail.

### 2.3 The cross section finding algorithm

Although I don't wish to delve too deep into technical aspects, I think the cross section finding algorithm merits a short discussion. The relevant `smoothmanifold` function is

```
pair[] [] sectionparams
(path g, path h, int n, real r, int p)
```

It tries to find the best positions for `n` cross sections between the paths `g` and `h`, and it does so by first splitting both paths into regions, as seen in Figure 5.

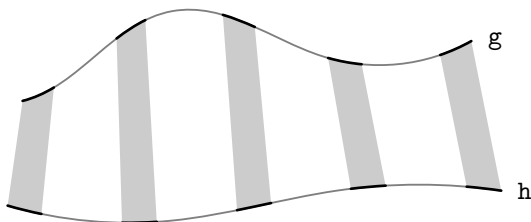


**Figure 5:** `n` regions (filled gray) are formed between the paths `g` and `h`

Here `n` is set to 5, so five regions are selected in the space between the paths, and the algorithm will try to find an optimal position for a cross section in each region. The `real r` parameter of the `sectionparams` function determines the relative width of these regions. If `r = 0`, each region is a line, and there is no choice. If `r = 1`, then the regions cover all space between `g` and `h`. In a sense, `r` is

the "freedom of choice", hence its default value is the `config.section.freedom` settings option.


Then, the algorithm proceeds to select `p` sample points along either edge of each region, and search for the optimal section position by minimizing a loss function. This is illustrated in Figure 6, with `p` equal to 10.

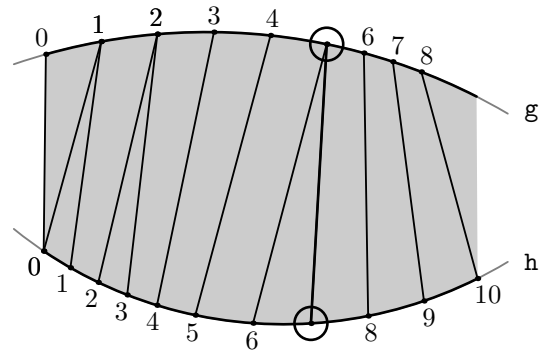

**Figure 6:** Selecting the optimal section position (circled) within one region

As you can see, not every combination of points is checked. This is a heuristic optimization based on the fact that "good" cross sections usually connect points whose indices are close. This allows the algorithm to run in  $O(np)$  time, whereas the naïve implementation is  $O(np^2)$ .

One final note on the cross section mechanism concerns this "illusion of 3D". `Asymptote` has full support for actual 3-dimensional drawing and allows producing something like this with relatively little effort:

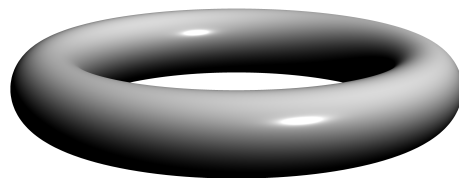

**Figure 7:** A real 3-dimensional torus

This certainly looks more realistic, but there are numerous objections to this approach:


- Despite the work done by the `Asymptote` team on 3-dimensional vector graphics, surfaces like this still force you to use a bitmap image format (the picture in Figure 7 is an embedded PNG image), which is not necessarily bad, but I personally prefer vector graphics whenever possible, for consistency.
- The resulting image file typically will be much larger. Here, the PNG file with the "real" torus

was 57.6 times larger than the PDF file embedded in Figure 4.

- In my opinion, the 3-dimensional torus in Figure 7 lacks some sort of “textbook style” that is kept in Figure 4.

## 2.4 Smooth objects as sets

Having achieved my initial goal of drawing smooth manifolds, I forgot about the library for about a year. But one day I realized that the `smooth` structure can be used to model not only smooth manifolds, but *sets* in general. Consider this set-theoretic diagram that illustrates the intersection of two sets:

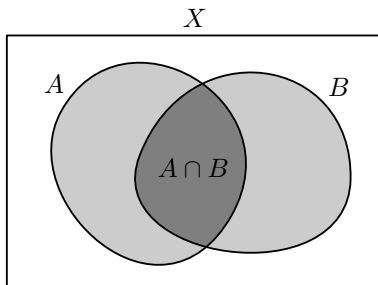

**Figure 8:** Intersection of two subsets of a set  $X$


Of course, this diagram can be drawn with relative ease in plain `Asymptote` or any other graphics program, but there is a common pattern that can be abstracted away: one encompassing cyclic path (labeled  $X$  in Figure 8) and a number of cyclic paths inside of it, representing subsets and their unions/intersections. Using the current version of `smoothmanifold`, the diagram in Figure 8 is generated with this code:

```
smooth sm = smooth(
  (-1.5,-1) -- (1.5,-1)
  -- (1.5,1) -- (-1.5,1) -- cycle,
  label = "$X$",
  labeldir = dir(90)
).addsubset(
  convexpaths[2],
  scale = .8, shift = (-.4,.05),
  label = "$A$", dir = dir(140)
).addsubset(
  convexpaths[3],
  scale = .8, shift = (.4,0),
  label = "$B$", dir = dir(40)
).setlabel(2, "$A \cap B$", dir = (0,0));

draw(sm, dpar(
  fill = false,
  drawnow = true,
  subsetfill = new pen[]{gray(.8),gray(.5)}
));
```

The `smooth` structure has a field called `subsets` which holds an array of “subsets” and which can be added to by invoking the `addsubset` method. Most importantly, after adding the second subset, the intersection of the two subsets is *automatically calculated and added as a third subset*, so that we can then set its label by calling `.setlabel(2, "$A \cap B$")` (here, 2 is the index of the third subset, since arrays in `Asymptote` are zero-indexed).


Why is this useful? Because now “sets” and “subsets” in your diagram are no longer just paths—they are `Asymptote` objects, and module `smoothmanifold` provides many useful methods and functions to manipulate these objects. For example, the `smooth` structure has a method called `move` that allows one to shift, scale and rotate a smooth object, respecting this object’s holes and subsets, as well as other data such as cross sections and labels:

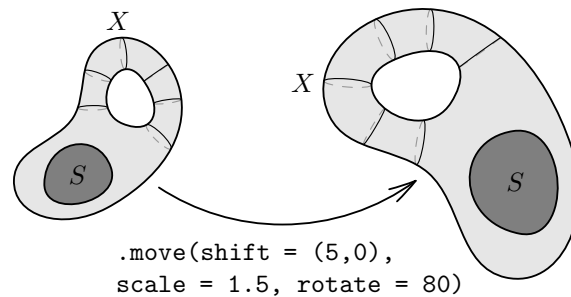

**Figure 9:** Calling one method to move a smooth object along with its hole, subset, label, and cross sections

Returning to Figure 8, the automatic intersection of subsets is achieved via the function

```
path[] intersection (
  path p, path q,
  bool round, real roundcoeff
)
```

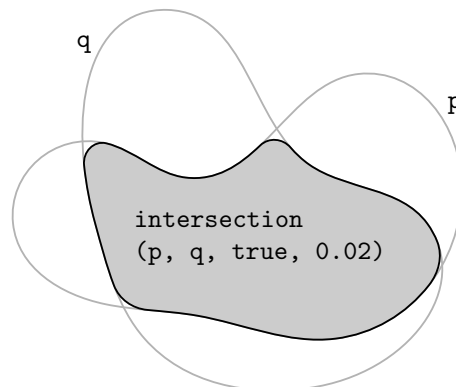

**Figure 10:** Intersection of two paths with rounded corners

It takes two *cyclic* paths `p` and `q` as arguments and returns the paths that bound the intersection of the areas bounded by `p` and `q`. Additionally, the intersection can be “rounded at the corners” if the `round` switch is set to `true`, and the degree of rounding can be regulated with `roundcoeff`. An example can be seen in Figure 10.

## References

- [1] J.C. Bowman. Asymptote: Interactive TeX-aware 3D vector graphics. *TUGboat*, 2010. <https://www.math.ualberta.ca/~bowman/publications/tb98bowman.pdf>
- [2] J.C. Bowman, A. Hammerlindl. Asymptote, A vector graphics language. *TUGboat*, 2008. <https://www.math.ualberta.ca/~bowman/publications/asyTUG.pdf>
- [3] R. Maksimovich. `smoothmanifold.asy`: Diagrams in higher mathematics with Asymptote. <https://github.com/thornoar/smoothmanifold/blob/master/documentation/main.pdf>

◇ Roman Maksimovich  
Hong Kong  
`r.a.maksimovich (at) gmail.com`