
FIGURE 1 · DATA-FLOW VIEW · SCOPE: ONE USER'S DATA, FROM SOURCE TO CITED ANSWER

Eight model roles, each at a marked step; everything else is deterministic code

Read left to right. A labelled arrow names the data that moves; a short unlabelled arrow means “next step”. Lavender steps call a model; white steps are plain code.

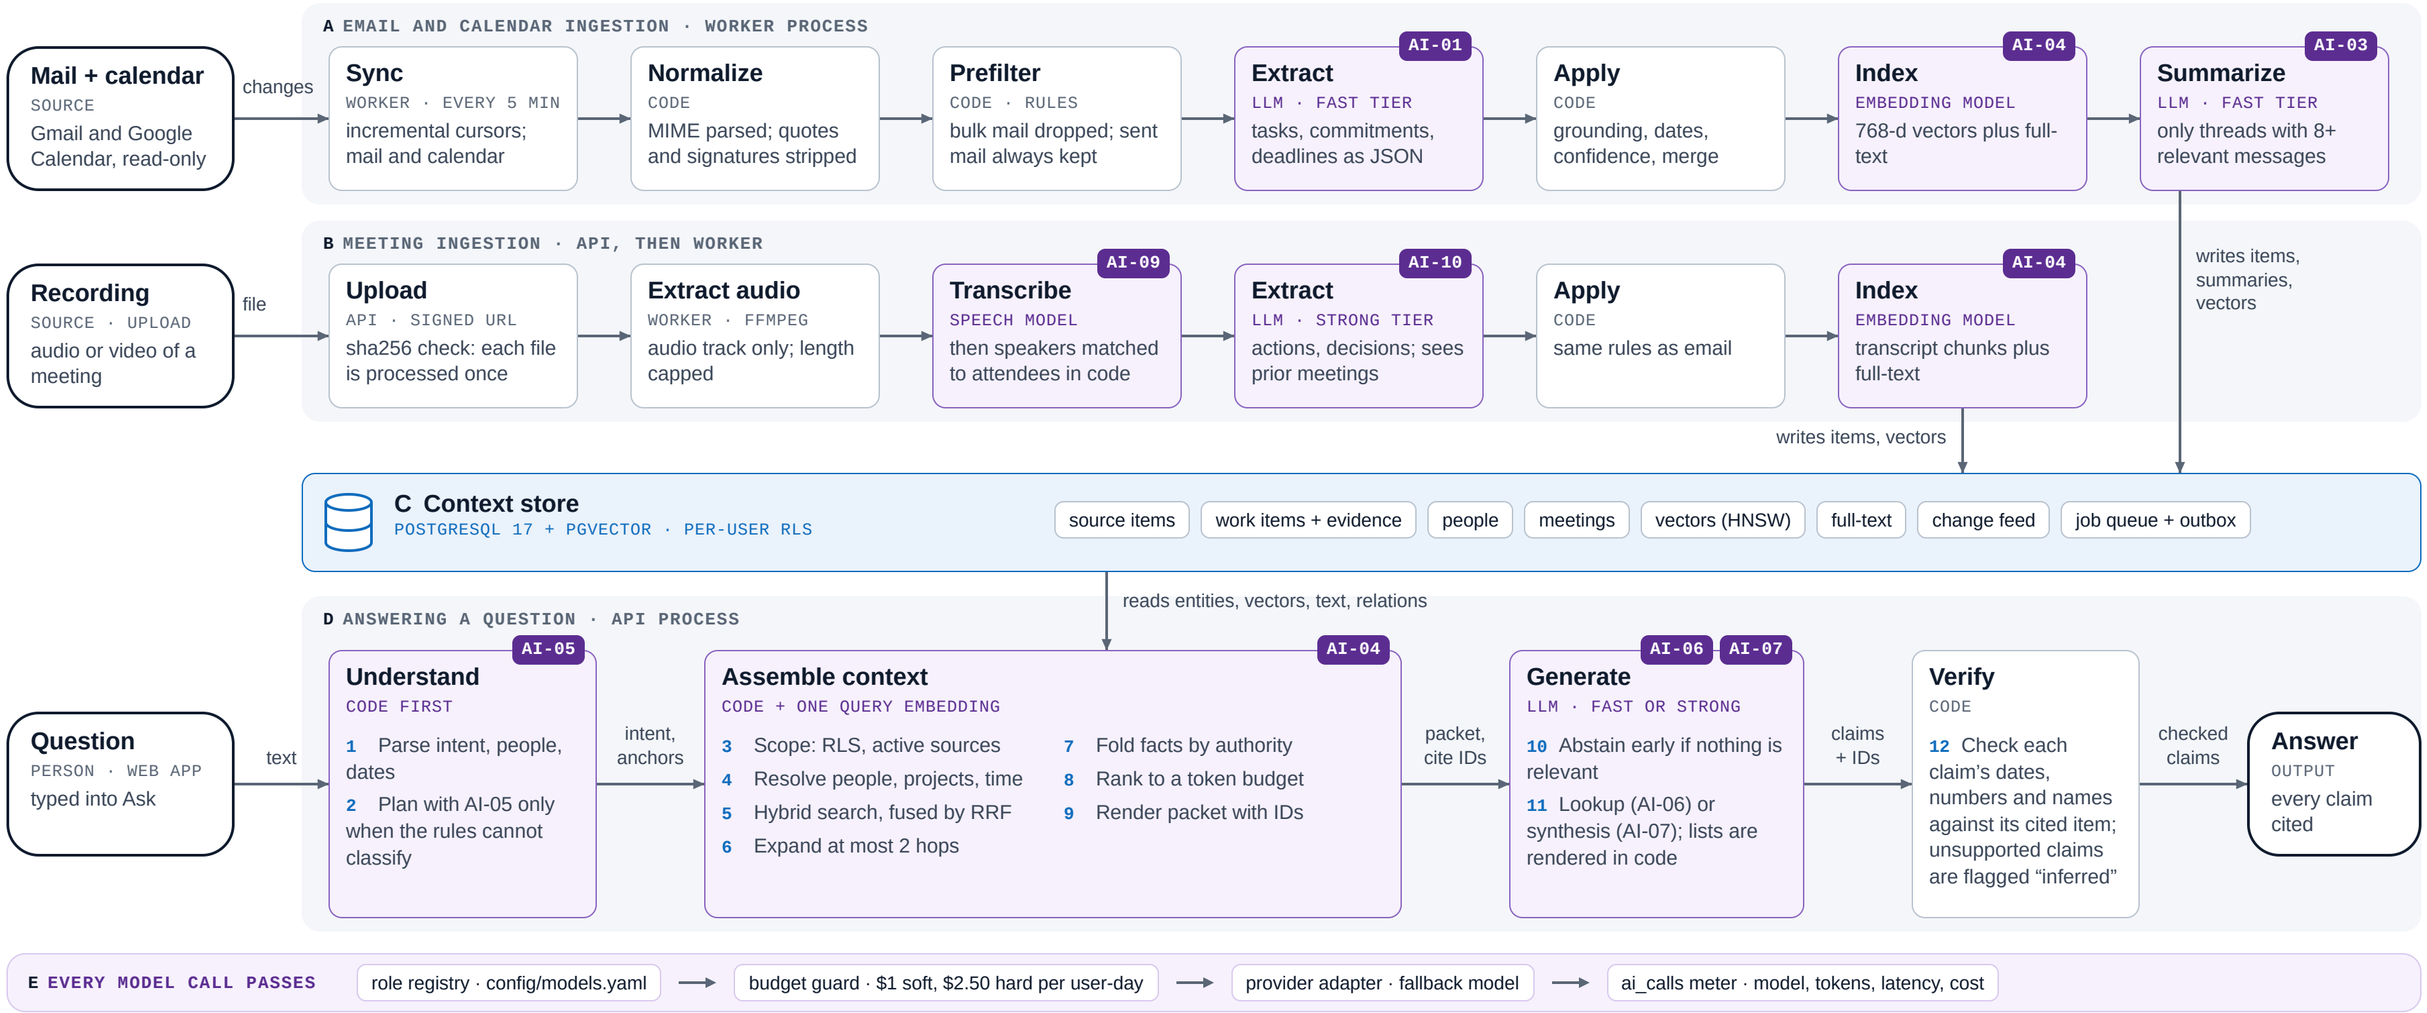

Model tiers, today → Azure: fast, Gemini 3.1 Flash-Lite → OpenAI mini · strong, Gemini 3.8 Flash → OpenAI full · embedding, gemini-embedding-2 → text-embedding-3-small (768-d) · speech, Gemini → Azure AI Speech. Every step drawn is built and tested.

Figure 1. How one user’s data becomes a cited answer. **(A)** The worker pulls mail and calendar changes every 5 minutes; rules drop bulk mail before any model sees it, and code, not the model, settles dates, confidence and merges. Calendar changes update meetings in code only. **(B)** Uploaded meetings are transcribed and extracted under the same rules. **(C)** Everything lands in one PostgreSQL store behind per-user row-level security (RLS). **(D)** A question is answered from a packet assembled mostly in code: vector (HNSW) and full-text results are fused by reciprocal rank fusion (RRF), and every claim is checked before it is shown. **(E)** No step calls a model directly.