


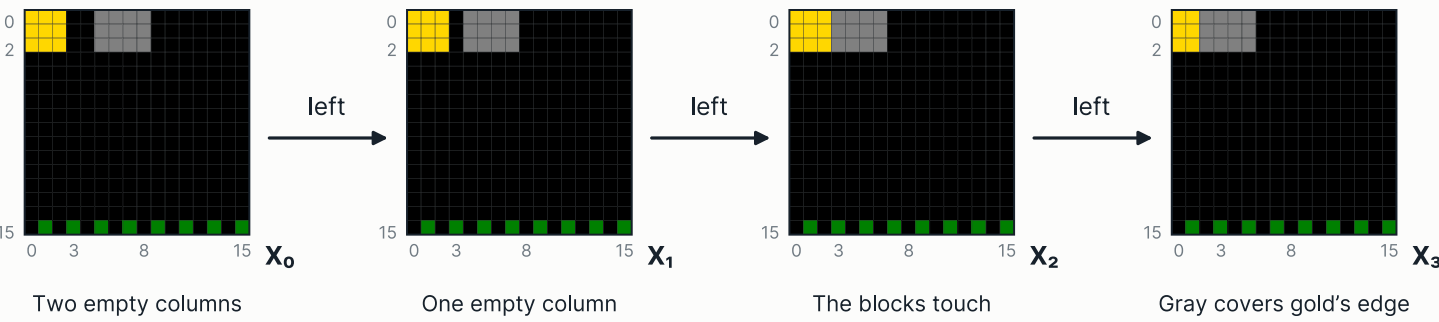

Iteration 3

P(X₀) 0,0:gold 0,1:gold 0,2:gold 0,5:gray 0,6:gray 0,7:gray 0,8:gray ...	P(X₁) 0,0:gold 0,1:gold 0,2:gold 0,4:gray 0,5:gray 0,6:gray 0,7:gray ...	P(X₂) 0,0:gold 0,1:gold 0,2:gold 0,3:gray 0,4:gray 0,5:gray 0,6:gray ...	P(X₃) 0,0:gold 0,1:gold 0,2:gray 0,3:gray 0,4:gray 0,5:gray ...
---	---	---	--

Dynamics model D = ∅ · no learned rules

Iteration 12

P(X₀) 0,0:gold 0,1:gold 0,2:gold 0,5:gray 0,6:gray 0,7:gray 0,8:gray ...	P(X₁) 0,0:gold 0,1:gold 0,2:gold 0,4:gray 0,5:gray 0,6:gray 0,7:gray ...	P(X₂) 0,0:gold 0,1:gold 0,2:gold 0,3:gray 0,4:gray 0,5:gray 0,6:gray ...	P(X₃) 0,0:gold 0,1:gold 0,2:gray 0,3:gray 0,4:gray 0,5:gray ...
---	---	---	--

Dynamics model D — learned block rules (excerpts)

... They form **two contiguous blocks** ...

... actions can **bring them together** ...

... left: ... If a gray block exists, it **shifts left by one column** ...

... right: ... The column vacated on the left becomes empty unless it is **immediately right of a gold block**, ... in which case **that column becomes gold** ...

Iteration 13

P(X₀) ... bg=black; gold:0-2,0-2 gray:0-2,5-8 green:15,1 ...	P(X₁) ... bg=black; gold:0-2,0-2 gray:0-2,4-7 green:15,1 ...	P(X₂) ... bg=black; gold:0-2,0-2 gray:0-2,3-6 green:15,1 ...	P(X₃) ... bg=black; gold:0-2,0-1 gray:0-2,2-5 green:15,1 ...
--	--	--	--

Dynamics model D — unchanged from iteration 12

... If a gray block exists, it shifts left by one column ...

Iteration 27

gare = 1 when gold is immediately left of gray.			
P(X₀) ... f: ... gare=0 , ... gold:0,0-2;... gray:0,5-8;... green:15,1;...	P(X₁) ... f: ... gare=0 , ... gold:0,0-2;... gray:0,4-7;... green:15,1;...	P(X₂) ... f: ... gare=1 , ... gold:0,0-2;... gray:0,3-6;... green:15,1;...	P(X₃) ... f: ... gare=1 , ... gold:0,0-1;... gray:0,2-5;... green:15,1;...

Dynamics model D — unchanged from iteration 12

The learned rules still describe gold and gray blocks in prose. They do not reference **gare**.

... marks omitted text; whitespace is reflowed.