


Learning-evolution candidates: recorded frame sequences

Frame preview; full P/B checkpoints and exact outputs are in the accompanying report and evidence JSON.

SET: select a third card, then clear an invalid selection

P17 groups cells into cards; B25 replaces row/column alignment with exactly three selected cards.


```
train_d1 | checkpoints: 15 (i=22), 17 (i=27), 25 (i=44)
```

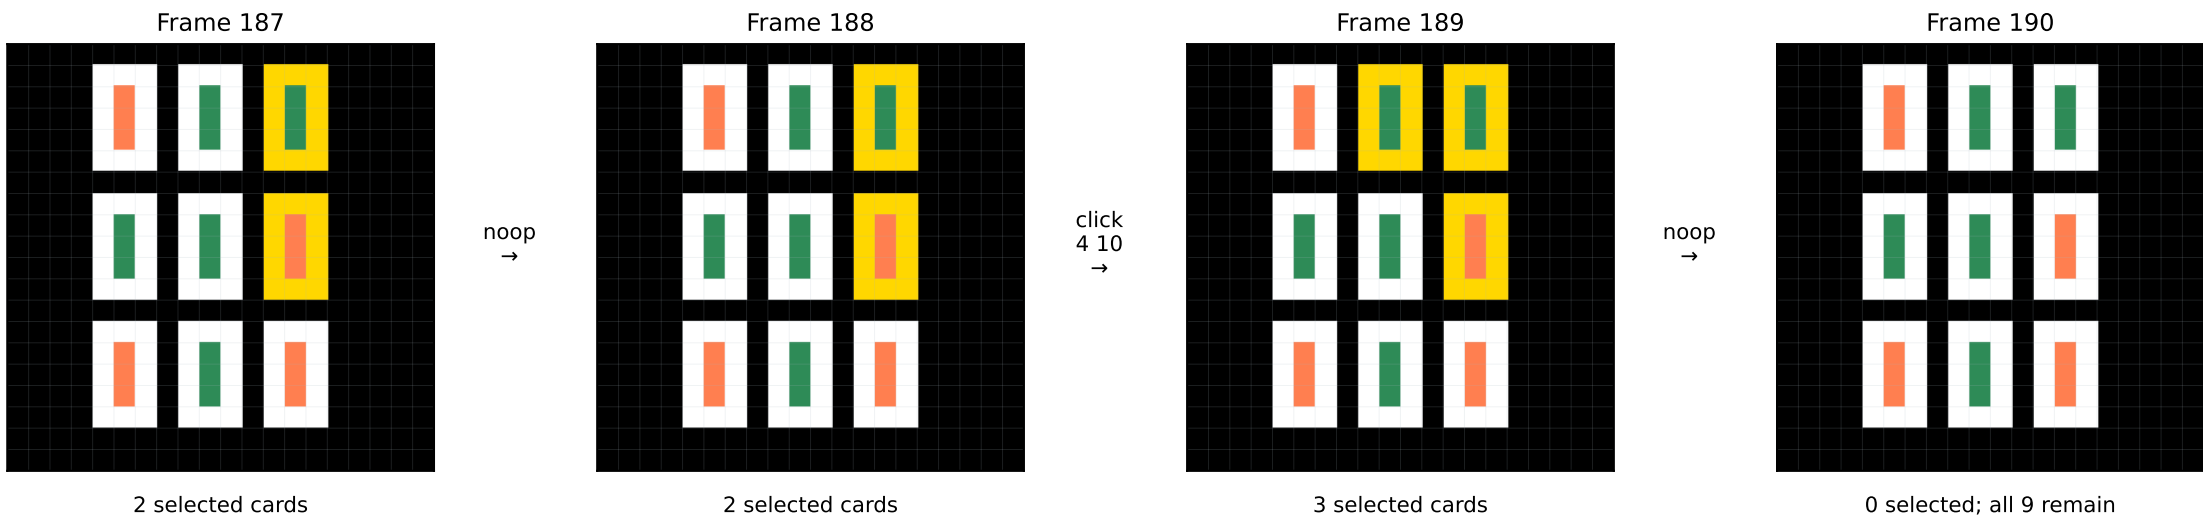

Disease: approach, then infection

P8 adds neighbor counts; P17 adds directions; B23 uses them but wrongly calls neighbors 'stacks'.


```
train_d0 | checkpoints: 1 (i=2), 8 (i=13), 10 (i=16), 17 (i=25), 23 (i=32)
```

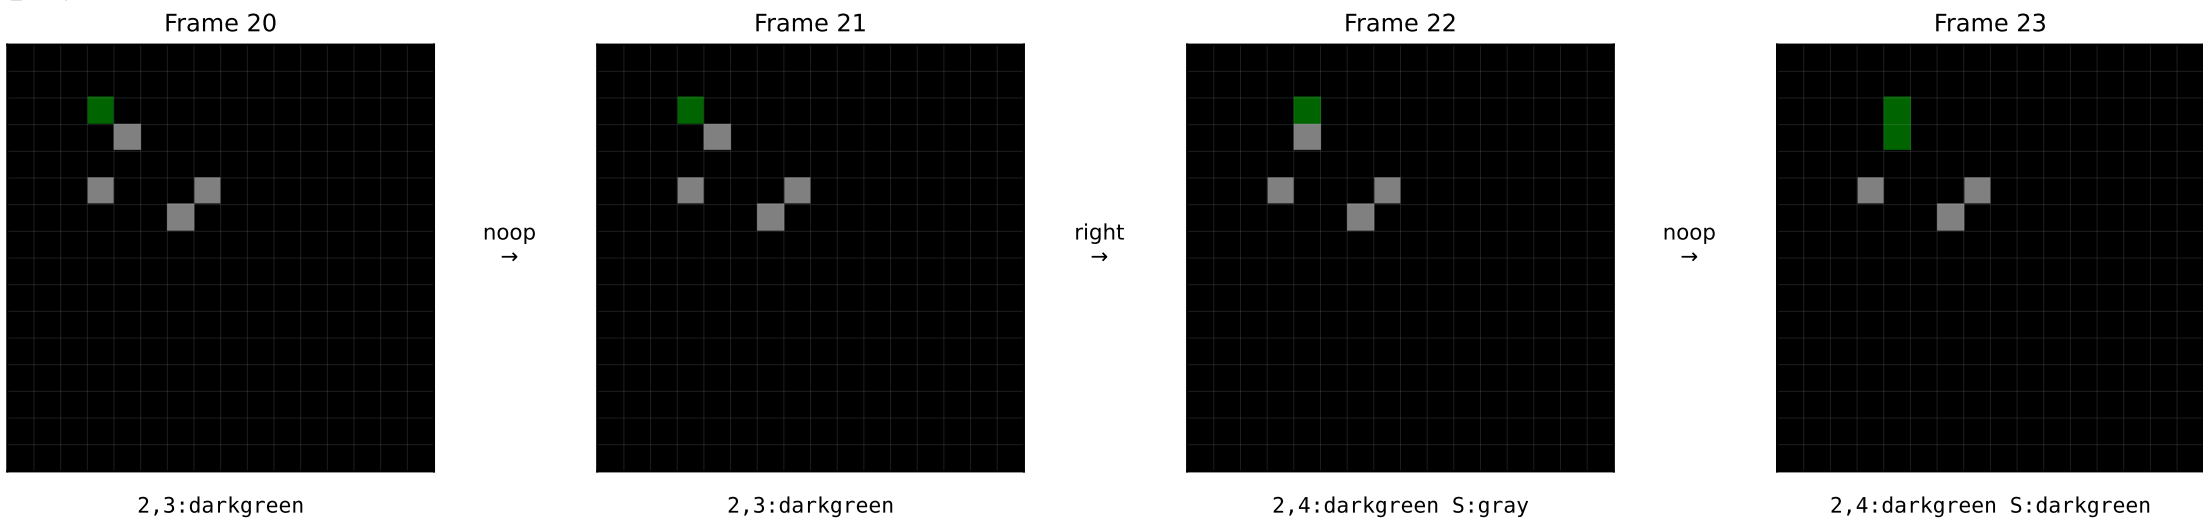

Magnets: down causes diagonal motion, then ordinary downward motion

P6 adds rDist / noRedRow; B8 branches on those exact tags. Rules are only locally correct.


```
train_d1 | checkpoints: 1 (i=1), 6 (i=6), 8 (i=8)
```

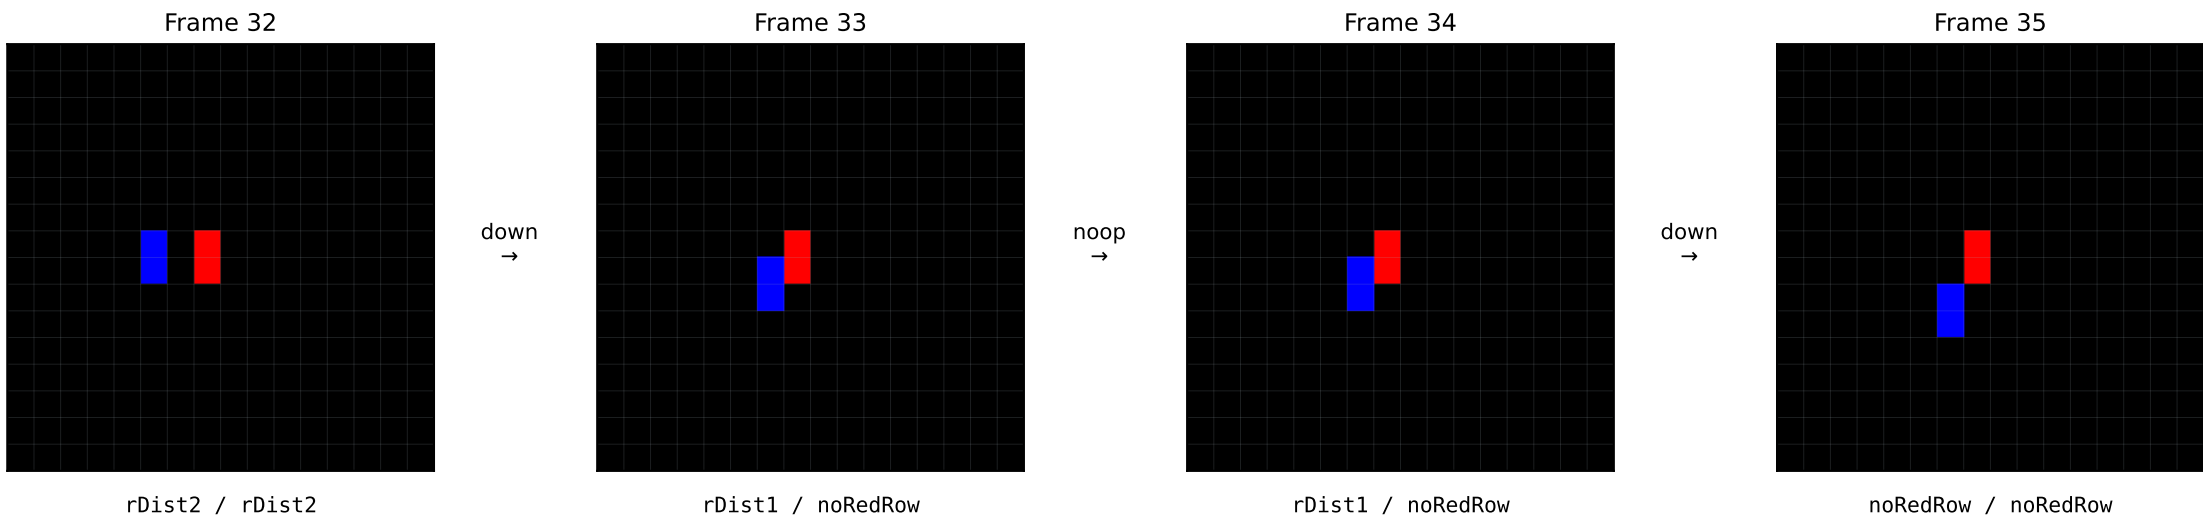

Logic Gates: a switch changes a conditional group of blocks

P7 extracts six blocks; B21 uses the right switch's color to determine the left click's effects.

```
train_d0 | checkpoints: 3 (i=4), 7 (i=9), 21 (i=24)
```

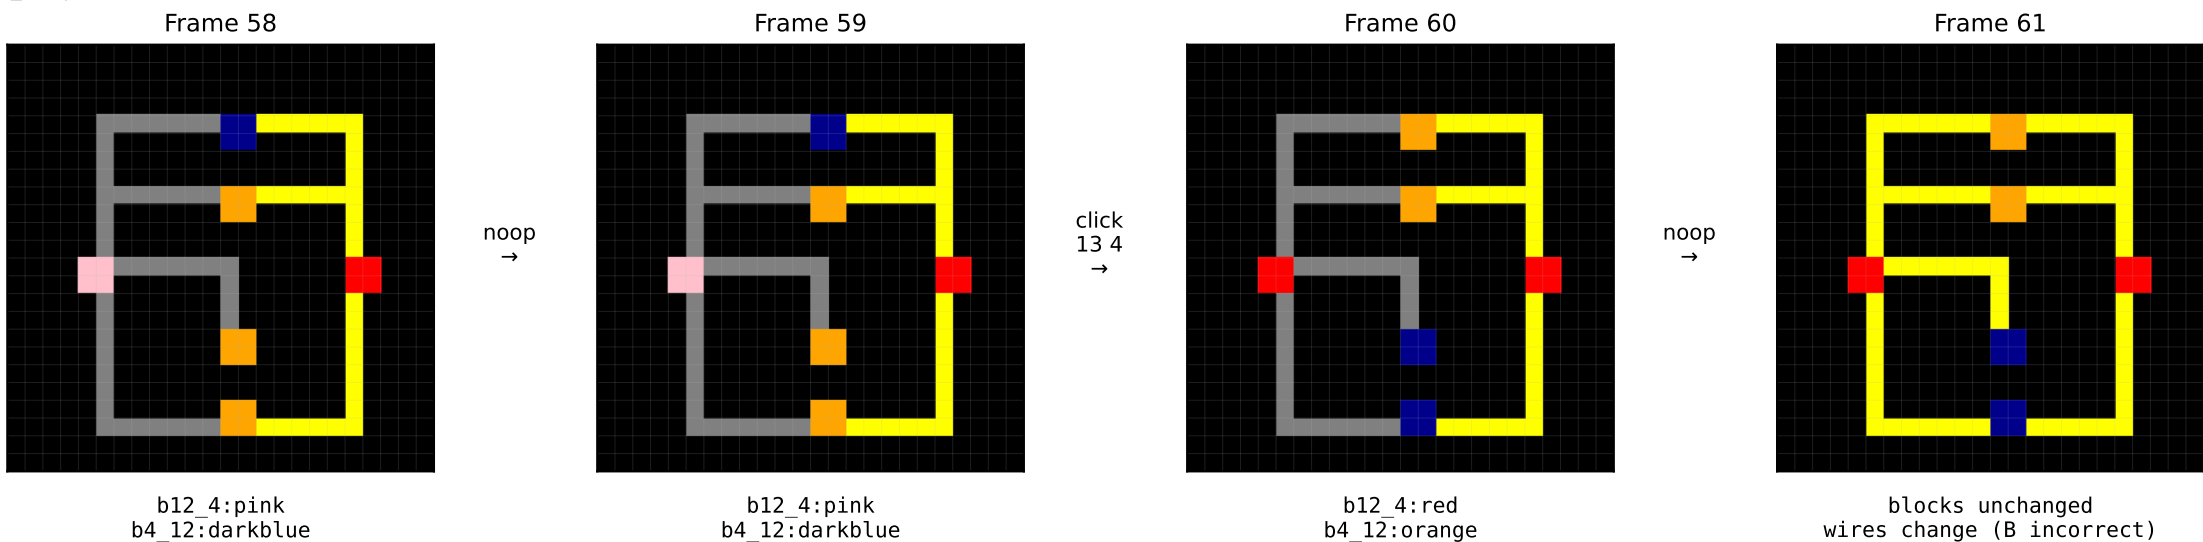

SET counts are derived from P's gold-containing card groups; other captions are excerpts or summaries of learned P.

These are explored learning branches. Correct local examples do not establish complete game models or causal necessity of a feature.